

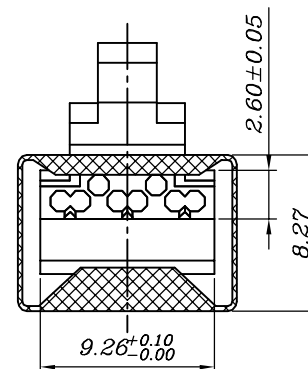
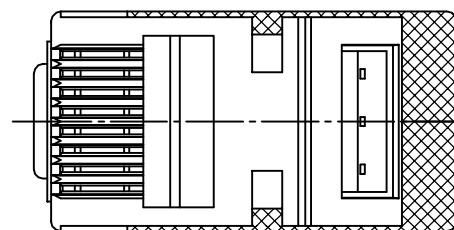
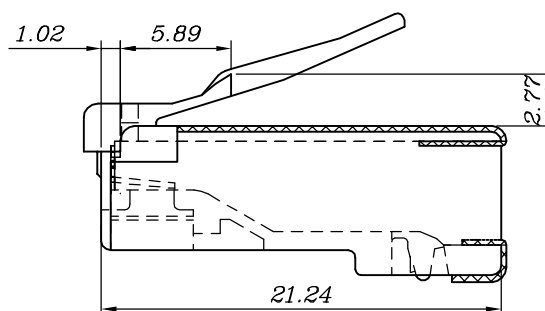
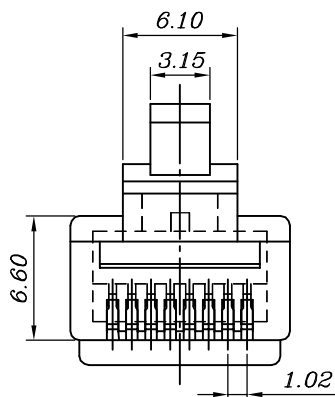
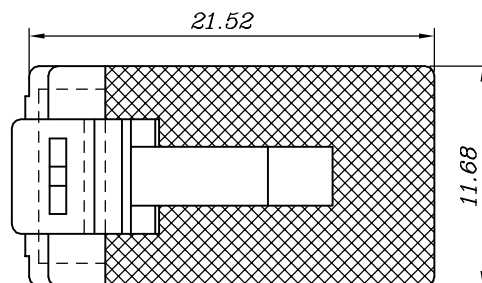


RoHS



THIS IS A RoHS  
COMPLIANT  
COMPONENT/  
PRODUCT.

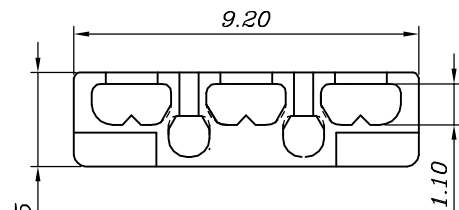

## SPECIFICATIONS

1. ELECTRICAL  
UL APPLICATIONS 250 VOLTS AC MAX. AT 2 AMPS  
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC  
INSULATION RESISTANCE: 100 MEG OHMS MIN.  
CONTACT RESISTANCE: 20 MILLIOHMS MAX

2. MECHANICAL  
CABLE-TO-PLUG TENSILE STRENGTH: 19.6N PER PCS MIN.  
DURABILITY: 200 MATING CYCLES

## 3. MATERIAL AND FINISH

HOUSING: POLYCARBONATE UL94V-2  
COLOR: TRANSPARENT  
CONTACT BLADE: PHOSPHOR BRONZE  
CONDUCTOR: STRANDED AND SOLID WIRES AWG24, AWG26  
GOLD PLATING: 50U

|                       |         |                                      |                    |           |
|-----------------------|---------|--------------------------------------|--------------------|-----------|
| △ X0                  | 0069000 | NEW DESIGN                           | JACK               | 122412'   |
| MARK                  | ECN-NO. | REVISION RECORD                      | DRAWN              | DATE      |
|                       |         | UNLESS OTHERWISE SPECIFIED TOLERANCE | SCALE              | CHECKED   |
|                       |         | Dimension Range Tolerance            | 1/1                |           |
|                       |         | X.X ±0.20                            | UNIT               | APPROVED  |
|                       |         | X.XX ±0.15                           | mm                 |           |
|                       |         | X.XXX ±0.10                          | SIZE               |           |
| Material/Plated/Notes |         | ANGLE ±5°                            | A3                 | SHEET 1/1 |
| SEE NOTE              |         | NAME                                 | PLUG CAT6 SHIELDED |           |
| Tooling No.           |         | PART NO.                             | 3202-0105-01       | REV.      |
|                       |         | DOC. NO.                             |                    | 0         |

CUL US UL RECOGNIZED - FILE #E465899