


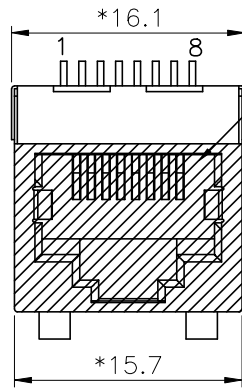


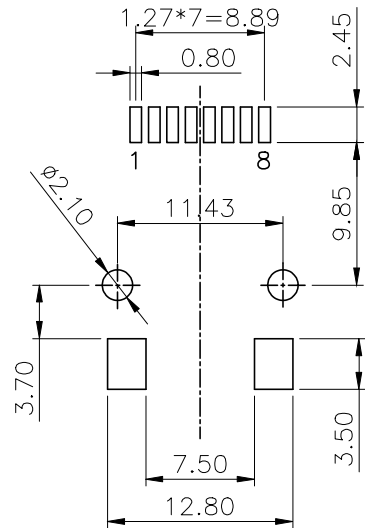


THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

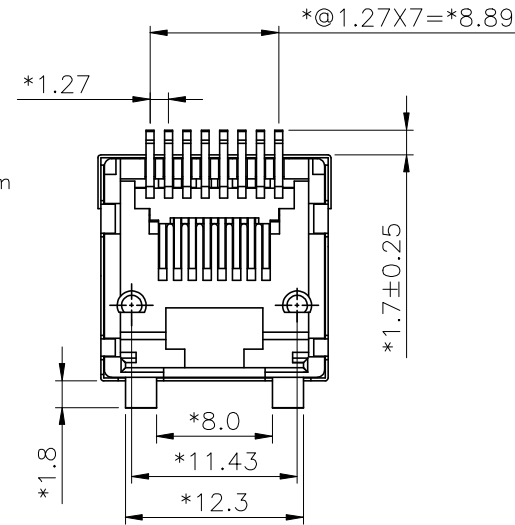

325I-0022-01&02&03
325I-0022-05&06&07

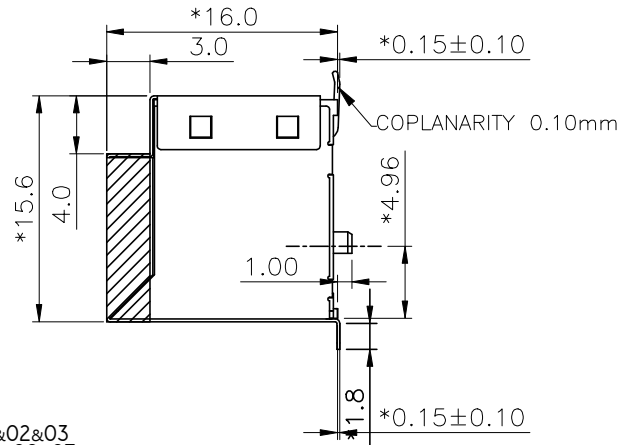


PCB LAYOUT
COMPONENT SIDE SHOWN


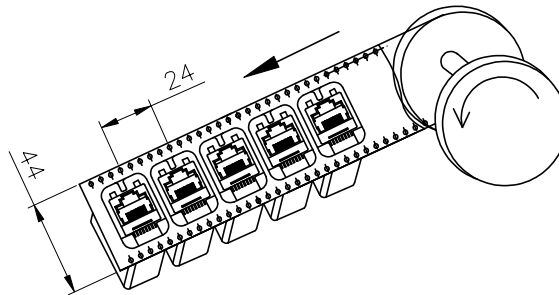


△ X5		MODIFY DRAWING	ROCK	081712'
△ X1		MODIFY DRAWING	ROCK	070912'
△ X2		ADD P/N	ROCK	051712'
△ X0	0009900	NEW DESIGN	INGER	080307
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
		Dimension Range Tolerance	1:25/1 mm	APPROVED
		X.X ±0.20		
		X.XX ±0.15	SIZE	A3
		X.XXX ±0.10		
Material/Plated/Notes		NAME		1/2
SEE NOTE		TOP ENTRY 8P SMT STP		
Tooling No.		PART NO.	SEE NOTE	REV.
		DOC. NO.		D

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

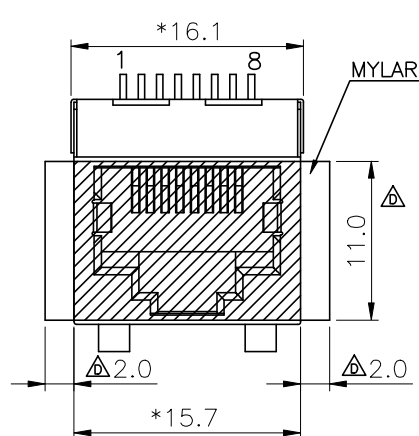

 325I-0022-04&08

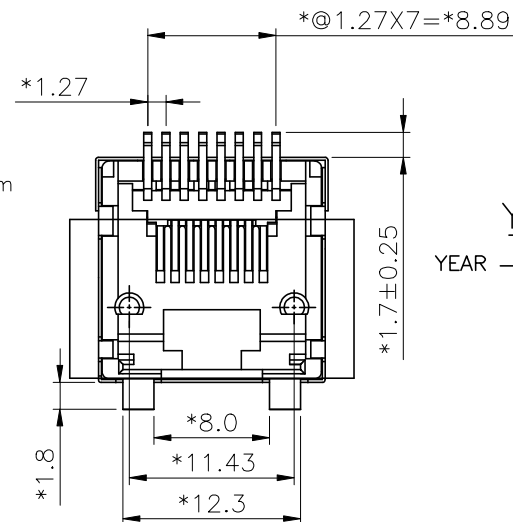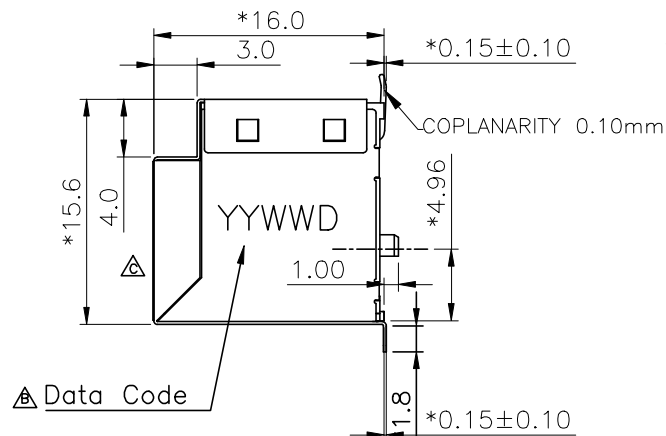

YYWWD
YEAR WEEK DAY
1-SUN
2-MON
3-TUS
4-WEN
5-THUR
6-FRI
7-SAT

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- ENVIRONMENTAL:
1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
 2. OPERATION : -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3251-0022-01	RJJS-88-121-EIV-039	6U" GOLD PLATING, WITH POST, WITHOUT MYLAR TAPE
3251-0022-02	RJJS-88-122-EIV-039	6U" GOLD PLATING, WITH POST, WITH MYLAR TAPE
3251-0022-03	RJJS-88-123-EIV-039	6U" GOLD PLATING, WITHOUT POST, WITHOUT MYLAR TAPE
3251-0022-04	RJJS-88-124-EIV-039	6U" GOLD PLATING, WITH POST, WITH MYLAR TAPE, WITH DC
3251-0022-05	RJJS-88-141-EIV-039	30U" GOLD PLATING, WITH POST, WITHOUT MYLAR TAPE
3251-0022-06	RJJS-88-142-EIV-039	30U" GOLD PLATING, WITH POST, WITH MYLAR TAPE
3251-0022-07	RJJS-88-143-EIV-039	30U" GOLD PLATING, WITHOUT POST, WITHOUT MYLAR TAPE
3251-0022-08	RJJS-88-144-EIV-039	30U" GOLD PLATING, WITH POST, WITH MYLAR TAPE, WITH DC



UL RECOGNIZED - FILE #E465899

	X5		MODIFY DRAWING	ROCK	081712
	X1		MODIFY DRAWING	ROCK	070912
	X2		ADD P/N	ROCK	051712
	X0		NEW DESIGN	LINGER	080307
MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
		Dimension Range Tolerance		1.25/1	
		X.X	±0.20	UNIT	APPROVED
		X.XX	±0.15	mm	
		X.XXX	±0.10	SIZE	
		ANGLE	±5°	A3	 SHEET 2/2
Material/Plated/Notes		NAME			
SEE NOTE		TOP ENTRY 8P SMT STP			
Tooling No.		PART NO.			REV.
		DOC. NO.			D