


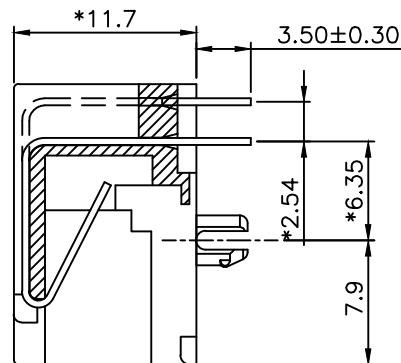
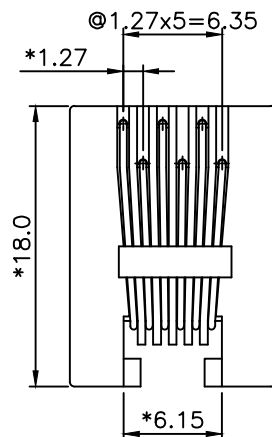


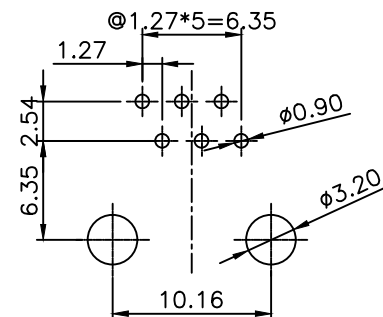

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

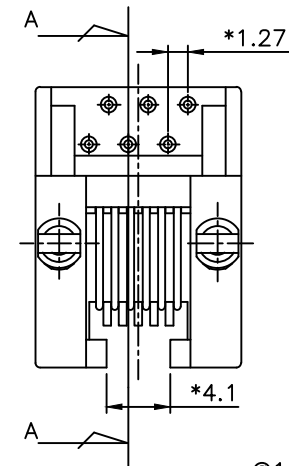

SECTION A-A

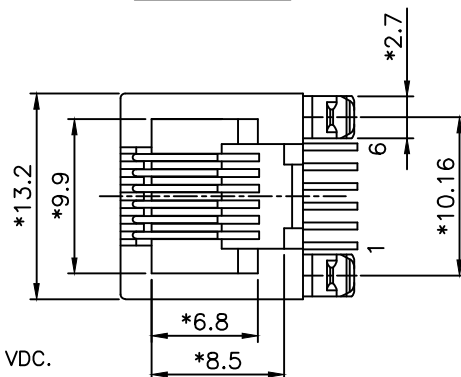

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 1000 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION

PART NUMBER	PRODUCT CODE	CONFIGURATION
3253-0002-01	RJJU-64-123-E3H-011	6U" GOLD PLATING, 6P4C
3253-0002-02	RJJU-64-143-E3H-011	30U" GOLD PLATING, 6P4C
3253-0002-03	RJJU-66-125-E3H-011	6U" GOLD PLATING, 6P6C
3253-0002-04	RJJU-66-145-E3H-011	30U" GOLD PLATING, 6P6C



Δ X1		ADD NEW P/N	DORIS	081013
Δ X1		ADD NEW P/N	DORIS	120512
Δ X2		ADD PART NO.	ROCK	071612
Δ X1		ADD PART NO.(3)	YANG	031409
Δ X1		MODIFY DESIGN	YANG	122908
Δ X1		ADD PART NO.(3)	SAIL	121207
Δ X0	0009000	NEW DESIGN	LINGER	041307

MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE Dimension Range Tolerance	SCALE 1/1	CHECKED
		X.X ± 0.20	UNIT mm	APPROVED
		X.XX ± 0.15		
		X.XXX ± 0.10	SIZE A3	
		ANGLE $\pm 5^{\circ}$		
Material/Plated/Notes		NAME 90° VERY L/P SIDE ENTRY 6P		
Tooling No.		PART NO. SEE NOTE	REV. G	
		DOC. NO.		