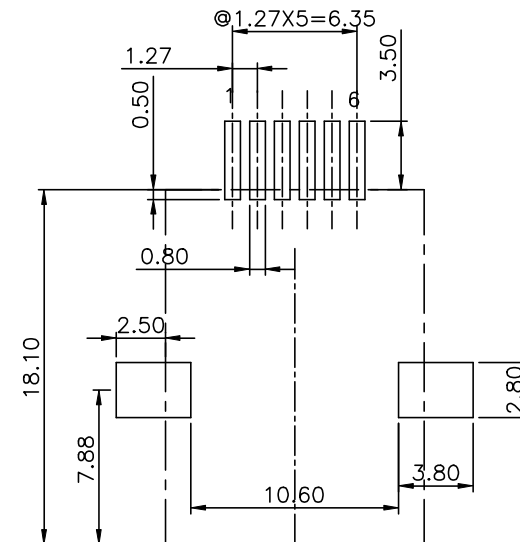
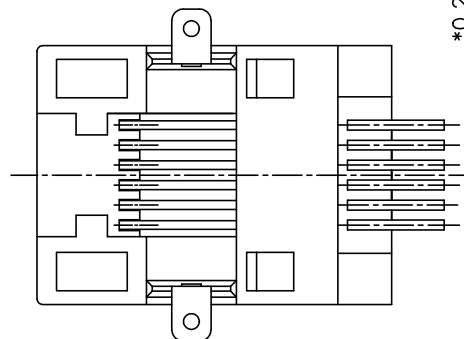
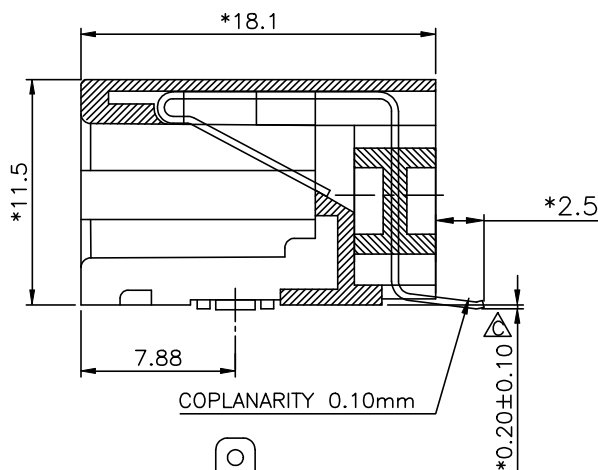
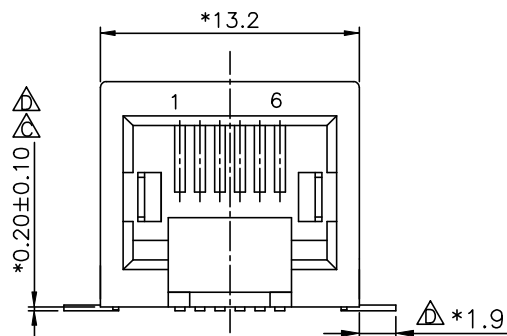


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

PCB Layout Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -0°C TO +85°C.
3. REFLOW SOLDERING TEMP. : 255°C~265°C (5~10 SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

ORDERING INFORMATION:


PART NUMBER

PRODUCT CODE

CONFIGURATION

3253-0006-01
3253-0006-02
3253-0006-03
3253-0006-04RJJU-66-I2I-E3H-008
RJJU-66-I4I-E3H-008
RJJU-64-I22-E3H-008
RJJU-64-I42-E3H-0086U" GOLD PLATING, 6P6C
30U" GOLD PLATING, 6P6C
6U" GOLD PLATING, 6P4C
30U" GOLD PLATING, 6P4C

UL RECOGNIZED - FILE #E465899

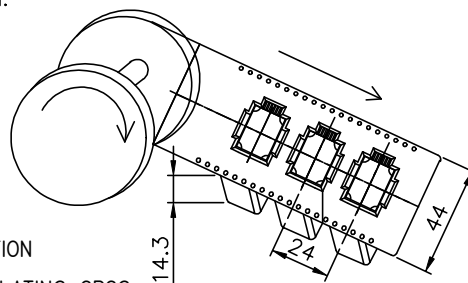

△ X2		MODIFY DRAWING	ROCK	061212'
△ X2		ADD ONE DIM.	ROCK	052412'
△ X1		ADD NEW P/N	LINGER	080807
△ X0	0000000	NEW DESIGN	LINGER	102706
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 3/1	CHECKED
		Dimension Range Tolerance		
		X.X ±0.20	UNIT mm	APPROVED
		X.XX ±0.15		
		X.XXX ±0.10	SIZE A3	
		ANGLE ±5°		
Material/Plated/Notes		NAME		
SEE NOTE		SIDE ENTRY PCB JACK(SMT) 6P PEG OUT		
Tooling No.	PART NO.		REV.	
	DOC. NO.		D	