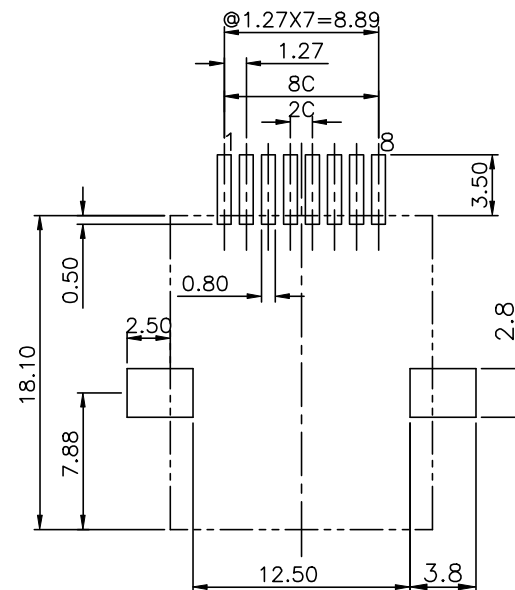
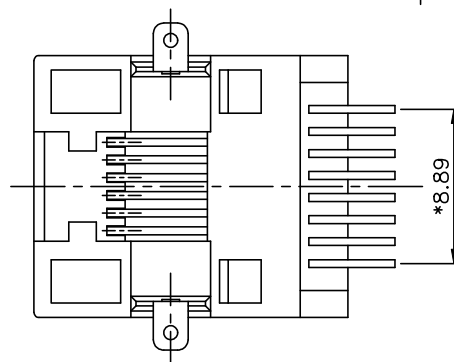
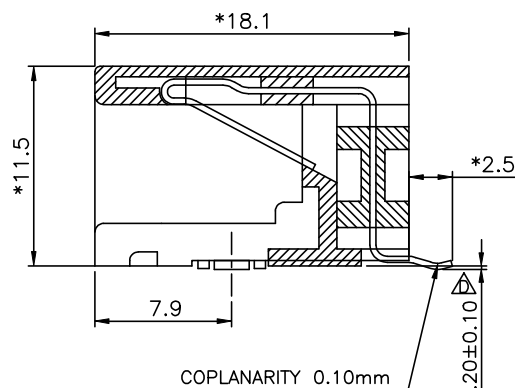
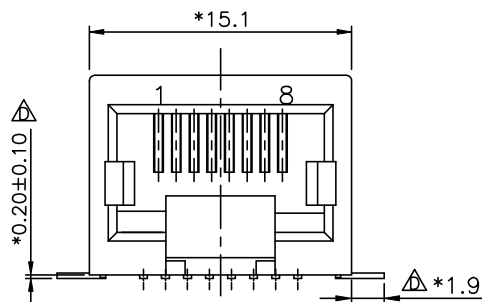


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.PC BOARD LAYOUT
COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER : 10 LBS MIN.


ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION : -40°C TO +85°C.
 3. REFLOW SOLDERING TEMP. : 255°C~265°C (5~10 SECONDS).
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3253-0007-01	RJJU-88-I2I-E3H-009	6U" GOLD PLATING
3253-0007-02	RJJU-88-I4I-E3H-009	30U" GOLD PLATING

UL RECOGNIZED - FILE #E465899

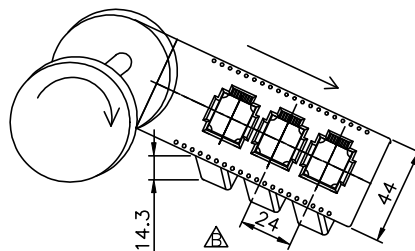

△X3		MODIFY DRAWING	ROCK	061212'
△X1		ADD NEW P/N	YANG	080409
△X2		MODIFY DESIGN	YANG	121608
△X0	0000000	NEW DESIGN	LINGER	102706
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE		CHECKED	
		Dimension Range		Tolerance		2.5/1	
		X.X		±0.20		UNIT	
		X.XX		±0.15		mm	
		X.XXX		±0.10		SIZE	
		ANGLE		±5°		A3	
Material/Plated/Notes		NAME					
SEE NOTE		SIDE ENTRY 8P SMT JACK PEG OUT					
Tooling No.		PART NO.				REV.	
		DOC. NO.				D	