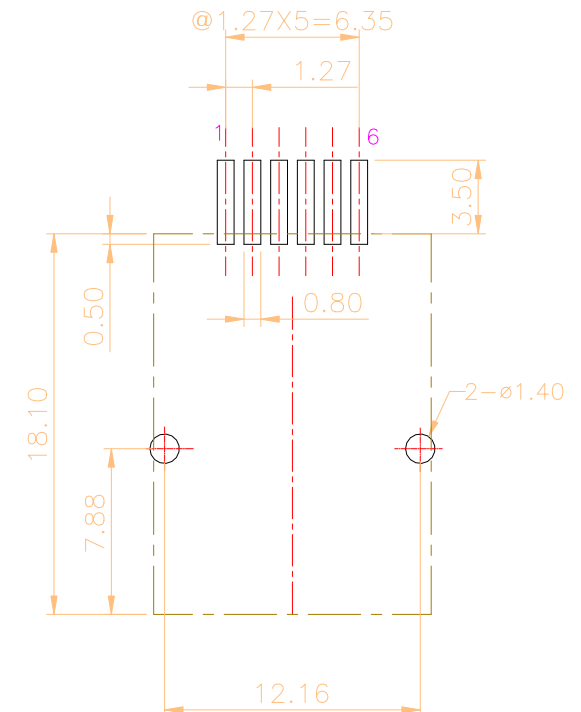
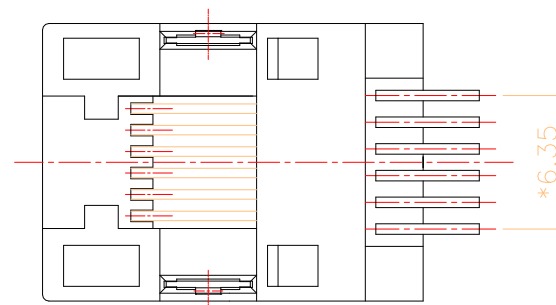
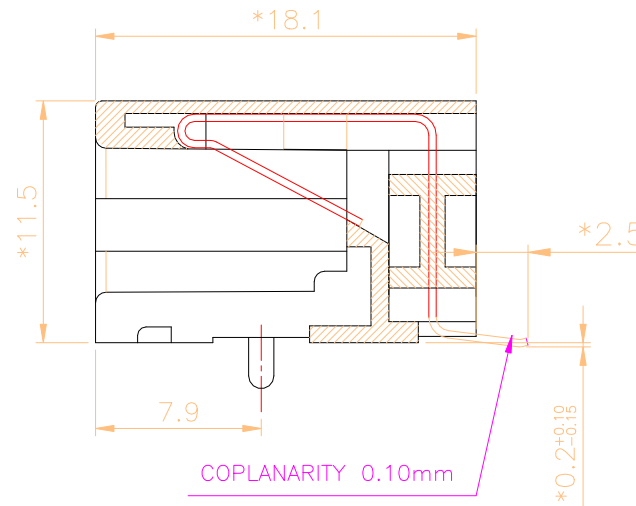
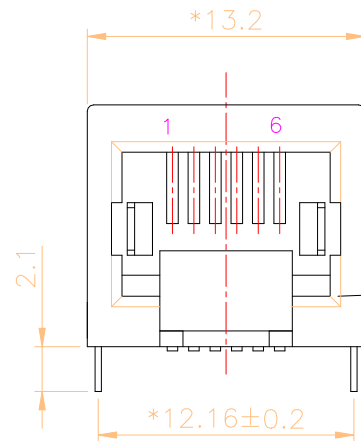


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.PC BOARD LAYOUT
COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 15 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGAOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1 MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35MM.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION : 0°C TO +70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3253-0008-01	RJJU-66-I2I-E3H-004	6U" GOLD PLATING, 6P6C
3253-0008-02	RJJU-66-I4I-E3H-004	30U" GOLD PLATING, 6P6C
3253-0008-03	RJJU-64-I22-E3H-004	6U" GOLD PLATING, 6P4C
3253-0008-04	RJJU-64-I42-E3H-004	30U" GOLD PLATING, 6P4C

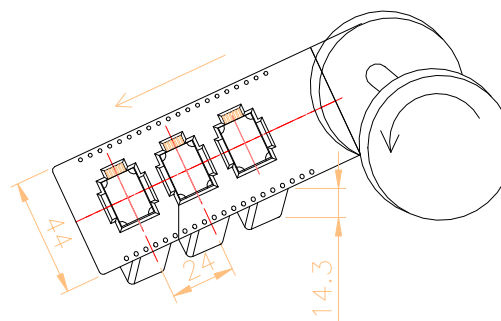

C UL RECOGNIZED - FILE #E465899

		ADD PART NO.(3)	SAIL	113007
	0060000	NEW DESIGN	LINGER	102706
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 2.5/1	CHECKED eva
		Dimension Range Tolerance		APPROVED peter
		X.X ±0.20 UNIT mm		
		X.XX ±0.15		
		X.XXX ±0.10 SIZE A3		
		ANGLE ±5°		
Material/Plated/Notes		NAME		
SEE NOTE		SIDE ENTRY SMT JACK 6P PEG DIP		
Tooling No.		PART NO. SEE NOTE	REV. B	
		DOC. NO.		

Design drawing