

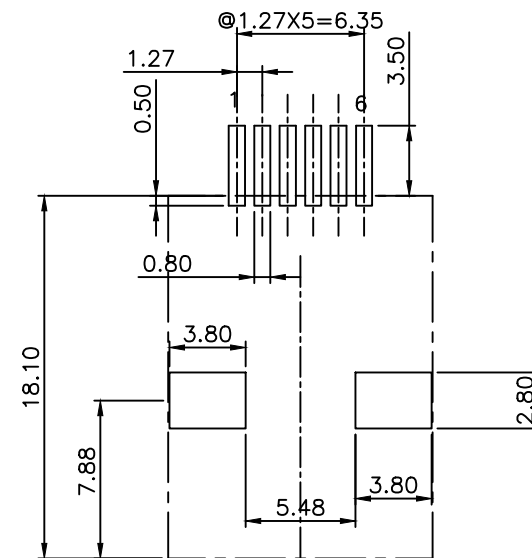


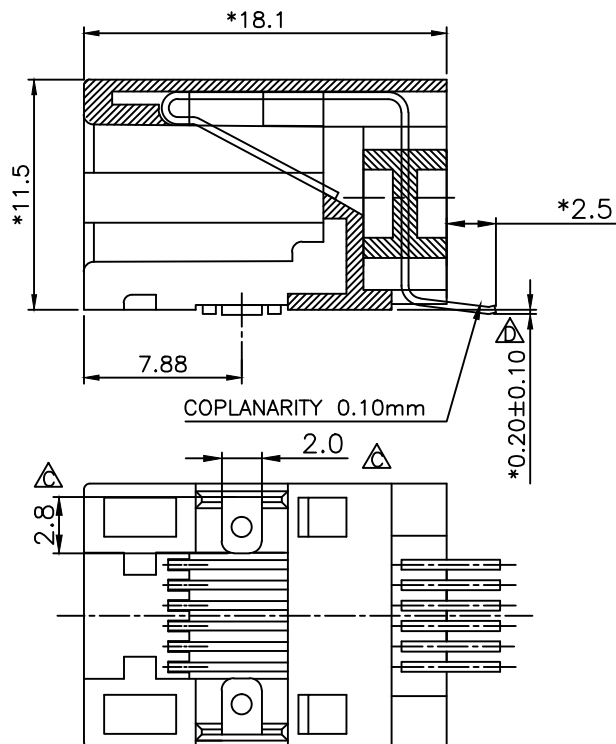

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

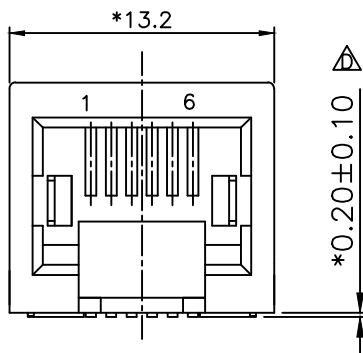

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.35\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER


PRODUCT CODE

CONFIGURATION

3253-0014-01
3253-0014-02
3253-0014-03
3253-0014-04

RJJU-66-I2I-E3H-014
RJJU-66-I4I-E3H-014
RJJU-64-I22-E3H-014
RJJU-64-I42-E3H-014

6U" GOLD PLATING, 6P6C
30U" GOLD PLATING, 6P6C
6U" GOLD PLATING, 6P4C
30U" GOLD PLATING, 6P4C

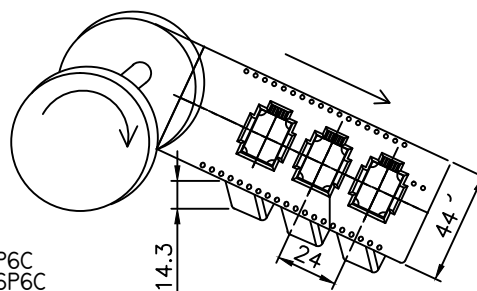

△ X2		MODIFY DRAWING	ROCK	061212'
△ X2		UPDATE DRAWING	DORIS	082311'
△ X1		ADD NEW P/N(3)	LINGER	061207
△ X0	0009000	NEW DESIGN	LINGER	020107
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
		Dimension Range Tolerance	3/1	
		X.X ±0.20 UNIT	mm	APPROVED
		X.XX ±0.15		
		X.XXX ±0.10	SIZE	A3
		ANGLE	±5°	
Material/Plated/Notes		NAME		
SEE NOTE		SIDE ENTRY PCB JACK(SMT) 6P PEG IN		
Tooling No.	PART NO.		REV.	
	SEE NOTE		D	
		DOC. NO.		

CULS UL RECOGNIZED - FILE #E465899

Design drawing