


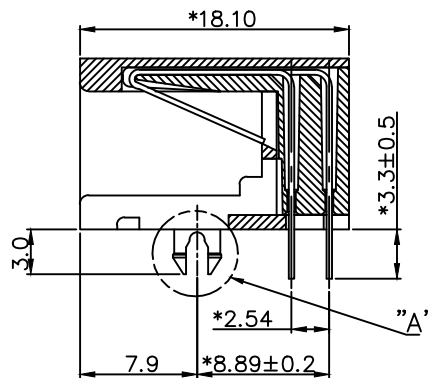
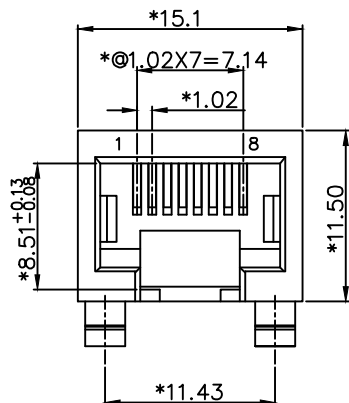


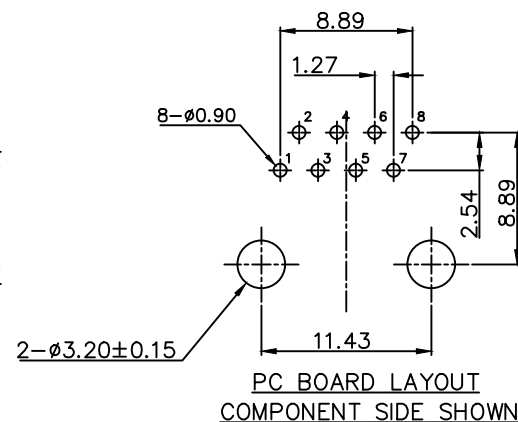

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

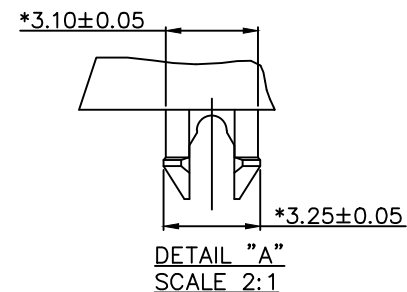

SECTION A-A

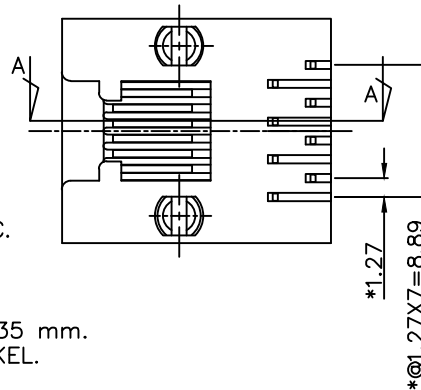

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION : -40°C TO +85°C.
- ΔMATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3253-0025-01	RJJU-88-122-E3H-033	6U" GOLD PLATING
3253-0025-02	RJJU-88-142-E3H-033	30U" GOLD PLATING



ΔX2		DRAWING MODIFY	DORIS	121415'
ΔX2		DRAWING MODIFY	YANG	021209
ΔX0	0069000	NEW DESIGN	YANG	061008
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 3/1	CHECKED
		Dimension Range Tolerance		
		X.X ±0.20	UNIT mm	APPROVED
		X.XX ±0.15		
		X.XXX ±0.10	SIZE A3	
		ANGLE ±1°		
Material/Plated/Notes		NAME		
SEE NOTE		11.5 SIDE ENTRY 10P8C DIP TYPE		
Tooling No.		PART NO.	SEE NOTE	REV.
		DOC. NO.		2