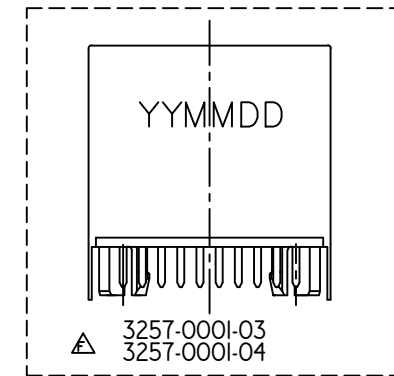

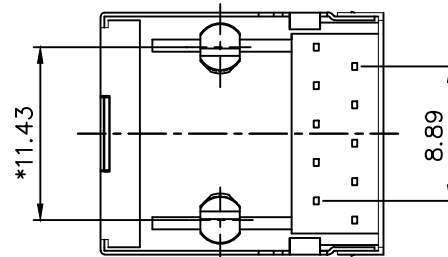
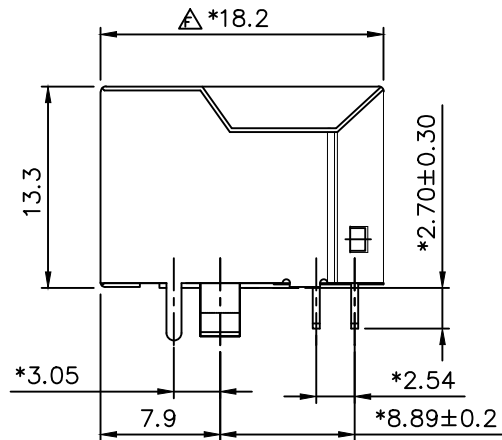
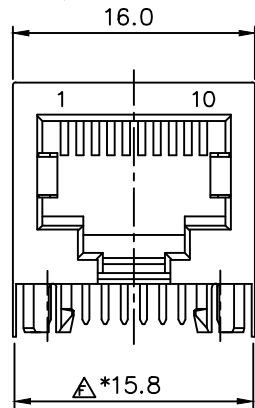


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC MIN.
2. CURRENT RATING : 1.5 AMP MIN.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0.
- Δ 2. INSERT MATERIAL : HIGH TEMP. UL94V-0.
- Δ 3. SHIELD MATERIAL : BRASS t=0.20 mm PLATED NICKEL 30u" MIN.
4. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
- Δ 5. PLATING : GOLD PLATING OVER NICKEL.
PLATING NICKEL 30u"~80u" FOR GOLD 3u"~30u"
PLATING Sn 100u"~200u".
- Δ 6. OPERATING LIFE : 1000 CYCLES MIN.
7. PCB RETENTION PRE-SOLDER : 1 LB MIN.
8. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.

Δ MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3257-0001-01	RJJS-I08-I22-E7H-005	6U" GOLD PLATING, IOP8C
3257-0001-02	RJJS-I08-I42-E7H-005	30U" GOLD PLATING, IOP8C
3257-0001-03	RJJS-I010-I25-E7H-005	6U" GOLD PLATING, IOPI0C
3257-0001-04	RJJS-I010-I45-E7H-005	30U" GOLD PLATING, IOPI0C

CUL US UL RECOGNIZED - FILE #E465899

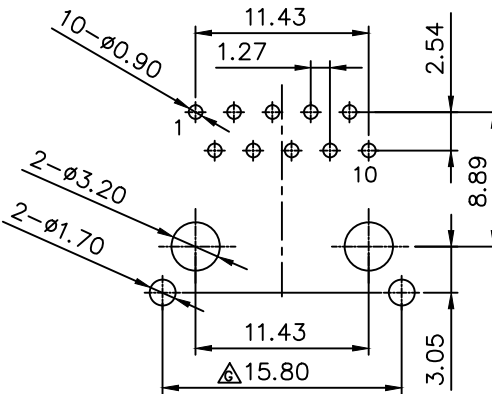

PC Board Layout Component Side Shown

Δ X1		UPDATE DIM.	DORIS	121914'
Δ X9		MODIFY DRAWING	DORIS	120513'
Δ X1		ADD NEW P/N	DORIS	032511'
Δ X3		ADD PART NO.(1)	ARES	121010
Δ X2		ADD PART NO.(1)	YANG	122308
Δ X1		ADD PART NO.(3)	SAIL	060508
Δ X0	000000	NEW DESIGN	LINGER	102506
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

encitech		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
		Dimension Range Tolerance	1/1	
		X.X ±0.20	UNIT	APPROVED
		X.XX ±0.15	mm	
		X.XXX ±0.10	SIZE	
		ANGLE ±5°	A3	
Material/Plated/Notes		NAME		
SEE NOTE		SIDE ENTRY JACK, 10P FTP		
Tooling No.		PART NO.	SEE NOTE	REV.
		DOC. NO.		G