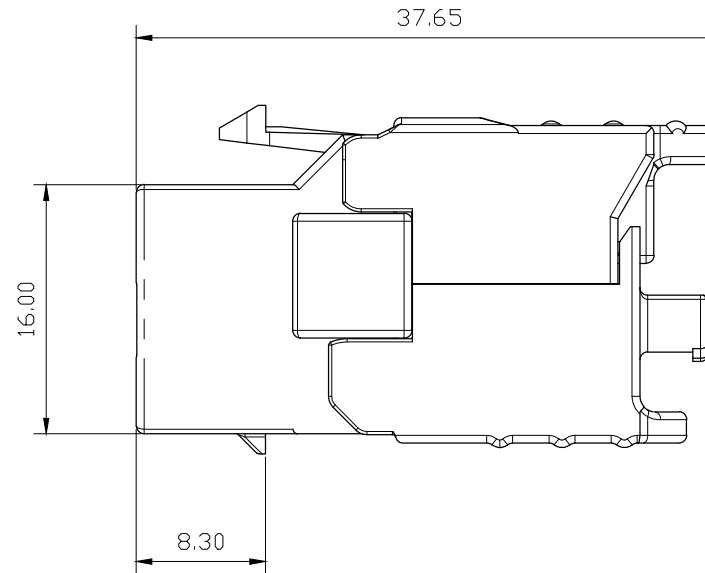
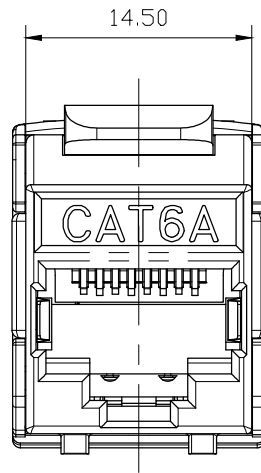


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN.
6. C6A CONNECTING HARDWARE:
CONFORM TO ANSI/TIA/EIA-568 B.2-1


ENVIRONMENTAL:


1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

CONFORM TO TIA/EIA 568B

MATES WITH MODULAR PLUG CONFORMING TO
TIA-1096-A.MECHANICAL:

1. HOUSING MATERIAL: UL94V-0
2. INSERT MATERIAL: UL94V-0
3. PCB MATERIAL: FR-4
4. CONTACT MATERIAL: PHOSPHOR BRONZE
5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
WITH SILVER OR NICKEL PLATING
6. WIRE: #22~26AWG

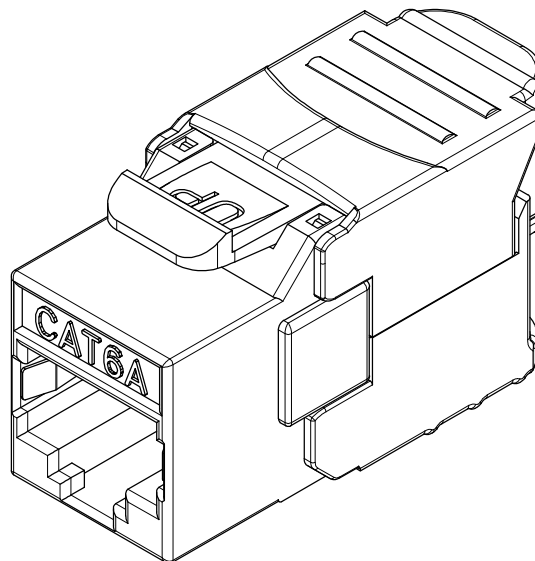

 X0	0068000	NEW DESIGN		Wing	091118	
MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE	
		UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE 2/1		
		Dimension Range Tolerance		CHECKED		
		X.X	±0.20	UNIT	APPROVED	
		X.XX	±0.15	mm		
		X.XXX	±0.10	SIZE		
		ANGLE	±5°	A3		SHEET
Material/Plated/Notes		NAME				
SEE NOTE		C6A Slim Type Keystone Jack TYPE2				
		PART NO. 326I-0006-I0			REV.	
		DOC. NO.			X	

Design drawing