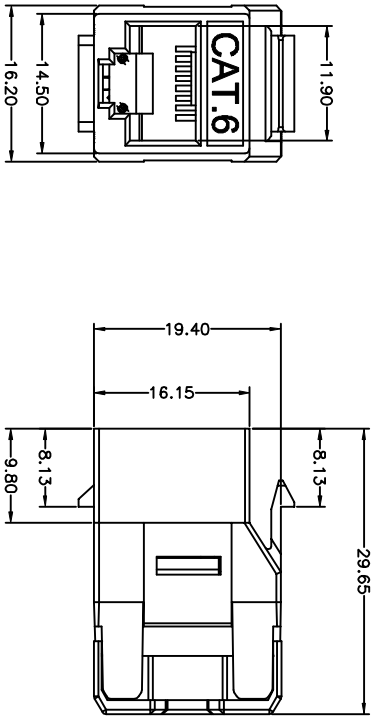
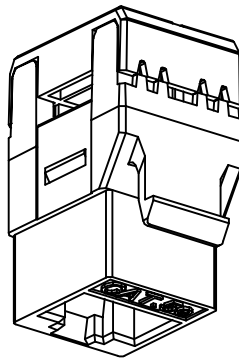




NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1 MIN.
6. CONFORM TO ANSI/TIA/EIA-568 B.2-1

MECHANICAL:

1. HOUSING MATERIAL : PC UL94V-0
2. INSERT MATERIAL : PBT+30%GF. UL94V-0
3. PCB MATERIAL : FR-4 THICKNESS 1.6 mm
4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN t=0.35 mm
5. IDC CONTACT MATERIAL : WITH NICKEL PLATING

WIRE

: #24~26 AWG

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION : 0°C TO 70°C.

CONFORMING TO TIA/EIA 568B
MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

A		0089900		NEW DESIGN		HENRY		030317	
MARK		ECN-NO.		REVISION RECORD		DRAWN		DATE	
		UNLESS OTHERWISE SPECIFIED		SCALE		CHECKED			
		Dimension Range		Tolerance		1 / 1			
		X.X		±0.20 UNIT		mm		APPROVED	
		X.XX		±0.15					
		X.XXX		±0.10					
		ANGLE		45°		A3			
Material/Printed Notes		NAME				SHEET		1 / 1	
SEE NOTE				180° CAT6 KEYSTONE JACK					
Tooling No.				PART NO.		3261-0015-05		REV.	
				DOC. NO.				A	