

**Style**  
M12 Socket, shielded  
5 pin  
B-coding

**Ratings**  
Voltage: 60 V  
Current: 4 A

**Operating Temperature Range**  
-40~105°C


**Materials**  
① Insulator: Polyamide 66 (PA66), UL94 HB, black  
② Pin: Phosphor copper, gold flashing  
③ M12 Shell: Brass, nickel plated  
④ O-ring: Nitrile rubber, black & green  
⑤ Epoxy: Epoxy resin

**Electrical Requirements**  
Insulation resistance: 100 MΩ @ 500 Vdc  
Contact resistance: 10 mΩ or less


**Mechanical Requirements**  
Life cycle: 500 mating cycles minimum

**Environmental Requirements**  
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.  
Waterproof: IP67




**Assembly info**  
Wire gauge: 22 AWG max




Front View  
Not to Scale

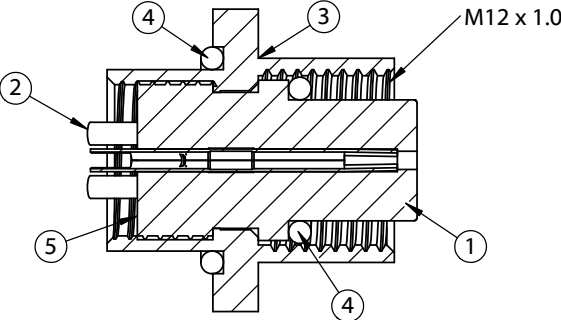

SECTION A-A

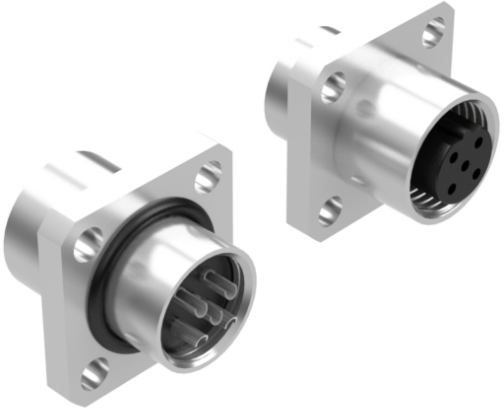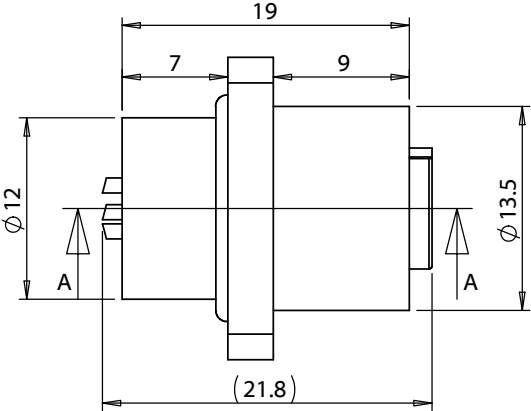

Panel cut-out  
Not to Scale

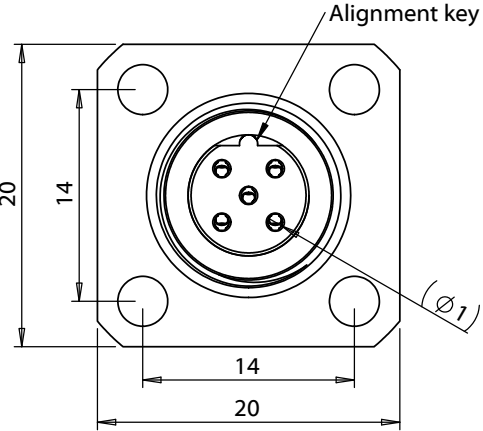

Revision:	Date:	Description:	Prepared:	Notes:	<div>TENSILITY</div> <div>tel 1.541.323.3228 800 877.670.7118</div> <div>fax 1.541.323.4202 web tensility.com</div> <div>Size: Part number:</div> <div>A 55-00235</div> <div>Scale: 2:1</div> <div>Sheet 1 of 1</div>		
A	04/05/2024	Initial release	Verified:	RoHS compliant			
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent			
			Tolerances:	Description:			
			X: ± 0.3 mm	Connector, 5 pin M12 B-code socket, 12xL21.8mm, gold plated, flange mount, solder cup, IP67, shielded			
			X.X: ± 0.1 mm				
			X.XX: ± 0.05 mm				