


This drawing must not without our permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

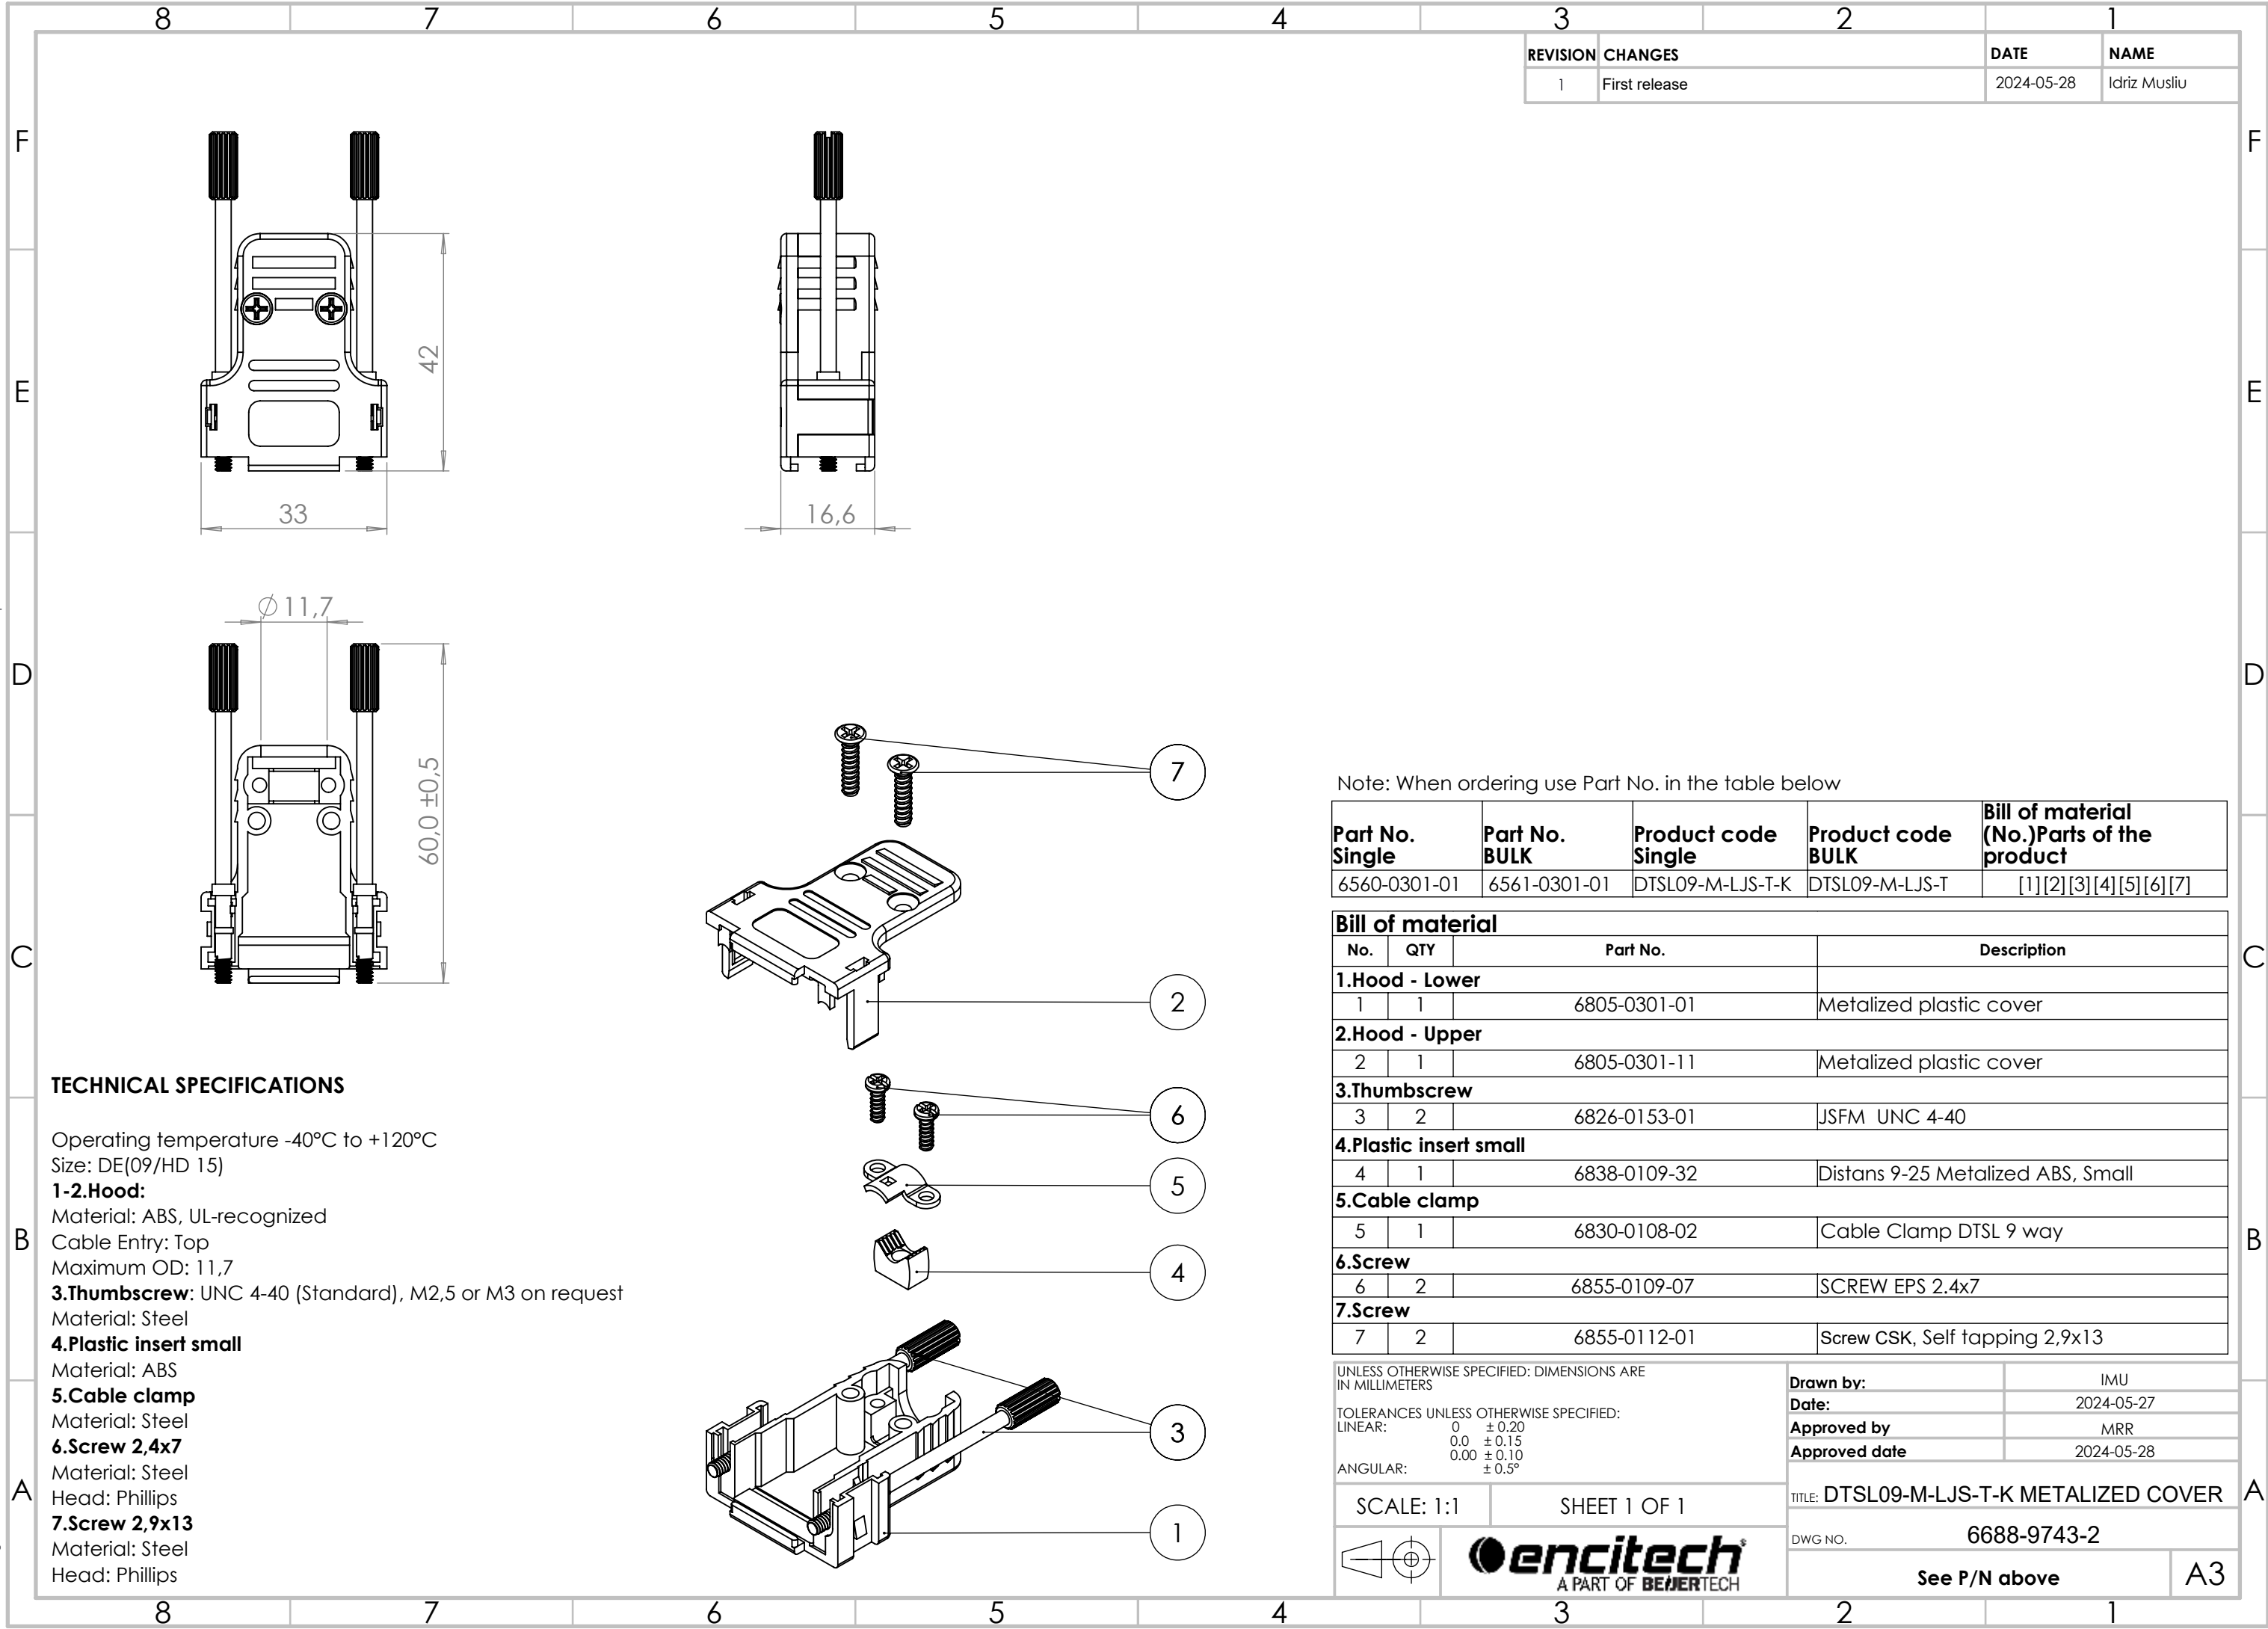

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DE(09/HD 15)
1-2.Hood:
Material: ABS, UL-recognized
Cable Entry: Top
Maximum OD: 11,7
3.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
4.Plastic insert small
Material: ABS
5.Cable clamp
Material: Steel
6.Screw 2,4x7
Material: Steel
Head: Phillips
7.Screw 2,9x13
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0301-01	6561-0301-01	DTSL09-M-LJS-T-K	DTSL09-M-LJS-T	[1][2][3][4][5][6][7]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood - Lower				
1	1	6805-0301-01	Metalized plastic cover	
2.Hood - Upper				
2	1	6805-0301-11	Metalized plastic cover	
3.Thumbscrew				
3	2	6826-0153-01	JSFM UNC 4-40	
4.Plastic insert small				
4	1	6838-0109-32	Distans 9-25 Metalized ABS, Small	
5.Cable clamp				
5	1	6830-0108-02	Cable Clamp DTSL 9 way	
6.Screw				
6	2	6855-0109-07	SCREW EPS 2.4x7	
7.Screw				
7	2	6855-0112-01	Screw CSK, Self tapping 2,9x13	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED: LINEAR: 0 ± 0.20 0.0 ± 0.15 0.00 ± 0.10 ANGULAR: ± 0.5°		Drawn by:	IMU
		Date:	2024-05-27
		Approved by	MRR
		Approved date	2024-05-28
SCALE: 1:1		SHEET 1 OF 1	
		TITLE: DTSL09-M-LJS-T-K METALIZED COVER	
		DWG NO. 6688-9743-2	
		See P/N above	
		A3	