


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

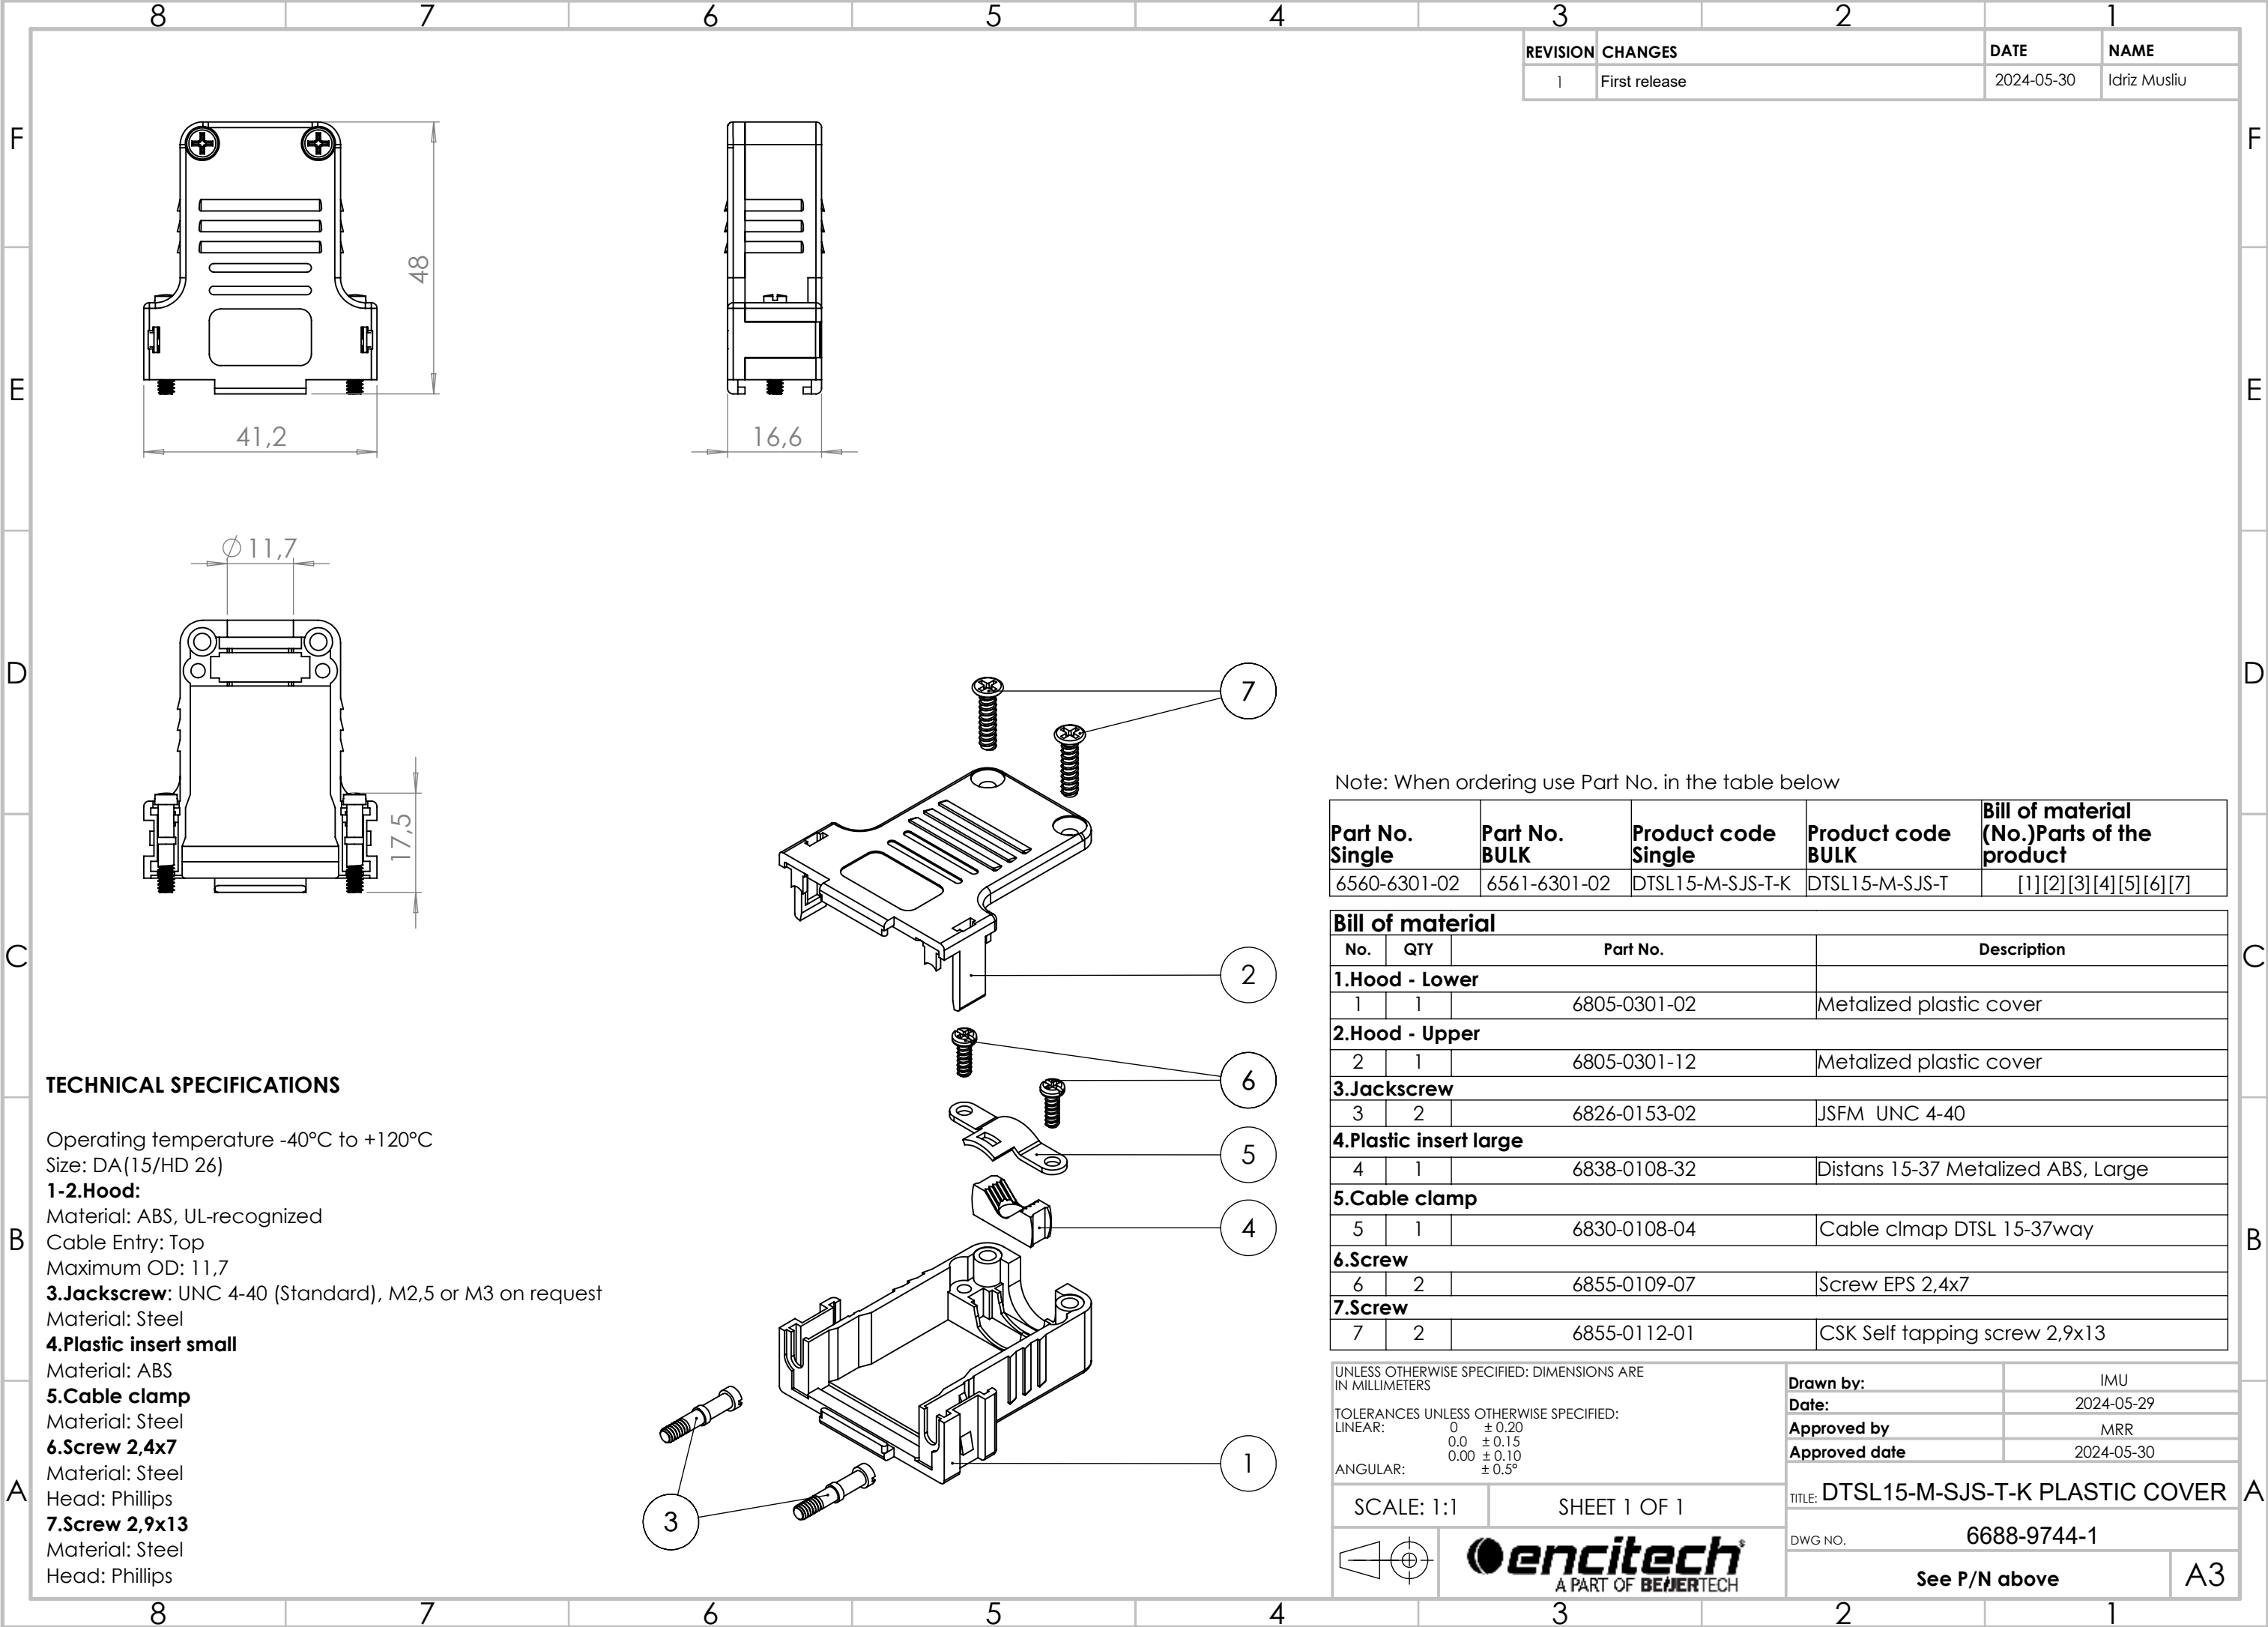

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DA(15/HD 26)

1-2.Hood:

Material: ABS, UL-recognized
Cable Entry: Top
Maximum OD: 11,7

3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel

4.Plastic insert small

Material: ABS

5.Cable clamp

Material: Steel

6.Screw 2,4x7

Material: Steel
Head: Phillips

7.Screw 2,9x13

Material: Steel
Head: Phillips

REVISION	CHANGES	DATE	NAME
1	First release	2024-05-30	Idriz Musliu

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-6301-02	6561-6301-02	DTSL15-M-SJS-T-K	DTSL15-M-SJS-T	[1][2][3][4][5][6][7]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood - Lower				
1	1	6805-0301-02	Metalized plastic cover	
2.Hood - Upper				
2	1	6805-0301-12	Metalized plastic cover	
3.Jackscrew				
3	2	6826-0153-02	JSFM UNC 4-40	
4.Plastic insert large				
4	1	6838-0108-32	Distans 15-37 Metalized ABS, Large	
5.Cable clamp				
5	1	6830-0108-04	Cable clmap DTSL 15-37way	
6.Screw				
6	2	6855-0109-07	Screw EPS 2,4x7	
7.Screw				
7	2	6855-0112-01	CSK Self tapping screw 2,9x13	


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR:

0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR:
± 0.5°

SCALE: 1:1

SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-05-29
Approved by	MRR
Approved date	2024-05-30

TITLE: DTSL15-M-SJS-T-K PLASTIC COVER

DWG NO. 6688-9744-1

See P/N above

A3