


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

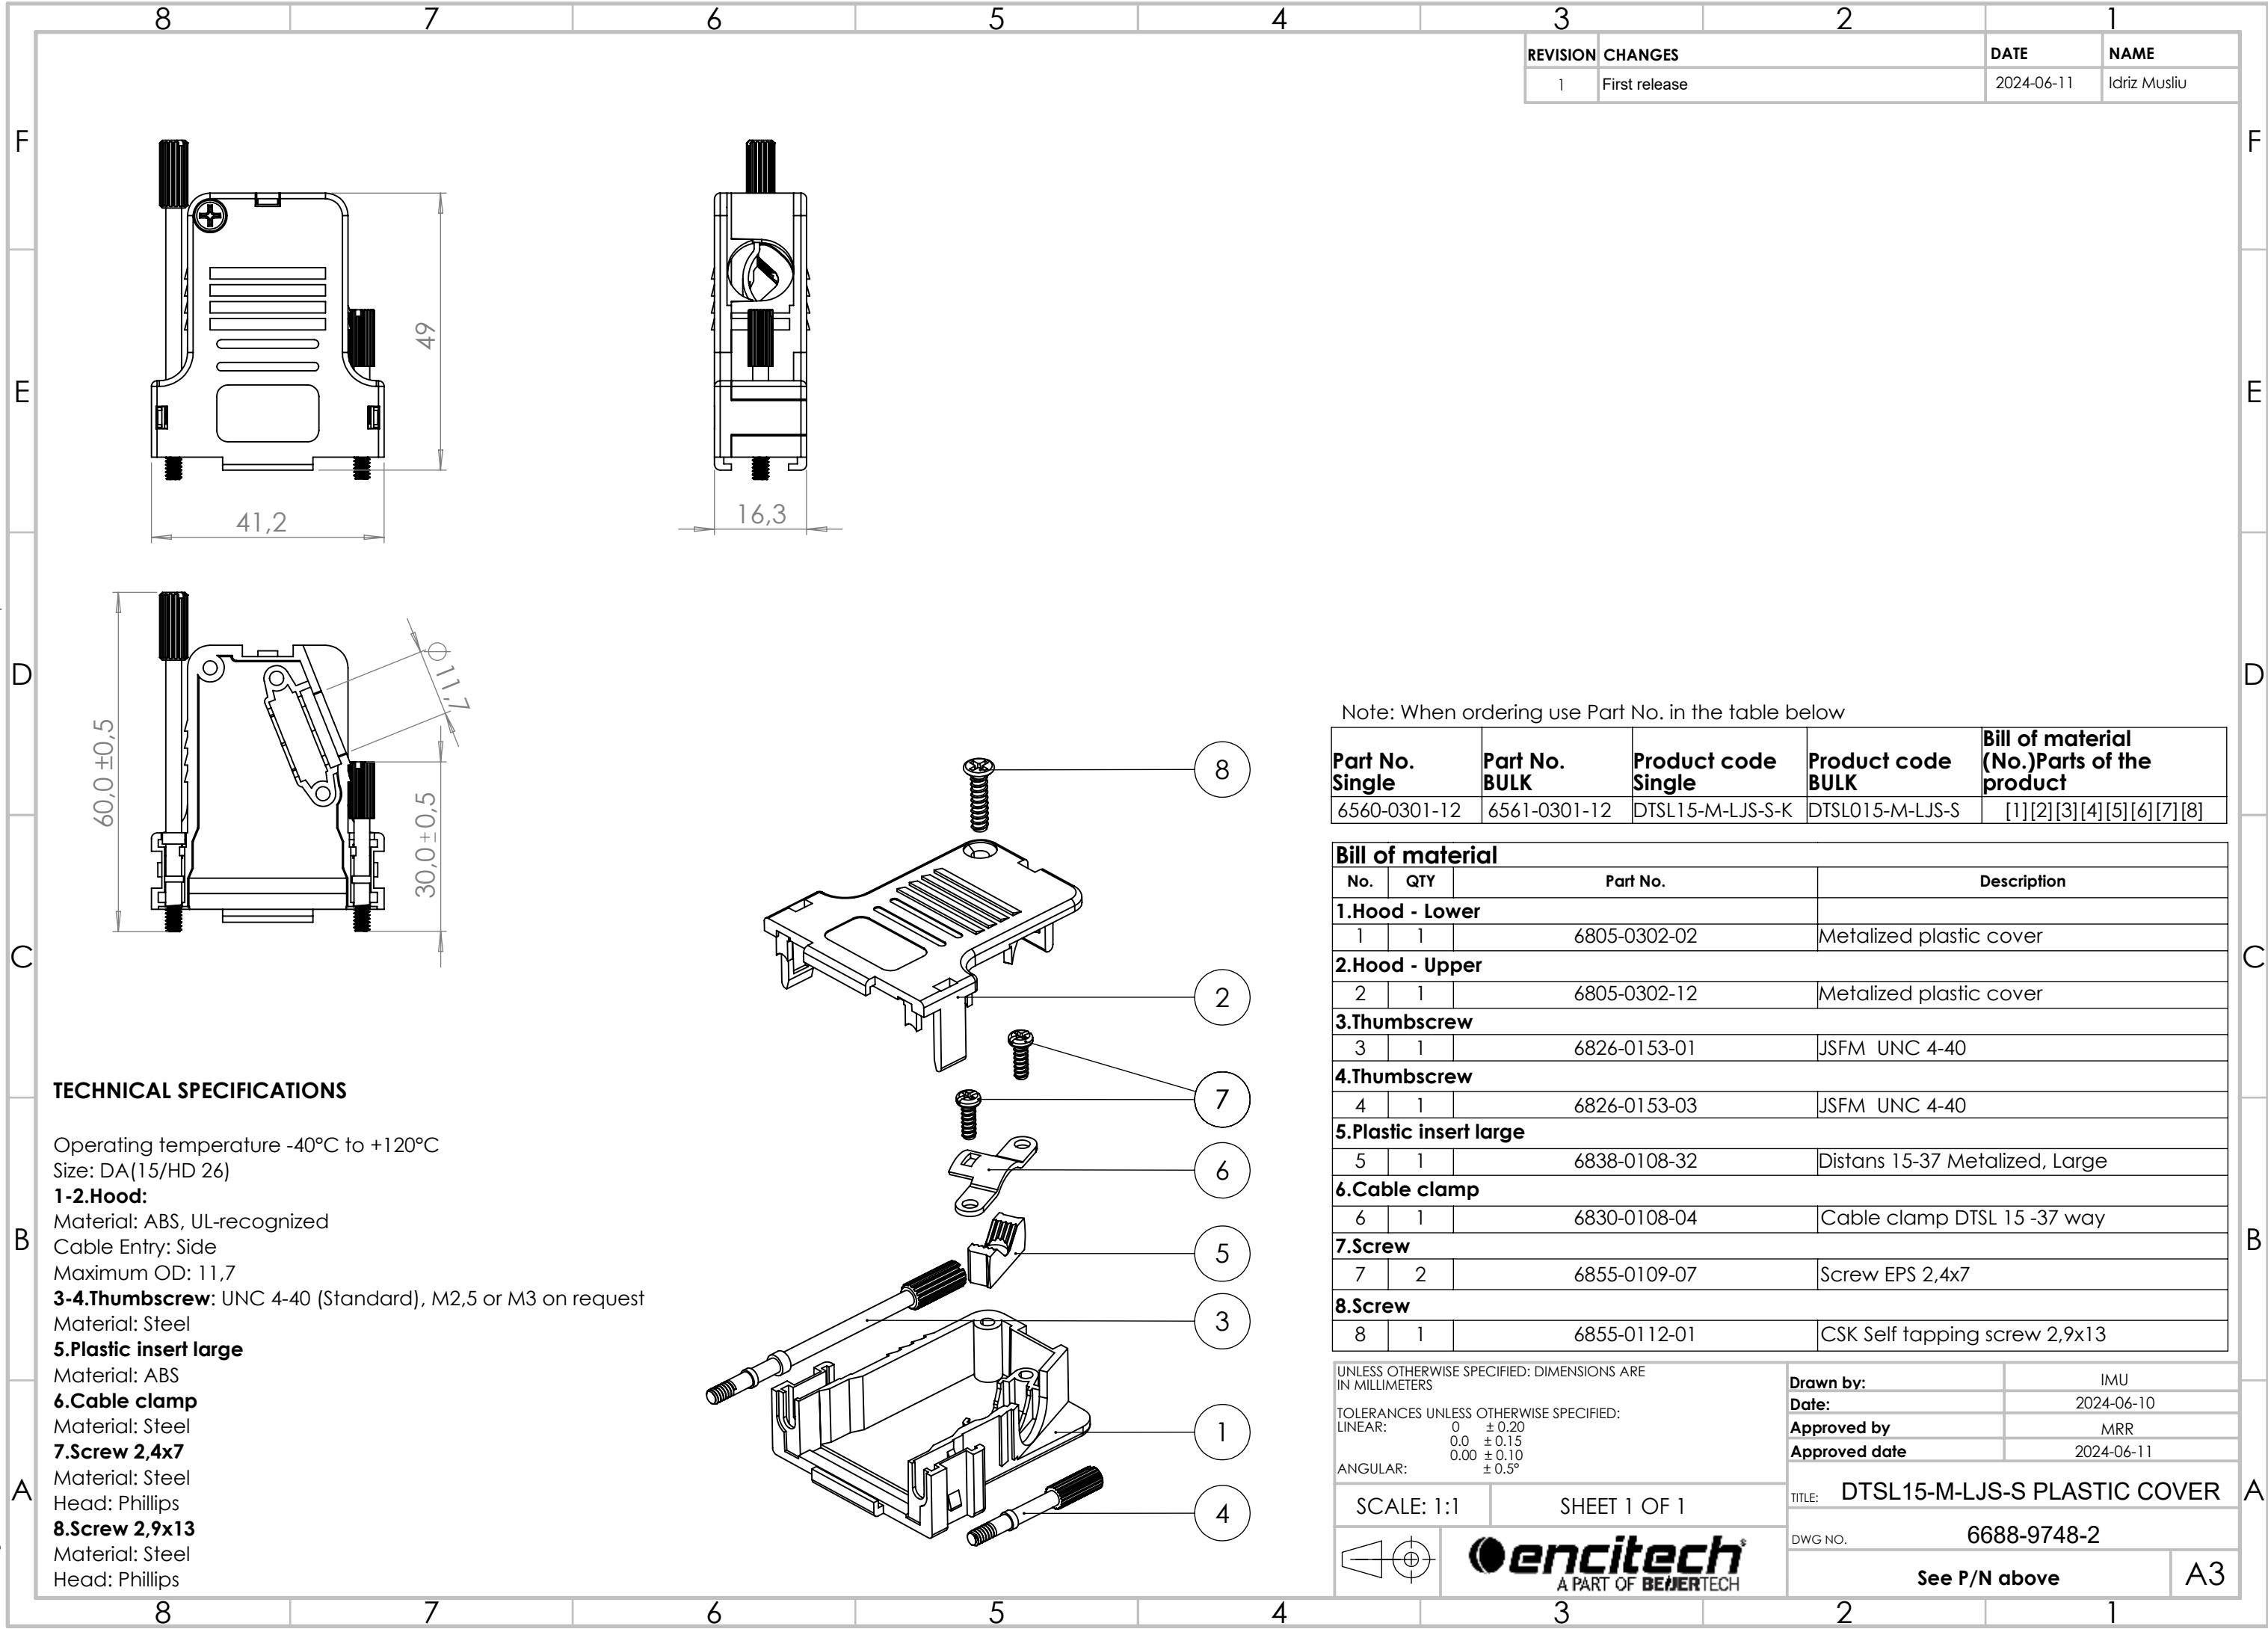

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DA(15/HD 26)
1-2.Hood:
Material: ABS, UL-recognized
Cable Entry: Side
Maximum OD: 11,7
3-4.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
5.Plastic insert large
Material: ABS
6.Cable clamp
Material: Steel
7.Screw 2,4x7
Material: Steel
Head: Phillips
8.Screw 2,9x13
Material: Steel
Head: Phillips

REVISION	CHANGES	DATE	NAME
1	First release	2024-06-11	Idriz Musliu

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0301-12	6561-0301-12	DTSL15-M-LJS-S-K	DTSL015-M-LJS-S	[1][2][3][4][5][6][7][8]

Bill of material			
No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0302-02	Metalized plastic cover
2.Hood - Upper			
2	1	6805-0302-12	Metalized plastic cover
3.Thumbscrew			
3	1	6826-0153-01	JSFM UNC 4-40
4.Thumbscrew			
4	1	6826-0153-03	JSFM UNC 4-40
5.Plastic insert large			
5	1	6838-0108-32	Distans 15-37 Metalized, Large
6.Cable clamp			
6	1	6830-0108-04	Cable clamp DTSL 15 -37 way
7.Screw			
7	2	6855-0109-07	Screw EPS 2,4x7
8.Screw			
8	1	6855-0112-01	CSK Self tapping screw 2,9x13

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR: 0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-06-10
Approved by	MRR
Approved date	2024-06-11
TITLE: DTSL15-M-LJS-S PLASTIC COVER	
DWG NO. 6688-9748-2	
See P/N above	
A3	