


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

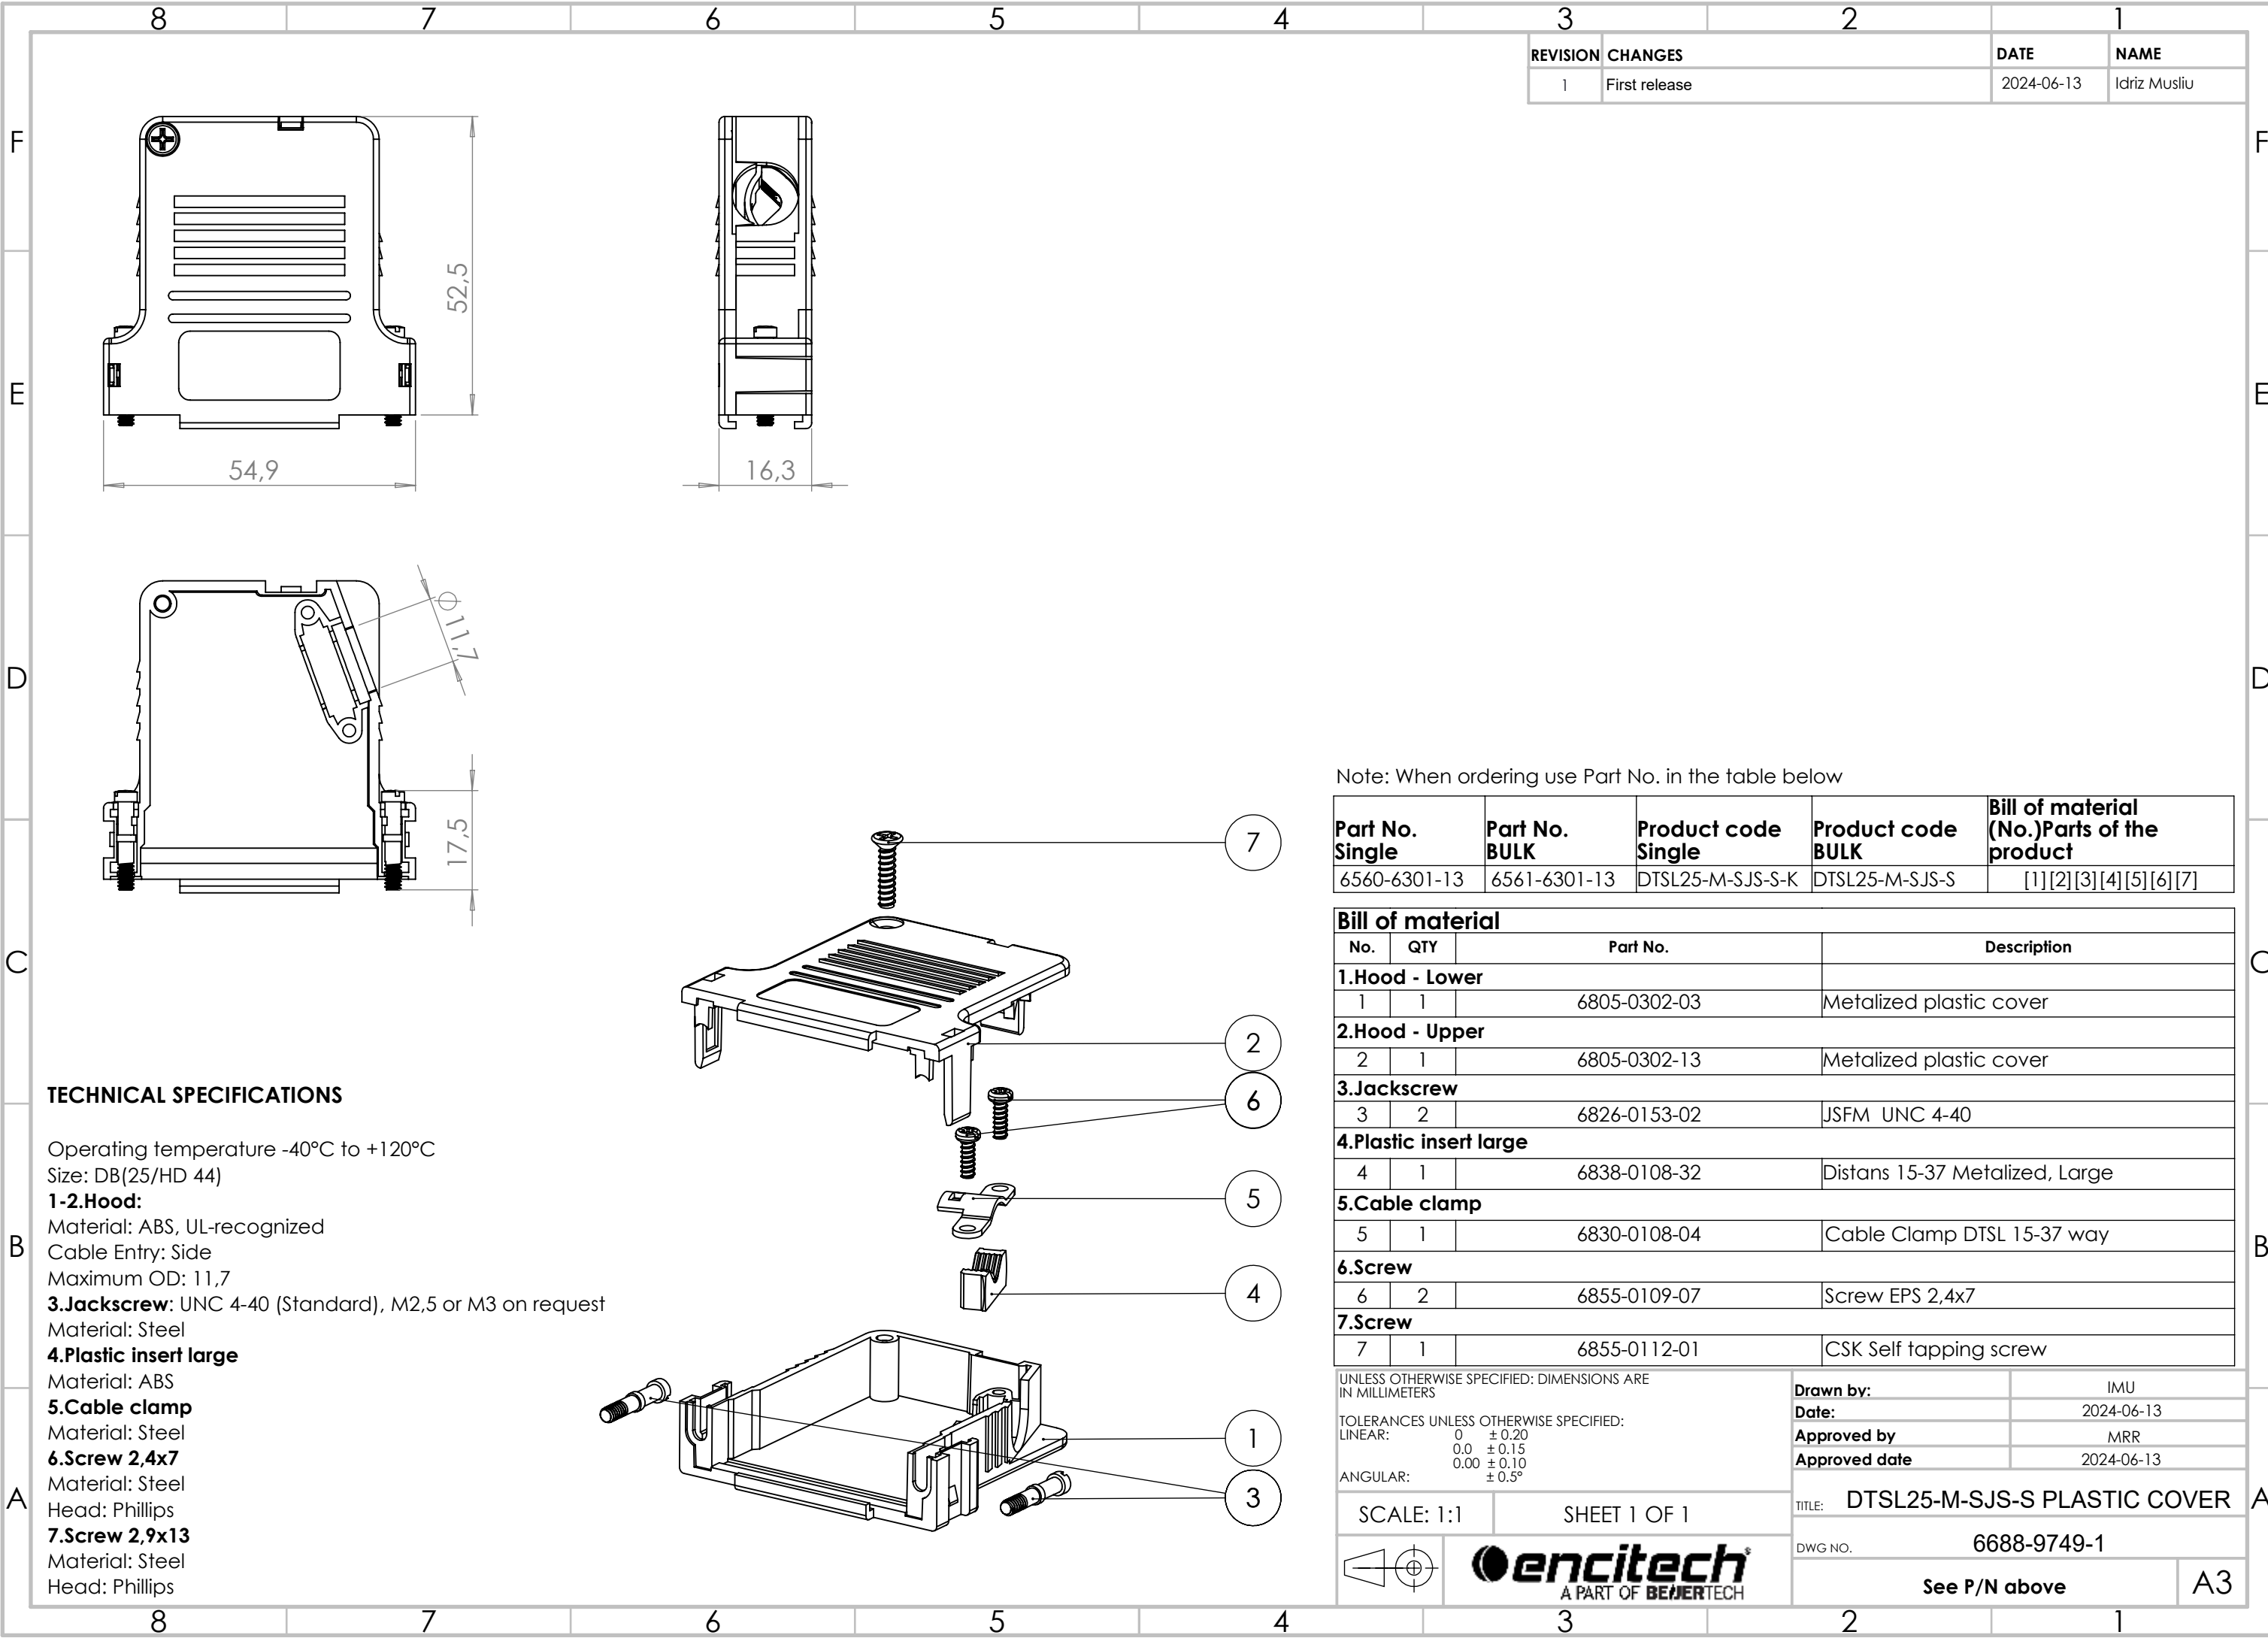

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DB(25/HD 44)
1-2.Hood:
Material: ABS, UL-recognized
Cable Entry: Side
Maximum OD: 11,7
3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
4.Plastic insert large
Material: ABS
5.Cable clamp
Material: Steel
6.Screw 2,4x7
Material: Steel
Head: Phillips
7.Screw 2,9x13
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below


Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-6301-13	6561-6301-13	DTSL25-M-SJS-S-K	DTSL25-M-SJS-S	[1][2][3][4][5][6][7]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood - Lower				
1	1	6805-0302-03	Metalized plastic cover	
2.Hood - Upper				
2	1	6805-0302-13	Metalized plastic cover	
3.Jackscrew				
3	2	6826-0153-02	JSFM UNC 4-40	
4.Plastic insert large				
4	1	6838-0108-32	Distans 15-37 Metalized, Large	
5.Cable clamp				
5	1	6830-0108-04	Cable Clamp DTSL 15-37 way	
6.Screw				
6	2	6855-0109-07	Screw EPS 2,4x7	
7.Screw				
7	1	6855-0112-01	CSK Self tapping screw	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:
LINEAR: 0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR: ± 0.5°

SCALE: 1:1 SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-06-13
Approved by	MRR
Approved date	2024-06-13
TITLE: DTSL25-M-SJS-S PLASTIC COVER	
DWG NO. 6688-9749-1	
See P/N above	
A3	