


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

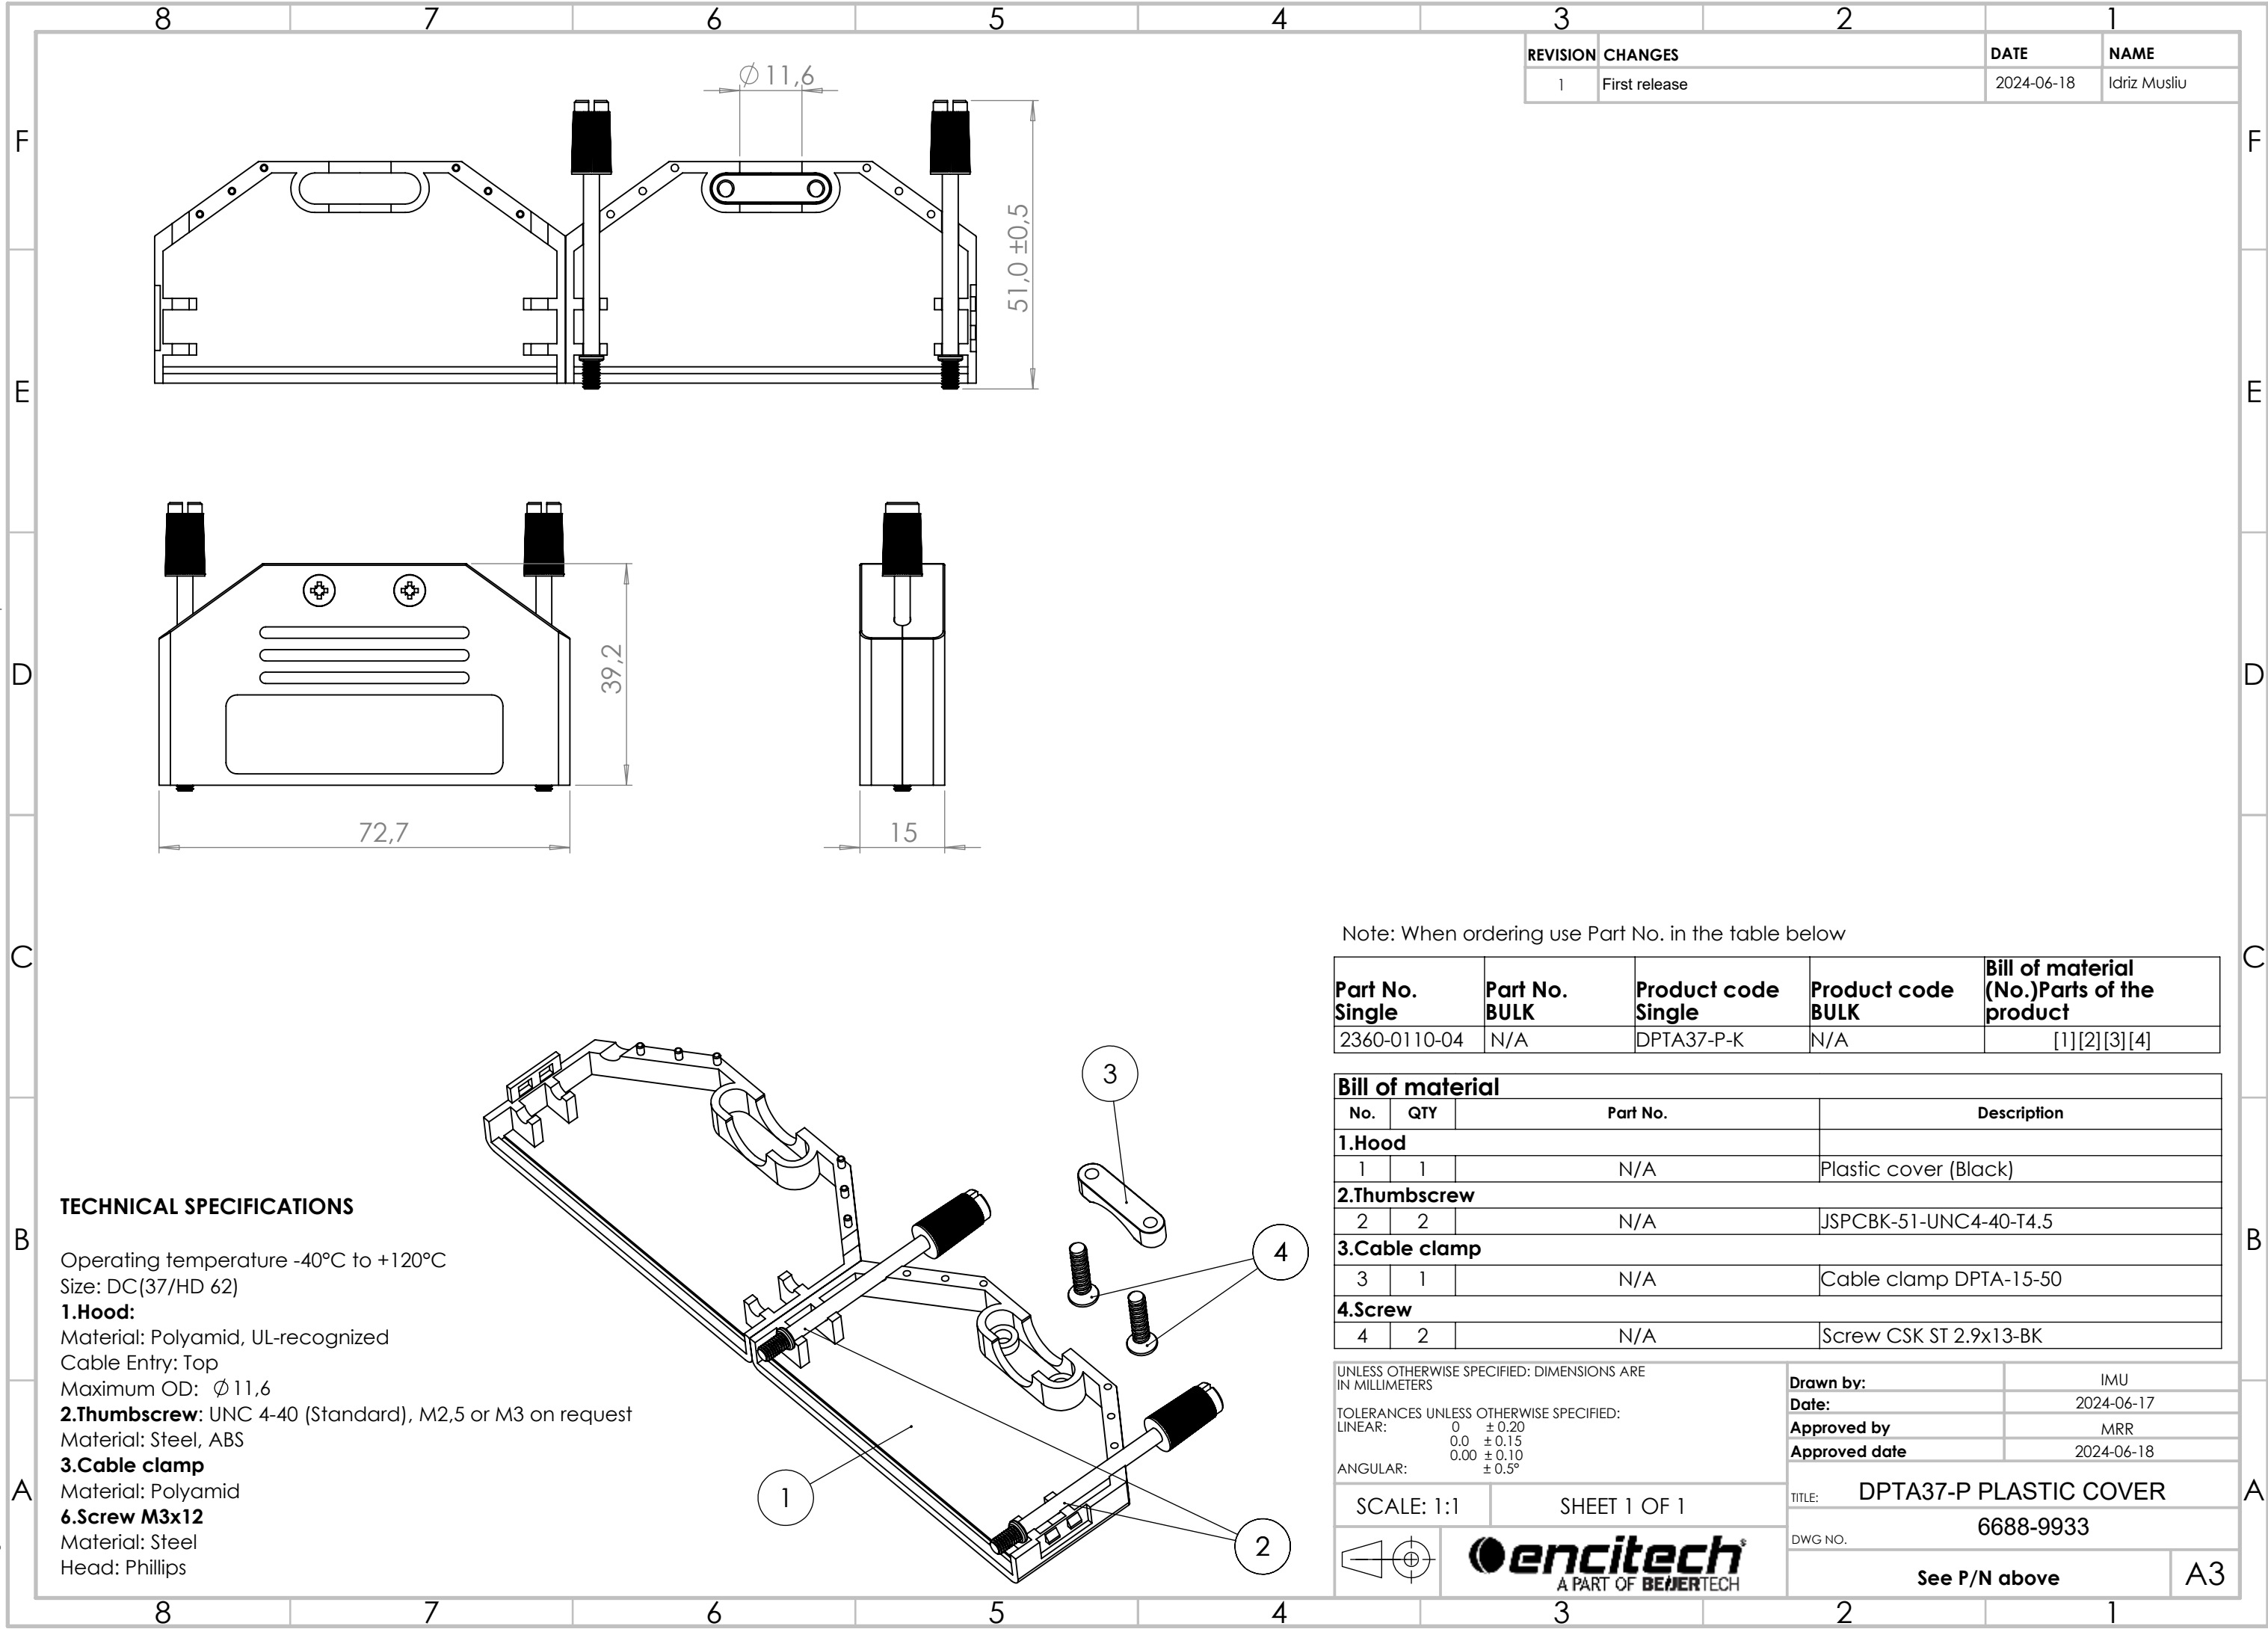

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DC(37/HD 62)

1.Hood:

Material: Polyamid, UL-recognized

Cable Entry: Top

Maximum OD: $\varnothing 11,6$

2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request

Material: Steel, ABS

3.Cable clamp

Material: Polyamid

6.Screw M3x12

Material: Steel

Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
2360-0110-04	N/A	DPTA37-P-K	N/A	[1][2][3][4]

Bill of material

No.	QTY	Part No.	Description
1.Hood			
1	1	N/A	Plastic cover (Black)
2.Thumbscrew			
2	2	N/A	JSPCBK-51-UNC4-40-T4.5
3.Cable clamp			
3	1	N/A	Cable clamp DPTA-15-50
4.Screw			
4	2	N/A	Screw CSK ST 2.9x13-BK

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR: 0 $\pm 0,20$


0,0 $\pm 0,15$

0,00 $\pm 0,10$

ANGULAR: $\pm 0,5^\circ$

SCALE: 1:1

SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-06-17
Approved by	MRR
Approved date	2024-06-18
TITLE:	DPTA37-P PLASTIC COVER
DWG NO.	6688-9933
See P/N above	A3