


HONEYWELL
PART NUMBER
8172CX2

REV	DOCUMENT	CHANGED BY	CHECK
A	0014396	TSG 25JUL05	RJ

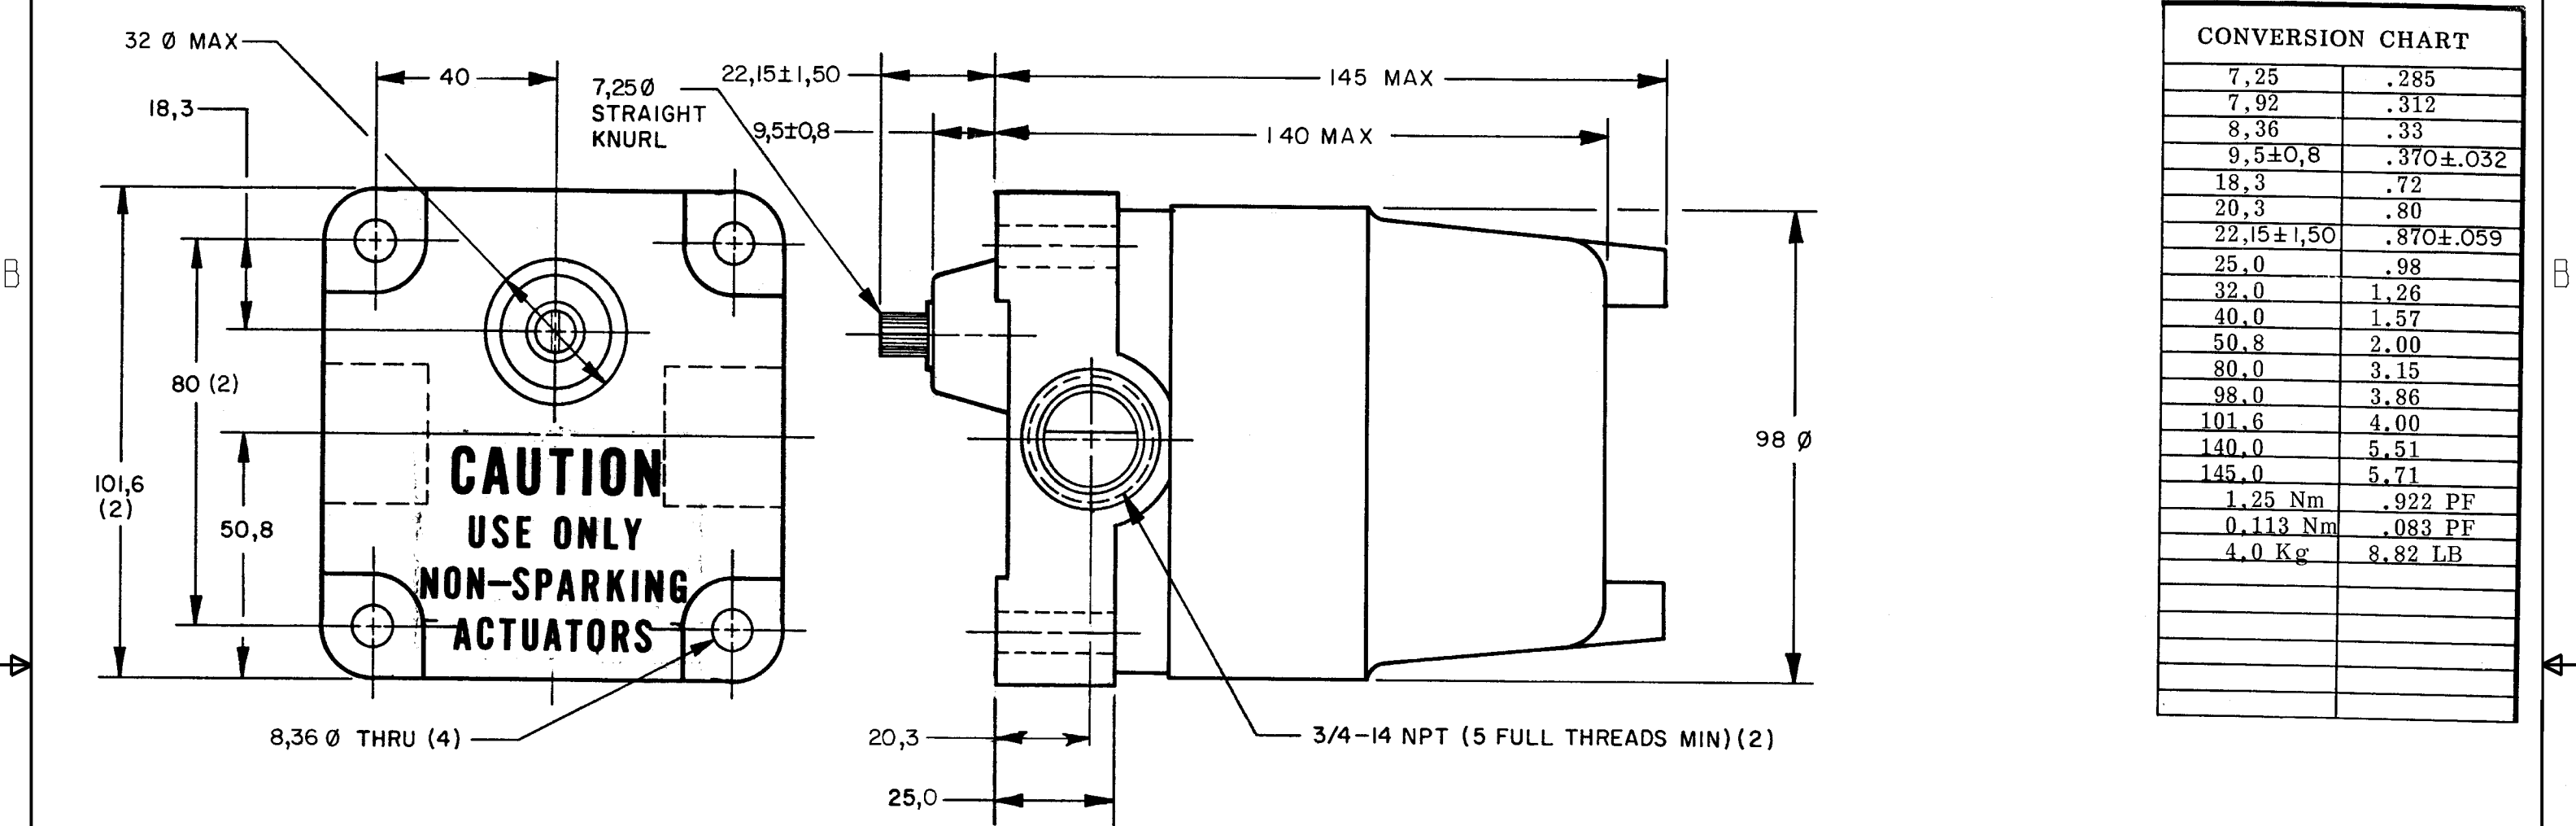

- NOTES
- 1 - EXPLOSION PROOF-UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS I, GROUPS C AND D; CLASS II GROUPS E, F AND G
 - 2 - BRONZE ENCLOSURE
 - 3 - 6-32 UNC X 7,92 REF PAN HEAD TERMINAL SCREW AND LOCK-WASHER (SEMS TERMI-LOX) (3 PER BASIC)
 - 4 - CAMS MAY BE REPOSITIONED IN 7°20' INCREMENTS
 - 5 - FOR USE IN TEMPERATURES UP TO 85°C
 - 6 - SEE (M) 7CX CHART 3 FOR LEVER ACTUATORS
 - 7 - WEIGHT 4.0 Kg APPROX.

CAT. LIST 6	DESCRIPTION	ELECTRICAL DATA
8172CX2	2 BASICS; EACH OPERATES CLOCK-WISE & COUNTER CLOCKWISE	UL LISTED-FILE E14274 CODE L22 1A 125 VAC

CHARACTERISTICS	
OPERATING FORCE	1.25 Nm MAX
RELEASE FORCE	.113 Nm MIN
PRETRAVEL	15° MAX
DIFFERENTIAL TRAVEL	10° MAX
OVERTRAVEL	90° MIN

DESIGN UNITS: MM
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	1.000
ONE PLACE	.X	±	0.4
TWO PLACE	.XX	±	0.15
THREE PLACE	.XXX	±	
FOUR PLACE	.XXXX	±	
ANGLES		±	

THIRD ANGLE PROJECTION

DRAWN	TSG	25 JUN 05
CHECK	RJ	25 JUN 05
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - ENCLOSED			
SIZE	TYPE	DRAWING NAME	REV
B	I	8172CX SERIES CHART 1	A
SCALE	-	SHEET 1 OF 1	