

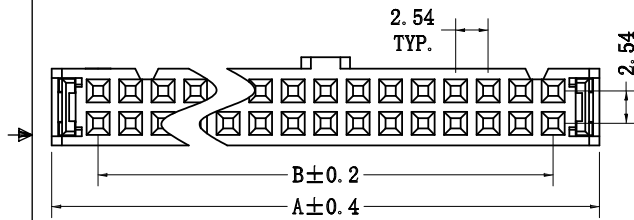

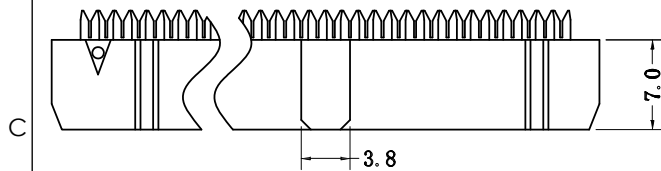



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EASE ELECTRONICS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF EASE ELECTRONICS IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/7/24	CHILLY. L

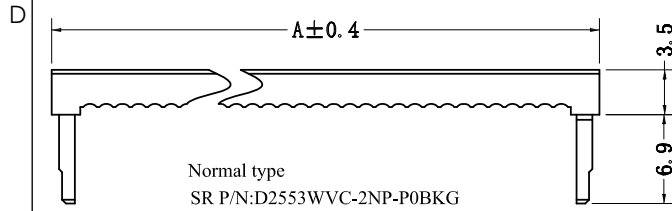

SPECIFICATION:

Current Rating: 3 A.

Withstanding Voltage: AC 1000V.

Insulation Resistance: 1000MΩ Min

Contact Resistance: 20mΩ Max..

Operating Temperature: -40°C ~ +105°C.

D2553 W V X- 2NP - P0 XX G X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
 - ② Category: W-Wafer
 - ③ Welding Board Angle: V- Straight 180°
 - ④ Feature Type: C-C type D-D type
 - ⑤ Circuit No.: 206-2x3PIN~264-2x32PIN,
 - ⑥ Material: P0-PBT, UL94V-0
 - ⑦ Color: BK-Black GY-Gray
 - ⑧ Plating Method: G-Au Or Sn Over Ni, E-Au 30u"
 - ⑨ Options: Blank-Normal type
- 1- A TYPE 3 pieces ; 1- B TYPE 3 pieces

A=2.54*N0 of Positions/2+4.70



B=2.54*N0 of Positions/2-2.54

A TYPE Three Piece

SR P/N: D2553WVC-2NP-P0BKG1

B TYPE Three Piece

SR P/N: D2553WVD-2NP-P0BKG1

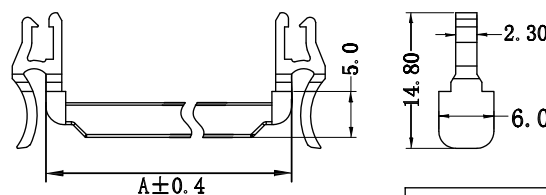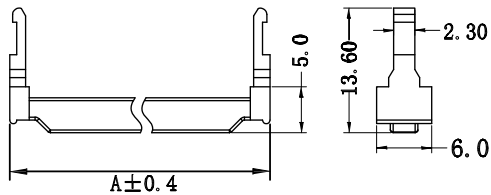

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .3 .XX = .15 PROJECTION 	APPROVALS	DATE	EASE Ease Electronics Co., Limited Zone A, 2nd Floor, Bldg A, No.45, Qiangin 3rd Rd, Tanzhou, 528467 Zhongshan, Guangdong, China +86-756-888810	
	DRAWN BY LUKE. L	05/7/2024		
	CHECKED BY TILY. H	05/7/2024	PART NUMBER D2553WVC-214-P0BKG1	
	APPROVED BY CHILLY. L	05/7/2024	PRODUCT DESCRIPTION 14 Position Rectangular Receptacle Connector IDC Gold 28 AWG	
COLOR VARIATIONS MAY OCCUR	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		ID I	SERIES NO. IDC-D2553
	REF		DWG. NO. 10095	REV. C
SCALE: NONE		CAD FILE: 10095		SHEET 1 OF 1