


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EASE ELECTRONICS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF EASE ELECTRONICS IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/7/24	CHILLY. L

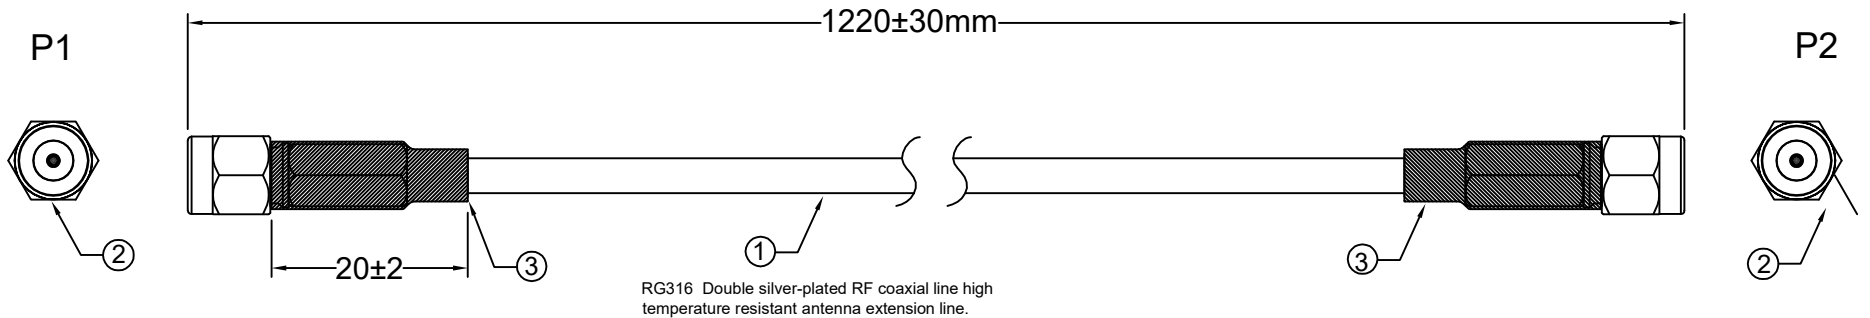



### CABLE CONSTRUCTION

ITEM		SPEC
CENTER CONDUCTOR	MATERIAL	SC
	CONSTRUCT mm/No.	0.51/Strands-7
INSULATION	MATERIAL	FEP
	O.D. mm	1.52±0.05
BRAID SHIELD	MATERIAL	SC
	CONSTRUCT mm/No.	2.00/Braid, 95%
PVC JACKET	MATERIAL	FEP
	O.D. mm	2.59±0.1
	COLOR	Brown, transparent

### WIRE ADDRESS




### PACKAGE



### ELECTRICAL TEST

- 1)100% OPEN SHORT&MISS WIRE TEST
- 2)INSULATION RESISTANCE:DC300V 10M OHM
- 3)CONDUCTOR RESISTANCE:3 OHM

3	XXXXXXXXXXXXXX	TUBE	Black heat shrinkable tube	2	PCS
2	XXXXXXXXXXXXXX	SMA MALE	PIN GOLD PLATED	2	SET
1	XXXXXXXXXXXXXX	CABLE	SEE " CABLE CONSTRUCTION "		MM
NO.	MATERIAL NO	PART NAME	MATERIAL/FINISH	QTY	UNIT

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div>EASEEase Electronics Co., Limited</div> <div>Zone A, 2nd Floor, Bldg A, No.45, Qianjin 3rd Rd, Tanhuo, 528467 Zhongshan, Guangdong, China +86-756-888810</div>					
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%		DRAWN BY LUKE. L		05/7/2024							
		CHECKED BY TILY. H		05/7/2024		PART NUMBER					
		APPROVED BY CHILLY. L		05/7/2024		8860768R039					
		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY									
ALL OTHER DIMENSIONAL TOLERANCES: X = .3 XX = .15						PRODUCT DESCRIPTION  Cable Assembly Coaxial SMA to SMA RG-316 47.2" (1.2m) 3.9'					
PROJECTION 		COLOR VARIATIONS MAY OCCUR		ID R		SERIES NO. COAX-CBL-RS		DWG. NO. R0039		REV. C	
		REF		SCALE: NONE		CAD FILE: R0039		SHEET 1 OF 1			