

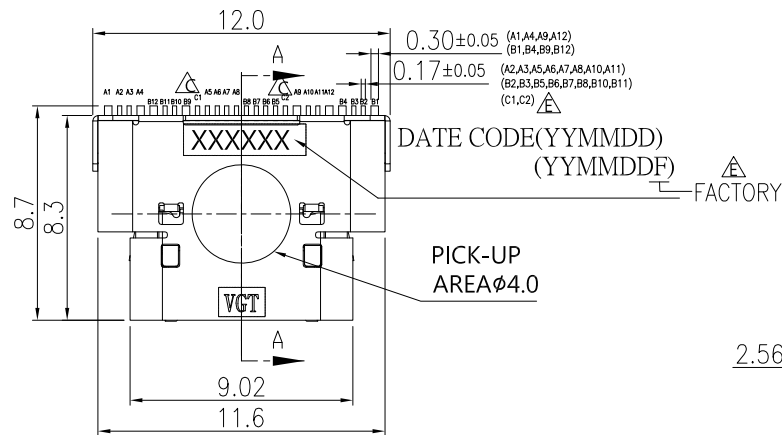

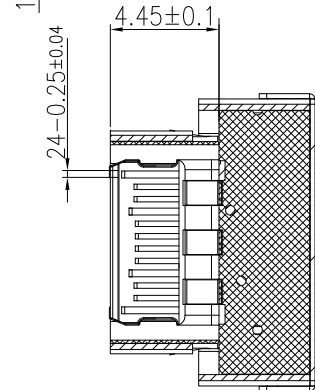


Section A-A

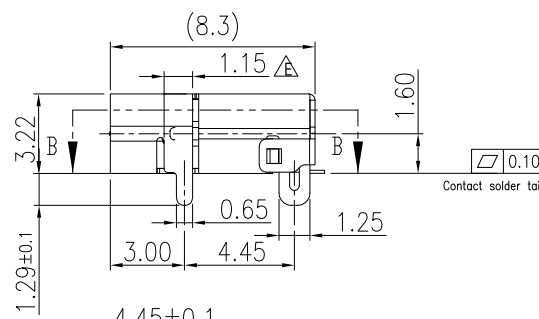

PART NUMBER : JCN-31CG-UD1B-BXR1

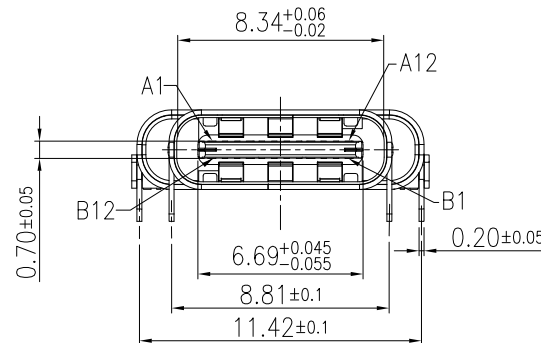

Section B-B

Gold Plating:
G=Gold Flash(1u")
A=3u"
B=6u"
C=10u"
D=15u"
E=30u"

NOTES:


- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 3A MAX.
 - 1-2 VOLTAGE RATING: DC 20V MAX.
 - 1-3 DIELECTRIC WITH STANDING: AC 100V
 - 1-4 INSULATION RESISTANCE: 100 MΩ
 - 1-5 CONTACT RESISTANCE:
 - INITIAL 30 MILLIOHMS MAX FOR VBUS AND GND CONTACT,
 - INITIAL 40 MILLIOHMS MAX FOR ALL OTHER CONTACT,
 - AFTER DURABILITY 10 MILLIOHMS MAX CHANGE,
- MECHANICAL CHARACTERISTICS:
 - 2-1 CONNECTOR MATING FORCE: 5~20N
 - 2-2 CONNECTOR UNMATING FORCE: 8N~20N INITIAL, 6N~20N AFTER DURABILITY.
 - 2-3 DURABILITY: 10000 CYCLES.
- ENVIRONMENTAL
 - 3-1 OPERATING TEMPERATURE RANGE: -20°C TO +85°C
- DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE INCHES EQUIVALENTS.
- RECOMMENDED PROCESS: IR REFLOW PEAK TEMPERATURE 260°C
- THE CONNECTOR IS ROHS COMPLIANT AND HALOGEN FREE.
- WHEN PLUG IS INSERTED INTO CONNECTOR IN WORSE CONDITION, SPRING TIP TOUCH PCB. SO INHIBIT CIRCUIT IN SPRING TIP AREA.

△	擴口結構強化+前DIP 1.15mm內設凸肋+本體DIP封膠+雷射點X6 ADD: DATA CODE XXXXXX+NOTES 修正補修	UNA	082124
△	修改A1、B1焊盤	STEVE	072023
△	Center shielding Ground pin, A1 and B1 changed to C1 and C2	STEVE	070523
△	增加激光點焊	STEVE	062123
△	NEW DESIGN	STEVE	020323
MARK	REVISION RECORD	DRAWN	MMDDYY'

CHECKED UNA		NAME USB3.2 Gen2 C.1 Row SMT, Offset 1.6mm, Cable detect, Dip Shell, Receptacle	
APPROVED KL		SCALE NA UNIT mm	
REV. E		SIZE A4	
UNLESS OTHERWISE SPECIFIED TOLERANCE		SHEET 1/2	
Dimension Range Tolerance		Material/Plated/Notes	
X.X ±0.35		④ SHIELD : STAINLESS STEEL/NICKEL PLATING	
X.XX ±0.25		⑤ HOUSING : HIGH TEMPERATURE PLASTIC	
X.XXX ±0.15		⑥ CONTACTS : COPPER ALLOY/NICKEL UNDERPLATED OVERALL, LEAD FREE TIN ALLOY AT TERMINATION.	
ANGLE ±5°		PART NO. & DOC NO.	

JCN-31CG-UD1B-BXR1



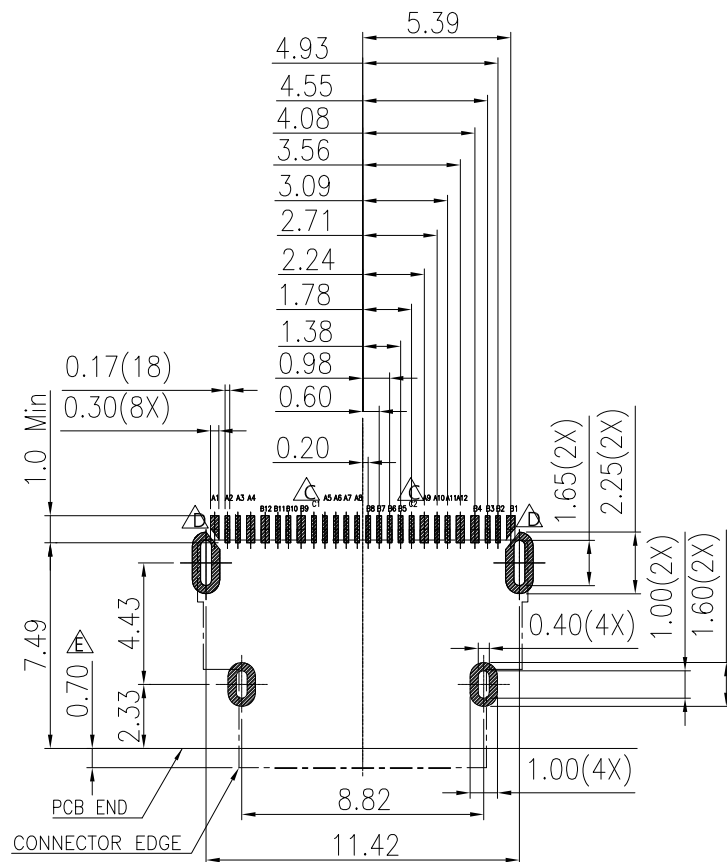


RECOMMEND PCB LAYOUT


TOP VIEW Tolerance:±0.05mm

SOLDER AREA
Tolerance:+0.05mm

PIN ASSIGNMENT		
Pin Number	Signal Name	Description
A1	GND	Ground for Power Return
A2	SS TX1+	Positive half of first SuperSpeed TX differential pair
A3	SS TX1-	Negative half of first SuperSpeed TX differential pair
A4	VBUS	POWER
A5	CC1	Configuration Channel
A6	D+	USB2.0 differential pair
A7	D-	
A8	SBU1	Sideband Use (SBU)
A9	VBUS	POWER
A10	SS RX2-	Negative half of second SuperSpeed RX differential pair
A11	SS RX2+	Positive half of second SuperSpeed RX differential pair
A12	GND	Ground for Power Return (Cable Detect-Middle partitions non shorts)
B12	GND	Ground for Power Return (Cable Detect-Middle partitions non shorts)
B11	SS RX1+	Positive half of first SuperSpeed RX differential pair
B10	SS RX1-	Negative half of first SuperSpeed RX differential pair
B9	VBUS	POWER
B8	SBU2	Sideband Use (SBU)
B7	D-	USB2.0 differential pair
B6	D+	
B5	CC2	Configuration Channel
B4	VBUS	POWER
B3	SS TX2-	Negative half of second SuperSpeed TX differential pair
B2	SS TX2+	Positive half of second SuperSpeed TX differential pair
B1	GND	Ground for Power Return
C1	GND	Center shielding Ground pin,
C2	GND	Center shielding Ground pin,

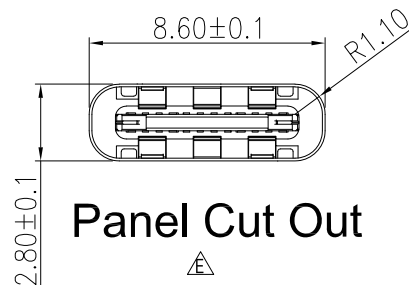

Panel Cut Out

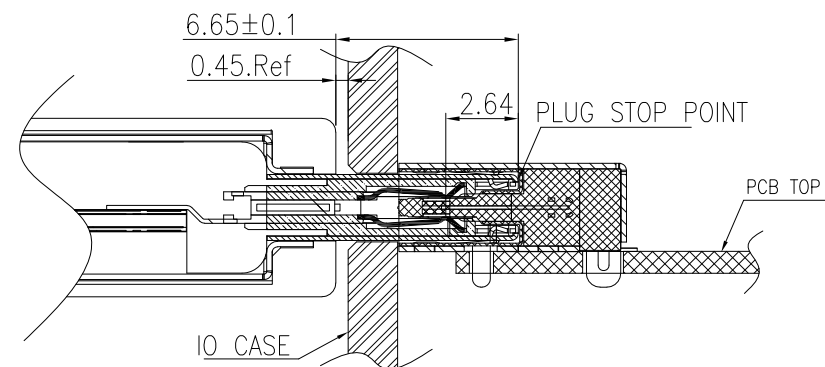

PLUG INTO RECEPTACLE REPRESENT

E		板口結構強化+前DIP 1.15mm+內殼凸點+本體DIP封膠+暫點X6 ADD DATA CODE XXXXX+NOTES 修正描述	UNA	082124	CHECKED UNA	UNLESS OTHERWISE SPECIFIED TOLERANCE Dimension Range Tolerance X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 ANGLE ±5°	SCALE NA	UNIT mm	NAME USB3.2 Gen2 C,1 Row SMT,Offset 1.6mm, Cable detect, Dip Shell,Receptacle		PART NO. & DOC NO. JCN-31CG-UD1B-BXR1	HF RoHS 	 V-GENERAL TECHNOLOGY 維將科技股份有限公司
		修改A1、B1焊盤	STEVE	072023									
		Center shielding Ground pin, A1 and B1 changed to C1 and C2	STEVE	070523	APPROVED KL								
		增加激光点焊	STEVE	062123	REV.								
		NEW DESIGN	STEVE	020323	E								
MARK		REVISION RECORD		DRAWN	MMDDYY'								
1		2		3		4		5		Design drawing			