


SIGN

7-in-1 room sensor

Scan or click to
discover product in
details

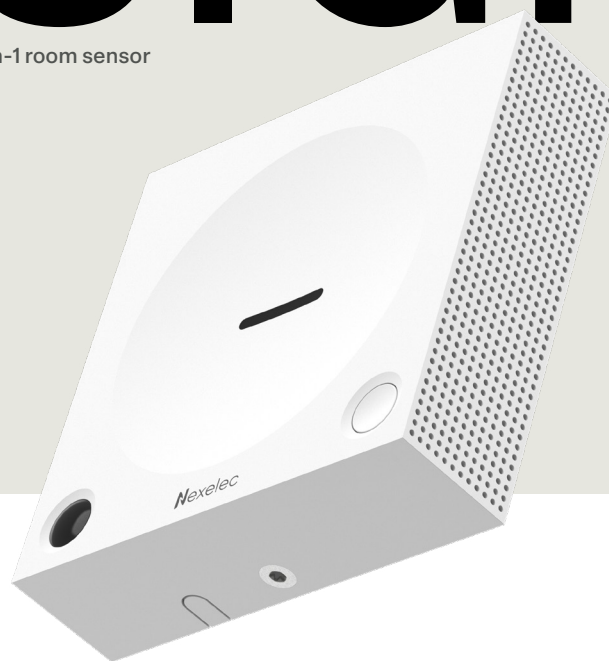

Intelligent and connected

On-board data analysis algorithm. Remote reading of measurements. All information is available in a secure cloud space.

Nexelec



Design

Facilitates product acceptance by occupants

 Carbon Dioxide

 Volatils Organic Compounds

 Temperature

 Humidity

 Presence

 Luminosity

 Noise

Monitors Indoor Air Quality

Numerous built-in sensors continuously analyze the atmosphere. Valuable data for occupant well-being

Controls VOC emissions

Volatile Organic Compounds are very present in indoor air. The VOC sensor quickly identifies excessively high concentration levels

Presence detection

Motion sensor detects people up to 6 meters away. Useful for lighting, security or temperature control

iZiAiR assesses Air Quality

The on-board algorithm simplifies interpretation of the extensive data measured by the sensors. Useful, effective decision support for healthier air

Detects and measures ambient light

The brightness sensor measures the amount of light in the room. Useful for controlling lighting or adjusting temperature more quickly according to sunshine levels

Sound under control


Measures noise and identifies noise pollution. Helps preserve a calm and peaceful environment

Reliable data transmission

Transmission modes adapted to every need, with redundant transmissions for high availability of critical data

Temperature / Humidity

For better indoor comfort. Measures ambient parameters in offices or homes

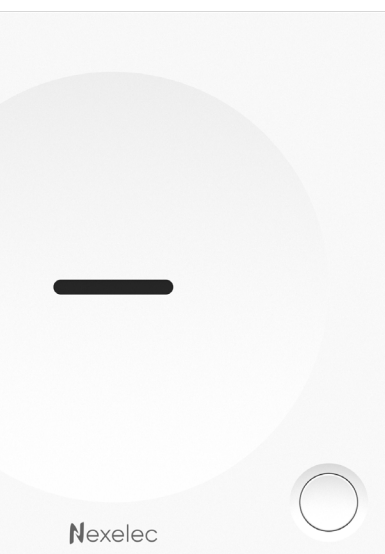

SIGN

7-in-1 room sensor

Nexelec

www.nexelec.eu

Reference

X565LS

X565LR



Various protocols and radio zones available.
Click or scan this QR Code to select the appropriate reference.


Radio

LoRaWAN - Sigfox

LoRaWAN

87 mm

23 mm

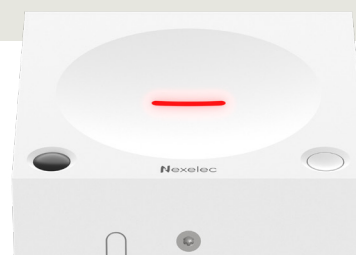

87 mm

Net weight: 150 g (including battery)

FUNCTIONS



Signal tone

An audible signal notifies occupants if Indoor Air Quality deteriorates. Can be activated / deactivated locally or remotely



Saves measured data

Integrated micro SD card. Up to 10 years of sensor measurements stored in memory. Useful in the event of a power cut



Anti-tear detection

Triggers an alert message if the product is removed from its mounting base



Measurement accuracy

No risk of measurement drift.
Automatic weekly recalibration of CO₂ sensor. Manual calibration possible



Easy to configure

Easy product adjustment via contactless NFC technology from a smartphone



Clearly visible indicator light

The Green / Orange / Red indicator changes with the CO₂ level and alerts you when it's time to ventilate to renew the indoor air



Easy to install

Free-standing on desk, wall or flush-mounted box. Adhesive mounting included



Calibration certificate

Accuracy of CO₂, temperature and humidity measurements validated by a COFRAC-accredited metrology laboratory



High-performance battery

Operates on replaceable lithium batteries. Up to 20 years⁽¹⁾ of autonomy



270° Air

Numerous side openings for better ambient air analysis



Anti-theft protection

Lockable mounting base reduces risk of sensor removal



Enhanced cyber security

Data transmitted by the product is secured from end to end using double AES128 encryption



USB-C socket

Universal connector for quick and easy power supply



Instantaneous measurement

Easy to operate, thanks to a button on the front of the sensor. Useful for occupants or technicians (function can be deactivated)



Regulatory compliance

Direct-reading sensor compliant with French standards for measuring CO₂ concentration in indoor air

FEATURES



Volatils Organic Compounds

Res.: 1 µg/m³
Prec.: 25%
Measuring range: 0 - 10 000 µg/m³

Carbon Dioxide

Res.: 1 ppm
Prec.: ±(50 ppm + 3% value)
Measuring range: 0 - 5 000 ppm

Conditions of use

Indoor environment
Temperature: -20°C to +50°C
Humidity: 0% RH to 99% RH (non-condensing)

Certification*



Presence

Technology: Passive infrared (PIR)
Angle: 92° (Vertical and Horizontal)
Detection distance: 6m

Temperature

Res.: 0.1°C
Prec.: ±0.2°C
Measuring range: -30°C - +70°C

Data transmission mode

Periodic
Grouped data (datalog) with transmission redundancy

Connectivity*



Luminosity

Res.: 5 lux
Prec.: ±5 lux
Measuring range: 0 - 5 000 lux

Humidity

Res.: 0.5% R.H.
Prec.: ±2% R.H.
Measuring range: 0 - 100% R.H.

Mounting type

Wall-mounted or free-standing

Warranty⁽²⁾

2 years

Mostly recyclable product



Noise

Res.: 1 dB
Prec.: ±5 dB
Measuring range: 35 - 120 dB

Power supply

2 battery slots
1 USB-C socket

Box content

1 sensor
2 batteries included
1 mounting base
1 SD card
2 nylon screws and plugs
1 3M® adhesive fastener

⁽¹⁾ Battery life is not guaranteed and may vary according to settings and product use. ⁽²⁾ Please refer to the information available on www.support.nexelec.fr *Available according to reference