



Sold in various diameters. Sold in 4' lengths in black and clear. Available in 3/16" to 2" inside diameters.
Continuous operating temperature: -55°C to 135°C



Applications:

Polyolefin heat shrink tubing is ideal for a wide variety of applications such as:

- Cable management
- Electrical insulation
- Mechanical protection
- Environmental sealing
- Wire harnessing

Features:


- Meets Requirements of AMS-DTL-23053/4 Class 3
- Crosses to Sumitomo W3B2(4X), Raychem ATUM4X, LG GSH4635WT
- High resistance to chemicals and oils
- Cross Reference: Raychem RP-4800, Alpha FIT 421, LG GSHS-4635



4:1 Dual Wall Heat Shrink Tubing - 4 foot Stick

Description:

This versatile dual walled adhesive-lined heat shrink tubing is ideally used where protection of cables and wires from moisture is important. Applied with a heat gun, tubing will adhere tightly to whatever wire or component is being protected. Tubing will shrink to 1/4 of it's original size. Typically used for insulation, identification of wires, strain relief and bundling of wires. Manufactured to meet SAE AMS-DTL-23053/4 Class 3 specifications.

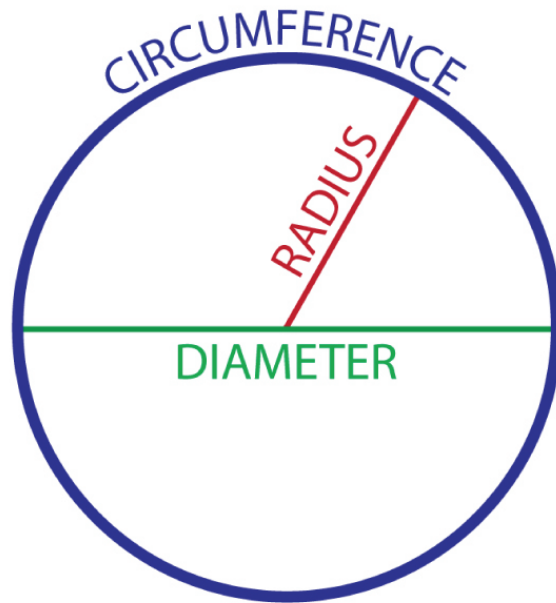

Part #	Nominal Size	Expanded		Recovered				Colors
		Inside Diameter		Inside Diameter		Total Wall Thickness		
		in	mm	in	mm	in	mm	
HS460-BK	3/16"	0.187	4	0.038	0.959	0.035	0.889 ±0.3	Black
HS461-BK	5/16"	0.314	8	0.065	1.65	0.035	0.889 ±0.3	Black
HS461-CL	5/16"	0.314	8	0.065	1.65	0.035	0.889 ±0.3	Clear
HS462-BK	1/2"	0.47	12	0.118	3	0.051	1.2954 ±0.4	Black
HS462-CL	1/2"	0.47	12	0.118	3	0.051	1.2954 ±0.4	Clear
HS463-BK	3/4"	0.75	19	0.18	4.5	0.063	1.6002 ±0.4	Black
HS463-CL	3/4"	0.75	19	0.18	4.5	0.063	1.6002 ±0.4	Clear
HS464-BK	1"	1	25.4	0.276	7	0.083	2.1082 ±0.3	Black
HS464-CL	1"	1	25.4	0.276	7	0.083	2.1082 ±0.3	Clear
HS465-BK	1 1/4"	1.26	32	0.315	8	0.09	2.286 ±0.3	Black
HS465-CL	1 1/4"	1.26	32	0.315	8	0.09	2.286 ±0.3	Clear
HS466-BK	2"	2.047	52	0.512	13	0.098	2.4892 ±0.3	Black
HS466-CL	2"	2.047	52	0.512	13	0.098	2.4892 ±0.3	Clear