

THIS IS A "BUILT TO ORDER" PRODUCT

### REQUEST A QUOTE

For trucks, trains, boats, and planes, the 88104-T delivers powerful and efficient audio for two-way communications. This specialty horn speaker uses a weather and corrosion resistant design and high durability materials to remain dependable and understandable longer than other speakers. Choose this driver if you need specialized, high-quality, and reliable sound.

- 5.5" (140 mm) diameter
- Voice range horn speaker, 8 ohms
- 107 dB SPL @ 1 Watt, 1 Meter
- 40 watts, 1 Octave at 2 kHz, averaged; 123 dB max SPL
- ABS plastic horn bell & assembly
- Phenolic diaphragm, ferrite magnet
- Black anodized aluminum heat sink
- Stainless steel screws
- 2 conductor, 18 AWG stranded, inner & outer PVC insulations


[ALSO AVAILABLE IN TAN](#)

\*Bracket in drawing optional, not included in this assembly



#### Primary Specifications

Size, Nominal (inch & mm)	5"
Rated Impedance ( $\Omega$ )	8
Sensitivity (dB SPL) <sup>1</sup>	107
Frequency Range (Hz)	500 - 7,000
Resonant Frequency (Fs) (Hz)	341

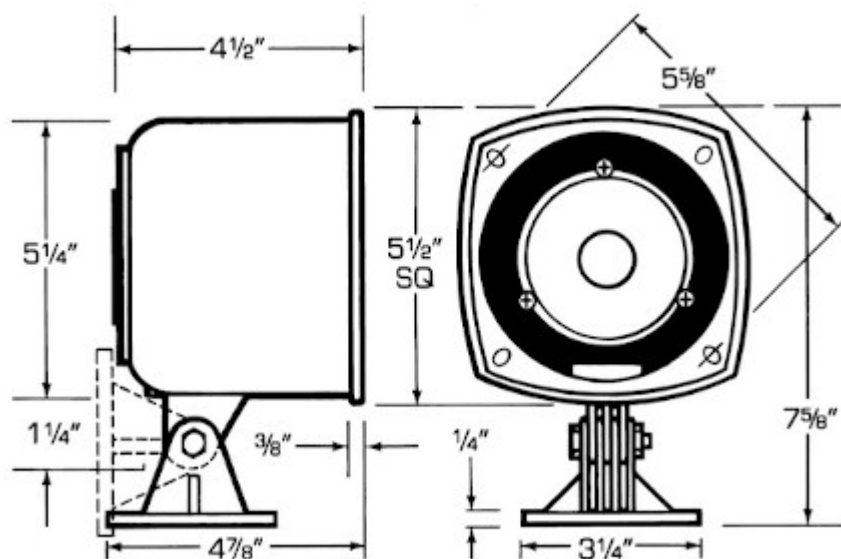

**More Specifications**

<b>Application</b>	Auto / Motorcycle, Drive-Thru / Kiosk, Outdoor , Signal / Alarm Systems, Transit, Voice Communications
<b>RoHS Compliant</b>	Yes
<b>Program Power (W)</b>	80

**Small Signal Parameters**

<b>Nominal Impedance (Z) (<math>\Omega</math>)</b>	8
<b>Resonant Frequency (Fs) (Hz)</b>	341
<b>Total Q Factor (Qts)</b>	1.50

**Material Descriptions**

<b>Magnet Material</b>	Ferrite
<b>Cone Body Material</b>	Phenolic treated cloth
<b>Net Weight (kg)</b>	1.14

