


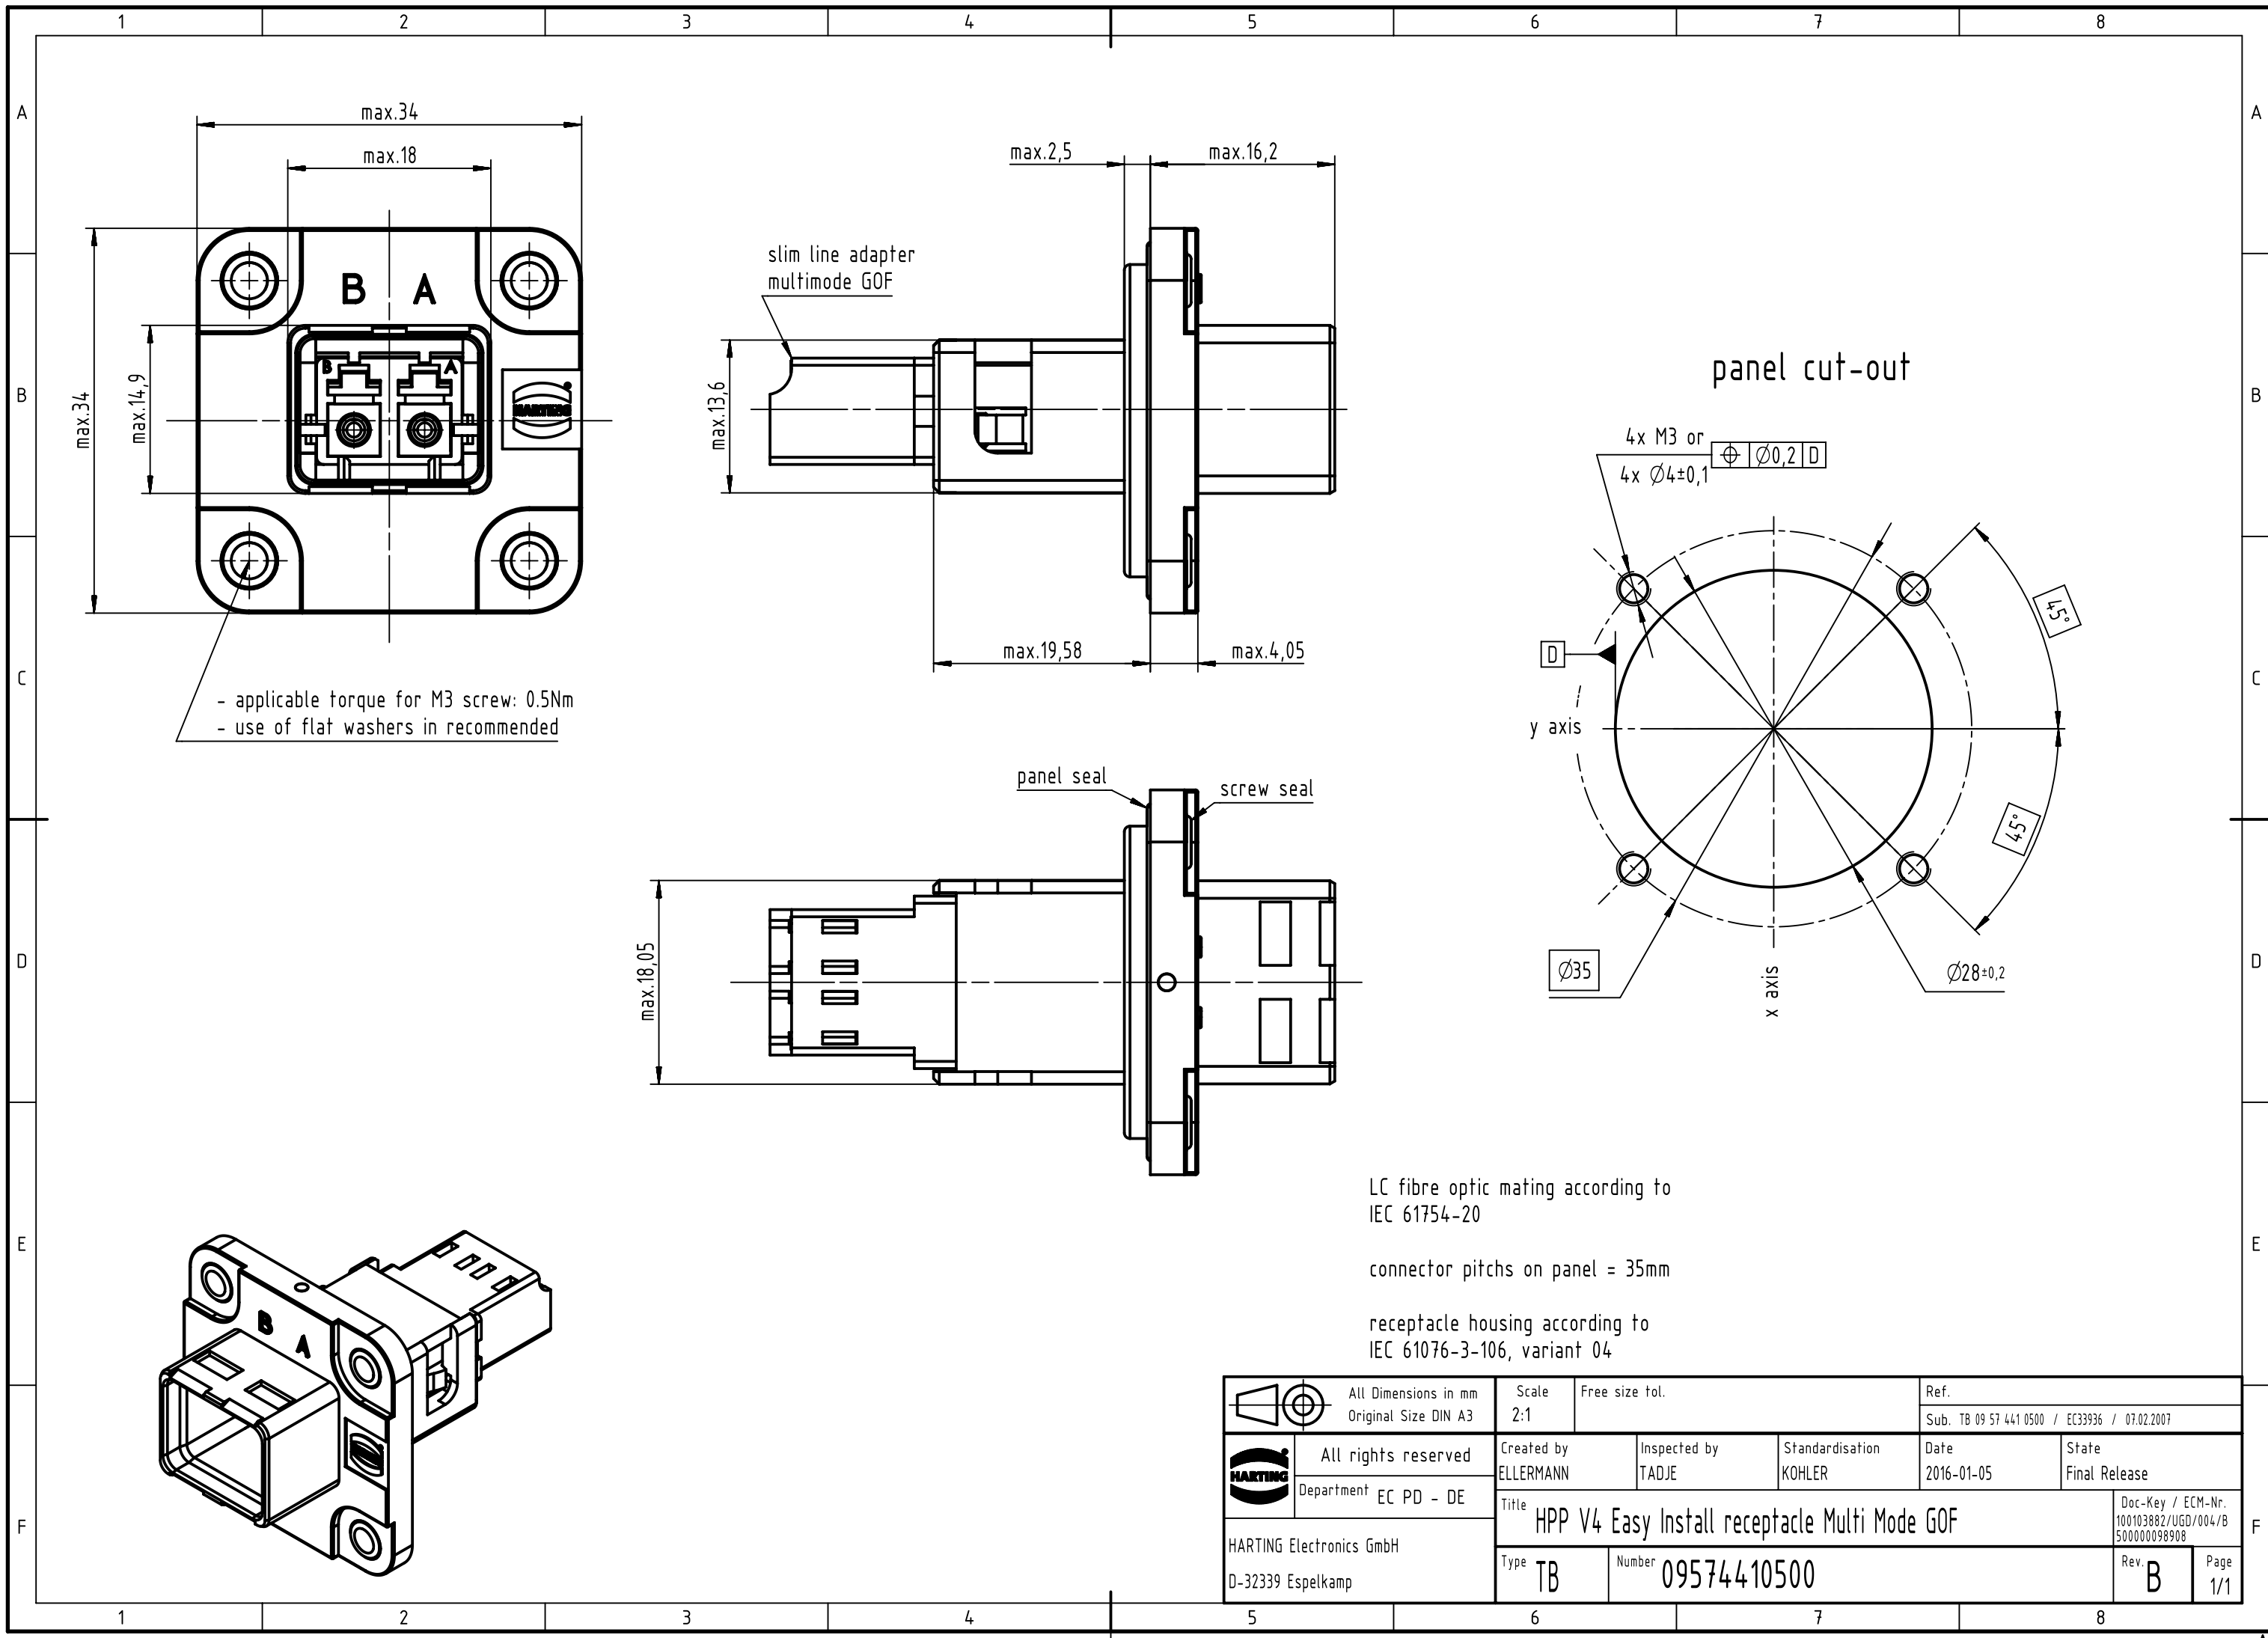

- applicable torque for M3 screw: 0.5Nm
- use of flat washers in recommended

LC fibre optic mating according to
IEC 61754-20

connector pitches on panel = 35mm

receptacle housing according to
IEC 61076-3-106, variant 04

	All Dimensions in mm Original Size DIN A3	Scale 2:1	Free size tol.		Ref.	
		Sub. TB 09 57 441 0500 / EC33936 / 07.02.2007				
	All rights reserved	Created by ELLERMANN	Inspected by TADJE	Standardisation KOHLER	Date 2016-01-05	State Final Release
	Department EC PD - DE	Title HPP V4 Easy Install receptacle Multi Mode GOF				
HARTING Electronics GmbH D-32339 Espelkamp		Type TB	Number 09574410500			Rev. B Page 1/1