

Cable Assembly Coaxial BNC to BNC  
RG-58C 6.00" (152.40mm)

RoHS  
Compliant

FEATURES

- 50Ω impedance
- BNC Plug to BNC Plug
- RG-58C

Stock No.: 9202384R0609




Product Description

Terminated with BNC male straight connector to BNC male straight connector for a durable, impedance match coaxial cable assembly. Gold plated contacts are utilized to minimize insertion loss.

General Specifications

Attribute	Value
Terminated/Unterminated	Terminated
Coaxial Type	RG-58C
Connector 1	BNC Plug
Connector 2	BNC Plug
Connector 1 Gender	Male
Connector 2 Gender	Male
Characteristic Impedance	50 Ω
Length	6.00" (152.40mm)
Voltage Rating	250 V ac

## Product Drawing

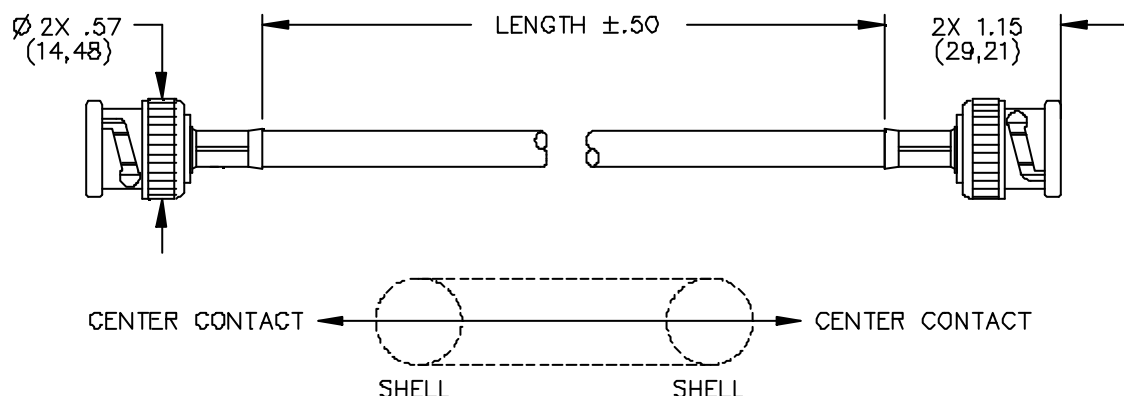

### MATERIALS:

Conn: 1<sup>st</sup> End-BNC Male  
 Impedance: 50 Ohms  
 Material: Body and Center Contact – Brass  
 Finish: Body: Tamish Resistance  
 Center Contact: Gold Plated  
 Cable: RG58C/U  
 Impedance: 50 Ohms  
 O.D.: (0.195)  
 Conn: 2<sup>nd</sup> End-Same as first end

### RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.  
 Inner Conductor/Shield: 500VRMS Max.  
 Operating Temperature: +80°C. (+176°F.) Max.

Dimensions: Millimeters (Inches)

### Part Number Table

Part Number	Description
9202384R0609	Cable Assembly Coaxial BNC to BNC RG-58C 6.00" (152.40mm)
9202382R0607	Cable Assembly Coaxial BNC to BNC RG-58C 12.00" (304.80mm)
9202551R0776	Cable Assembly Coaxial BNC to BNC RG-58C 18.00" (457.20mm)
9202448R0673	Cable Assembly Coaxial BNC to BNC RG-58C 24.00" (609.60mm)
9202388R0613	Cable Assembly Coaxial BNC to BNC RG-58C 36.00" (914.40mm)
9202404R0629	Cable Assembly Coaxial BNC to BNC RG-58C 48.0" (1.2m) 4.0'
9202422R0647	Cable Assembly Coaxial BNC to BNC RG-58C 60.0" (1.5m) 5.0'
9202387R0612	Cable Assembly Coaxial BNC to BNC RG-58C 72.0" (1.8m) 6.0'
9202553R0778	Cable Assembly Coaxial BNC to BNC RG-58C 96.0" (2.4m) 8.0'
9202402R0627	Cable Assembly Coaxial BNC to BNC RG-58C 120.0" (3.0m) 10.0'
9202550R0775	Cable Assembly Coaxial BNC to BNC RG-58C 144.0" (3.7m) 12.0'
9202462R0687	Cable Assembly Coaxial BNC to BNC RG-58C 180.0" (4.6m) 15.0'
9202408R0633	Cable Assembly Coaxial BNC to BNC RG-58C 240.0" (6.1m) 20.0'
9202552R0777	Cable Assembly Coaxial BNC to BNC RG-58C 600.0" (15.2m) 50.0'

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.