

Cable Assembly Coaxial BNC to BNC  
RG-58C 24.00" (609.60mm)

RoHS  
Compliant

Stock No.: 9202511R0736

FEATURES

- 50Ω impedance
- BNC Plug (R.A.) to BNC Plug (R.A.)
- RG-58C




Product Description

Terminated with BNC male right angle connector to BNC male right angle connector for a durable, impedance match coaxial cable assembly. Gold plated contacts are utilized to minimize insertion loss.

General Specifications

| Attribute                | Value                 |
|--------------------------|-----------------------|
| Terminated/Unterminated  | Terminated            |
| Coaxial Type             | RG-58C                |
| Connector 1              | BNC Plug, Right Angle |
| Connector 2              | BNC Plug, Right Angle |
| Connector 1 Gender       | Male                  |
| Connector 2 Gender       | Male                  |
| Characteristic Impedance | 50 Ω                  |
| Length                   | 24.00" (609.60mm)     |
| Voltage Rating           | 500 VRMS              |

## Product Drawing

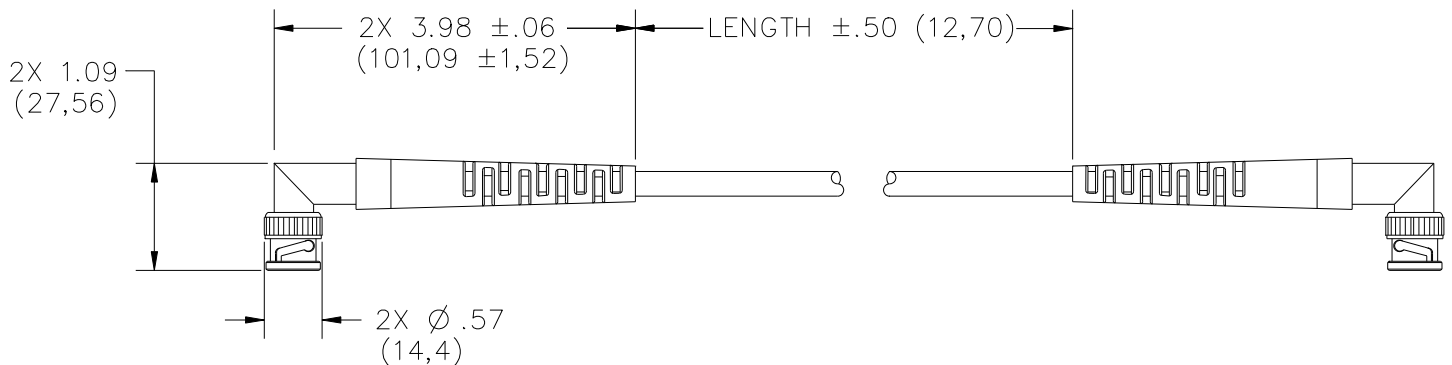

### Features:

- This cable is designed to access those BNC connectors in tight locations such as found in the back of rack mounted equipment.
- The right angle connectors are impedance matched to provide the best signal quality.
- These cables are made of the highest quality materials and assembly procedures.

### Materials:

BNC: Body: Brass, tarnish resistant plating  
 Center Contacts: Brass, gold plating  
 Strain Relief: PVC, molded onto cable and connector  
 Cable: RG58C/U, 50 Ohm, .195 OD

### Ratings:

Voltage: Shield/Earth: 30VAC/60VDC Max.  
 Inner Conductor/Shield: 500VRMSMax.  
 Operating Temperature: +50 C (+122 F)  
 Nominal Impedance: 50 Ohms

Dimensions: Millimeters (Inches)

### Part Number Table

| Part Number  | Description                                                |
|--------------|------------------------------------------------------------|
| 9202496R0721 | Cable Assembly Coaxial BNC to BNC RG-58C 12.00" (304.80mm) |
| 9202511R0736 | Cable Assembly Coaxial BNC to BNC RG-58C 24.00" (609.60mm) |
| 9202469R0694 | Cable Assembly Coaxial BNC to BNC RG-58C 36.00" (914.40mm) |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.