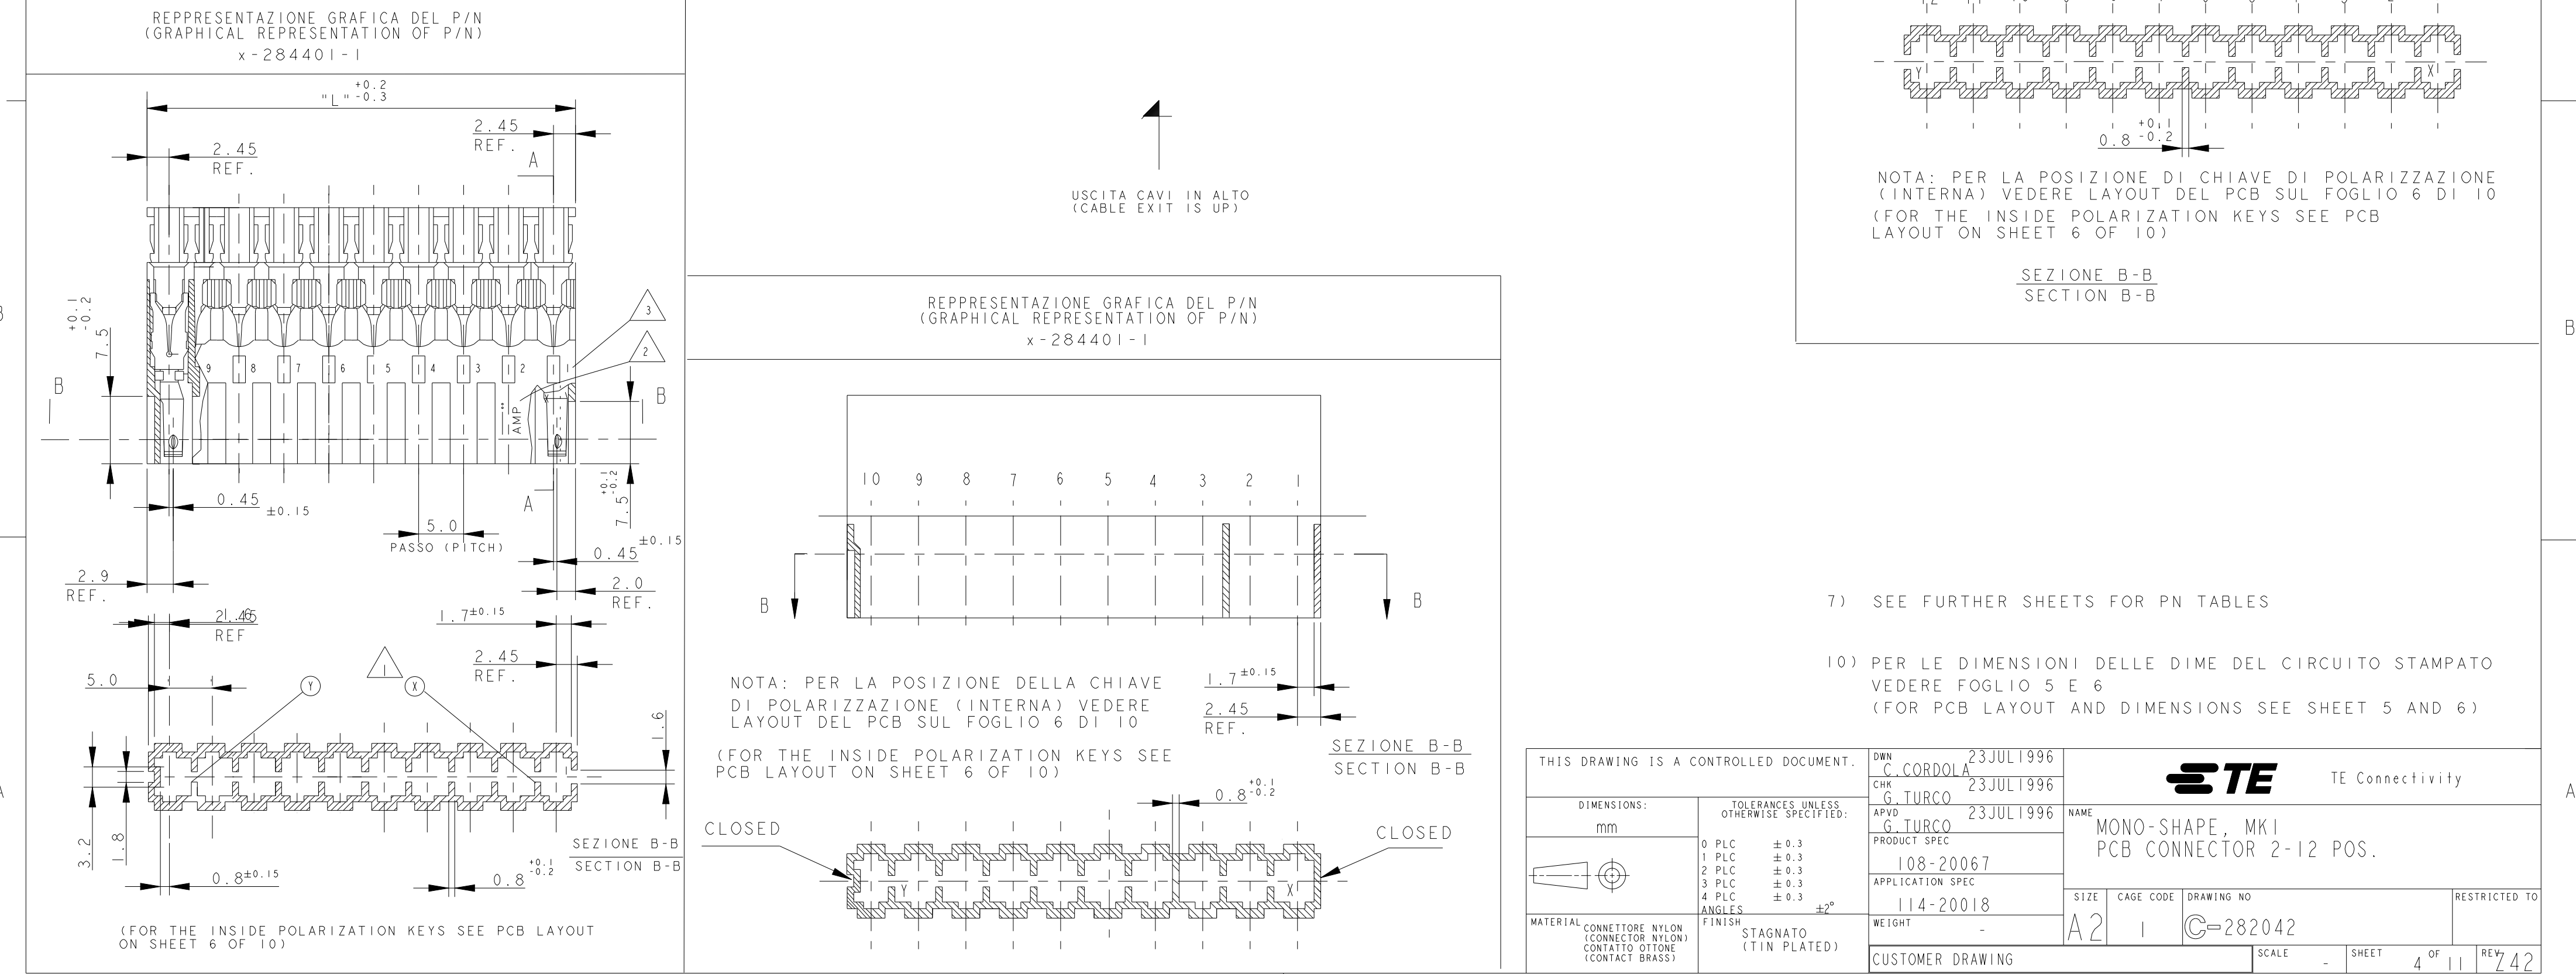
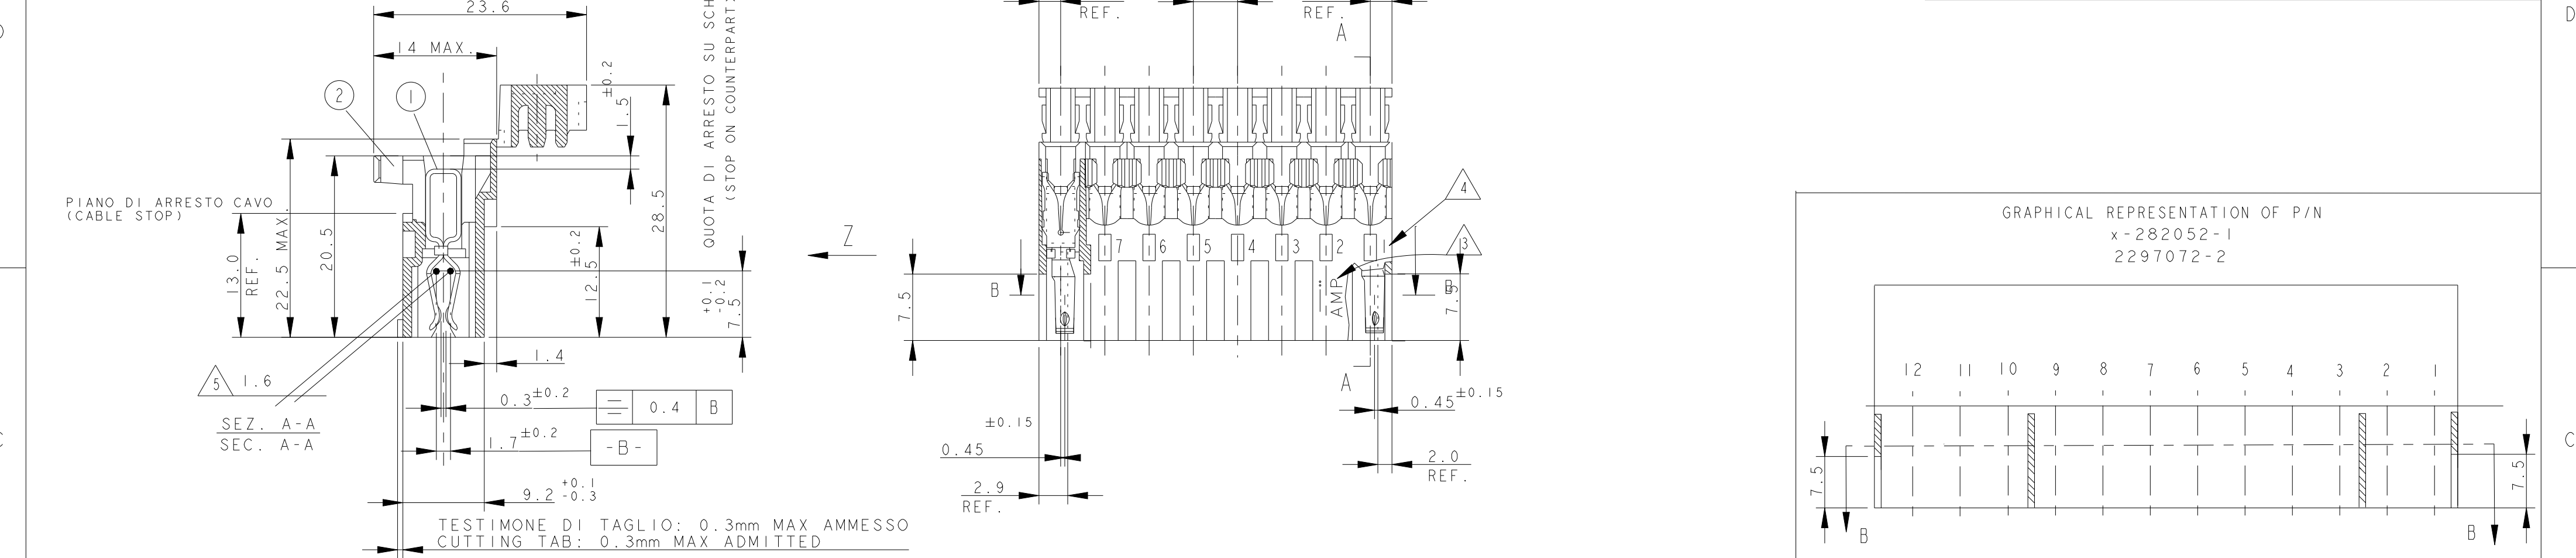


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-



4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION				REVISIONS	
COPYRIGHT copyright.dBe-		ALL RIGHTS RESERVED.					
2 POS.		2 POS.		2 POS.		2 POS.	
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282042-1		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282042-2		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282042-3, 2298752-2 and 2333039-2		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282042-4	
2 POS.		2 POS.		2 POS.		2 POS.	
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284561-1		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282042-6		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) 1-2293372-2		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284561-2	
3 POS.		3 POS.		3 POS.		3 POS.	
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282043-2, x-282043-3 2298752-3 and 2333039-3, 2293372-3		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282235-2 and x-282235-3		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-284546-1		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) 284546-2	
- SUGGESTED SHAPE FOR PCB MATING SIDE, CAN BE ALSO OBTAINED BY SCORING PROCESS-		11) LE DIMENSIONI TIPICHE RIFERITE ALLE GEOMETRIE COMUNI A TUTTE LE DIME SONO INDICATE SOLO NEL DETTAGLIO RELATIVO AL PN 1-282042. (PCB GEOMETRY TYPICAL DIMENSIONS ARE SHOWN ON SKETCH FOR PN 1-282042-1)		12) LE DIME DEI PCB ACCOPPIANO CON I CONNETTORI INSERITI CO USCITA CAVI VERSO IL BASSO (PCB LAYOUT AS SHOWN WILL MATE WITC CONNECTORS HAVING CABLE EXIT DOWN)		CONNECTOR LAYOUT 3D VIEW FOR REFERENCE TO SHOW THE CONNECTOR ORIENTATION RESPECT TO PCB CUT OUT DESIGN	

4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION				REVISIONS	
COPYRIGHT copyright.dBTe		ALL RIGHTS RESERVED.				P	LTR
4 POS.						DESCRIPTION	
						DATE	
						DWN	
						APVD	
						SEE SHEET I	
						CONNECTOR LAYOUT 3D VIEW FOR REFERENCE TO SHOW THE CONNECTOR ORIENTATION RESPECT TO PCB CUT OUT DESIGN	
PCB LAYOUT FOR PNs x-282044-1, 2293372-4 2298752-4 and 2333039-4		PCB LAYOUT FOR PNs 3-282044-2					
5 POS.		5 POS.					
DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282045-1		DIMA DEL PCB PER PN (PCB LAYOUT FOR PN.S) x-282045-2					

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT copyright.dBTe-

ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

6 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-284734-1

8 POS.

PCB LAYOUT FOR PN.S
x-284208-1, 2293372-8,
2298752-8 and 2333039-8

7 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
2-282047-3 AND 1-2293372-7

11 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-282051-x and 2298552-1

6 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-282046-1, 2298752-6 and 2333039-6
(EXCEPT 4-282046-1, 5-282046-1)

8 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-284401-x

10 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-282050-x and 1-2298752-0

12 POS.

PCB LAYOUT FOR PN.S
x-282052-x, 2297072-2 and 2298552-2

7 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-282047-1, 2293372-7, 2298752-7
and 2333039-7

9 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
x-282049-1, 2293372-9 and 2298752-9

6 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
4-282046-1 AND 5-282046-1

6 POS.

DIMA DEL PCB PER PN
(PCB LAYOUT FOR PN.S)
2-282046-2

CONNECTOR LAYOUT

(3D VIEW FOR REFERENCE TO SHOW THE CONNECTOR ORIENTATION RESPECT TO PCB CUT OUT DESIGN)

BACK SIDE

PCB ENTRY SIDE

CABLE EXIT

1.5±0.14

PCB THK.

CHAMFER 0.5 mm x 30°

or 0.3 mm x 45°

- SUGGESTED SHAPE FOR PCB MATING SIDE, CAN BE ALSO OBTAINED BY SCORING PROCESS-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±2°

FINISH

STAGNATO (TIN PLATED)

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DWN

CHK

APVD

108-20067

114-20018

-

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

SHEET

OF

REV

TE Connectivity

MONO-SHAPE, MK1

PCB CONNECTOR 2-12 POS.

A2

1

C-282042

2:1

7

11

Z42

1471-9 (3/13)

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT copyright.dBTe

PART NUMBER

ASSY CONN.

REVISONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

NUMERO DI VIE	CONFIGURAZIONE (VISTA CON USCITA CAVI IN ALTO) ①	VERSIONE PEZZI IN VASSOIO	REV	VERSIONE PEZZI SCIOLTI	REV	POSIZIONE POLARIZ. (INTERVIA)	L (mm) ⑫	MARCHIATURA CON BANDA COLORATA
NO. OF POS.	CONFIGURATION (VIEW WITH CABLE EXIT UP) ①	ON TRAY VERSION	PART REV.	LOOSE PIECES PACKAGING VERSION	PART REV.	POLARIZ. POSITION (INTERVIA)	L (mm) ⑫	STRIP COLOUR
2		1-282042-1	U	2-282042-1	U	-	10.8	ARANCIONE (ORANGE)
2		1-282042-2	U	2-282042-2	U	-	10.8	VERDE (GREEN)
2		1-282042-3	U	2-282042-3	U	-	9.9	BLU (BLUE)
2		1-282042-4	U	2-282042-4	U	-	10.8	ROSSO (RED)
2		1-282042-5	U	2-282042-5	U	-	9.9	NERO (BLACK)
2		1-282042-6	V	-	-	-	9.9	VIOLA (VIOLET)
2		1-284561-1	V	-	-	-	9.9	VERDE (GREEN)
2		1-284561-2	V	-	-	-	9.9	-
3		1-282043-2	U	2-282043-2	U	-	14.9	-
		1-282043-3 ①⑨	U	2-282043-3 ①⑨	U	-	14.9	NERO (BLACK)
3		0-282235-2 ②⑩	U	2-282235-2 ②⑩	U	-	15.8	-
		0-282235-3 ②⑩	U	2-282235-3 ②⑩	U	-	15.8	NERO (BLACK)
3		1-284546-1	V	-	-	2-3	14.9	BLU (BLUE)
3		284546-2	Z	-	-	-	14.9	VERDE (GREEN)
4		1-282044-1	V	2-282044-1	V	-	19.9	-
		①⑧ 3-282044-1	V	-	-	-	19.9	-
4		3-282044-2	I	-	-	2-3	19.9	-
		①⑥						

CONNETTORE COMPLETO DI CAVO (TERMINATED CONNECTOR)

LEGENDA (DESCRIPTION)

AMP MONO-SHAPE PCB CONNECTOR

① Parte anteriore connettore (Lato cavi) (Top side connector) (Cable side)

lato banda colorata (Colour strip side)

1) PER LE DIMENSIONI DEGLI SCARICHI SUL PCB VEDERE FOGLIO 5 E 6 (FOR PCB LAYOUT AND DIMENSIONS SEE SHEET 5 AND 6)

② GLI AGGANCI PER DIMA CIRCUITO STAMPATO, SONO SEMPRE RICAVATI SULLA SECONDA E PENULTIMA PARETE DEL BLOCCETTO (INDICATI COME X-Y SUI DETTAGLI DEL DISEGNO) (LOCKING TEETH ARE OBTAINED ON THE SECOND AND THE SECOND-LAST WALL (NAMED "X-Y" ON RELEVANT DWG. DETAILS)

③ MARCHIO DI FABBRICA (LIBERA POSIZIONE) (TRADEMARK) (FREE POSITION)

④ NUMERI DI IDENTIFICAZIONE CAVITA' (CIRCUIT IDENTIFICATION)

⑤ ADATTO PER SCHEDA CIRCUITO STAMPATO SPESSORE 1.5±0.14 (SUITABLE FOR P.C.B. THK. 1.5±0.14)

⑥ PRELIMINARY PART - NOT YET RELEASED FOR PRODUCTION

⑫ INCLUDE LA POLARIZZAZIONE DOVE E' ESISTENTE (INCLUDING POLARIZATION KEY, WHEN EXISTING)

15) STATO DI FORNITURA: CONFEZIONAMENTO IN "VASSOI + SCATOLA" (PACKAGING: "ON TRAY PLUS CARTON BOX")

16) CONFEZIONAMENTO IN BOBINA OBSOLETATO (PACKAGING: "ON REEL" OBSOLETE)

17) APPROVAZIONE VDE, FILE No. 3905 (VDE APPROVAL, FILE No. 3905)

①⑧ PROFILO "A" E' VALIDO PER OGNI CONFIGURAZIONE, PROFILO "B" E' AMMESSO SOLO PER I PN IDENTIFICATI IN TABELLA DALLA PRESENTE NOTA. VEDERE DETTAGLI A PAGINA 3. (SHAPE "A" VALID FOR EACH CONFIGURATION, SHAPE "B" IS PERMITTED ONLY ON PN WHERE THIS NOTE IS SHOWN ON RELEVANT DRAWING TABLE). SEE DETAILS AT PAGE 3.

①⑨ OBSOLETE: CIS STREAMLINING PER D.RENAUD/D.SINISI

②⑩ OBSOLETE

②① PA GF, UL-V0 GWEPT 750°C NO FLAME, NATURAL

②

BLOCCETTO (HOUSING)

①

CONTATTO (CONTACT)

ITEM

DENOMINAZIONE (DESCRIPTION)

NATURALE (NATURAL)

STAGNATO (TIN-PLATED)

FINITURA/COLORE (FINISH/COLOUR)

PA 6.6 CARICATO VETRO (POLIAMIDE 6.6 GLASSFIBER FILLED)

OTTONE (BRASS)

MATERIALE (MATERIAL)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±0.3

1 PLC ±0.3

2 PLC ±0.3

3 PLC ±0.3

4 PLC ±0.3

ANGLES ±2°

MATERIAL CONNETTORE NYLON (CONNECTOR NYLON) CONTATTO OTTONE (CONTACT BRASS)

FINISH STAGNATO (TIN PLATED)

DWN C.CORDOLA 23JUL1996

CHK G.TURCO 23JUL1996

APVD G.TURCO 23JUL1996

PRODUCT SPEC 108-20067

APPLICATION SPEC 114-20018

WEIGHT -

CUSTOMER DRAWING

NAME MONO-SHAPE, MK1 PCB CONNECTOR 2-12 POS.

SIZE A2

CAGE CODE 1

DRAWING NO C-282042

RESTRICTED TO

SCALE -

SHEET 8 OF 11

REV 242

1471-9 (3/13)

1

2

3

4

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT copyright.dBTe

PART NUMBER

ASSY CONN.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

NUMERO DI VIE

NO. OF POS.

CONFIGURAZIONE (VISTA CON USCITA CAVI IN ALTO)

CONFIGURATION (VIEW WITH CABLE EXIT UP)

VERSIONE PEZZI IN VASSOIO

ON TRAY VERSION

REV

PART REV.

VERSIONE PEZZI SCIOLTI

LOOSE PIECES PACKAGING VERSION

REV

PART REV.

POSIZIONE POLARIZ. (INTERVIA)

POLARIZ. POSITION (INTERVIA)

L (mm)

L (mm)

MARCHIATURA CON BANDA COLORATA

STRIP COLOUR

5		1-282045-1	U	2-282045-1	U	-	24.9	-
5		1-282045-2	U	2-282045-2	U	2-3	24.9	VERDE (GREEN)
5		1-282045-3	U	2-282045-3	U	2-3	24.9	BLU (BLUE)
5		1-284733-1	U	2-284733-1	U	-	24.9	-
5		3-282045-4	Z	-	-	1-2	24.9	ARANCIONE (ORANGE)
6		1-282046-1	U	2-282046-1	U	2-3	29.9	-
6		2-282046-2	I	-	-	2-3	29.9	-
6		4-282046-1	Z	5-282046-1	I	2-3	29.9	-
6		1-284734-1	U	2-284734-1	U	2-3	29.9	-
7		1-282047-1	U	2-282047-1	U	-	34.9	-
7		2-282047-3	Z	-	-	2-3	34.9	VIOLA (VIOLET)
8		0-284208-1	U	2-284208-1	U	2-3	39.9	-
9		1-282049-1	U	2-282049-1	U	2-3 6-7	44.9	-
10		1-282050-1	U	2-282050-1	U	2-3 7-8	49.9	-
10		1-284401-1	V	-	-	2-3	49.9	NERO (BLACK)
11		1-282051-1	U	2-282051-1	U	2-3 8-9	54.9	-
12		1-282052-1	U	2-282052-1	U	2-3 9-10	59.9	-

CONNETTORE COMPLETO DI CAVO (TERMINATED CONNECTOR)

LEGENDA (DESCRIPTION)

AMP MONO-SHAPE PCB CONNECTOR

① Parte anteriore connettore (Lato cavi) (Top side connector) (Cable side)

② lato banda colorata (Colour strip side)

1) PER LE DIMENSIONI DEGLI SCARICHI SUL PCB VEDERE FOGLIO 5 E 6 (FOR PCB LAYOUT AND DIMENSIONS SEE SHEET 5 AND 6)

② GLI AGGANCI PER DIMA CIRCUITO STAMPATO, SONO SEMPRE RICAVATI SULLA SECONDA E PENULTIMA PARETE DEL BLOCCHETTO (INDICATI COME X-Y SUI DETTAGLI DEL DISEGNO) (LOCKING TEETH ARE OBTAINED ON THE SECOND AND THE SECOND-LAST WALL (NAMED "X-Y" ON RELEVANT DWG. DETAILS)

③ MARCHIO DI FABBRICA (LIBERA POSIZIONE) (TRADEMARK) (FREE POSITION)

④ NUMERI DI IDENTIFICAZIONE CAVITA' (CIRCUIT IDENTIFICATION)

⑤ ADATTO PER SCHEDA CIRCUITO STAMPATO SPESSORE 1.5±0.14 (SUITABLE FOR P.C.B. THK. 1.5±0.14)

⑥ PRELIMINARY PART - NOT YET RELEASED FOR PRODUCTION

⑫ INCLUDE LA POLARIZZAZIONE DOVE E' ESISTENTE (INCLUDING POLARIZATION KEY, WHEN EXISTING)

15) STATO DI FORNITURA: CONFEZIONAMENTO IN "VASSOI + SCATOLA" (PACKAGING: "ON TRAY PLUS CARTON BOX")

16) CONFEZIONAMENTO IN BOBINA OBSOLETATO (PACKAGING: "ON REEL" OBSOLETE)

17) APPROVAZIONE VDE, FILE No. 3905 (VDE APPROVAL, FILE No.3905)

⑬ PROFILO "A" E' VALIDO PER OGNI CONFIGURAZIONE, PROFILO "B" E' AMMESSO SOLO PER I PN IDENTIFICATI IN TABELLA DALLA PRESENTE NOTA (SHAPE "A" VALID FOR EACH CONFIGURATION, SHAPE "B" IS PERMITTED ONLY ON PN WHERE THIS NOTE IS SHOWN ON RELEVANT DRAWING TABLE)

⑭ OBSOLETE: CIS STREAMLINING PER D.RENAUD/D.SINISI

⑮ OBSOLETE

⑰ PA GF, UL-V0 GWEPT 750°C NO FLAME, NATURAL

⑱

⑲

⑳

2	BLOCCHETTO (HOUSING)	NATURALE (NATURAL)	PA 6.6 CARICATO VETRO (POLIAMIDE 6.6 GLASSFIBER FILLED)
1	CONTATTO (CONTACT)	STAGNATO (TIN-PLATED)	OTTONE (BRASS)
ITEM (ITEM)	DENOMINAZIONE (DESCRIPTION)	FINITURA/COLORE (FINISH/COLOUR)	MATERIALE (MATERIAL)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±0.3
1 PLC ±0.3
2 PLC ±0.3
3 PLC ±0.3
4 PLC ±0.3
ANGLES ±2°

MATERIAL CONNETTORE NYLON (CONNECTOR NYLON)
CONTATTO OTTONE (CONTACT BRASS)

DWN C.CORDOLA 23JUL1996
CHK G.TURCO 23JUL1996
APVD G.TURCO 23JUL1996
PRODUCT SPEC 108-20067
APPLICATION SPEC 114-20018
WEIGHT -

NAME MONO-SHAPE, MK1 PCB CONNECTOR 2-12 POS.

SIZE A2
CAGE CODE 1
DRAWING NO C-282042
RESTRICTED TO

CUSTOMER DRAWING
SCALE 2:1
SHEET 9 OF 11
REV 242

1471-9 (3/13)

1

2

3

4

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT copy right.dBTe-

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET I	-	-	-

21

PA GF, UL-V0 GWEPT 750°C NO FLAME, NATURAL

NO of POS.	CONFIGURATION (SEE TYP. SECTION ONLY FOR REF①)	ON TRAY PACKAGING VERSION	PART REV.	LOOSE PIECES PACKAGING VERSION	PART REV.	POLARIZ. POSITION (INTERVIA)	"L" (mm)	COLOR CODE
2		2293372-2	Z	-	-	-	9.9	BLUE
2		1-2293372-2	Z	-	-	-	9.9	-
2		2-2293372-2	I	-	-	-	9.9	-
3		2293372-3	I	-	-	-	14.9	-
4		2293372-4	Z	-	-	-	19.9	-
5		2293372-5	Z	-	-	1-2	24.9	-
6		2293372-6	Z	-	-	2-3	29.9	-
7		2293372-7	Z	-	-	-	34.9	-
7		1-2293372-7	I	-	-	2-3	34.9	VIOLET
8		2293372-8	Z	-	-	-	39.9	-
9		2293372-9	Z	-	-	2-3 6-7	44.9	-
10	-	1-2293372-0	I	-	-	-	49.9	-
11	-	2297072-1	I	-	-	-	54.9	-
12		2297072-2	I	-	-	2-3 9-10	59.9	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
CONNETTORE NYLON
(CONNECTOR NYLON)
CONTATTO OTTONE
(CONTACT BRASS)

FINISH
STAGNATO
(TIN PLATED)

DWN
C.CORDOLA
23JUL1996

CHK
G.TURCO
23JUL1996

APVD
G.TURCO
23JUL1996

PRODUCT SPEC
108-20067

APPLICATION SPEC
114-20018

WEIGHT
-

CUSTOMER DRAWING

NAME
MONO-SHAPE, MKI
PCB CONNECTOR 2-12 POS.

SIZE
A2

CAGE CODE
I

DRAWING NO
C-282042

RESTRICTED TO

SCALE
2:1

SHEET
10

OF
11

REV
Z42








1471-9 (3/13)

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

 PA GF, UL-V0 GWEPT 750°C NO FLAME, NATURAL


LONG VERSION

PARTS HAVE NOT YET COMPLETED QUALIFICATION TESTING

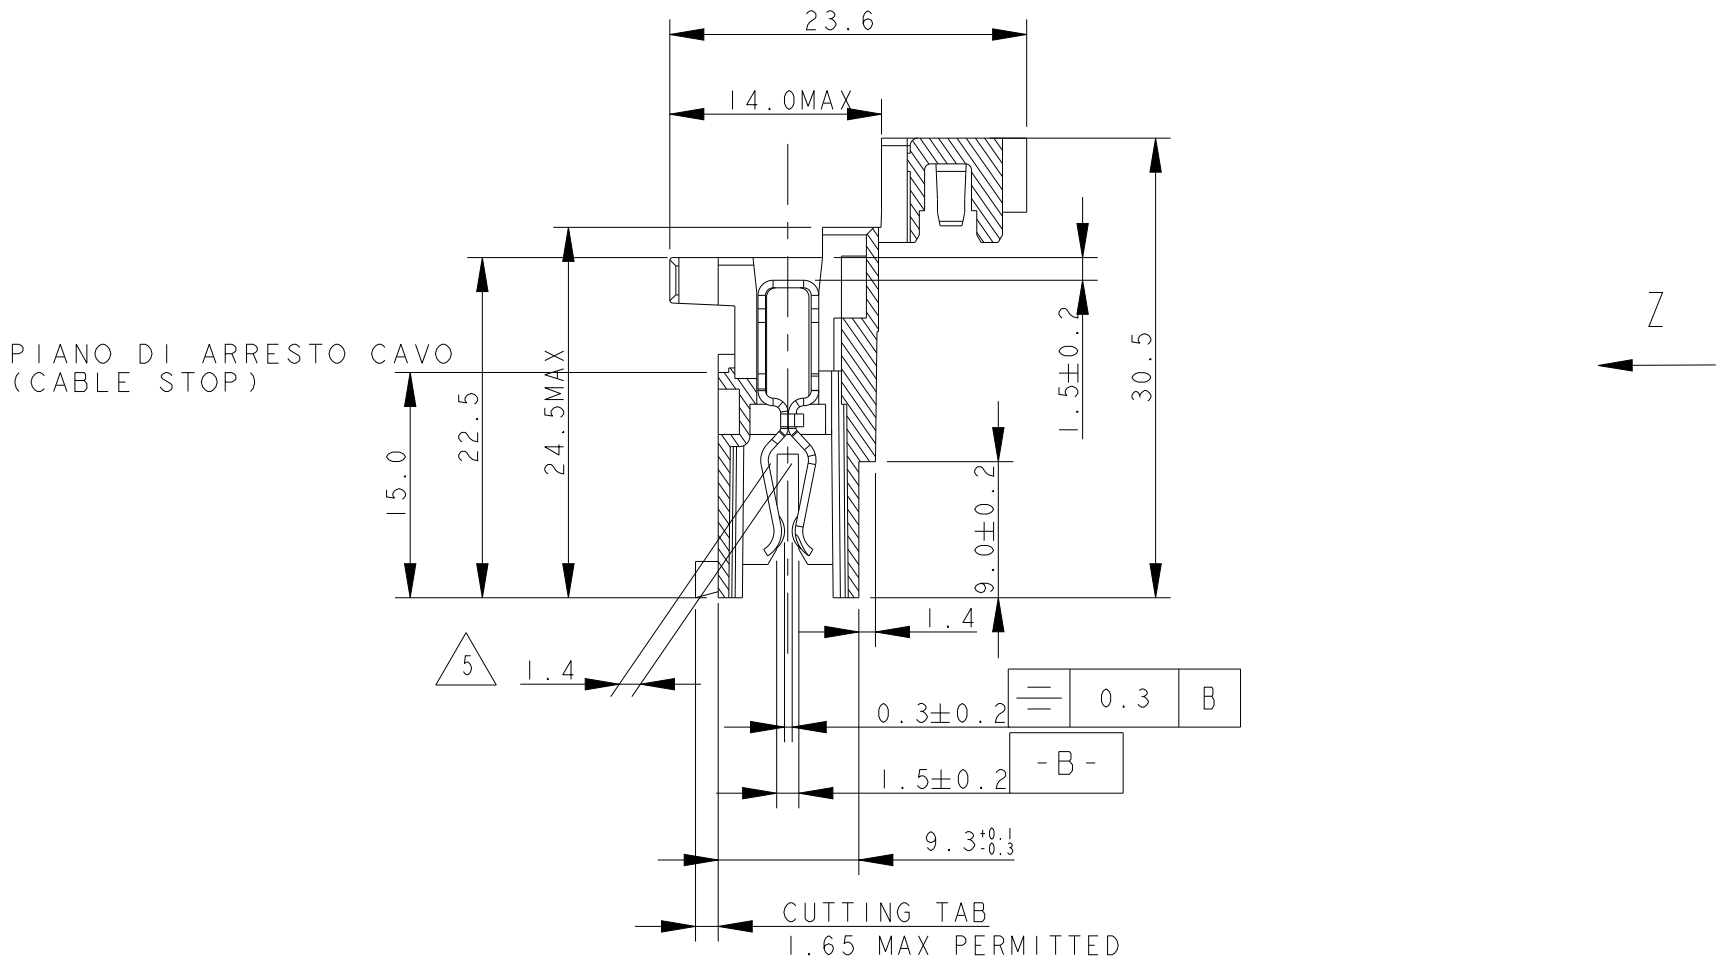
NO of POS.	CONFIGURATION (SEE TYP. SECTION ONLY FOR REF.)	ON TRAY PACKAGING VERSION	PART REV.	POLARIZ. POSITION (INTERNAL)	"L" (mm)	COLOR CODE
2		2298752-2	Z	-	9.9	BLUE
2		1-2298752-2	Z	-	9.9	BLACK
3		2298752-3	Z	-	14.9	-
4		2298752-4	Z	-	19.9	-
5		2298752-5	Z	1-2	24.9	ORANGE
5		1-2298752-5	Z	2-3	24.9	GREEN
6		2298752-6	Z	2-3	29.9	-
7		2298752-7	Z	-	34.9	-
8		2298752-8	Z	2-3	39.9	-
9		2298752-9	Z	2-3 6-7	44.9	-
10		1-2298752-0	Z	2-3 7-8	49.9	-
11		2298552-1	Z	2-3 8-9	54.9	-
12		2298552-2	Z	2-3 9-10	59.9	-


LONG VERSION

PARTS HAVE NOT COMPLETED QUALIFICATION TESTING
PA GF, UL-V2, NATURAL

NO. OF POS.	CONFIGURATION	ON TRAY PACKAGING VERSION	PART REV.	POLARIZATION	"L"	COLOR CODE
2		2333039-2	Z	-	9.9	BLUE
2		1-2333039-2	Z	-	9.9	BLACK
3		2333039-3	Z	-	14.9	-
4		2333039-4	Z	-	19.9	-
5		2333039-5	Z	2-3	24.9	GREEN
6		2333039-6	Z	2-3	29.9	-
7		2333039-7	Z	-	34.9	-
8		2333039-8	Z	2-3	39.9	-

VIEW APPLIES TO LONG VERSION ONLY



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. CORDOLA 23JUL1996	 TE Connectivity					
DIMENSIONS: mm		CHK G. TURCO 23JUL1996						
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.3 1 PLC ± 0.3 2 PLC ± 0.3 3 PLC ± 0.3 4 PLC ± 0.3 ANGLES ± 2°	APVD G. TURCO 23JUL1996	NAME MONO-SHAPE, MK1 PCB CONNECTOR 2-12 POS.					
		PRODUCT SPEC 108-20067						
		APPLICATION SPEC 114-20018	SIZE A2	CAGE CODE 1	DRAWING NO C-282042	RESTRICTED TO		
		MATERIAL (CONNETTORE NYLON (CONNECTOR NYLON) (CONTATTO OTTONE (CONTACT BRASS)	FINISH STAGNATO (TIN PLATED)	WEIGHT -	SCALE 2:1			SHEET 11
CUSTOMER DRAWING								