

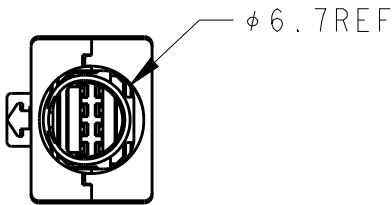
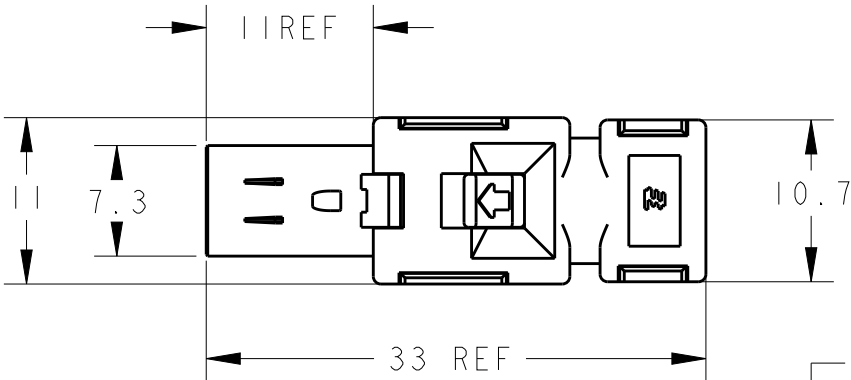


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED	09AUG2010	T.S	N.Y
	D1	ECR-18-016368	05SEP2018	GCM	P.P
	D2	NOTE 4 ADDED (PROP 65 WARNING)	25AUG2020	SS	JDB
	D3	ADDED NEW PART VARIANT 3-2040008-1	19OCT2020	SS	JDB





D-SHAPE TYPE 2



VIEW

CIRCUIT NO.

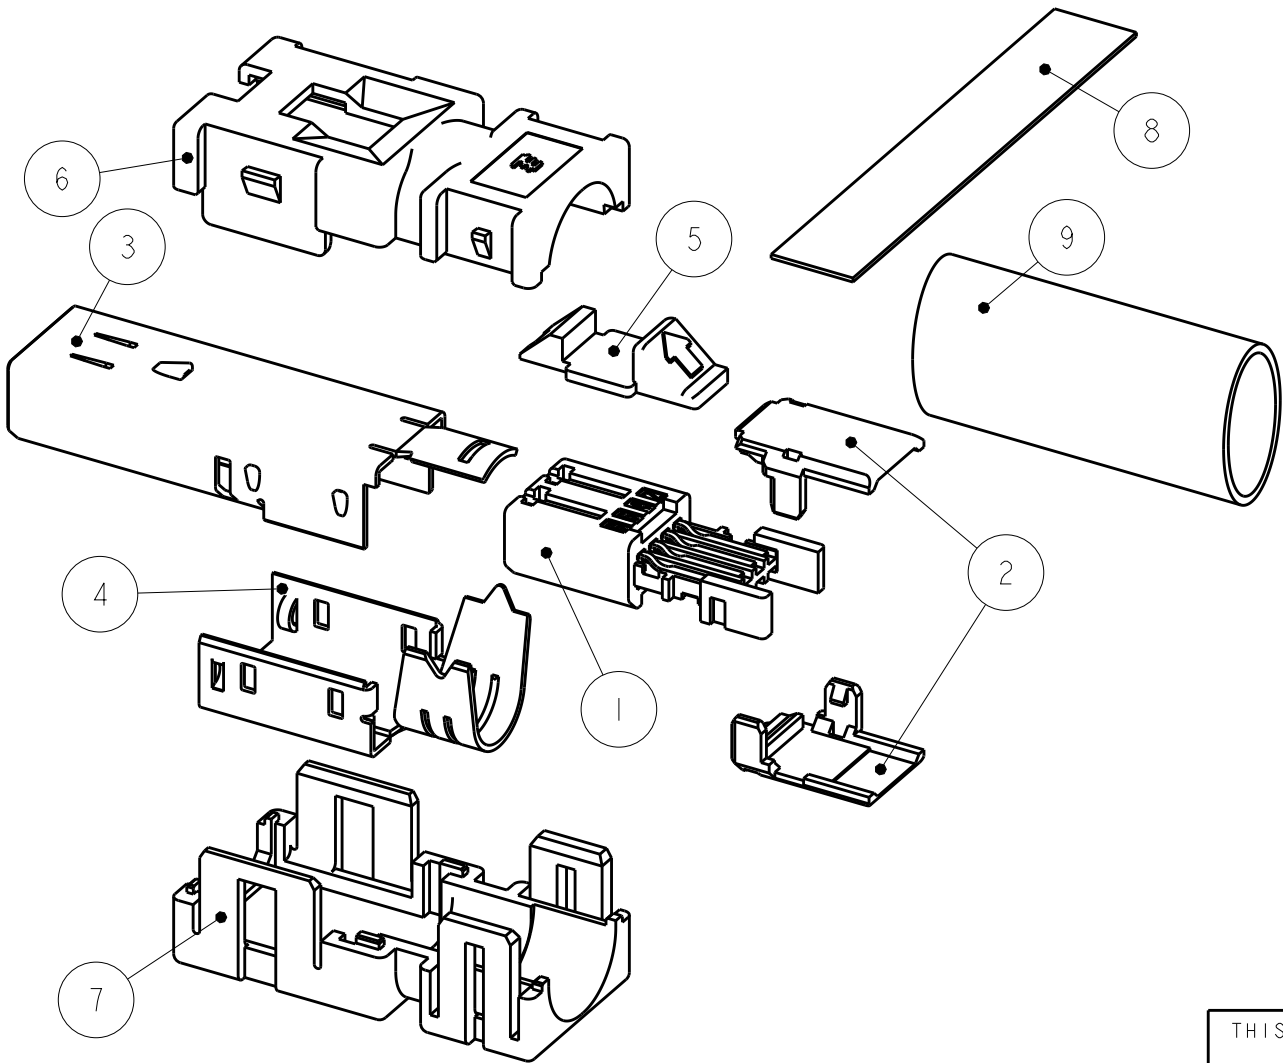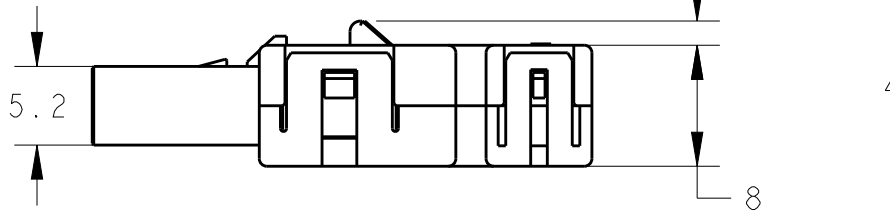

1. APPLICABLE CABLE: RECOMMENDED AWG30~26 X 8C
MAX AWG22 X 4C
OVERALL DIAMETER 6.7MAX.
2. DATE CODE IS DESCRIBED ON THE BUNDLED CUSTOMER DRAWING.
3. THE PRODUCT OF THIS DRAWING NO. IS PACKED INDIVIDUALLY
IN PACKAGE OF EXCLUSIVE USE.

4 PROP 65 WARNING LABEL: SEE SHEET 2

4	PRELIMINARY	4	4	4					
1	1	1	1		CROSS-LINKED POLYOLEFIN	HEAT SHRINKABLE TUBE			9
1	1	1	1		ELECTROLYSIS COPPER FOIL, ACRYLIC ADHESIVE MATERIAL	COPPER FOIL TAPE			8
-	1	-	-		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	BOTTOM COVER	YELLOW		7
1	-	1	1		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	BOTTOM COVER	BLACK		6
-	1	-	-		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	TOP COVER	YELLOW		6
1	-	1	1		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	TOP COVER	BLACK		6
-	1	1	-		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	LOCK EJECTOR			5
1	-	-	1		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	LOCK EJECTOR			5
1	1	1	1		STEEL/UNDER:Cu PLATING, TOP:Ni PLATING	BOTTOM SHELL			4
1	1	1	1		STEEL/UNDER:Cu PLATING, TOP:Ni PLATING	TOP SHELL			3
2	2	2	2		POLYESTER OF GLASS FILLED THERMO PLASTIC(UL94V-0)	PLUG HSG COVER			2
1	-	-	-		CONTACT: COPPER ALLOY UNDER ALL SURFACE: Ni PLATING 1.27μmMIN TOP CONTACT AREA: Au PLATING: 0.76μmMIN SOLDERING AREA: Au FLASH HSG: POLY-AMID OF GLASS FILLED THERMO PLASTIC(UL94V-0)	PLUG HSG SUB ASSY			1
-	1	1	1		CONTACT: COPPER ALLOY UNDER ALL SURFACE: Ni PLATING 1.27μmMIN TOP CONTACT AREA: Au PLATING: 0.5μmMIN SOLDERING AREA: Au FLASH HSG: POLY-AMID OF GLASS FILLED THERMO PLASTIC(UL94V-0)				1
3-2040008-1	2040008-3	2040008-2	2040008-1						
REQ'D/ASSY				MATERIAL / FINISH			PART NAME	COLOR	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. INOMATA 12NOV2007	TE Connectivity				
		CHK I. HASEGAWA 12NOV2007					
		APVD I. HASEGAWA 12NOV2007					
		PRODUCT SPEC 108-78405					
DIMENSIONS: mm		APPLICATION SPEC 114-5431		NAME INDUSTRIAL MINI I/O PLUG CONNECTOR KIT D-SHAPE TYPE 2			
		WEIGHT -		SIZE A3	CAGE CODE 00779	DRAWING NO C-2040008	RESTRICTED TO
		MATERIAL SEE TABLE		FINISH SEE TABLE		CUSTOMER DRAWING	
		SCALE 1:1		SHEET 1 OF 2		REV D3	

NOTES: CONTINUATION FROM SHEET 1:

4 PROP 65 WARNING LABEL:

- THE WARNING LABEL ON THE PRODUCT OR LOWEST LEVEL PACKAGING.
- CHEMICAL NAME: ANTIMONY TRIOXIDE



WARNING: This product can expose you to chemicals including ANTIMONY TRIOXIDE which is known to the state of California to cause cancer. For more information, visit www.P65Warnings.ca.gov.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
±0.3

0 PLC ±

1 PLC ±0.5

2 PLC ±0.13

3 PLC ±0.013

4 PLC ±0.0001

ANGLES ±

FINISH
SEE TABLE

DWN
S. INOMATA
12NOV2007

CHK
I. HASEGAWA
12NOV2007

APVD
I. HASEGAWA
12NOV2007

PRODUCT SPEC
108-78405

APPLICATION SPEC
114-5431

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
INDUSTRIAL MINI I/O
PLUG CONNECTOR KIT
D-SHAPE TYPE 2

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-2040008

RESTRICTED TO

SCALE
1:1

SHEET
2 OF 2

REV
D3

1470-19 (3/13)