


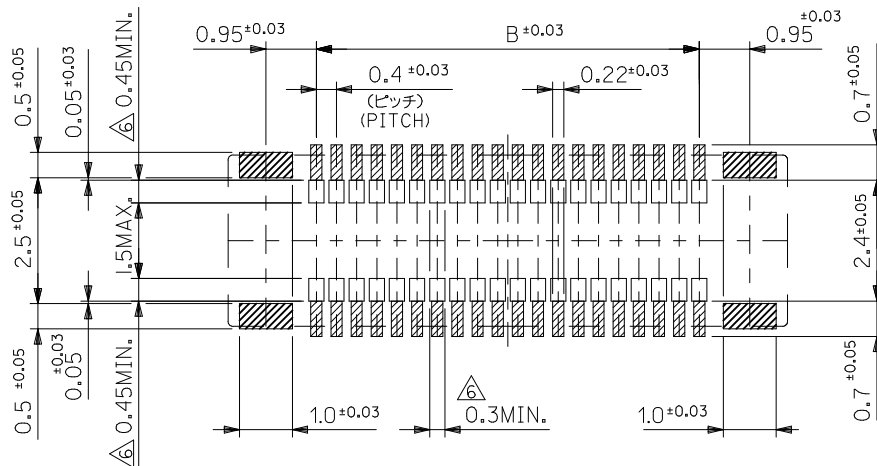

参考基板レイアウト (マウント面)
P.W. BOARD PATTERN DIMENSION (REFERENCE)
(MOUNTING AREA)


注記 NOTES:

1. 使用材料 MATERIAL
ハウジング: 液晶ポリマー (LCP) ガラス充填 UL94V-0 (黒)
HOUSING: LIQUID CRYSTAL POLYMER (GLASS FILLED)
UL94V-0 (COLOR: BLACK)
ターミナル: リン青銅 (t=0.15)
TERMINAL: PHOSPHOR BRONZE (t=0.15)
金具: リン青銅 (t=0.15)
FITTING NAIL: PHOSPHOR BRONZE (t=0.15)
2. メッキ仕様 PLATING
ターミナル TERMINAL
金メッキ 0.2マイクロメートル以上 (コンタクト部)
GOLD 0.2MICROMETER MINIMUM (CONTACT AREA)
金メッキ 0.4マイクロメートル以下 (テール部)
GOLD 0.4MICROMETER MAXIMUM (TAIL AREA)
下地メッキ: ニッケルメッキ 1.5マイクロメートル以上
UNDER PLATING: NICKEL 1.5MICROMETER MINIMUM
* コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT
AND THE TAIL PART BY THE NICKEL PLATING.
金具 FITTING NAIL
錫メッキ 1.0 マイクロメートル以上
TIN PLATING 1.0 MICROMETER MINIMUM
下地メッキ: ニッケルメッキ 1.0 マイクロメートル以上
UNDER PLATING: NICKEL 1.0 MICROMETER MINIMUM
3. (全極数/2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2) = EVEN.
4. 嵌合相手: 55909シリーズ
MATE WITH: 55909 SERIES.
5. テール平坦度は、0.08以下
テール及び金具の平坦度は、0.1以下
TAIL COPLANARITY TO BE 0.08 MAXIMUM
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM
6. 同一回路以外のパターン書込み禁止範囲を示す。
NO PRINT CIRCUIT AREA OTHER THAN THE SAME CIRCUIT.
7. 本製品は 51338-***3 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51338-***3.
8. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

REVISED EC NO: J2010-2586 DRWN:YON002 CHKD:S. MARUYAMA APPR:MSASAO		DESCRIPTION 2010/06/24 2010/06/29		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		CONNECTOR SERIES No.: 51338-***9	
								DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
				10 UNDER ± 0.2		Y. NUKANOBU 2010/01/25		TITLE 0.4 B-TO-B REC ASSY HGT=1.5 J-BEND TAIL			
				10 OVER 30 UNDER ± 0.25		CHECKED BY DATE S. MARUYAMA 2010/01/25					
				30 OVER ± 0.3		APPROVED BY DATE M. SASAO 2010/01/25		MOLEX INCORPORATED			
				ANGULAR ±3 °		MATERIAL NO.				DOCUMENT NO.	
REV B		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1		SD-51338-005		2 OF 2			
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							


NOTES

1. 製品詳細寸法については、SD-51338-005 を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING SD-51338-005.
2. 梱包数量：2500個/リール
NUMBER OF CONNECTORS : 2500PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

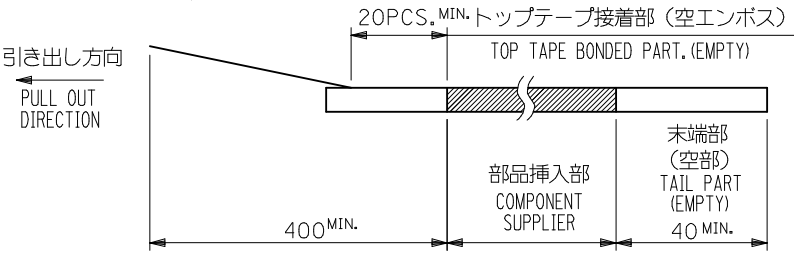


4. 材料
キャリアテープ : PS
トップテープ : PS, OTHER
リール : PS<リサイクル材を含む>
MATERIAL
CARRIER TAPE : PS
TOP TAPE : PS, OTHER
REEL : PS <RECYCLE MATERIAL CONTAINED>

5. ELV 及び RoHS 適合品。
ELV AND RoHS COMPLIANT.

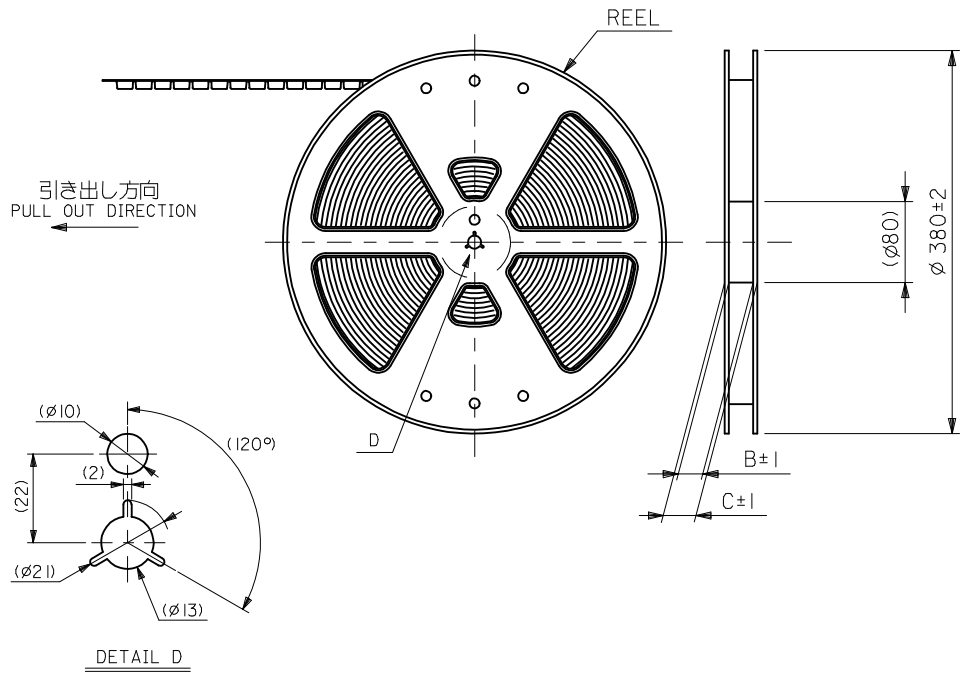

REVISED EC NO: J2015-0987 DRW:KMIYAHARA 2015/01/27 CHKD:KTAKAKO 2015/09/07 APPR:KMORI KAWA 2015/09/11 A		DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		51338-**73		MODEL NO.	
			0.25 UNDER UNDER ± 0.03			DRAWN BY DATE	TITLE	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			0.25 OVER 0.5 UNDER ± 0.05			YON002 2010/06/23	0.4 B-TO-B CONN. REC HSG ASSY(HGT=1.5) EMBSTP PKG				
			0.5 OVER 1.0 UNDER ± 0.1			CHECKED BY DATE					
			1.0 OVER 10 UNDER ± 0.2			APPROVED BY DATE	molex				
10 OVER 30 UNDER ± 0.25			MSASAO 2010/06/29								
30 OVER ± 0.3			MATERIAL NO.	DOCUMENT NO.		SHEET NO.					
ANGULAR ±3 °			SEE CHART		SD-51338-006				1 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

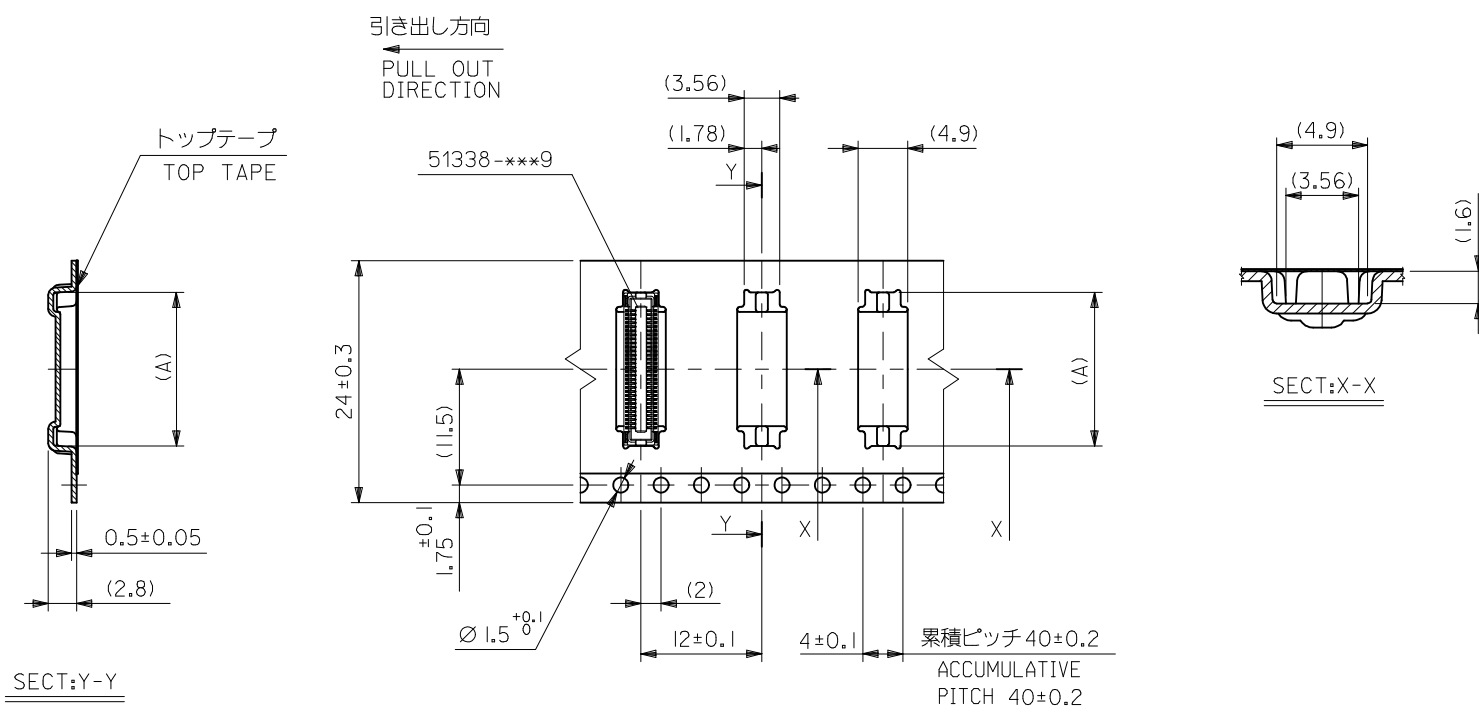

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

注記) 製品がポケット内に問題なく納まること。
NOTE. Pocket should contain product smoothly.

24	29.4	25.4	16.06	51338-6473	64
			14.06	51338-5473	54
			12.06	51338-4473	44
			5.26	51338-9873	10
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	オーダー番号 ORDER NO.	極数 CIRCUITS

REVISED EC NO: J2015-0987 DRAWN:KMIYAHARA 2015/01/27 CHKD:KTANAKA03 2015/09/07 APPR:KMORIKAWA 2015/09/11 A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	MODEL NO. 51338-***73		THIRD ANGLE PROJECTION		
		0.25	UNDER	UNDER	±0.03	DRAWN BY YON002	DATE 2010/06/23	TITLE 0.4 B-TO-B CONN. REC HSG ASSY(HGT=1.5) EMBSTP PKG					
		0.25	OVER	0.5	UNDER	±0.05	CHECKED BY						
		0.5	OVER	1.0	UNDER	±0.1	APPROVED BY MSASAO						
		1.0	OVER	10	UNDER	±0.2							DATE 2010/06/29
		10	OVER	30	UNDER	±0.25	DOCUMENT NO. SD-51338-006						
		30	OVER		±0.3	MATERIAL NO.							
		ANGULAR ±3 °				SEE CHART			SHEET NO. 2 OF 2				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						