
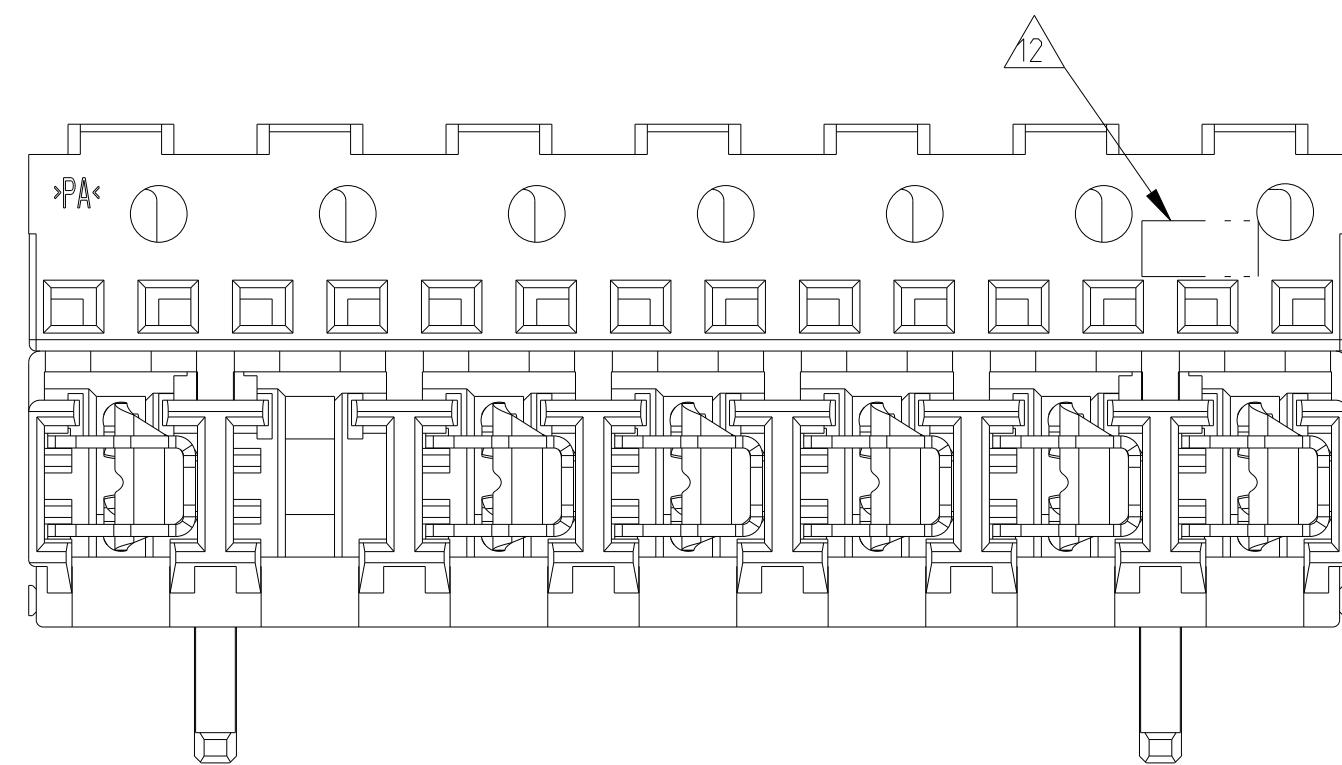
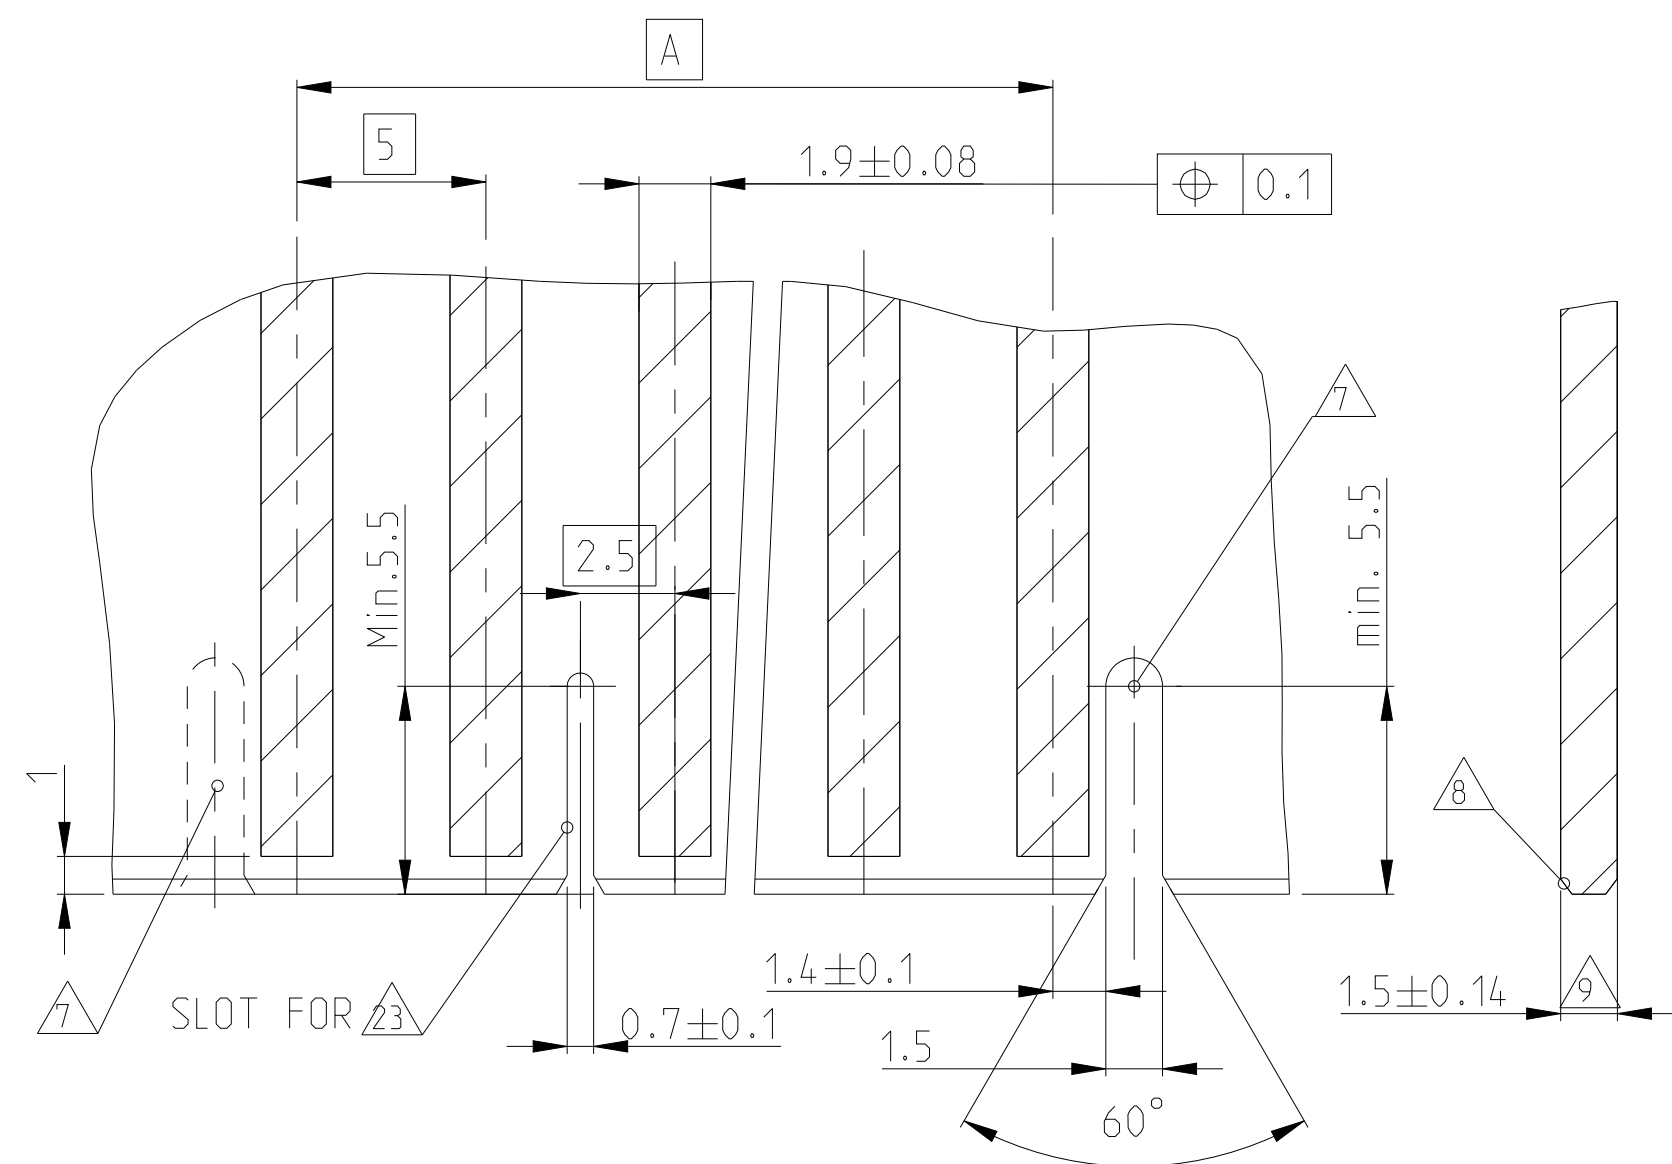
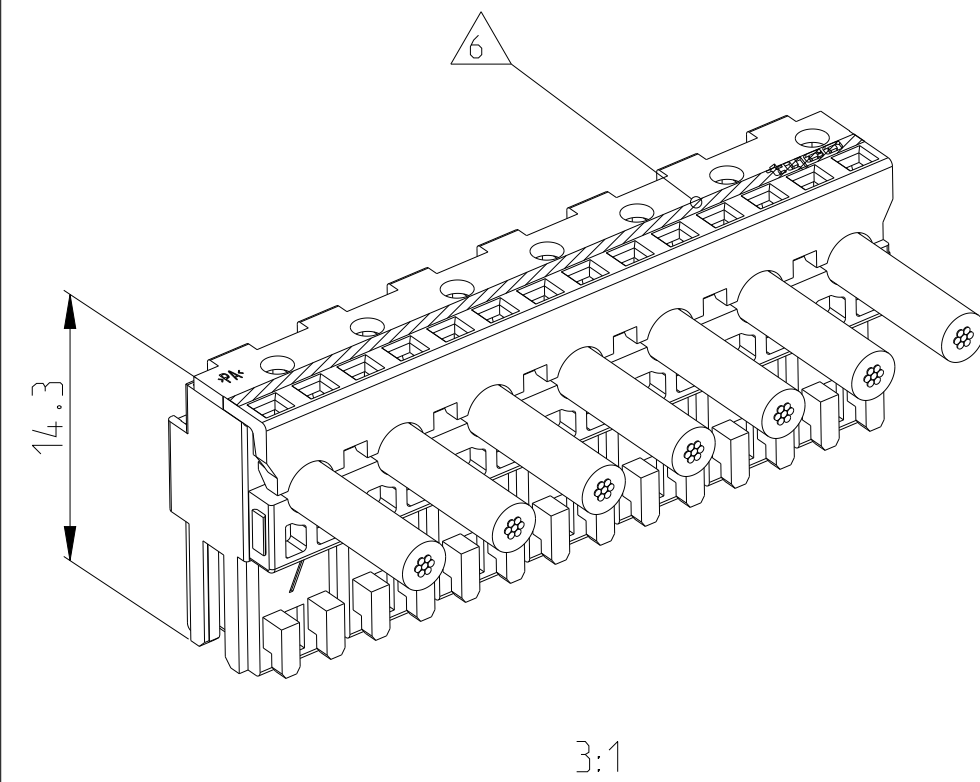
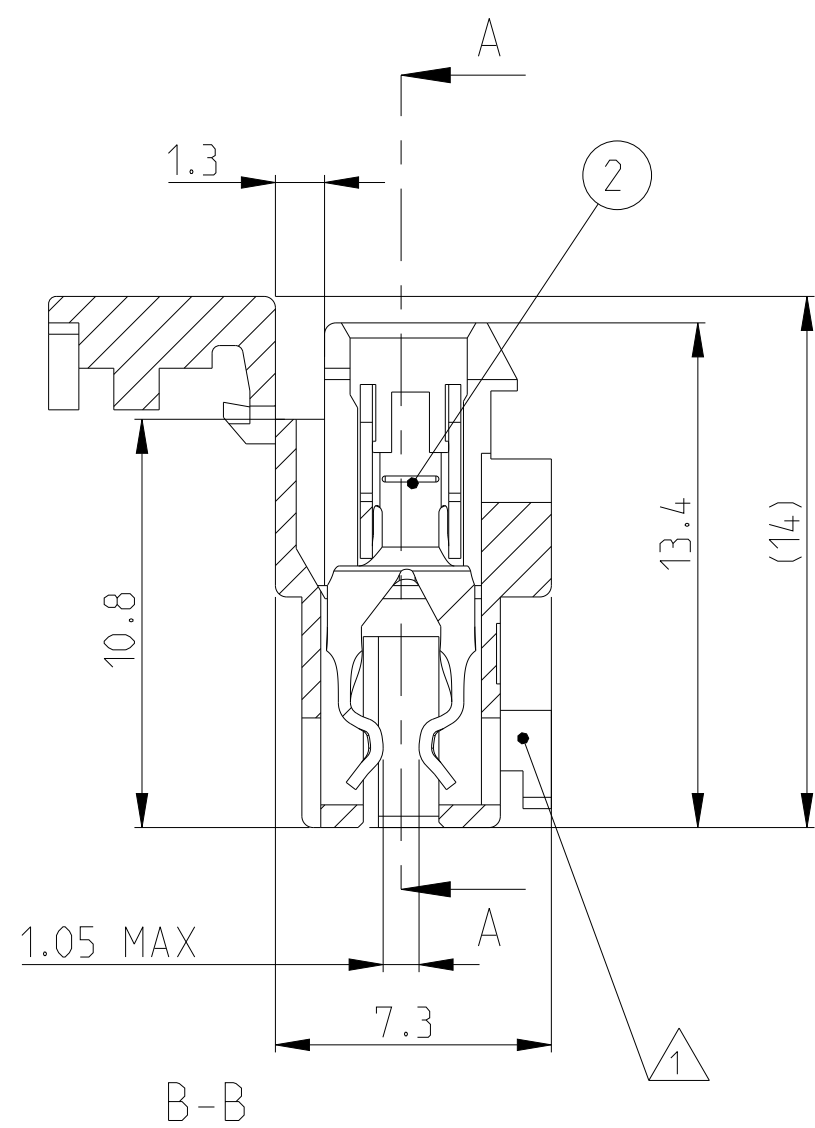


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	2016
© COPYRIGHT 2016	TE Connectivity Germany GmbH	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DN	APVD	
A1	-		D21	ECR-20-100619	05NOV2020	W	W	FL
			D22	ECR-21-108728	16AUG2021		SM	FL
			D23	ECR-21-114072	22SEP2021		SM	FL
			D24	ECR-21-115341	28SEP2021		SM	FL

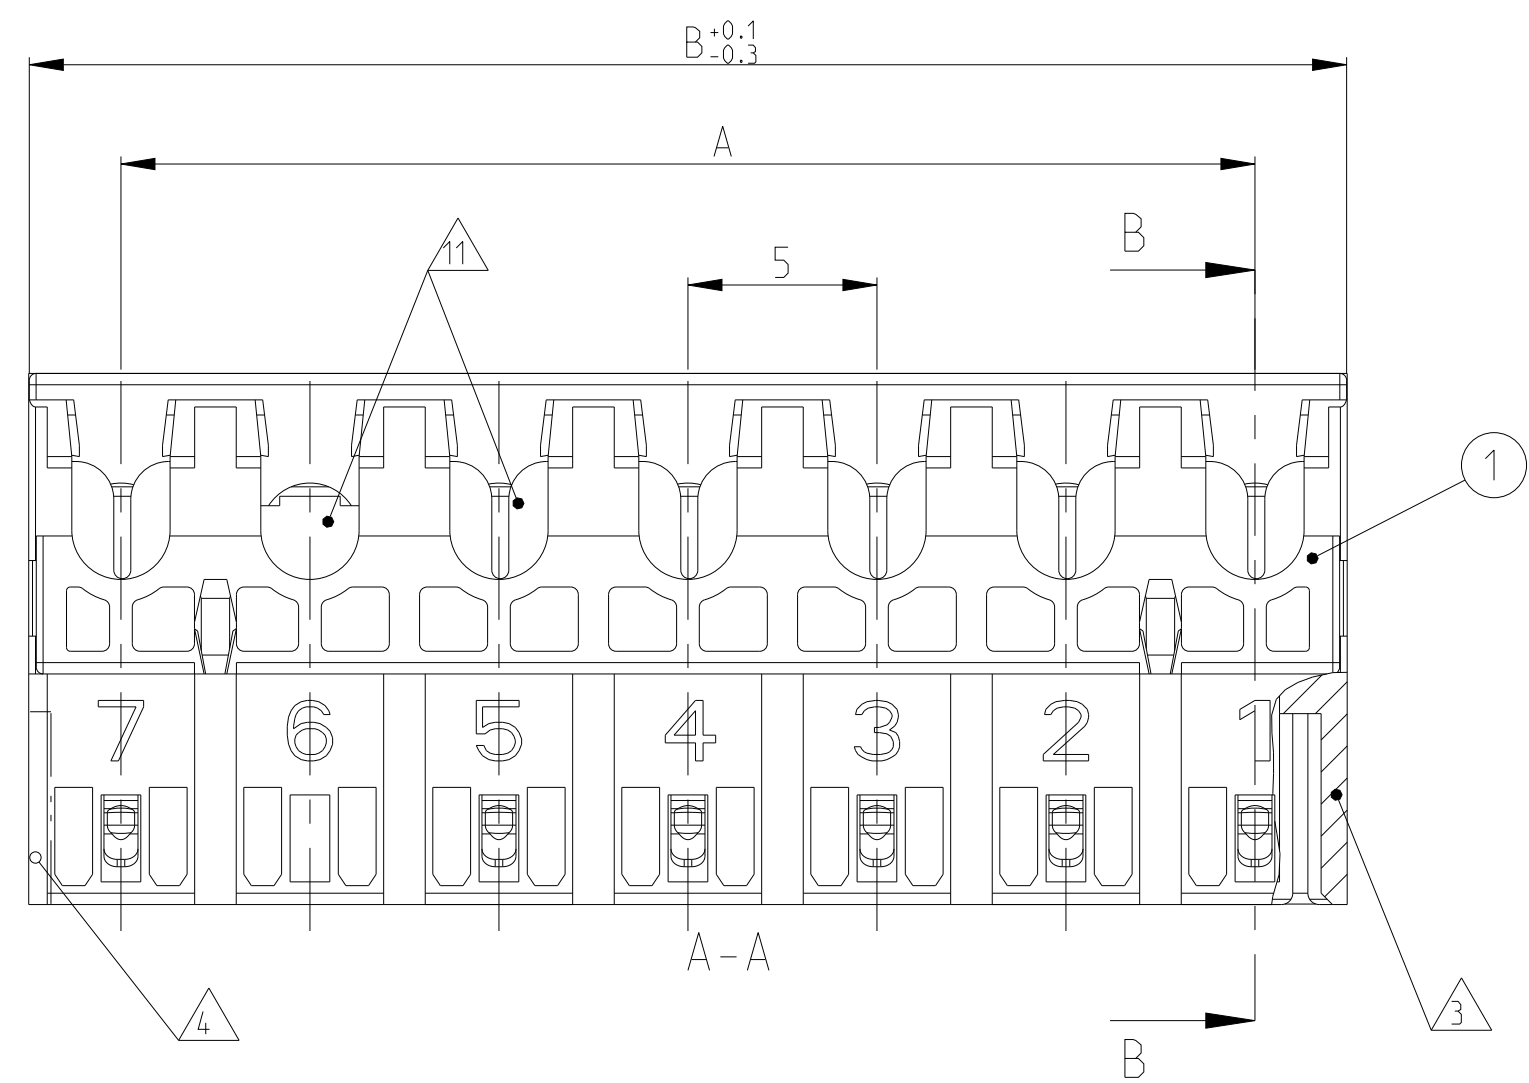

KEYING PLAN (VIEW Z)
Kodierschema (Ansicht Z)

0-15 3 4 4 15-2
4-15 3 4 4 15-2

1-15 3 4 4 15-2

2-15 3 4 4 15-2

3-15 3 4 4 15-2

4-15 3 4 4 15-2

5-15 3 4 4 15-2

6-15 3 4 4 15-2

7-15 3 4 4 15-2

8-15 3 4 4 15-2

9-15 3 4 4 15-2

10-15 3 4 4 15-2


11-15 3 4 4 15-2

12-15 3 4 4 15-2

13-15 3 4 4 15-2

14-15 3 4 4 15-2

15-15 3 4 4 15-2

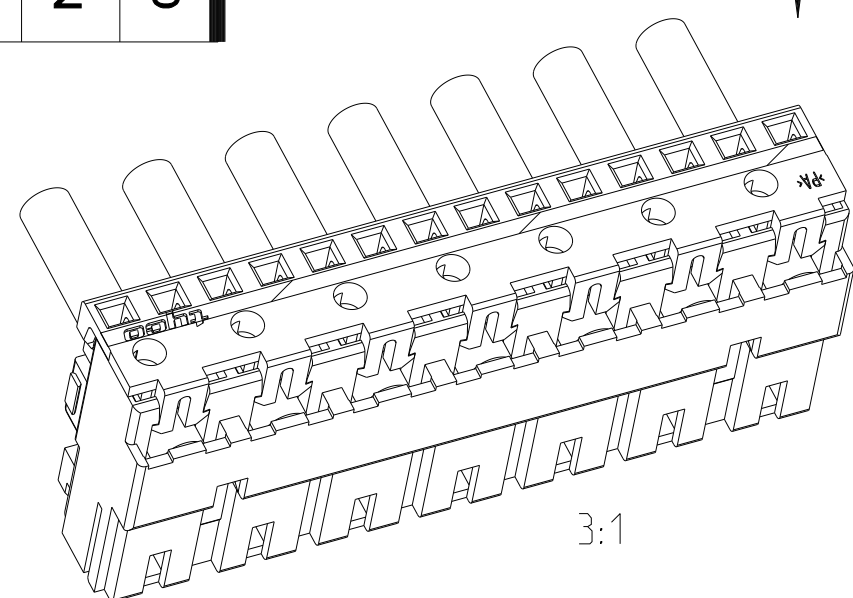

- | | |
|----|---|
| 16 | KEYING BETWEEN POSITIONS |
| 15 | UL94 V0 AND GLOW WIRE TEST 750 °C WITHOUT FLAME |
| 14 | PRELIMINARY PART NOT RELEASED FOR PRODUCTION |
| 13 | OBSOLETE |
| 12 | TE LOGO |

- △11 X...CAVITY LOADED WITH CONTACT
O...CAVITY WITHOUT CONTACT
X...Kammer mit Kontakt
O...Kammer ohne Kontakt
 - △10 GLOW WIRE TEST 750 °C WITHOUT FLAME
Gluehdrahttest 750°C ohne Flamme
 - △9 INCLUSIVE COPPER CLADDING:
Inclusive Kupferkaschierung:
 - △8 PCB PREFERABLY CHAMFERED.
Leiterplatte vorzugsweise angefast.
 - △7 SLOT FOR SIDE KEYING. △4 △4 △4
Schlitz fuer Seitenkodierung, △4 △4 △4 .
 - △6 COLOUR MARKING ON TOP OF HOUSING OPTIONAL ON TERMINATION MACHINE
Farbmarkierung auf Gehäuseoberseite optional an Verarbeitungsmaschine
- MATING PART: PCB (WITH FRAMES ACC. RAST 2.5 E.G. PN 964 575/576)
TABHEADER PN 1 534 787/788
5 Passender Gegenstecker: Leiterplatten (mit Rahmen nach RAST 2.5 z.B.
964 575/576)
Tabwannen Nr. 1 534 787/788
- △4 SIDE KEYING, ON LAST CAVITY
Seitenkodierung, an letzter Kammer
 - △3 SIDE KEYING, on CAVITY 1
Seitenkodierung, an Kammer 1
 - 2 WIRE RANGE: 0.35-0.75 mm²
Drahtgrößenbereich: 0.35-0.75 mm²
 - △1 KEYING RIBS; CUTTING WITH TERMINATION MACHINE POSSIBLE
Kodierrippe; Schneiden auf der Verarbeitungsmaschine möglich

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN C. Karabiyik 130C 12016		 TE Connectivity	
		CHK B. Schnaubelt 24 JAN2002			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME AMP DUOPLUG POWER FEMALE CONNECTOR (Standard Version)	
mm					
		APPRO T. Klenner 24 JAN2002		SIZE CAGE CODE DRAWING NO A1 00779 C=1534415	
		PRODUCT SPEC 108-18780			
MATERIAL		APPLICATION SPEC 114-18458		RESTRICTED TO	
FINISH		WEIGHT			
		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 2 REV 24	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

GWEPT 750°C NO FLAME + UL94-V2																		
X	X	X	X	X	X	X	X	X	X	NATURE	10	45	49.9	3/4	-	-	2-1534415-0	
X	X	X	X	X	X	X	X	X	X	NATURE	10	45	49.9		-	-	1-1534415-0	
	X	X	X	X	X	X	X	X	X	NATURE	9	40	44.9		-	-	0-1534415-9	
		X	X	X	X	X	X	X	X	NATURE	8	35	39.9		-	-	0-1534415-8	
			X	X	X	X	X	X	X	NATURE	7	30	34.9		-	-	0-1534415-7	
				X	X	X	X	X	X	NATURE	6	25	29.9		-	-	0-1534415-6	
					X	X	X	X	X	NATURE	5	20	24.9		-	-	0-1534415-5	
						X	X	X	X	NATURE	4	15	19.9		-	X	3-1534415-4	
						X	X	X	X	NATURE	4	15	19.9	3/4	X	X	2-1534415-4	
						X	X	X	X	NATURE	4	15	19.9	2/3	X	X	1-1534415-4	
						X	X	X	X	NATURE	4	15	19.9		-	-	0-1534415-4	
							X	X	X	RED	3	10	14.9		X		8-1534415-3	
							X	X	X	GREEN	3	10	14.9			X	7-1534415-3	
							X	X	X	NATURE	3	10	14.9	1/2		X	6-1534415-3	
							X	0	X	NATURE	3	10	14.9		-	-	4-1534415-3	
							X	X	X		3	10	14.9		X	X	3-1534415-3	
							X	X	X	NATURE	3	10	14.9		X	-	2-1534415-3	
							X	X	X	NATURE	3	10	14.9		-	X	1-1534415-3	
							X	X	X	NATURE	3	10	14.9		-	-	0-1534415-3	
								X	X	BROWN	2	5	9.9		-	-	4-1534415-2	
								X	X	NATURE	2	5	9.9		X	X	3-1534415-2	
								X	X	NATURE	2	5	9.9		X	-	2-1534415-2	
								X	X	NATURE	2	5	9.9		-	X	1-1534415-2	
								X	X	NATURE	2	5	9.9		-	-	0-1534415-2	
10	9	8	7	6	5	4	3	2	1		POS. Polzahl	DIM A	DIM B				PN Bestell-Nr.	
CAVITY LOADED 										COLOR				KEYING	KEYING	KEYING		
2		SEE TABLE		KONTAKT		CuNiSi		TINNED										
1		siehe Tabelle		Federleistengehaeuse		PA 6 		NATUR/Natur										
POS.		PN Bestell-Nr.		DESCRIPTION Beschreibung		MATERIAL		COLOUR/FINISH Farbe/Oberflaeche										

GWEPT 750°C NO FLAME + UL94-V0 																		
X	X	X	X	X	X	X	X	X	X	NATURE	10	40	49.9	3/4	-	-	-	2-2328644-0 
X	X	X	X	X	X	X	X	X	X	NATURE	10	40	49.9	-	-	-	-	1-2328644-0 
	X	X	X	X	X	X	X	X	X	NATURE	9	40	44.9	-	-	-	-	-
			0	0	X	X	X	X	X	NATURE	7	30	34.9	-	-	-	-	1-2328644-7 
			X	X	X	X	X	X	X	NATURE	7	30	34.9	-	-	-	-	2328644-7 
					X	X	X	X	X	NATURE	5	20	24.9	-	-	-	-	2328644-5 
							X	X	X	NATURE	3	10	14.9	-	-	X	-	2328644-3 
							X	X	X	NATURE	3	10	14.9	-	X	-	-	5-1534415-3
								X	X	NATURE	2	5	9.9	-	-	-	-	-
10	9	8	7	6	5	4	3	2	1									
CAVITY LOADED 										COLOR 	POS.	DIM A	DIM B	KEYING 	KEYING 	KEYING 	TE P/N	
2		SEE TABLE siehe Tabelle		CONTACT Federleistengehaeuse				CuNiSi PA 66				TINNED NATUR/Natur						
1																		
POS.		TE P/N		DESCRIPTION				MATERIAL				COLOUR/FINISH						