

## 409DMQ135 409DMQ150 SCHOTTKY RECTIFIER




PRM4 (Isolated)

### Features

- 175°C T<sub>J</sub> operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Baseplate: Nickel plated; Terminals: Nickel plated
- This is a Pb – Free Device
- All SMC parts are traceable to the wafer lot
- Additional testing can be offered upon request

### Circuit Diagram

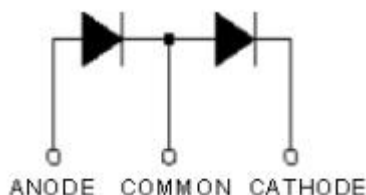

### Applications

- High current switching power supply
- Plating power supply
- Free-Wheeling diodes
- Reverse battery protection
- Converters
- UPS System
- Welding

### Maximum Ratings:

| Characteristics                                       | Symbol             | Condition                                                       | Max.            |           | Units |
|-------------------------------------------------------|--------------------|-----------------------------------------------------------------|-----------------|-----------|-------|
| Peak Repetitive Reverse Voltage                       | V <sub>RRM</sub>   | -                                                               | 135             | 409DMQ135 | V     |
| Working Peak Reverse Voltage                          | V <sub>RWM</sub>   |                                                                 | 150             | 409DMQ150 |       |
| DC Blocking Voltage                                   | V <sub>R</sub>     |                                                                 |                 |           |       |
| Average Rectified Forward Current                     | I <sub>F(AV)</sub> | 50% duty cycle @T <sub>C</sub> =105°C,<br>rectangular wave form | 200(Per Leg)    |           | A     |
|                                                       |                    |                                                                 | 400(Per Device) |           |       |
| Peak One Cycle Non-Repetitive Surge Current (Per Leg) | I <sub>FSM</sub>   | 8.3 ms, half Sine pulse                                         | 2760            |           | A     |

**Electrical Characteristics:**

| Characteristics                | Symbol           | Condition                                                                        | Typ.         | Max.         | Units |
|--------------------------------|------------------|----------------------------------------------------------------------------------|--------------|--------------|-------|
| Forward Voltage Drop(Per Leg)* | V <sub>F1</sub>  | @ 200A, Pulse, T <sub>J</sub> = 25 °C<br>@ 400A, Pulse, T <sub>J</sub> = 25 °C   | 0.91<br>1.10 | 1.03<br>1.21 | V     |
|                                | V <sub>F2</sub>  | @ 200A, Pulse, T <sub>J</sub> = 125 °C<br>@ 400A, Pulse, T <sub>J</sub> = 125 °C | 0.68<br>0.80 | 0.72<br>0.83 | V     |
| Reverse Current(Per Leg)*      | I <sub>R1</sub>  | @V <sub>R</sub> = rated V <sub>R</sub> , T <sub>J</sub> = 25 °C                  | 0.05         | 6            | mA    |
|                                | I <sub>R2</sub>  | @V <sub>R</sub> = rated V <sub>R</sub> , T <sub>J</sub> = 125 °C                 | 50           | 85           | mA    |
| Junction Capacitance(Per leg)  | C <sub>T</sub>   | @V <sub>R</sub> = 5V, T <sub>C</sub> = 25 °C<br>f <sub>sig</sub> = 1MHz          | 5500         | 6000         | pF    |
| Voltage Rate of Change         | dv/dt            | -                                                                                | -            | 10,000       | V/μs  |
| Isolation Voltage              | V <sub>ISO</sub> | Tracer to 1500V, measuring whether conducting base plate and the center column   | -            | 1500         | V     |

\* Pulse width < 300 μs, duty cycle < 2%

**Thermal-Mechanical Specifications:**

| Characteristics                                          | Symbol           | Condition                            | Specification   |                    | Units |
|----------------------------------------------------------|------------------|--------------------------------------|-----------------|--------------------|-------|
| Junction Temperature                                     | T <sub>J</sub>   | -                                    | -55 to +150     |                    | °C    |
| Storage Temperature                                      | T <sub>stg</sub> | -                                    | -55 to +150     |                    | °C    |
| Typical Thermal Resistance Junction to Case(Per leg)     | R <sub>θJC</sub> | DC operation                         | 0.40            |                    | °C/W  |
| Typical Thermal Resistance Junction to Case(Per package) | R <sub>θJC</sub> | DC operation                         | 0.20            |                    | °C/W  |
| Typical Thermal Resistance, case to Heat Sink            | R <sub>θcs</sub> | Mounting surface, smooth and greased | 0.10            |                    | °C/W  |
| Mounting Torque                                          | T <sub>M</sub>   | -                                    | Mounting Torque | 24(min)<br>35(max) | Kg-cm |
|                                                          |                  |                                      | Terminal Torque | 35(min)<br>46(max) |       |
| Approximate Weight                                       | wt               | -                                    | 79              |                    | g     |
| Case Style                                               | PRM4 Isolated    |                                      |                 |                    |       |

**Ratings and Characteristics Curves**

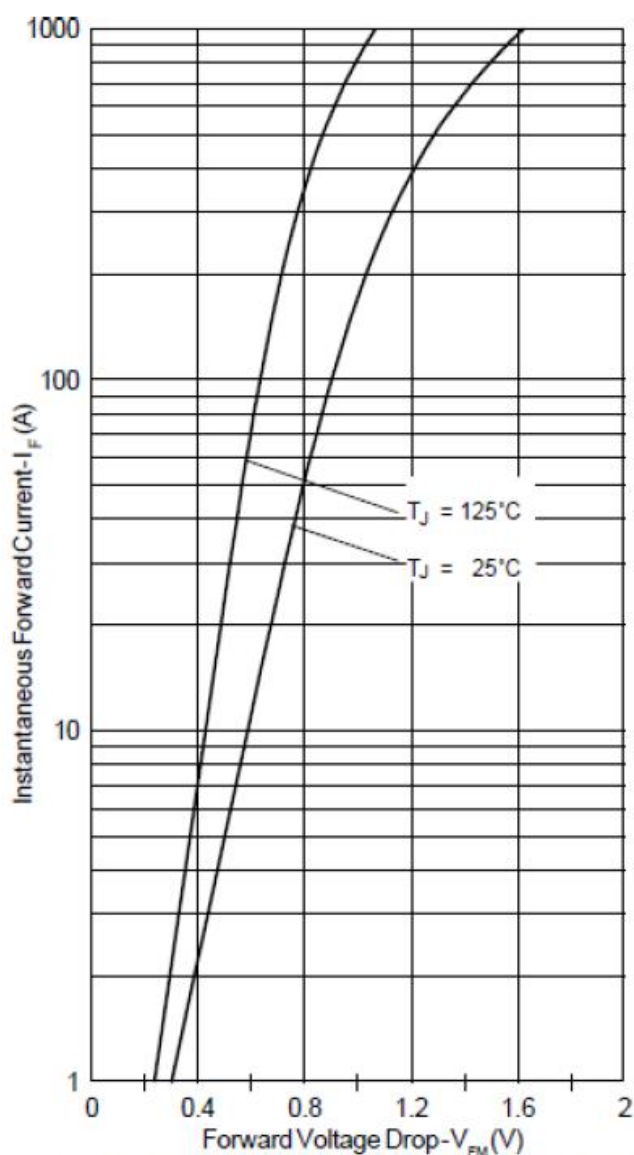


Fig. 1 - Max. Forward Voltage Drop Characteristics

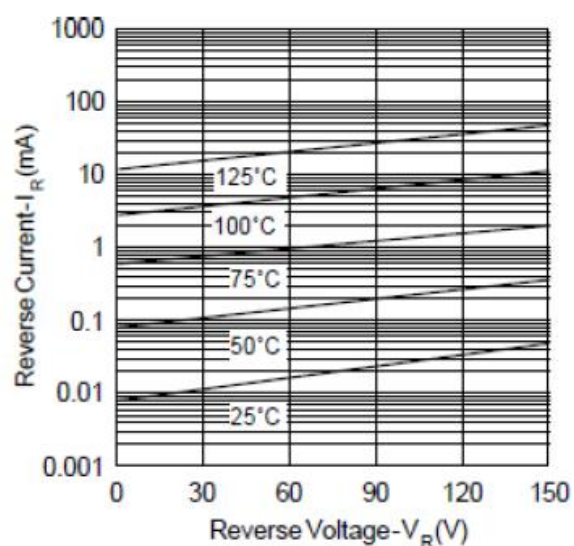


Fig. 2 - Typical Reverse Characteristics


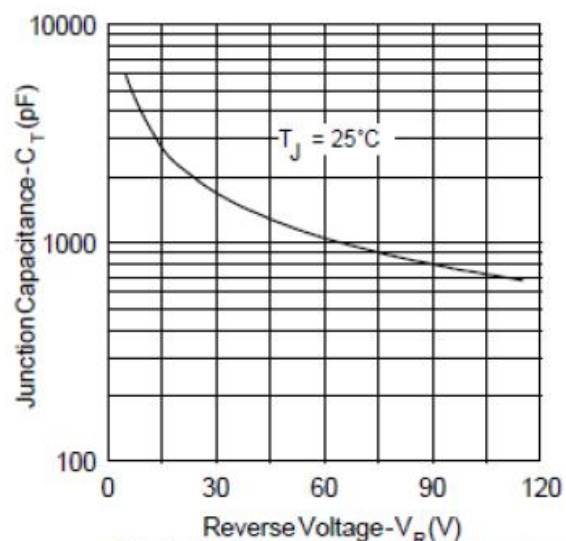



Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

## Mechanical Dimensions PRM4 Isolated(Millimeters/Inches)

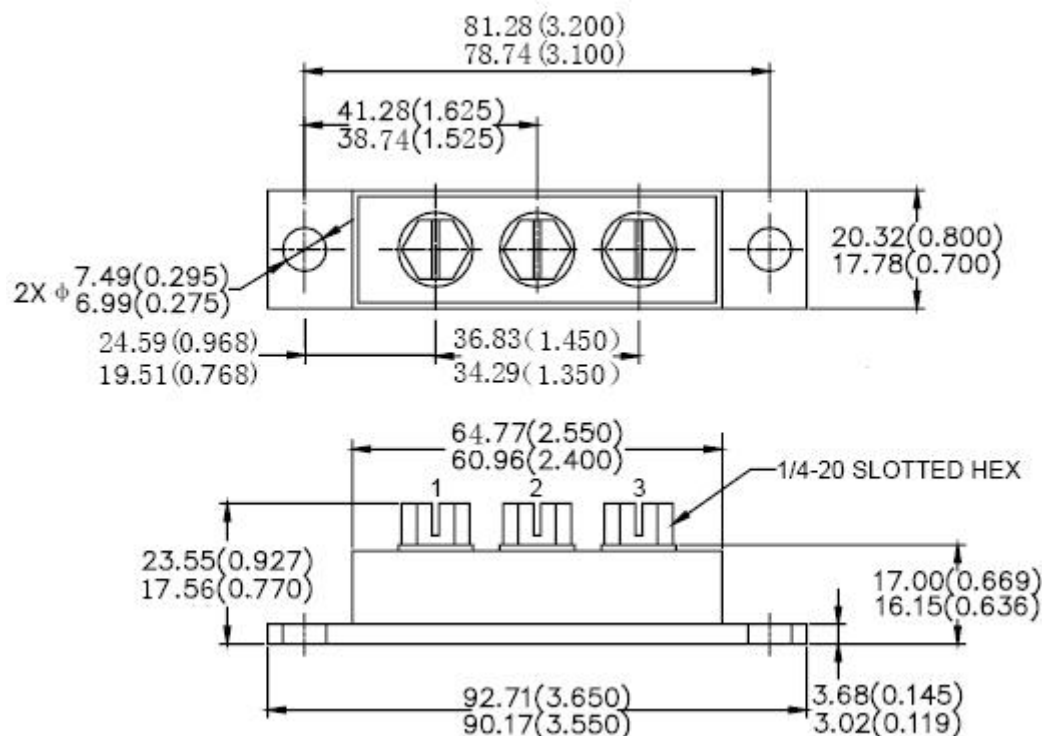

Please Note: Suffix "R" Denotes For Reversed Polarity

## Marking Diagram

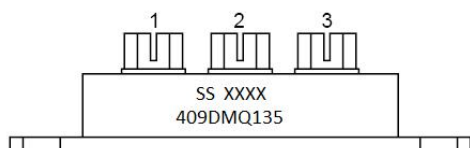

Where XXXX is YYWW

409DMQ135 = Part name  
SS = SS  
YY = Year  
WW = Week

**Cautions:** Molding resin  
Epoxy resin UL:94V-0

## Ordering Information

| Device        | Package                    | Shipping  |
|---------------|----------------------------|-----------|
| 409DMQ SERIES | PRM4 Isolated<br>(Pb-Free) | 9 pcs/box |

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our tape and reel packaging specification.

**Technical Data**  
**Data Sheet N1502, Rev A**



**DISCLAIMER:**

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..