


Overview

The Cabling123® can offer 100GBASE-SR4 QSFP28 optical transceiver. These optical transceiver module are designed for use in 100G Gigabit Ethernet links over multimode fiber, using a wavelength of 850nm via a 12 fiber MPO connector. This optical transceiver have a wide variety of high-density and low-power 100G Gigabit Ethernet connectivity options for data center, high-performance computing networks, enterprise core and distribution layers, and service provider applications.

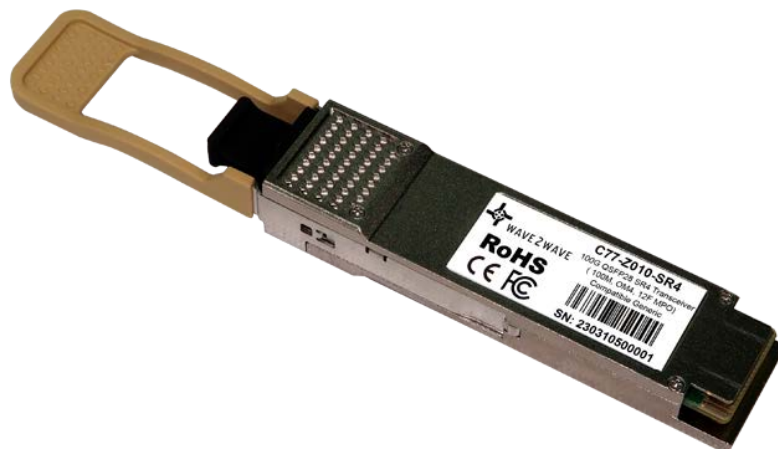

Features & Benefits

- Hot pluggable QSFP28 form factor.
- Supports 100 Gb/s aggregate bit rate.
- Single 12 fiber MPO receptacle.
- +3.3V single power supply.
- Low power consumption.
- Support DDM.
- Generic compatible.
- Compliant to MSA, RoHS standard.

Applications

- 100G Gigabit Ethernet.
- InfiniBand QDR, EDR.
- Switch / Router /HBA.
- Enterprise network SAN.
- Data storage and communication industry.
- Data center network.

Specification

Parameter	Value
Form Type	QSFP28
Connector Type	12F MPO Male
Maximum Distance	100 m @ OM4 MMF
Supported Data Rate	100 Gb/s
Wavelength(nm)	850
Output Power	Min: -6.0 dBm; Max: 2.4 dBm
Extinction Ratio	Min: 2 dB;
Receiver Sensitivity	Max: -7.5dBm
H x W x D (mm)	12.2 x 18.35 x 125
Weight (g)	43
Storage Temperature	-40 °C ~ 85 °C
Operatig Temperature	0 °C ~ 70 °C
Humidity	5%RH ~ 85%RH

Product Selection

Part Number: C77-Z010-SR4

Standards Compliance

- SFF-8636.
- IEEE Std 802.3bm.
- RoHS.

