

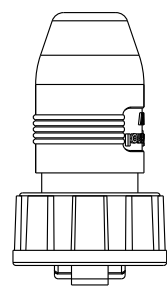



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C191395	2019/07/29	JC Chen	Dimensional tolerance change

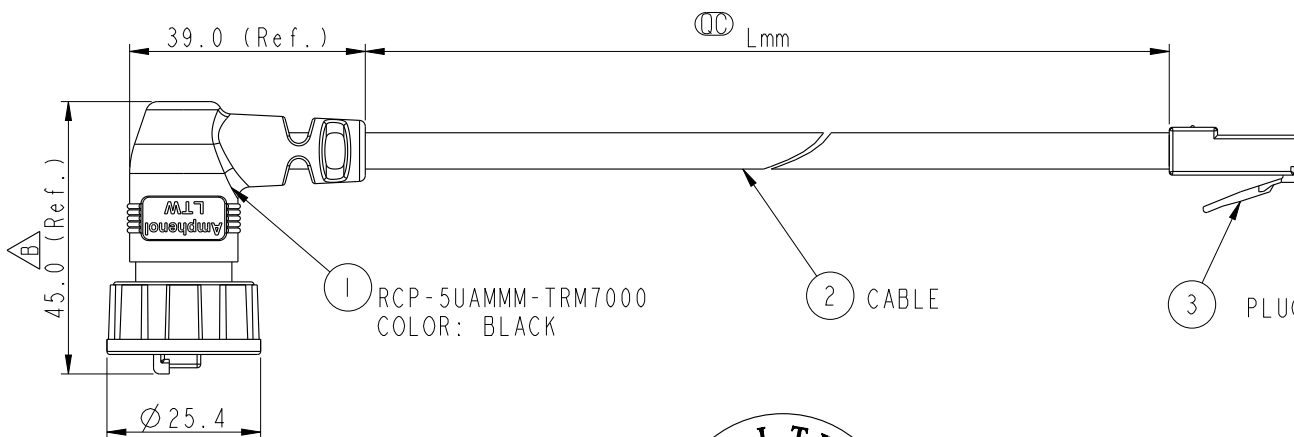


CONN.1

Waterproof Rate: IP67



CONN.2

截面 A-A



RCP5UM-UPG06M-TR7A XX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L): 01~99Meters

Note:

- * Important Dimension To Check
- * Waterproof Rate: IP67 (Mating)
- * Housing: Nylon+GF, Black
- * Lock Nut: Nylon+GF, Black
- * RJ Plug: Unshield, Phosphor Bronze, Gold Plated
- * Cable: NOUL, CAT5E UTP 24#*4P, OD6.0, Black
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
11M~30M: ±200mm
31M~99M: ±500mm

8	BROWN	棕	8
7	WHITE/BROWN	白/棕	7
6	GREEN	綠	6
5	WHITE/BLUE	白/藍	5
4	BLUE	藍	4
3	WHITE/GREEN	白/綠	3
2	ORANGE	橘	2
1	WHITE/ORANGE	白/橘	1
Conn.1	Wire Color		Conn.2
	PIN OUT		

UNIT:mm		TITLE	RJ DOUBLE-90 ENDED, WITH PLUG 3KEY LOCK	
TOLERANCE	.X ±0.5	SCALE	4:5	SIZE A4
REV.	B	WC-REV.	A.3	SHEET 1 OF 1
				QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	JC Chen	2019-07-29
RCP5UM-UPG06M-TR7AXX	CHECKED BY	DATE
CUSTOMER	Li Feng	2019-07-29
ALTW	APPROVED BY	DATE
	Jerry	2019-07-29