
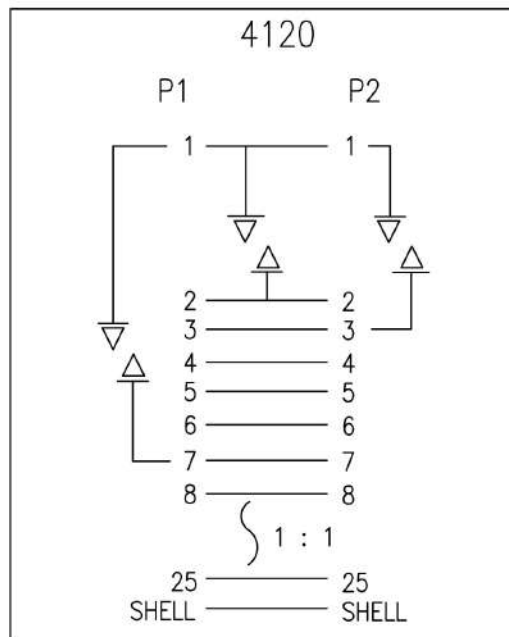


Customer No.:

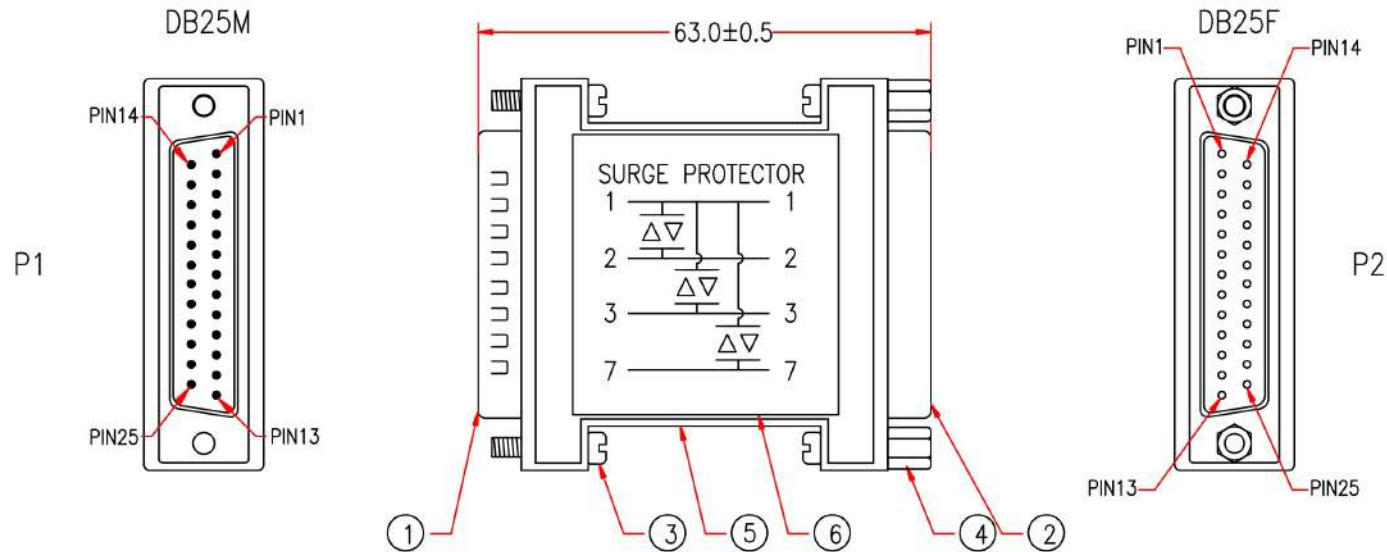

NOTE: All relevant materials are complied with RoHS directive .

6	ALUMINUM LABEL	1	M10
5	UL1007 26AWG INSULATOR WIRE, LENGTH 55mm	29	M541
	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 10$ mm	6	M743
	SURGE ABSORBER	3	M156
	ELECTRO-PLATED HOOD	1set	M16
4	HEX-NUT 5*6.6mm	2	M95
3	SCREW 4*12.5mm, #4-40, ASSEMBLY TYPE	4	M95
2	DB25 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		 Providing Connectivity Solutions Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm	
CHECKED	HU		
DRAWING	XIANG		
DATE	14/MAY/09	ITEM NO.	DST-25MF-SP & DST-25MF-SP-MF
UNIT:mm			

CHECKED