

# SIEMENS



SIMATIC HMI / PC-based Automation

# Human Machine Interface Systems/ PC-based Automation

Catalog  
ST 80/  
ST PC

Edition  
2021

[siemens.com/simatic](https://siemens.com/simatic)

## Related catalogs

### SIMATIC

Products for  
Totally Integrated Automation

ST 70

PDF (E86060-K4670-A101-B8-7600)



### SIMATIC

SIMATIC PCS 7 Process Control System  
Vol. 1: System components

ST PCS 7

E86060-K4678-A111-C7-7600



### Industrial Communication

SIMATIC NET

IK PI

E86060-K6710-A101-B8-7600




### SITOP

SITOP  
Power Supply

KT 10.1

E86060-D4001-A510-D9



### SITRAIN

Digital Industry Academy

[www.siemens.com/sitrain](http://www.siemens.com/sitrain)



### Siemens TIA Selection Tool

for the selection, configuration and ordering of  
TIA products and devices

[www.siemens.com/tst](http://www.siemens.com/tst)



### Industry Mall

Information and Ordering Platform  
on the Internet:



[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

### Contact

Your personal contact can be found in our  
Contacts Database at:



[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

# TIA Selection Tool

The smart configurator for the entire Siemens automation portfolio



## Prime reasons for the TIA Selection Tool




### Quick, easy and secure

Components can be selected, configured and ordered quickly, easily and securely from the Siemens automation portfolio



### Intelligent

Intelligent selection wizards check the compatibility of the configured components and enable error-free ordering



### Clear

Required modules, devices and networks are automatically generated and clearly compared to one another



### Time-saving

Time savings of 80% in design – thanks to ease of use and intelligent support

The screenshot displays the TIA Selection Tool's user interface. On the left, a navigation sidebar includes links for Welcome, New device, Projects, Configuration, Views, and Order list. The main area shows a 'Device series' catalog with categories like All devices, Basic Controller, Advanced Controller, etc. A search bar is at the top. To the right, a detailed configuration view for a SIMATIC 300 module is shown, featuring a grid-based slot assignment table where specific modules are being placed.

**The TIA Selection Tool is a completely paperless solution.**

**Download it now:**

[www.siemens.com/tst](http://www.siemens.com/tst)

For more information,  
scan the  
QR code





# Operator control and monitoring systems/ PC-based Automation

© Siemens 2021

## SIMATIC HMI / PC-based Automation



### Catalog ST 80/ST PC · 2021

Supersedes:

Catalog ST 80/ST PC · 2020

Refer to the Industry Mall for current updates of  
this catalog:

[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

© Siemens 2021

### Introduction

1

### Operator panels

2

### HMI software

3

### Industrial Edge

4

### PC-based Automation

5

### Accessories

6

### Appendix

7



The products and systems described in  
this catalog are manufactured/distributed  
under application of a certified quality  
management system in accordance with  
DIN EN ISO 9001 (Certified Registration  
No. 2613-05). The certificate is recognized  
by all IQNet countries.

# Digital Enterprise

**The building blocks that ensure everything works together perfectly in the digital enterprise**

Digitalization is already changing all areas of life and existing business models. It is placing greater pressure on industry while at the same time creating new business opportunities. Today, thanks to scalable solutions from Siemens, companies can already become a digital enterprise and ensure their competitiveness.




## Industry faces tremendous challenges



### Reduce time-to-market

Today manufacturers have to bring products to market at an ever-increasing pace despite the growing complexity of these products. In the past, a major manufacturer would push aside a small one, but now it is a fast manufacturer that overtakes a slow one.



### Boost flexibility

Consumers want customized products, but at a price they would pay for a mass-produced item. That only works if production is more flexible than ever before.



### Improve quality

To ensure a high level of quality while meeting legal requirements, companies have to establish closed quality loops and enable the traceability of products.



### Boost efficiency

Today the product itself needs to be sustainable and environmentally friendly, while energy efficiency in production has become a competitive advantage.



### Increase security

Increasing networking escalates the threat to production facilities of cyberattacks. Today more than ever, companies need suitable security measures.



## The digital enterprise has already become a reality

To fully benefit from all the advantages of digitalization, companies first have to achieve complete consistency of their data. Fully digitally integrated business processes, including those of suppliers, can help to create a digital representation of the entire value chain. This requires

- the integration of industrial software and automation,
- expansion of the communication networks,
- security in automation,
- and the use of business-specific industrial services.

## MindSphere

### The cloud-based open IoT operating system from Siemens

With MindSphere, Siemens offers a cost-effective and scalable cloud platform as a service (PaaS) for the development of applications. The platform, designed as an open operating system for the Internet of Things, makes it possible to improve the efficiency of plants by collecting and analyzing large volumes of production data.

### Totally Integrated Automation (TIA) Where digitalization becomes reality

Totally Integrated Automation (TIA) ensures the seamless transition from the virtual to the real world. It already encompasses all the necessary conditions for transforming the benefits of digitalization into true added value. The data that will form the digital twin for actual production is generated from a common base.

## Digital Plant

Learn more about the digital enterprise for the process industry  
[www.siemens.com/digitalplant](http://www.siemens.com/digitalplant)

## Digital Enterprise Suite

Learn more about the digital enterprise for the discrete industry  
[www.siemens.com/digital-enterprise-suite](http://www.siemens.com/digital-enterprise-suite)



## Operator control and monitoring systems PC-based Automation



1/2

1/6

SIMATIC HMI operator control and monitoring systems  
PC-based Automation

# 1 Introduction

## SIMATIC HMI operator control and monitoring systems

### Overview



#### **SIMATIC HMI operator control and monitoring systems – efficient machine-level operator control and monitoring**

Equipment for monitoring and operator control is needed wherever people have to work with or on machinery and plants performing diverse tasks from cylinder driers to waste compactors. It is not difficult to find the right device for your specific task. The challenge is to find a solution that is future-proof and flexible, that can be integrated into higher-level networks, and that can also meet the ever-increasing demands for transparency and data provision.

SIMATIC HMI Panels have proven their value in a variety of different applications in all industrial sectors over many years. The range of the systems in use is just as wide as that of the applications and technologies in the respective plants.

SIMATIC HMI stands for highly efficient machine-level operator control and monitoring and has some unique advantages:

- Efficient engineering  
Visualization can be created more quickly and easily than ever before.
- Innovative design and operation  
Visualization becomes the outstanding feature of the machine.
- Brilliant HMI operator panels  
The right operator panel for every application.
- Backup – with security  
Protection for investments and know-how, secure operation.
- Commissioning in the fast lane  
Lose no time with testing and servicing.
- Openness with PC-based  
For flexible, independent applications

<http://www.siemens.com/hmi>

#### **NEW: SIMATIC WinCC Unified system – unlimited visualization for every application**

SIMATIC WinCC Unified is a totally new visualization system for meeting the challenges of digitalization in machine and plant construction.

State-of-the-art hardware and software technologies make this possible now and in the future. Tried and tested engineering in the TIA Portal, the latest web technology and great reserves of performance for the coming years combined with the freedom to implement your ideas as you imagine them.

<http://www.siemens.com/wincc-unified>

#### **SIMATIC HMI software – a lot more than just visualization software**

With the SIMATIC WinCC (TIA Portal), SIMATIC WinCC and SIMATIC WinCC Open Architecture product families, SIMATIC HMI covers the entire engineering and visualization software spectrum for the human machine interface.

- Almost the entire range of SIMATIC operator panels can be configured with SIMATIC WinCC (TIA Portal), the successor to SIMATIC WinCC flexible. The functionality covers both visualization tasks at machine level and SCADA applications on PC-based multi-user systems.
- The current version 7.5 of SIMATIC WinCC is available for extremely complex process visualization tasks and SCADA applications, e.g. taking account of redundant solutions and vertical integration all the way to plant intelligence solutions.
- Ultimately, SIMATIC WinCC Open Architecture addresses applications that require extensive customer-specific adaptations or manage large and/or complex applications, as well as projects that demand special system requirements and functions.

<http://www.siemens.com/hmi-software>

#### **NEW: SIMATIC WinCC Unified visualization software**

SIMATIC WinCC Unified software enables access to open interfaces, modern web technologies and consistent integration in order to implement modern visualization concepts simply and easily in the TIA Portal.

<http://www.siemens.com/wincc-unified-software>

#### **SIMATIC HMI – brilliant and rugged operator panels**

Basic HMI – for the entry level

- Key Panels  
Pre-assembled and ready for installation, for conventional operator panels. No configuration required with WinCC!  
<http://www.siemens.com/key-panels>
- Basic Panels  
The entry level series for simple HMI applications.  
<http://www.siemens.com/basic-panels>

Advanced HMI Panel-based - for higher requirements


- **New:** SIMATIC HMI Unified Comfort Panels  
High-end performance and state-of-the-art technology for the future of visualization.  
<http://www.siemens.com/wincc-unified-hardware>
- Comfort Panels  
High-end functionality for demanding indoor and outdoor HMI applications.  
<http://www.siemens.com/comfort-panels>
- Mobile Panels  
Portable operator panels for mobile deployment on site.  
<http://www.siemens.com/mobile-panels>

#### **Individual HMI devices in customized versions**

<http://www.siemens.com/customized-automation>

## SIMATIC HMI operator control and monitoring systems

## Overview

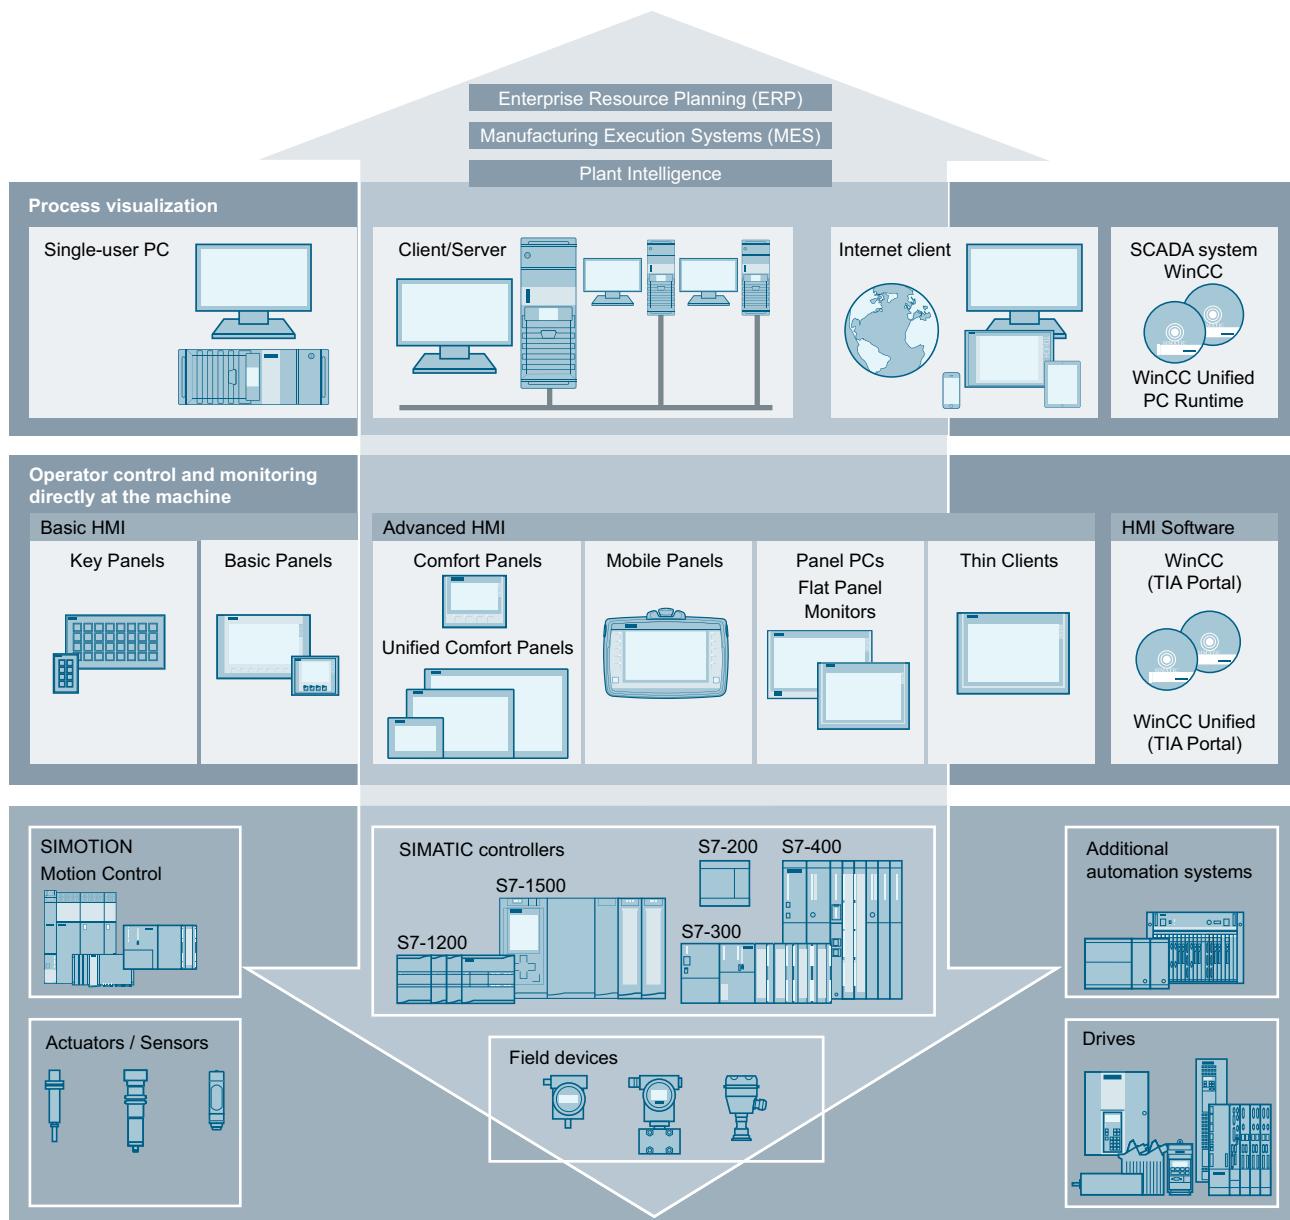

G\_ST80\_XX\_00365

# 1 Introduction

## SIMATIC HMI operator control and monitoring systems

### Overview

Control system optimizes the productivity of a hot dip galvanizing plant




Reference: V7 Control room

As semi-finished products, galvanized steel sheets play a key role in industrial production, such as car manufacturing. One proven method of protecting steel sheets from rust is the application of a zinc coating in a hot dip galvanizing process, in which strips of sheet steel are drawn through a bath containing liquid zinc.

Plants for this process are complex and in continuous operation, thus placing high demands on the process control system and the hardware used.

Advantages of the SIMATIC SCADA system and SIMATIC IPC solution:

- SIMATIC WinCC V7 SCADA control system whose scalability and openness also permits the implementation of future functional expansions.
- Redundant setup of the control system and operating stations with industry-compatible SIMATIC industrial PCs and Thin Clients.
- Optimum overview thanks to multi-monitor solution in the control room and more than 27 operating stations throughout the plant and production hall.
- Availability of the production data over a long period in SIMATIC Process Historian for reasons of traceability.
- Increased productivity using long-term analyses of plant availability, productivity, energy consumption and quality.
- More effective support and shorter downtimes thanks to fast, web-based access to plants with the SIMATIC WinCC WebNavigator.

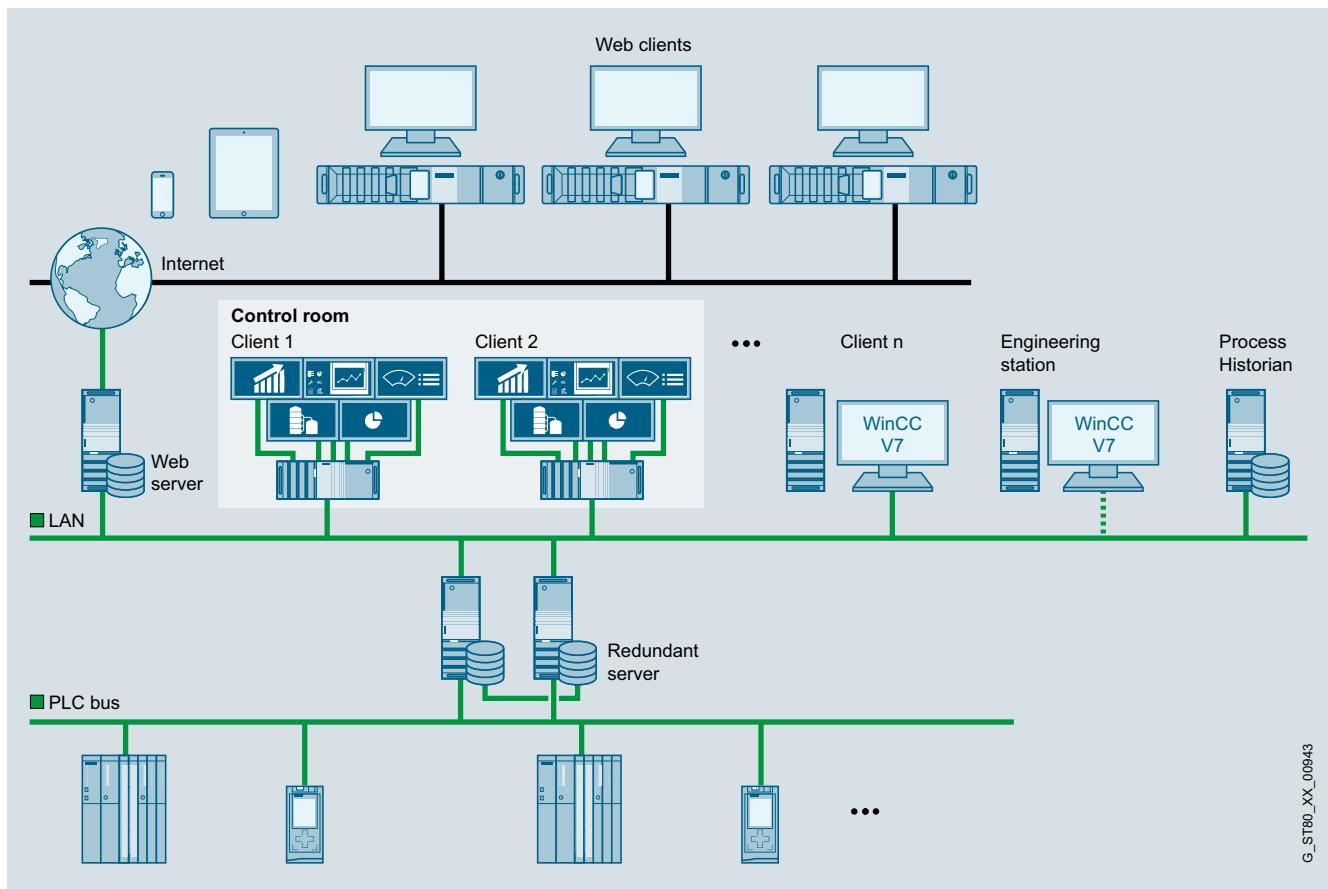

G\_ST80\_XX\_00943

## SIMATIC HMI operator control and monitoring systems

### Overview

Modernization of a plant in the food and beverage industry on the basis of an integrated automation and visualization solution




WinCC Professional reference

The modernization involved equipping 3 production lines with an expanded SCADA system, a new control architecture, converters and motor starters. The project was implemented smoothly, and the integrated hardware and software solution with the TIA Portal enabled the simplification of the engineering process.

Advantages of the solution with the SIMATIC SCADA system WinCC Professional in the TIA Portal, S7-1500 and SIMATIC IPC:

- Simplified application engineering
- Efficient monitoring of the production lines enables the optimal path through the production to be defined for each batch.
- Increased productivity
- Simple and intuitive operation implemented thanks to good visual support
- Better control of the motors involved with the process
- Integration of the production data into the existing ERP system
- Faults in the current process can be easily localized

Tunnel control system for the longest railway tunnel in the world

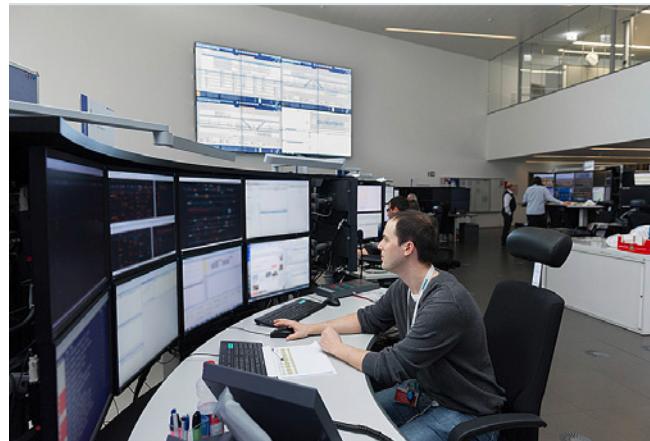

Control room with WinCC OA

The SIMATIC WinCC Open Architecture tunnel control system is at the heart of the monitoring systems for the entire tunnel infrastructure. Continuous availability of the entire system is essential to ensure the trouble-free operation of the Gotthard Base Tunnel.

The Gotthard Base Tunnel has a tunnel control center at the south and north portals. The two tunnel control systems installed there monitor and control all of the installed systems and plants. All the required data are acquired, collated and visualized on the tunnel control system. A fully integrated maintenance management tool and an operations control system are also part of the tunnel control system with a large screen display.


The advantages of the solution:

- Highest failure safety thanks to the presence of doubly redundant tunnel control equipment – Disaster Recovery System (2x2 redundancy)
- Central monitoring of the infrastructure simplifies fault management
- More efficient operation through central control of the entire infrastructure
- Integration of many (sub-)systems thanks to OPC UA as a standardized interface throughout the entire project
- Optimal user friendliness through uniform user interface across all plants, overview of all systems at one workstation as well as large screen display (multi-monitor management)

# 1 Introduction

## PC-based Automation

### Overview

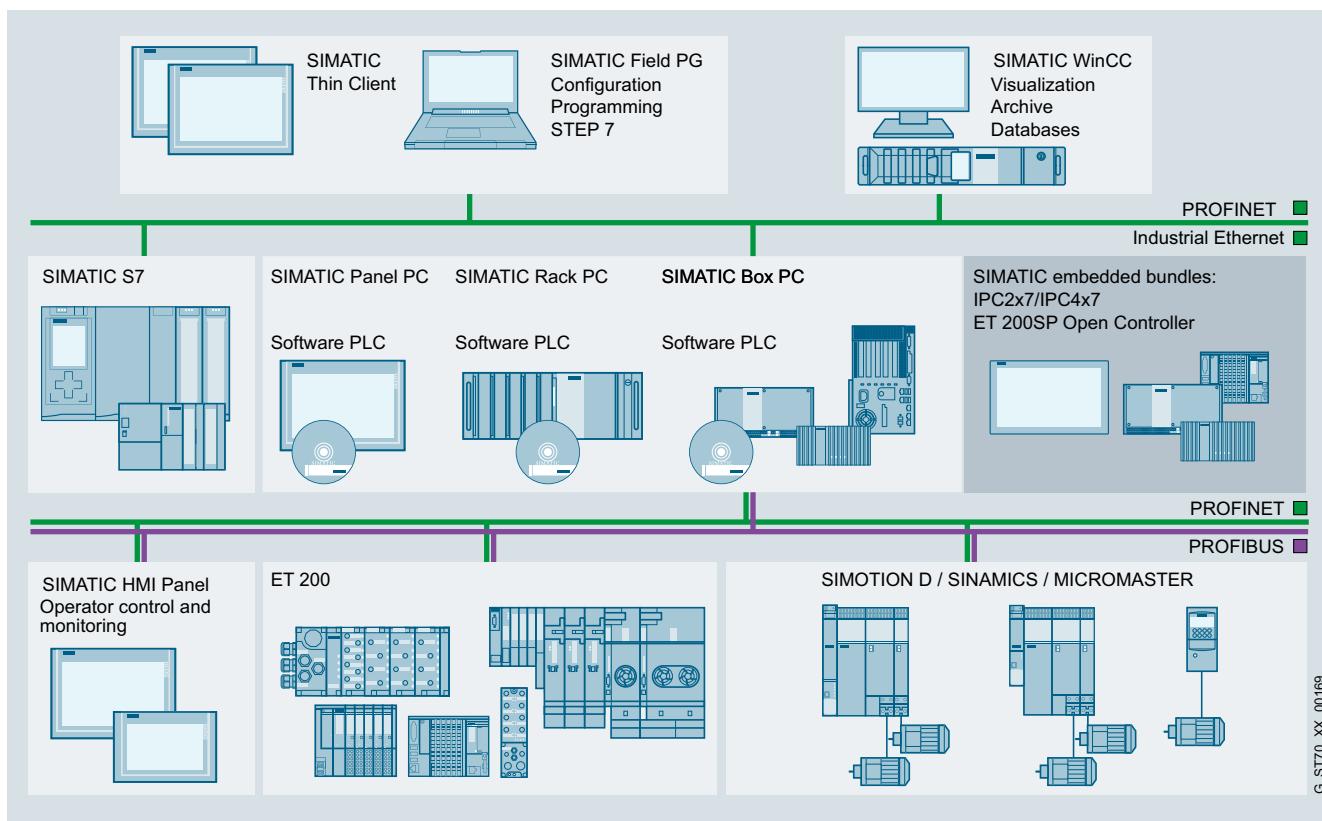

G\_ST70\_XX\_00169

### **SIMATIC PC-based Automation**

<http://www.siemens.com/pc-based>

### Industrial IoT Gateway - SIMATIC IOT2000

An intelligent gateway which harmonizes communication between the various sources of data before analyzing it and forwarding it to the corresponding recipients.  
An easy-to-implement solution.

<http://siemens.com/iot2000>

### Industrial PCs

Our reliable and innovative industrial PCs are the optimal PC hardware platform for PC-based Automation from Siemens.

- Rack PC
- Box PC
- Panel PC
- Tablet PC
- Industrial monitors and thin clients
- Devices for special requirements
  - Fully-enclosed IP65-protected devices
  - Devices with stainless steel fronts
  - Devices for hazardous areas
- IPC software
- Embedded bundles/software packages

<http://www.siemens.com/simatic-ipc>

### Software controller

The SIMATIC S7-1500 Software Controller implements a SIMATIC S7-1500 controller on SIMATIC IPC. It is particularly suitable for control solutions in special-purpose machine manufacturing which involve a high-performance implementation of complex control tasks, the integration of PC applications, or the realization of multiple tasks on a single device.

<http://www.siemens.com/software-controller>

### PC-baicontrol systemcontrollers

PC-based controllers combine the functions of a PC-based software controller with visualization, PC applications and central I/Os (inputs/outputs) in a single, compact device. The SIMATIC ET 200SP Open Controller is an industrial PC with the design of the ET 200SP I/O system and a pre-installed S7-1500 Software Controller.

<http://www.siemens.com/open-controller>

### Application examples and references

You can find an overview of the references and application examples at the Reference Center and on the following web pages:

<http://www.siemens.com/automation/references>

or

<https://new.siemens.com/global/en/products/automation/references.html>

## Operator panels




<b>2/2</b>	<b>Introduction</b> SIMATIC HMI Panels
<b>2/5</b>	<b>Basic HMI</b> Introduction Key Panels SIMATIC HMI KP8/KP8F/KP32F SIPLUS HMI KP8/KP8F/KP32F <u>Basic Panels</u> Standard devices 2 <sup>nd</sup> Generation SIPLUS Basic Panels (2 <sup>nd</sup> Generation)
<b>2/30</b>	<b>Advanced HMI Panel-based</b> <u>Unified Comfort Panels</u> SIMATIC HMI Unified Comfort Panels <u>Standard</u> <u>Comfort Panels</u> Comfort Panels Standard devices SIPLUS Comfort Panels Standard Comfort Panels Outdoor SIPLUS Comfort Panels Outdoor Comfort Panels PRO Comfort Panels INOX and INOX PCT <u>Mobile Panels</u> Mobile Panels 2 <sup>nd</sup> Generation Mobile Panels for low-temperature environment Connection box for Mobile Panels (2 <sup>nd</sup> Generation) and Arctic Panel
<b>2/104</b>	<b>Advanced HMI PC-based (Ch. 5)</b>
<b>2/105</b>	<b>System interfaces with WinCC (TIA Portal)</b> SIMATIC S7 Controllers from other manufacturers

## Operator panels

Introduction

### SIMATIC HMI Panels

#### Overview

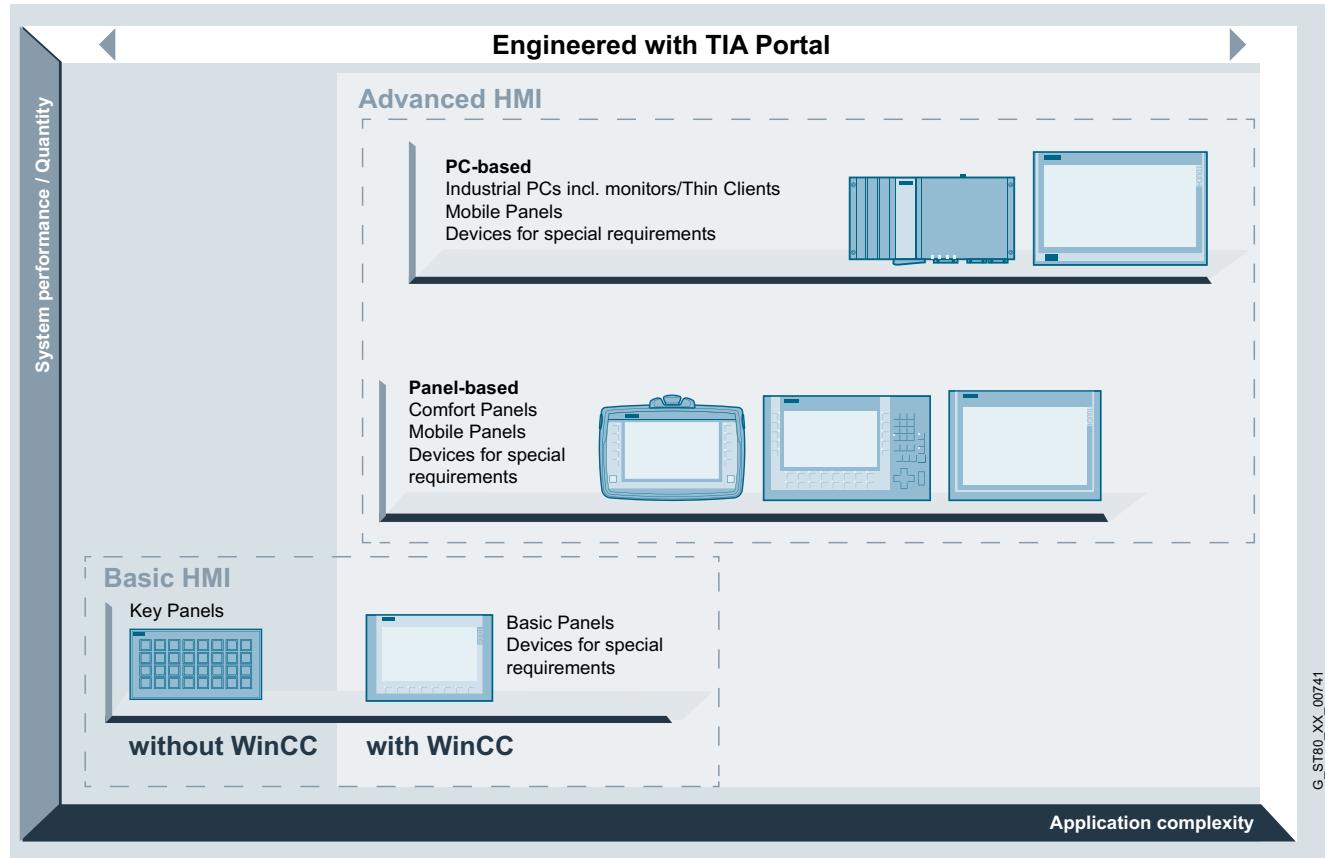

#### **SIMATIC HMI Panels – HMI devices for efficient machine-level interaction**

A complete range of powerful and innovative operator control and monitoring devices is available for implementing efficient, machine-level HMI solutions in the most diverse applications and industries. One unique and highly efficient feature is the integrated configuring via SIMATIC WinCC in the TIA Portal, with which users can achieve significant savings with regard to engineering time, costs and effort.

<http://www.siemens.com/hmi-panels>

#### Basic HMI

- **Panel-based:**  
HMI devices with excellent price-performance ratio for simple visualization tasks.  
<http://www.siemens.com/basic-hmi>

#### Advanced HMI

- **Panel-based:**  
Powerful HMI devices for realization of demanding visualization tasks with a high level of convenience.  
<http://www.siemens.com/advanced-hmi-panel>
- **PC-based:**  
High-performance operator panels for complex, data-intensive, visualization tasks.  
<http://www.siemens.com/advanced-hmi-pc>

#### **Rugged and compact for use at machine level**

With IP65/NEMA 4 degree of protection at the front, high EMC and extreme vibration resistance, the SIMATIC HMI operator panels are ideally suited for use at machine level in rough industrial environments. Thanks to their compact design with a shallow mounting depth, the stationary operator panels can be fitted anywhere, even where only restricted space is available. For distributed configurations, there are also devices available with all-round IP65/NEMA 4 protection.

The extremely rugged and shock-proof enclosure with degree of protection IP65 makes the Mobile Panels especially suitable for industrial applications. Their low weight and ergonomic design means that they are user-friendly and easy to operate.

#### **One configuration software for everything**

SIMATIC WinCC (TIA Portal) is a tool for the uniform configuration of all SIMATIC HMI Panels as well as PC-based systems. Graded variants are available for every task. The software permits simple and efficient configuration. Programming experience is not required.

Once created, configurations can be reused within the family. Key Panels only need to be configured, not programmed.

## Overview

### Component of Totally Integrated Automation

Siemens provides the complete modular system of matched components for automation solutions from one source and — with Totally Integrated Automation — one of the most globally successful automation concepts. SIMATIC WinCC (TIA Portal) is an integral component of this world. It offers crucial advantages. Thanks to the triple uniformity in configuration/programming, data management and communication, automation solution engineering costs are significantly reduced.

### Open for a wide variety of automation systems

Despite being consistently incorporated into the SIMATIC world, the panels are nevertheless open for connection to PLCs from many different manufacturers. The standard delivery includes a comprehensive range of user-friendly drivers.

### Innovative operator control and monitoring

The SIMATIC HMI Panels facilitate innovative operator control and monitoring combined with ruggedness, stability and simplicity. On the Comfort Panels in particular, standard hardware and software interfaces, e.g. the Multimedia Card/SD Card, USB, Ethernet, PROFINET, PROFIBUS DP and Visual Basic scripts, provide more flexibility and openness as well as access to the office world.

### Worldwide application

The SIMATIC HMI Panels are ideally equipped for global use. Online language switching permits selection of up to 32 languages during operation simply by pressing a button.

The wide variety of languages available also includes, for example, Asian logographic languages (Chinese, Taiwanese, Korean, Japanese) and Russian.

The configuration interface of WinCC (TIA Portal) including the online help and the complete documentation is also multilingual. Up to 32 languages can be used in one project. And all this is complemented by global service and support from Siemens.

## Configuration at a glance

	WinCC Unified (TIA Portal) engineering software		WinCC (TIA Portal) engineering software				STEP 7
	Comfort	PC	Basic	Comfort	Advanced	Professional	STEP 7
<b>Key Panels</b>	-	-	-	-	-	-	•
<b>Basic Panels 2<sup>nd</sup> Generation<sup>1)</sup></b>	•	•	•	•	•	•	-
<b>Basic Panels 1<sup>st</sup> Generation</b>	-	-	•	•	•	•	-
<b>Comfort Panels</b>	•	•	-	• <sup>3)</sup>	•	•	-
<b>Unified Comfort Panels</b>	•	•	-	-	-	-	-
<b>Mobile Panels 2<sup>nd</sup> Generation</b>	•	•	-	• <sup>2)</sup>	• <sup>2)</sup>	• <sup>2)</sup>	-
<b>Mobile Panels x77 Series</b>	-	-	-	•	•	•	-

• Possible

1) As of WinCC (TIA Portal) V13

2) As of WinCC (TIA Portal) V13 SP1

3) Outdoor versions from WinCC (TIA Portal) V13 SP1, Update 6 and HSP (download), or Comfort Panels 15" - 22" (-0AX1) from V14 SP1 HSP

# Operator panels

## Introduction

### SIMATIC HMI Panels

#### Overview

	Micro	Compact	Standard	Advanced
<b>Key Panels</b>	-	-	-	-
<b>Basic Panels (1<sup>st</sup> Generation)</b>				
KTP400 Basic mono PN	-	•	•	•
KTP600 Basic	-	•	•	•
KTP1000 Basic	-	•	•	•
TP1500 Basic	-	•	•	•
<b>Mobile Panels</b>				
Mobile Panel 177	-	•	•	•
Mobile Panel 277(F) IWLAN	-	-	•	•
<b>Micro Panels</b>				
OP 73micro	•	•	•	•
TP 177micro	•	•	•	•
<b>Panels – 70 Series</b>				
OP 73; OP 77A/B	-	•	•	•
<b>Panels – 170 Series</b>				
TP 177A	-	•	•	•
TP/OP 177B	-	• <sup>1)</sup>	• <sup>1)</sup>	• <sup>1)</sup>
<b>Panels – 270 Series</b>				
TP 277/OP 277	-	-	• <sup>2)</sup>	• <sup>2)</sup>
<b>Multi Panels – 170 Series</b>				
MP 177	-	• <sup>5)</sup>	• <sup>4)</sup>	• <sup>4)</sup>
<b>Multi Panels – 270 Series</b>				
MP 277	-	-	•	•
<b>Panels – 370 Series</b>				
MP 377	-	-	• <sup>3)</sup>	• <sup>3)</sup>
<b>WinAC MP</b>				
WinAC MP 177	-	• <sup>5)</sup>	• <sup>5)</sup>	• <sup>5)</sup>
WinAC MP 277	-	-	• <sup>5)</sup>	• <sup>5)</sup>
WinAC MP 377	-	-	• <sup>5)</sup>	• <sup>5)</sup>

• Possible

<sup>1)</sup> WinCC flexible 2005 or higher and TP 177B 4" with WinCC flexible 2008 and higher


<sup>2)</sup> WinCC flexible 2005 SP1 and higher

<sup>3)</sup> WinCC flexible 2007 and higher: Mobile Panel 277(F) IWLAN V1;  
WinCC flexible 2008 SP2 and higher: Mobile Panel 277(F) IWLAN V2

<sup>4)</sup> WinCC flexible 2008 and higher

<sup>5)</sup> WinCC flexible 2008 SP1 and higher

## Overview

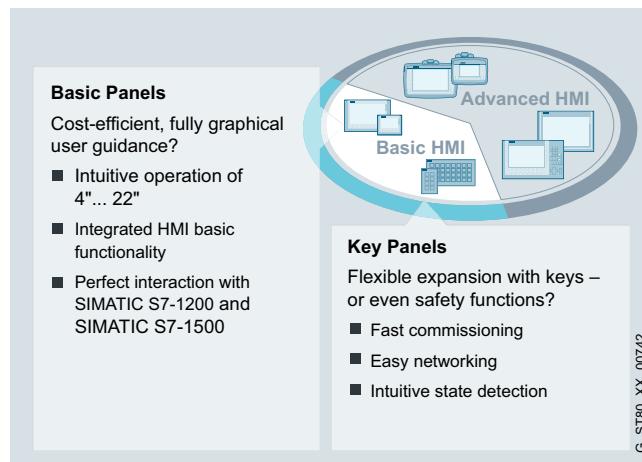

### Inexpensive realization of simple HMI tasks

Basic HMI is recommended for simple applications with a limited quantity structure, where the price-performance ratio counts as well as fast, intuitive operation.

The devices offer a brilliant display quality and high-power visualization, which significantly simplifies the operation of simple machines and equipment.

You can also save valuable time during installation, commissioning and engineering with turnkey and flexible solutions.

### SIMATIC HMI Key Panels

You can use the Key Panels to realize operator panels quickly, as well as save a lot of time and money setting them up since they are prefabricated and ready for installation.

All illuminated pushbuttons are freely configurable and equipped with five colored LEDs (red, green, blue, yellow and white). All buttons can also easily be inscribed in IP65. On the back, there are integrated IO terminals for connecting actuators and sensors.

### SIMATIC HMI Basic Panels

Basic Panels are perfect for the cost-effective implementation of simple visualization tasks at machine level. Their basic features and functionality as well as the especially attractive price make them perfect entry-level devices.

The following modules are available:

- Key Panels
  - SIMATIC HMI KP8/KP8F/KP32F (key devices with multi-colored LEDs)
- Basic Panels
  - Standard devices 2<sup>nd</sup> Generation

## Operator panels

Basic HMI

### Key Panels

#### Overview

##### **SIMATIC HMI Key Panels**

The Key Panels, PROFINET successors to the PROFIBUS-based Push Button Panels, are operator panels which are ready-to-run without any configuration effort at all.

Alternatives to individually wired long-stroke keys. They are designed for direct operator control of the machine.

Key Panels provide many basic functions for direct operator control and monitoring instead of machine operator control, a cost-effective, versatile and space-saving combination, and they reduce configuration and installation costs to a minimum. Furthermore, additional actuators and sensors can also be optionally connected directly on the back of the devices. For applications directly next to a monitor, a very slim KP8 version is available (KP8 PN LX with 8 keys on top of each other).

The Key Panels can be used directly in line and ring topologies thanks to an integrated switch and two RJ45 PN sockets.

In addition there are two fully configured IP65 installation enclosures for KP8(F) available.


Exact cutouts included. Even supply cables with plugs can easily be connected in IP65 without any drilling or milling. These ready-made enclosures can be used as small local operator stations.

They can be found under Accessories -> Fixing elements, and depending on the version can come supplied with features such as emergency off buttons.

- SIMATIC HMI blank front design
- SIMATIC HMI KP8 PN
- SIMATIC HMI KP8 PN LX
- SIMATIC HMI KP8F PN (shared device with GSD file possible)
- SIMATIC HMI KP32F PN (PROFIsafe can be switched off)
- Installation enclosure KP8 (Accessories -> Fixing elements)
- Installation enclosure KP8F (Accessories -> Fixing elements)

More information is available at:

<http://www.siemens.com/key-panels>

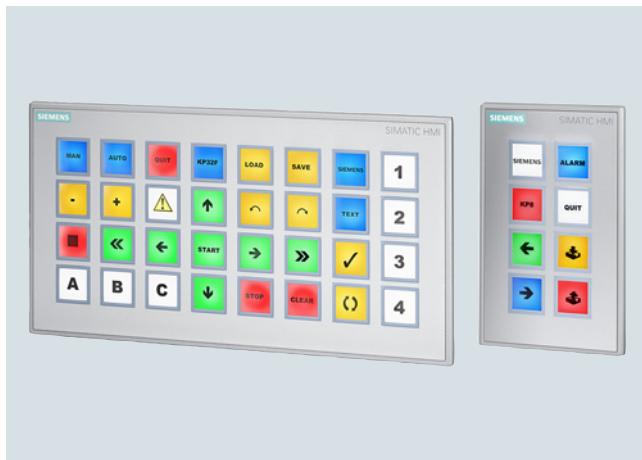**Overview**

SIMATIC HMI KP8/KP8F/KP32F



Key Panel, blank front, at the front, populated and not populated

**SIMATIC HMI Key Panels**

- Optimum operability thanks to large mechanical keys and multi-colored LED backlighting (daylight readable)
- Over 60% time savings for wiring and installation (Plug&Play)
- More than 30% savings in material costs compared to conventional keypad operator panels
- 2 PROFINET ports (incl. switch) already integrated for setting up line and ring topologies
- Freely configurable digital I/Os on the rear for connecting key-operated switches, indicator lamps, etc.
- Connection of fail-safe emergency stop buttons or other fail-safe signals with KP8F and KP32F (in SIL2 or SIL3)
- Functionally compatible with all standard PROFINET master CPUs, also non-Siemens
- KP8 PN LX is suitable for direct installation next to monitors
- KP8 and blank front design, also optimized for installation in IPC Extension Units in IP65
- Maximum flexibility due to parameterization
- Blank front design for standardized assembly of flexible operator panels
- Installation enclosure, fully-enclosed IP65, no drilling or milling necessary, KP8(F) not included; for accessories see technical specifications for installation enclosure

## Operator panels

Basic HMI

Key Panels

### SIMATIC HMI KP8/KP8F/KP32F

Ordering data	Article No.	Article No.
<b>SIMATIC HMI KP8 PN</b>  Key Panel, 8 short-stroke keys with multi-colored LEDs, PROFINET interfaces, 2 x parameterizable with STEP 7 V5.5 or higher <ul style="list-style-type: none"><li>• SIEMENS Design (4 x 2 key pairs)</li><li>• Neutral design black LX (8 keys on top of each other)</li></ul>	<b>6AV3688-3AY36-0AX0</b>  <b>6AV2127-1AB00-0LX0</b>	<b>Demo case</b>  SIMATIC HMI Key Panel – low-cost demo and experiment case <ul style="list-style-type: none"><li>• Includes:<ul style="list-style-type: none"><li>- 1x case</li><li>- 1x KP8 PN</li><li>- 1x CPU1211C</li><li>- 1x stand, permanently wired, including program</li></ul></li><li>• Power supply possible with a standard laptop mains adapter (not included in scope of supply)</li></ul> <b>Documentation</b>  You can find the Equipment Manual for the Key Panels on the Internet at: <a href="http://support.automation.siemens.com/WW/view/en/56652789">http://support.automation.siemens.com/WW/view/en/56652789</a>
<b>SIMATIC HMI KP8F PN</b>  Key Panel, 8 short-stroke keys with multi-colored LEDs, PROFINET interfaces with PROFIsafe, parameterizable with STEP 7 V5.5 or higher; 4 additional fail-safe inputs. Can be used as 2 x SIL 2 or 1 x SIL 3 <ul style="list-style-type: none"><li>• SIEMENS design</li><li>• As neutral design without Siemens imprint</li></ul>	<b>6AV3688-3AF37-0AX0</b>  <b>6AV3688-3AF37-0AX0-Z A01+S00</b>	<b>Accessories</b>  See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"
<b>SIMATIC HMI KP32F PN</b>  Key Panel, 32 short-stroke keys with multi-colored LEDs, PROFINET interfaces with PROFIsafe, parameterizable with STEP 7 V5.5 or higher; including 8 fail-safe inputs. Can be used as 4 x SIL 2 or 2 x SIL 3 <ul style="list-style-type: none"><li>• SIEMENS design</li><li>• Blank front design For standard 22.5 mm operator controls, same mounting dimensions as KP8</li></ul>	<b>6AV3688-3EH47-0AX0</b>  <b>6AV3688-3XY38-3AX0</b>	

### Technical specifications

Article number	<b>6AV3688-3AY36-0AX0</b> SIMATIC HMI KP8 PN	<b>6AV2127-1AB00-0LX0</b> SIMATIC HMI KP8 PN LX
<b>General information</b>		
Product type designation	KP8 PN	Key Panel KP8 PN LX (1 mm)
<b>Control elements</b>		
With parameterizable keys	Yes	Yes
<b>Keyboard fonts</b>		
• Membrane keyboard <ul style="list-style-type: none"><li>- user-definable label membrane keys</li></ul>	Yes	No; possible via adjacent display
• Function keys <ul style="list-style-type: none"><li>- Number of function keys</li></ul>	8	with L-pattern at key edge 8; 19 x 19 mm per button
• Short-stroke keys <ul style="list-style-type: none"><li>- Number of short-stroke keys</li></ul>	8	8
<b>Expansions for operator control of the process</b>		
• DP direct LEDs (LEDs as S7 output I/O)	8; Adjustable brightness	8; Adjustable brightness
• Number of color modes for LED	5; red, green, blue, yellow, white	5; red, green, blue, yellow, white
• Direct keys (keys as S7 input I/O)	8	8
<b>Installation type/mounting</b>		
Mounting type	Mounting clip	clamp fastening with additional mounting clips
Front mounting	Yes; Compatible with Extension Units dimensions	Yes; mounting clip - Torx T20 tighten to 0.2 Nm; enclosure - Torx T10 tighten to 0.2 Nm
Rail mounting	No	No
Mounting in portrait format possible	Yes	Yes
Mounting in landscape format possible	Yes	Yes
maximum permissible angle of inclination without external ventilation	30°; To the front/rear	30°; To the front/rear
Number of slots for command devices and signalling units	0	0

**Technical specifications**

Article number	<b>6AV3688-3AY36-0AX0</b> SIMATIC HMI KP8 PN	<b>6AV2127-1AB00-0LX0</b> SIMATIC HMI KP8 PN LX
<b>Supply voltage</b>		
Rated value (DC)	24 V; 24 V can be looped through connector, interrupted when pulled	24 V; 24 V can be looped through connector, interrupted when pulled
<b>Digital inputs</b>		
Number of digital inputs	8; Total inputs and outputs max. 8 and 1x SIL 2 or 2x SIL 3	8; Total inputs and outputs max. 8 and 1x SIL 2 or 2x SIL 3
<b>Input voltage</b>		
• Rated value (DC)	24 V	24 V
<b>Digital outputs</b>		
Number of digital outputs	8; Max. 8 inputs and outputs (total)	8; Max. 8 inputs and outputs (total)
Short-circuit protection	Yes	Yes
<b>Switching capacity of the outputs</b>		
• with resistive load, max.	100 mA	100 mA
<b>Output voltage</b>		
• Rated value (DC)	24 V; Non-isolated	24 V; Non-isolated
<b>Total current of the outputs</b>		
• Current per channel, max.	100 mA	100 mA
• Current per group, max.	800 mA	800 mA
<b>Interfaces</b>		
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch	2; Incl. switch
<b>Industrial Ethernet</b>		
• Number of ports of the integrated switch	2; Per port	2; Per port
<b>Protocols</b>		
PROFINET	Yes; also 3rd party PLC	Yes; also 3rd party PLC
PROFINET CBA	No	No
IRT	Yes	Yes
PROFIsafe	No	No
PROFIBUS	No	No
<b>Redundancy mode</b>		
<b>Media redundancy</b>		
- MRP	Yes	Yes
<b>Test commissioning functions</b>		
Illuminant test	Yes; During switch on	Yes; During switch on
Key and signal lamp test	Yes; automatically when switching on	Yes; automatically when switching on
<b>Degree and class of protection</b>		
NEMA (front)		
• Enclosure Type 4x at the front	Yes; Incl. NEMA12	No
• Enclosure Type 12 at the front		No
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
CSA approval		No
UL approval		No
cULus	Yes	No
FM approval		No
RCM (formerly C-TICK)	Yes	No
KC approval	Yes	No
EAC (formerly Gost-R)	Yes	No
CCC		No; not necessary
Suitable for safety functions	Yes	No
Marine approval		No
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes	No
• ATEX Zone 22	Yes	No
• cULus Class I Zone 2, Division 2	Yes	No
• FM Class I Division 2	Yes	No

## Operator panels

Basic HMI

Key Panels

### SIMATIC HMI KP8/KP8F/KP32F

#### Technical specifications

Article number	<b>6AV3688-3AY36-0AX0</b> SIMATIC HMI KP8 PN	<b>6AV2127-1AB00-0LX0</b> SIMATIC HMI KP8 PN LX
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	55 °C	60 °C
<b>Relative humidity</b>		
• Operation, max.	95 %; no condensation	95 %; no condensation
<b>Configuration</b>		
<b>Configuration software</b>		
• STEP 7 Basic (TIA Portal)	Yes	Yes
• STEP 7 Professional (TIA Portal)	Yes	Yes
<b>Functionality under WinCC (TIA Portal)</b>		
<b>Process coupling</b>		
• S7-1200	Yes; with ET 200pro CPU and ET 200S CPU	Yes; with ET 200pro CPU and ET 200S CPU
• S7-1500	Yes	Yes
• S7-200	No	No
• S7-300/400	Yes; with F-CPU: STEP 7 V11 SP1 (or higher) and Safety V11 (or higher) or SIMATIC STEP 7 Basic V11 (or higher)	Yes; with F-CPU: STEP 7 V11 SP1 (or higher) and Safety V11 (or higher) or SIMATIC STEP 7 Basic V11 (or higher)
• LOGO!	No	No
• WinAC	Yes	Yes
• SIMOTION	No	No
• Allen Bradley (EtherNet/IP)	No	No
• Allen Bradley (DF1)	No	No
• Mitsubishi (MC TCP/IP)	No	No
• Mitsubishi (FX)	No	No
• OMRON (FINS TCP)	No	No
• OMRON (LINK/Multilink)	No	No
• Modicon (Modbus TCP/IP)	No	No
• Modicon (Modbus)	No	No
<b>Mechanics/material</b>		
Enclosure material (front)		Bayblend FR3010 enclosure, Autotex F150 front membrane
• Plastic	Yes	Yes; neutral enclosure, black RAL 9005
• Aluminum	No	No
<b>Service life</b>		
• Short-stroke keys (in switching cycles)	1 500 000	1 500 000
• LEDs (ON period)	100 %	100 %
<b>Dimensions</b>		
Width of the housing front	98 mm	40.7 mm
Height of housing front	155 mm	252.4 mm
Mounting cutout, width	68 mm; Max. thickness of mounting plate 2 - 6 mm	24 mm; tolerances +0.5 mm, not including connection plug (depending on connector type)
Mounting cutout, height	129 mm	244 mm; tolerances +0.5 mm, not including connection plug (depending on connector type)
Overall depth	49 mm; Incl. angled SIMATIC Ethernet connector	68.15 mm
<b>Weights</b>		
Weight (without packaging)	280 g	280 g
<b>Other</b>		
Merchandise		Yes
Manufacturer name		GETT Gerätetechnik GmbH
Manufacturer's address		Mittlerer Ring 1, 08233 Treuen (Vogtland), Germany
Note:		key panel must be configured as 6AV3688-3AY36-0AX0 Key Panel

**Technical specifications**

Article number	<b>6AV3688-3AF37-0AX0</b> SIMATIC HMI KP8F PN	Article number	<b>6AV3688-3AF37-0AX0</b> SIMATIC HMI KP8F PN
<b>General information</b>			
Product type designation	KP8F PN	PROFINET	Yes; also 3rd party PLC
<b>Control elements</b>			
With parameterizable keys	Yes	PROFINET CBA	No
<b>Keyboard fonts</b>			
• Membrane keyboard - user-definable label membrane keys	Yes	IRT	Yes
• Function keys - Number of function keys	8	PROFIsafe	Yes; 1x SIL 3 (two-channel) or 2x SIL 2 (single-channel) emergency stop sensors
• Short-stroke keys - Number of short-stroke keys	8	PROFIBUS	No
<b>Expansions for operator control of the process</b>			
• DP direct LEDs (LEDs as S7 output I/O)	8; Adjustable brightness	<b>Redundancy mode</b>	
• Number of color modes for LED	5; red, green, blue, yellow, white	Media redundancy	
• Direct keys (keys as S7 input I/O)	8	- MRP	Yes
<b>Installation type/mounting</b>			
Mounting type	Mounting clip	<b>Test commissioning functions</b>	
Front mounting	Yes; Compatible with Extension Units dimensions	Illuminant test	Yes; During switch on
Rail mounting	No	Key and signal lamp test	Yes; automatically when switching on
Mounting in portrait format possible	Yes		
Mounting in landscape format possible	Yes		
maximum permissible angle of inclination without external ventilation	30°; To the front/rear		
Number of slots for command devices and signalling units	0		
<b>Supply voltage</b>			
Rated value (DC)	24 V; 24 V can be looped through connector, interrupted when pulled		
<b>Digital inputs</b>			
Number of digital inputs	8; Total inputs and outputs max. 8 and 1x SIL 2 or 2x SIL 3		
<b>Input voltage</b>			
• Rated value (DC)	24 V		
<b>Digital outputs</b>			
Number of digital outputs	8; Max. 8 inputs and outputs (total)		
Short-circuit protection	Yes		
<b>Switching capacity of the outputs</b>			
• with resistive load, max.	100 mA		
<b>Output voltage</b>			
• Rated value (DC)	24 V; Non-isolated		
<b>Total current of the outputs</b>			
• Current per channel, max.	100 mA		
• Current per group, max.	800 mA		
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch		
Number of PROFINET interfaces	2; Incl. switch		
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2; Per port		

## Operator panels

Basic HMI  
Key Panels

### SIMATIC HMI KP8/KP8F/KP32F

#### Technical specifications

Article number	<b>6AV3688-3AF37-0AX0</b> SIMATIC HMI KP8F PN	Article number	<b>6AV3688-3AF37-0AX0</b> SIMATIC HMI KP8F PN
<b>Functionality under WinCC (TIA Portal)</b>			
<b>Process coupling</b>			
• S7-1200	Yes; with ET 200pro CPU and ET 200S CPU	• Plastic	Yes
• S7-1500	Yes	• Aluminum	No
• S7-200	No	<b>Service life</b>	
• S7-300/400	Yes; with F-CPU: STEP 7 V11 SP1 (or higher) and Safety V11 (or higher) or SIMATIC STEP 7 Basic V11 (or higher)	• Short-stroke keys (in switching cycles)	1 500 000
• LOGO!	No	• LEDs (ON period)	100 %
• WinAC	Yes	<b>Dimensions</b>	
• SIMOTION	No	Width of the housing front	98 mm
• Allen Bradley (EtherNet/IP)	No	Height of housing front	155 mm
• Allen Bradley (DF1)	No	Mounting cutout, width	68 mm; Max. thickness of mounting plate 2 - 6 mm
• Mitsubishi (MC TCP/IP)	No	Mounting cutout, height	129 mm
• Mitsubishi (FX)	No	Overall depth	49 mm; Incl. angled SIMATIC Ethernet connector
• OMRON (FINS TCP)	No	<b>Weights</b>	
• OMRON (LINK/Multilink)	No	Weight (without packaging)	280 g
• Modicon (Modbus TCP/IP)	No		
• Modicon (Modbus)	No		

**Technical specifications**

Article number	<b>6AV3688-3EH47-0AX0</b> SIMATIC HMI KP32F PN
<b>General information</b>	
Product type designation	KP32F PN
<b>Control elements</b>	
With parameterizable keys	Yes
<b>Keyboard fonts</b>	
• Membrane keyboard	
- user-definable label membrane keys	Yes
• Function keys	
- Number of function keys	32
• Short-stroke keys	
- Number of short-stroke keys	32
<b>Expansions for operator control of the process</b>	
• DP direct LEDs (LEDs as S7 output I/O)	8; Adjustable brightness
• Number of color modes for LED	5; red, green, blue, yellow, white
• Direct keys (keys as S7 input I/O)	32
<b>Installation type/mounting</b>	
Mounting type	Mounting clip
Front mounting	Yes
Rail mounting	No
Mounting in portrait format possible	Yes
Mounting in landscape format possible	Yes
maximum permissible angle of inclination without external ventilation	30°; To the front/rear
Number of slots for command devices and signaling units	0
<b>Supply voltage</b>	
Rated value (DC)	24 V; 24 V looped through at connector, no interruption on pulling
<b>Digital inputs</b>	
Number of digital inputs	32; Total inputs and outputs max. 32 and 2x SIL 2 or 4x SIL 3
<b>Input voltage</b>	
• Rated value (DC)	24 V
<b>Digital outputs</b>	
Number of digital outputs	16; Max. 32 inputs and outputs (total)
Short-circuit protection	Yes
<b>Switching capacity of the outputs</b>	
• with resistive load, max.	100 mA
<b>Output voltage</b>	
• Rated value (DC)	24 V; Non-isolated
<b>Total current of the outputs</b>	
• Current per channel, max.	100 mA
• Current per group, max.	800 mA

Article number	<b>6AV3688-3EH47-0AX0</b> SIMATIC HMI KP32F PN
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch
<b>Industrial Ethernet</b>	
• Number of ports of the integrated switch	2; Per port
<b>Protocols</b>	
PROFINET	Yes; incl. shared device, 3rd party PLC
PROFINET CBA	No
IRT	Yes
PROFIsafe	Yes; 2x SIL 3 (two-channel) or 4x SIL 2 (single-channel) emergency stop sensors
PROFIBUS	No
<b>Redundancy mode</b>	
Media redundancy	
- MRP	Yes
<b>Test commissioning functions</b>	
Illuminant test	Yes; During switch on
Key and signal lamp test	Yes; automatically when switching on
<b>Degree and class of protection</b>	
NEMA (front)	
• Enclosure Type 4x at the front	Yes; Incl. NEMA12
<b>Standards, approvals, certificates</b>	
CE mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
CCC	No; not necessary
Suitable for safety functions	Yes
<b>Use in hazardous areas</b>	
• ATEX Zone 2	No
• ATEX Zone 22	No
• cULus Class I Zone 2, Division 2	No
• FM Class I Division 2	No
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	55 °C
<b>Relative humidity</b>	
• Operation, max.	95 %; no condensation

## Operator panels

Basic HMI

Key Panels

### SIMATIC HMI KP8/KP8F/KP32F

#### Technical specifications

Article number	<b>6AV3688-3EH47-0AX0</b> SIMATIC HMI KP32F PN	Article number	<b>6AV3688-3EH47-0AX0</b> SIMATIC HMI KP32F PN
<b>Configuration</b>			
<b>Configuration software</b>			
• STEP 7 Basic (TIA Portal)	Yes	• Plastic	No
• STEP 7 Professional (TIA Portal)	Yes	• Aluminum	Yes
<b>Functionality under WinCC (TIA Portal)</b>			
<b>Process coupling</b>		<b>Service life</b>	
• S7-1200	Yes; with ET 200pro CPU and ET 200S CPU	• Short-stroke keys (in switching cycles)	1 500 000
• S7-1500	Yes	• LEDs (ON period)	100 %
• S7-200	No	<b>Dimensions</b>	
• S7-300/400	Yes; with F-CPU: STEP 7 V11 SP1 or higher and Safety V11 (or higher), without F-CPU STEP 7 or SIMATIC STEP 7 Basic V11 (or higher)	Width of the housing front	295 mm
• LOGO!	No	Height of housing front	155 mm
• WinAC	Yes	Mounting cutout, width	277 mm; Max. thickness of mounting plate 2 - 6 mm
• SIMOTION	No	Mounting cutout, height	137 mm
• Allen Bradley (EtherNet/IP)	No	Overall depth	69 mm; Incl. angled SIMATIC Ethernet connector
• Allen Bradley (DF1)	No	<b>Weights</b>	
• Mitsubishi (MC TCP/IP)	No	Weight (without packaging)	1 220 g
• Mitsubishi (FX)	No		
• OMRON (FINS TCP)	No		
• OMRON (LINK/Multilink)	No		
• Modicon (Modbus TCP/IP)	No		
• Modicon (Modbus)	No		

**Technical specifications**

Article number	<b>6AV3688-3XY38-3AX0</b> KP8 Design blank Front
<b>General information</b>	
Product type designation	Empty front design
<b>Installation type/mounting</b>	
Mounting type	Clamp terminals
Rack mounting	No
Front mounting	Yes; Compatible with Extension Units dimensions
Rail mounting	No
Wall mounting/direct mounting	No
Mounting in portrait format possible	Yes
Mounting in landscape format possible	Yes
maximum permissible angle of inclination without external ventilation	180°; To the front/rear
Number of slots for command devices and signaling units	5; Max. 5 possible
<b>Supply voltage</b>	
Type of supply voltage	external
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	0
Number of PROFINET interfaces	0
Number of USB interfaces	0
<b>Protocols</b>	
PROFINET	No
PROFIsafe	No
<b>Redundancy mode</b>	
<b>Media redundancy</b>	
- MRP	No
<b>Test commissioning functions</b>	
Key and signal lamp test	No
<b>Degree and class of protection</b>	
NEMA (front)	
• Enclosure Type 4 at the front	No
• Enclosure Type 4x at the front	No

Article number	<b>6AV3688-3XY38-3AX0</b> KP8 Design blank Front
<b>Standards, approvals, certificates</b>	
CE mark	Yes
cULus	No
RCM (formerly C-TICK)	No
<b>Use in hazardous areas</b>	
• ATEX Zone 2	No
• ATEX Zone 22	No
• cULus Class I Zone 1	No
• cULus Class I Zone 2, Division 2	No
• FM Class I Division 2	No
<b>Marine approval</b>	
• Germanischer Lloyd (GL)	No
• American Bureau of Shipping (ABS)	No
• Bureau Veritas (BV)	No
• Det Norske Veritas (DNV)	No
• Lloyds Register of Shipping (LRS)	No
• Nippon Kaiji Kyokai (Class NK)	No
• Polski Rejestr Statków (PRS)	No
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	55 °C
<b>Relative humidity</b>	
• Operation, max.	95 %
<b>Mechanics/material</b>	
Enclosure material (front)	
• Plastic	No
• Aluminum	Yes
• Stainless steel	No
<b>Dimensions</b>	
Width of the housing front	98 mm
Height of housing front	155 mm
Mounting cutout, width	68 mm; Max. thickness of mounting plate 2 - 6 mm
Mounting cutout, height	129 mm
Overall depth	49 mm
<b>Weights</b>	
Weight (without packaging)	240 g
<b>Other</b>	
Merchandise	Yes
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany

You can find more information on the Internet at:

<http://www.siemens.com/key-panels>

For accessories see "SIMATIC HMI operator control and monitoring systems" -> "Accessories"


## Operator panels

Basic HMI  
Key Panels

### SIPLUS HMI KP8/KP8F/KP32F

2

#### Overview

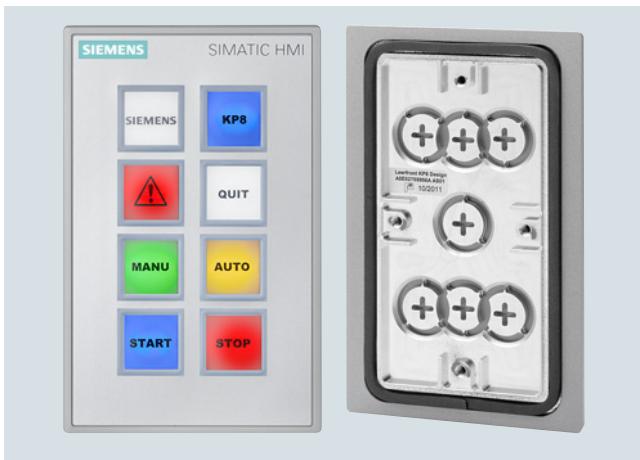

SIPLUS HMI KP8 PN, blank front

#### SIPLUS HMI Key Panels

- Optimum operability thanks to large mechanical keys and multi-colored LED backlighting (daylight readable)
- Over 60% time savings for wiring and installation (Plug&Play)
- More than 30% savings in material costs compared to conventional keypad operator panels
- 2 PROFINET ports (incl. switch) already integrated for setting up line and ring topologies
- Freely configurable digital I/Os on the rear for connecting key-operated switches, indicator lamps, etc.
- Connection of fail-safe emergency stop buttons or other fail-safe signals with KP8F and KP32F (in SIL 2 or SIL 3)
- Functionally compatible with all standard PROFINET master CPUs, also non-Siemens
- KP8 and blank front design, also optimized for installation in IPC Extension Units in IP65
- Maximum flexibility due to parameterization
- Blank front design for standardized assembly of flexible operator panels

#### Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products.

**SIPLUS extreme-specific information was added.**

#### Ordering data

#### Article No.

<b>SIPLUS HMI KP8 PN</b> (extended temperature range and exposure to environmental substances) Key Panel, 8 short-stroke keys with multi-colored LEDs, PROFINET interfaces, 2 x parameterizable with STEP 7 V5.5 or higher	<b>6AG1688-3AY36-2AX0</b>
<b>SIPLUS HMI KP8F PN</b> (extended temperature range and exposure to environmental substances) Key Panel, 8 short-stroke keys with multi-colored LEDs, PROFINET interfaces with PROFIsafe, parameterizable with STEP 7 V5.5 or higher; 4 additional fail-safe inputs. Can be used as 2 x SIL 2 or 1 x SIL 3	<b>6AG1688-3AF37-2AX0</b>
<b>SIPLUS HMI KP32F PN</b> (extended temperature range and exposure to environmental substances) Key Panel, 32 short-stroke keys with multi-colored LEDs, PROFINET interfaces with PROFIsafe, parameterizable with STEP 7 V5.5 or higher; including 8 fail-safe inputs. Can be used as 4 x SIL 2 or 2 x SIL 3	<b>6AG1688-3EH47-2AX0</b>
<b>Blank front design</b> (Exposure to environmental substances) For standard 22.5 mm operator controls, same mounting dimensions as KP8	<b>6AG1688-3XY38-2AX0</b>
<b>Documentation</b> You can find the Equipment Manual for the Key Panels on the Internet at: <a href="http://support.automation.siemens.com/WW/view/en/56652789">http://support.automation.siemens.com/WW/view/en/56652789</a>	
<b>Accessories</b>	See SIMATIC HMI accessories

**Technical specifications**

Article number	<b>6AG1688-3AY36-2AX0</b> SIPLUS HMI KP8 PN	<b>6AG1688-3AF37-2AX0</b> SIPLUS HMI KP8F PN	<b>6AG1688-3EH47-2AX0</b> SIPLUS HMI KP32F PN
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-40 °C; = Tmin; Startup @ -25 °C	-20 °C; = Tmin (incl. condensation/frost)	-20 °C; = Tmin (incl. condensation/frost)
• max.	60 °C; = Tmax	55 °C; = Tmax	55 °C; = Tmax
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	2 000 m	2 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)		
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)		
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

## Operator panels

Basic HMI

Basic Panels

### Standard devices 2nd Generation

#### Overview



#### Basic Panels (2<sup>nd</sup> Generation)

With their fully developed HMI basic functions, 2<sup>nd</sup> Generation SIMATIC HMI Basic Panels are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics.

The new USB interface enables the connection of keyboard, mouse or barcode scanner, and supports the simple archiving of data on a USB flash drive as well as the manual backup and restoring of the complete panel.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

<http://www.siemens.com/basic-panels>

#### Ordering data

#### Article No.

##### *SIMATIC HMI Basic Panels (2<sup>nd</sup> Generation)*

##### *Key and touch devices*

##### **SIMATIC HMI KTP400 Basic**

Key/touch operation;  
4" TFT widescreen display,  
65 536 colors, PROFINET interface

**6AV2123-2DB03-0AX0**

##### **SIMATIC HMI TP400 Basic Keyless**

Touch screen operation;  
4" TFT widescreen display,  
65 536 colors, PROFINET interface

**6AV2143-6DB00-0AA0**

##### **SIMATIC HMI KTP700 Basic**

Key/touch operation;  
7" TFT display, 65 536 colors,  
PROFINET interface

**6AV2123-2GB03-0AX0**

##### **SIMATIC HMI KTP700 Basic DP**

Key/touch operation;  
7" TFT display, 65 536 colors,  
PROFIBUS interface

**6AV2123-2GA03-0AX0**

##### **SIMATIC HMI TP700 Basic Keyless**

Touch operation;  
7" TFT display, 65 536 colors,  
PROFINET interface

**6AV2143-6GB00-0AA0**

##### **SIMATIC HMI KTP900 Basic**

Key/touch operation;  
9" TFT display, 65 536 colors,  
PROFINET interface

**6AV2123-2JB03-0AX0**

##### **SIMATIC HMI TP900 Basic Keyless**

Touch operation;  
9" TFT display, 65 536 colors,  
PROFINET interface

**6AV2143-6JB00-0AA0**

##### **SIMATIC HMI KTP1200 Basic**

Key/touch operation;  
12" TFT display, 65 536 colors,  
PROFINET interface

**6AV2123-2MB03-0AX0**

##### **SIMATIC HMI KTP1200 Basic DP**

Key/touch operation;  
12" TFT display, 65 536 colors,  
PROFIBUS interface

**6AV2123-2MA03-0AX0**

#### *Starter kits*

##### **Starter kit LOGO! + KP300 Basic mono PN**

**6AV2132-0HA00-0AA1**

##### **Starter kit LOGO! + KTP400 Basic**

**6AV2132-0KA00-0AA1**

##### **Starter kit LOGO! + KTP700 Basic**

**6AV2132-3GB00-0AA1**

Starter kits with a LOGO! consist of:

- the respective SIMATIC HMI Basic Panel
- SIMATIC HMI KP300 Basic mono PN
- SIMATIC HMI KTP400 Basic
- SIMATIC HMI KTP700 Basic
- LOGO! 12/24 RCE
- LOGO! POWER 24 V 1.3 A
- LOGO! SOFT COMFORT V7
- WINCC BASIC (TIA Portal)
- Ethernet CAT5 cable, 2 m

#### *Documentation*

Additional information on the Equipment Manual for the Basic Panels is available on the Internet at:

<http://support.automation.siemens.com>

#### *Accessories*

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

**Standard devices 2nd Generation****Technical specifications**

Article number	<b>6AV2123-2DB03-0AX0</b> SIMATIC HMI KTP400 Basic	<b>6AV2143-6DB00-0AA0</b> SIMATIC HMI TP400 Basic OEM	<b>6AV2123-2GB03-0AX0</b> SIMATIC HMI KTP700 Basic	<b>6AV2123-2GA03-0AX0</b> SIMATIC HMI KTP700 Basic DP	<b>6AV2143-6GB00-0AA0</b> SIMATIC HMI TP700 Basic OEM
<b>General information</b>					
Product type designation	KTP400 Basic color PN	TP400 Basic Keyless	KTP700 Basic color PN	KTP700 Basic color DP	TP700 Basic Keyless
<b>Display</b>					
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	4.3 in	4.3 in	7 in	7 in	7 in
Number of colors	65 536	65 536	65 536	65 536	65 536
<b>Resolution (pixels)</b>					
• Horizontal image resolution	480 pixel	480 pixel	800 pixel	800 pixel	800 pixel
• Vertical image resolution	272 pixel	272 pixel	480 pixel	480 pixel	480 pixel
<b>Backlighting</b>					
• MTBF backlighting (at 25 °C)	20 000 h	20 000 h	20 000 h	20 000 h	20 000 h
<b>Control elements</b>					
<b>Keyboard fonts</b>					
• Function keys		No			No
- Number of function keys	4	0	8	8	
<b>Touch operation</b>					
• Design as touch screen	Yes	Yes	Yes	Yes	Yes
• Design as multi-touch screen		No			
• Monitor keyboard		Yes			
<b>Installation type/mounting</b>					
Wall mounting/direct mounting	No	No	No		
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
<b>Memory</b>					
Memory available for user data	10 Mbyte	10 Mbyte	10 Mbyte	10 Mbyte	10 Mbyte
<b>Type of output</b>					
Acoustics					
• Buzzer	Yes	Yes	Yes	Yes	Yes
<b>Time of day</b>					
<b>Clock</b>					
• Software clock	Yes	Yes	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes	Yes	Yes
<b>Interfaces</b>					
Number of industrial Ethernet interfaces	1	1	1	0	1
Number of RS 485 interfaces	0	0	0	1	0
Number of USB interfaces	1; Up to 16 GB	1	1; Up to 16 GB	1; Up to 16 GB	1; Up to 16 GB
Number of SD card slots	0	0	0	0	0
<b>Protocols</b>					
PROFINET	Yes	Yes	Yes	No	Yes
IRT	No	No	No	No	No
PROFIBUS	No	No	No	Yes	No
MPI	No	No	No	Yes	No
<b>Redundancy mode</b>					
<b>Media redundancy</b>					
- MRP	No		No	No	No

## Operator panels

Basic HMI

Basic Panels

### Standard devices 2nd Generation

#### Technical specifications

Article number	<b>6AV2123-2DB03-0AX0</b> SIMATIC HMI KTP400 Basic	<b>6AV2143-6DB00-0AA0</b> SIMATIC HMI TP400 Basic OEM	<b>6AV2123-2GB03-0AX0</b> SIMATIC HMI KTP700 Basic	<b>6AV2123-2GA03-0AX0</b> SIMATIC HMI KTP700 Basic DP	<b>6AV2143-6GB00-0AA0</b> SIMATIC HMI TP700 Basic OEM
<b>Degree and class of protection</b>					
NEMA (front)					
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes
KC approval	Yes		Yes	Yes	Yes
EAC (formerly Gost-R)		Yes			
<b>Use in hazardous areas</b>					
• ATEX Zone 2	No	No	No	No	No
• ATEX Zone 22	No	No	No	No	No
• IECEx Zone 2	No		No	No	No
• IECEx Zone 22	No		No	No	No
• cULus Class I Zone 2, Division 2	No	No	No	No	No
• FM Class I Division 2	No	No	No	No	No
<b>Marine approval</b>					
• Germanischer Lloyd (GL)	Yes		Yes	Yes	Yes
• American Bureau of Shipping (ABS)	Yes		Yes	Yes	Yes
• Bureau Veritas (BV)	Yes		Yes	Yes	Yes
• Det Norske Veritas (DNV)	Yes		Yes	Yes	Yes
• Lloyds Register of Shipping (LRS)	Yes		Yes	Yes	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes		Yes	Yes	Yes
• Polski Rejestr Statków (PRS)	No		No	No	No
• Chinese Classification Society (CCS)	No		No	No	
<b>Ambient conditions</b>					
Suited for indoor use	Yes			Yes	
Suited for outdoor use	No			No	
<b>Ambient temperature during operation</b>					
• Operation (vertical installation)					
- For vertical installation, min.	0 °C	0 °C	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Relative humidity</b>					
• Operation, max.	90 %; no condensation	90 %	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Configuration</b>					
<b>Configuration software</b>					
• STEP 7 Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)
• WinCC flexible Compact	No	No	No	No	No
• WinCC Basic (TIA Portal)	Yes	Yes	Yes	Yes	Yes
<b>Languages</b>					
<b>Online languages</b>					
• Number of online/runtime languages	10	10	10	10	10

**Technical specifications**

Article number	<b>6AV2123-2DB03-0AX0</b> SIMATIC HMI KTP400 Basic	<b>6AV2143-6DB00-0AA0</b> SIMATIC HMI TP400 Basic OEM	<b>6AV2123-2GB03-0AX0</b> SIMATIC HMI KTP700 Basic	<b>6AV2123-2GA03-0AX0</b> SIMATIC HMI KTP700 Basic DP	<b>6AV2143-6GB00-0AA0</b> SIMATIC HMI TP700 Basic OEM
<b>Functionality under WinCC (TIA Portal)</b>					
Applications/options					
• Web browser	Yes		Yes	No	Yes
• SIMATIC WinCC Sm@rtServer	Yes; Available with WinCC (TIA Portal) V14 or higher		Yes; Available with WinCC (TIA Portal) V14 or higher	No	
Number of Visual Basic Scripts	No	No	No	No	No
Task planner	Yes	Yes	Yes	Yes	Yes
• time-controlled	No	No	No	No	No
• task-controlled	Yes	Yes	Yes	Yes	Yes
<b>Message system</b>					
• Bit messages					
- Number of bit messages	1 000	1 000	1 000	1 000	1 000
• Analog messages					
- Number of analog messages	25	25	25	25	25
• Message buffer					
- Number of entries	256	256	256	256	256
- Circulating buffer	Yes	Yes	Yes	Yes	Yes
- retentive	Yes	Yes	Yes	Yes	Yes
<b>Recipe management</b>					
• Number of recipes	50	50	50	50	50
• Size of internal recipe memory	256 kbyte	256 kbyte	256 kbyte	256 kbyte	256 kbyte
• Recipe memory expandable	No	No	No	No	No
<b>Variables</b>					
• Number of variables per device	800	800	800	800	800
• Number of variables per screen	100	100	100	100	100
<b>Images</b>					
• Number of configurable images	250	100	250	250	250
<b>Archiving</b>					
• Number of archives per device	2; One message and one process value archive	2	2; One message and one process value archive	2; One message and one process value archive	2
• Number of entries per archive	10 000	10 000	10 000	10 000	10 000
• Message archive	Yes	Yes	Yes	Yes	Yes
• Process value archive	Yes	Yes	Yes	Yes	Yes
• Archiving methods					
- Sequential archive	Yes	Yes	Yes	Yes	Yes
- Short-term archive	Yes	Yes	Yes	Yes	Yes
• Memory location					
- Memory card	No	No	No	No	No
- USB memory	Yes	Yes	Yes	Yes	Yes
- Ethernet	No	No	No	No	No
• Data storage format					
- CSV	No	Yes	No	No	No
- TXT	Yes	No	Yes	Yes	Yes
- RDB	No	No	No	No	No

## Operator panels

Basic HMI

Basic Panels

### Standard devices 2nd Generation

#### Technical specifications

Article number	<b>6AV2123-2DB03-0AX0</b> SIMATIC HMI KTP400 Basic	<b>6AV2143-6DB00-0AA0</b> SIMATIC HMI TP400 Basic OEM	<b>6AV2123-2GB03-0AX0</b> SIMATIC HMI KTP700 Basic	<b>6AV2123-2GA03-0AX0</b> SIMATIC HMI KTP700 Basic DP	<b>6AV2143-6GB00-0AA0</b> SIMATIC HMI TP700 Basic OEM
<b>Security</b>					
• Number of user groups	50		50	50	50
• Number of users	50		50	50	50
• SIMATIC Logon	No	No	No	No	No
<b>Transfer (upload/download)</b>					
• MPI/PROFIBUS DP	No	No	No	Yes	No
• Ethernet	Yes	Yes	Yes	No	Yes
<b>Process coupling</b>					
• S7-1200	Yes	Yes	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes	No	Yes
• Allen Bradley (DF1)	No	No	No	Yes	No
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes	No	Yes
• Mitsubishi (FX)	No	No	No	Yes	No
• OMRON (FINS TCP)	No	No	No	No	No
• OMRON (LINK/Multilink)	No	No	No	Yes	No
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes	No	Yes
• Modicon (Modbus)	No	No	No	Yes	No
<b>Peripherals/Options</b>					
Printer	No	No	No	No	No
SIMATIC HMI MM memory card: Multi Media Card	No	No	No	No	No
SIMATIC HMI SD memory card: Secure Digital memory card	No	No	No	No	No
USB memory	Yes	Yes; USB storage medium can be connected	Yes	Yes	Yes
<b>Mechanics/material</b>					
Enclosure material (front)					
• Plastic	Yes	Yes	Yes	Yes	Yes
• Aluminum	No	No	No	No	No
• Stainless steel	No	No	No	No	No
<b>Dimensions</b>					
Width of the housing front	141 mm	141 mm	214 mm	214 mm	214 mm
Height of housing front	116 mm	116 mm	158 mm	158 mm	158 mm
Mounting cutout, width	123 mm	123 mm	197 mm	197 mm	197 mm
Mounting cutout, height	99 mm	99 mm	141 mm	141 mm	141 mm
Overall depth	33 mm	33 mm	39 mm	39 mm	39 mm
<b>Weights</b>					
Weight (without packaging)	360 g		780 g	800 g	780 g

**Technical specifications**

Article number	<b>6AV2123-2JB03-0AX0</b> SIMATIC HMI KTP900 Basic	<b>6AV2143-6JB00-0AA0</b> SIMATIC HMI TP900 Basic OEM	<b>6AV2123-2MB03-0AX0</b> SIMATIC HMI KTP1200 Basic	<b>6AV2123-2MA03-0AX0</b> SIMATIC HMI KTP1200 Basic DP
<b>General information</b>				
Product type designation	KTP900 Basic color PN	TP900 Basic Keyless	KTP1200 Basic color PN	KTP1200 Basic color DP
<b>Display</b>				
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	9 in	9 in	12 in	12 in
Number of colors	65 536	65 536	65 536	65 536
<b>Resolution (pixels)</b>				
• Horizontal image resolution	800 pixel	800 pixel	1 280 pixel	1 280 pixel
• Vertical image resolution	480 pixel	480 pixel	800 pixel	800 pixel
<b>Backlighting</b>				
• MTBF backlighting (at 25 °C)	20 000 h	20 000 h	20 000 h	20 000 h
<b>Control elements</b>				
<b>Keyboard fonts</b>				
• Function keys		No		
- Number of function keys	8	0	10	10
<b>Touch operation</b>				
• Design as touch screen	Yes	Yes	Yes	Yes
• Design as multi-touch screen		No		
• Monitor keyboard		Yes		
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Memory</b>				
Memory available for user data	10 Mbyte	10 Mbyte	10 Mbyte	10 Mbyte
<b>Type of output</b>				
Acoustics		Buzzer		
• Buzzer	Yes	Yes	Yes	Yes
<b>Time of day</b>				
<b>Clock</b>				
• Software clock	Yes	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes	Yes
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	1	1	1	0
Number of RS 485 interfaces	0	0	0	1
Number of USB interfaces	1; Up to 16 GB	1; USB 2.0, up to 16 GB respectively	1; Up to 16 GB	1; Up to 16 GB
Number of SD card slots	0	0	0	0
<b>Industrial Ethernet</b>				
• Number of ports of the integrated switch		0		

## Operator panels

Basic HMI

Basic Panels

### Standard devices 2nd Generation

#### Technical specifications

Article number	<b>6AV2123-2JB03-0AX0</b> SIMATIC HMI KTP900 Basic	<b>6AV2143-6JB00-0AA0</b> SIMATIC HMI TP900 Basic OEM	<b>6AV2123-2MB03-0AX0</b> SIMATIC HMI KTP1200 Basic	<b>6AV2123-2MA03-0AX0</b> SIMATIC HMI KTP1200 Basic DP
<b>Protocols</b>				
PROFINET	Yes	Yes	Yes	No
IRT	No	No	No	No
PROFIBUS	No	No	No	Yes
MPI	No	No	No	Yes
<b>Redundancy mode</b>				
<b>Media redundancy</b>				
- MRP	No	No	No	No
<b>Degree and class of protection</b>				
NEMA (front)				
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes		Yes	Yes
RCM (formerly C-TICK)	Yes		Yes	Yes
KC approval	Yes		Yes	Yes
<b>Use in hazardous areas</b>				
• ATEX Zone 2	No		No	No
• ATEX Zone 22	No		No	No
• IECEx Zone 2	No		No	No
• IECEx Zone 22	No		No	No
• cULus Class I Zone 2, Division 2	No		No	No
• FM Class I Division 2	No		No	No
<b>Marine approval</b>				
• Germanischer Lloyd (GL)	Yes		Yes	Yes
• American Bureau of Shipping (ABS)	Yes		Yes	Yes
• Bureau Veritas (BV)	Yes		Yes	Yes
• Det Norske Veritas (DNV)	Yes		Yes	Yes
• Lloyds Register of Shipping (LRS)	Yes		Yes	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes		Yes	Yes
• Polski Rejestr Statków (PRS)	No		No	No
• Chinese Classification Society (CCS)	No		No	No
<b>Ambient conditions</b>				
Suited for indoor use				Yes
Suited for outdoor use				No
<b>Ambient temperature during operation</b>				
• Operation (vertical installation)				
- For vertical installation, min.	0 °C	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C	50 °C	50 °C	50 °C
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation	90 %; no condensation

**Technical specifications**

Article number	<b>6AV2123-2JB03-0AX0</b> SIMATIC HMI KTP900 Basic	<b>6AV2143-6JB00-0AA0</b> SIMATIC HMI TP900 Basic OEM	<b>6AV2123-2MB03-0AX0</b> SIMATIC HMI KTP1200 Basic	<b>6AV2123-2MA03-0AX0</b> SIMATIC HMI KTP1200 Basic DP
<b>Configuration</b>				
<b>Configuration software</b>				
• STEP 7 Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)	Yes; via integrated WinCC Basic (TIA Portal)
• WinCC flexible Compact	No	No	No	No
• WinCC Basic (TIA Portal)	Yes	Yes	Yes	Yes
<b>Languages</b>				
<b>Online languages</b>				
• Number of online/runtime languages	10	10	10	10
<b>Functionality under WinCC (TIA Portal)</b>				
Applications/options				
• Web browser	Yes	No	Yes	No
• SIMATIC WinCC Sm@rtServer	Yes; Available with WinCC (TIA Portal) V14 or higher	No	Yes; Available with WinCC (TIA Portal) V14 or higher	No
Number of Visual Basic Scripts	No	No	No	No
Task planner	Yes	Yes	Yes	Yes
• time-controlled	No	No	No	No
• task-controlled	Yes	Yes	Yes	Yes
<b>Message system</b>				
• Bit messages				
- Number of bit messages	1 000	1 000	1 000	1 000
• Analog messages				
- Number of analog messages	25	25	25	25
• Message buffer				
- Number of entries	256	256	256	256
- Circulating buffer	Yes	Yes	Yes	Yes
- retentive	Yes	Yes	Yes	Yes
<b>Recipe management</b>				
• Number of recipes	50	50	50	50
• Size of internal recipe memory	256 kbyte	256 kbyte	256 kbyte	256 kbyte
• Recipe memory expandable	No		No	No
<b>Variables</b>				
• Number of variables per device	800	800	800	800
• Number of variables per screen	100	100	100	100
<b>Images</b>				
• Number of configurable images	250	100	250	250
<b>Archiving</b>				
• Number of archives per device	2; One message and one process value archive	2	2; One message and one process value archive	2; One message and one process value archive
• Number of entries per archive	10 000	10 000	10 000	10 000
• Message archive	Yes	Yes	Yes	Yes
• Process value archive	Yes	Yes	Yes	Yes
• Archiving methods				
- Sequential archive	Yes	Yes	Yes	Yes
- Short-term archive	Yes	Yes	Yes	Yes
• Memory location				
- Memory card	No	No	No	No
- USB memory	Yes	Yes	Yes	Yes
- Ethernet	No	No	No	No
• Data storage format				
- CSV	No	No	No	No
- TXT	Yes	Yes	Yes	Yes
- RDB	No	No	No	No

## Operator panels

Basic HMI

Basic Panels

### Standard devices 2nd Generation

#### Technical specifications

Article number	<b>6AV2123-2JB03-0AX0</b> SIMATIC HMI KTP900 Basic	<b>6AV2143-6JB00-0AA0</b> SIMATIC HMI TP900 Basic OEM	<b>6AV2123-2MB03-0AX0</b> SIMATIC HMI KTP1200 Basic	<b>6AV2123-2MA03-0AX0</b> SIMATIC HMI KTP1200 Basic DP
<b>Security</b>				
• Number of user groups	50		50	50
• Number of users	50		50	50
• SIMATIC Logon	No	No	No	No
<b>Transfer (upload/download)</b>				
• MPI/PROFIBUS DP	No	No	No	Yes
• Ethernet	Yes	Yes	Yes	No
<b>Process coupling</b>				
• S7-1200	Yes	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes	No
• Allen Bradley (DF1)	No	No	No	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes	No
• Mitsubishi (FX)	No	No	No	Yes
• OMRON (FINS TCP)	No	No	No	No
• OMRON (LINK/Multilink)	No	No	No	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes	No
• Modicon (Modbus)	No	No	No	Yes
<b>Peripherals/Options</b>				
Printer	No	No	No	No
SIMATIC HMI MM memory card: Multi Media Card	No	No	No	No
SIMATIC HMI SD memory card: Secure Digital memory card	No	No	No	No
USB memory	Yes	Yes; USB storage medium can be connected	Yes	Yes
<b>Mechanics/material</b>				
Enclosure material (front)				
• Plastic	Yes	Yes	Yes	Yes
• Aluminum	No	No	No	No
• Stainless steel	No	No	No	No
<b>Dimensions</b>				
Width of the housing front	267 mm	267 mm	330 mm	330 mm
Height of housing front	182 mm	182 mm	245 mm	245 mm
Mounting cutout, width	251 mm	251 mm	310 mm	310 mm
Mounting cutout, height	166 mm	166 mm	221 mm	221 mm
Overall depth	55 mm	55 mm	60 mm	60 mm
<b>Weights</b>				
Weight (without packaging)	1 130 g	1 130 g	1 710 g	1 710 g

More information is available on the Internet at:

<http://www.siemens.com/basic-panels>

**SIPLUS Basic Panels (2nd Generation)**

2

**Overview**

With their fully developed HMI basic functions, 2<sup>nd</sup> Generation SIPLUS Basic Panels are the ideal entry-level series for simple HMI applications.

The device family offers panels with 4", 7", 9" and 12" displays, as well as combined key and touch operation.

The innovative high-resolution widescreen displays with 64 000 colors are also suitable for upright installation, and they can be dimmed down to 100%. The innovative operator interface with improved usability opens up a diverse range of options thanks to new controls and graphics. The new USB interface enables the connection of keyboard, mouse or barcode scanner, and supports the simple archiving of data on a USB flash drive.

The integrated Ethernet or RS 485/422 interface (version-specific) enables simple connection to the controller.

**Note:**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products.

**SIPLUS extreme-specific information was added.**

Technical documentation on SIPLUS can be found here:

<http://www.siemens.com/siplus-extreme>

**Ordering data****Article No.***SIPLUS HMI Basic Panels,  
Key and Touch***SIPLUS HMI KTP400 Basic**

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +60 °C

**6AG1123-2DB03-2AX0****SIPLUS HMI KTP700 Basic**

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

**6AG1123-2GB03-2AX0****SIPLUS HMI KTP700 Basic DP**

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

**6AG1123-2GA03-2AX0****SIPLUS HMI KTP900 Basic**

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -20 ... +50 °C

**6AG1123-2JB03-2AX0****SIPLUS HMI KTP1200 Basic**

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C

**6AG1123-2MB03-2AX0****SIPLUS HMI KTP1200 Basic DP**

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -10 ... +50 °C

**6AG1123-2MA03-2AX0****Accessories**

See SIMATIC Basic Panels  
2<sup>nd</sup> Generation

# Operator panels

Basic HMI

Basic Panels

## SIPLUS Basic Panels (2nd Generation)

### Technical specifications

Article number	<b>6AG1123-2DB03-2AX0</b> SIPLUS HMI KTP400 BASIC	<b>6AG1123-2GB03-2AX0</b> SIPLUS HMI KTP700 BASIC	<b>6AG1123-2GA03-2AX0</b> SIPLUS HMI KTP700 BASIC DP
<b>Ambient conditions</b>			
Suited for indoor use		Yes	Yes
Suited for outdoor use		No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	-20 °C; = Tmin	-20 °C	-20 °C; = Tmin
- For vertical installation, max.	60 °C; = Tmax	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

**Technical specifications**

Article number	<b>6AG1123-2JB03-2AX0</b> SIPLUS HMI KTP900 BASIC	<b>6AG1123-2MB03-2AX0</b> SIPLUS HMI KTP1200 BASIC	<b>6AG1123-2MA03-2AX0</b> SIPLUS HMI KTP1200 BASIC DP
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	-20 °C	-10 °C; = Tmin	-10 °C; = Tmin
- For vertical installation, max.	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request		
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)		
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

More information is available on the Internet at:

<http://www.siemens.com/basic-panels>

## Operator panels

Advanced HMI Panel-based

### Introduction

#### Overview



#### ***Realization of demanding HMI tasks with a high level of user convenience***

Advanced HMI is the Panel-based solution for demanding applications with large configuration limits.

The user benefits from excellent functionality and a wide range of devices and applications, with key or touch operation. Both stationary and mobile solutions are available.

#### SIMATIC HMI Unified Comfort Panels

The new generation of high-end, 7–22-inch operator panels, part of the new SIMATIC WinCC Unified System, boasts numerous improvements over the predecessor devices in terms of performance, openness and user-friendliness.

- Rugged multi-touch technology
- Innovative SIMATIC WinCC Unified visualization software
- Integrated Edge functionality

#### SIMATIC HMI Comfort Panels

SIMATIC HMI Comfort Panels are designed for implementing high-performance visualization tasks at machine-level. High performance, functionality and numerous integrated interfaces offer the greatest convenience in high-end applications.

- Brilliant widescreen display of 4" to 22"
- Easy commissioning and service concept

#### SIMATIC HMI Mobile Panels

Panels for high-end mobile applications – even in the fail-safe area of machines and widely distributed plants. The process communication can be wired or via WLAN.

- Innovative operation from 4" to 9"
- Rugged for location-related local operation
- Integrated security concept

## Overview



### **SIMATIC HMI Unified Comfort Panel**

The new generation of high-end, 7–22-inch operator panels, part of the new SIMATIC WinCC Unified System, boasts numerous improvements over the predecessor devices in terms of performance, openness and user-friendliness.

Thanks to their capacitive glass front with multi-touch technology, the Unified Comfort Panels are as convenient to use as a smartphone or tablet. The sharp colors and high contrast improve the readability and ease of use.

Visualization on the devices is based on SIMATIC WinCC Unified, the new visualization system in the TIA Portal. This opens up many new opportunities and functionalities for the user – across all device sizes.

Brand new to the SIMATIC HMI product portfolio is the option to expand device functionality with apps. Previously, HMI Panels were used exclusively for visualization software. Thanks to the integration of Siemens Industrial Edge, users can now run other programs simultaneously alongside this standard device functionality. Project-specific requirements can thus be implemented quickly and easily.

The following SIMATIC HMI Unified Comfort Panels are available:

- Standard design:
  - MTP700 Comfort
  - MTP1000 Comfort
  - MTP1200 Comfort
  - MTP1500 Comfort
  - MTP1900 Comfort
  - MTP2200 Comfort
- Neutral design:
  - MTP700 Comfort
  - MTP1000 Comfort
  - MTP1200 Comfort
  - MTP1500 Comfort
  - MTP1900 Comfort
  - MTP2200 Comfort

Starter Kits are available for standard design devices.

These consist of:

- HMI Unified Comfort Panel
- WinCC Unified V16 Comfort
- EDGE Runtime for Unified Comfort (Device-managed) license
- 1.5 m PROFINET cable
- Memory card (32 GB)
- Protective film

## Operator panels

Advanced HMI Panel-based  
Unified Comfort Panels

### SIMATIC HMI Unified Comfort Panels Standard

#### Overview



SIMATIC HMI MTP2200 Unified Comfort Panel Standard design front view

#### **SIMATIC HMI Unified Comfort Panels - standard devices**

SIMATIC HMI Unified Comfort Panels consist of six different devices with varying display sizes. All devices come with the same number of hardware interfaces and the same functionality – just select the perfect device for your needs based on the screen size.

Each Unified Comfort Panel is available in the standard design with Siemens and SIMATIC HMI branding and a silver-colored aluminum frame.

All Unified Comfort Panels come with integrated Edge functionality.

Siemens Industrial Edge can be used in two different ways:

- Device-managed Edge
- Centrally-managed Edge (planned)

SIMATIC HMI Unified Comfort Panels can also be ordered with a neutral design.

Starter Kits are available for standard design devices.

#### Note:

The technical specifications of the neutral design devices correspond to the technical specifications of the devices with standard design.

Ordering data	Article No.	Article No.
<i>Touch devices for SIMATIC HMI Unified Comfort Panels</i>		
<i>Standard design, Touch operation</i>		
<b>SIMATIC HMI MTP700 Unified Comfort</b> 7" widescreen display	<b>6AV2128-3GB06-0AX0</b>	<b>6AV2128-3GB36-0AX0</b>
<b>SIMATIC HMI MTP1000 Unified Comfort</b> 10" widescreen display	<b>6AV2128-3KB06-0AX0</b>	<b>6AV2128-3KB36-0AX0</b>
<b>SIMATIC HMI MTP1200 Unified Comfort</b> 12" widescreen display	<b>6AV2128-3MB06-0AX0</b>	<b>6AV2128-3MB36-0AX0</b>
<b>SIMATIC HMI MTP1500 Unified Comfort</b> 15" widescreen display	<b>6AV2128-3QB06-0AX0</b>	<b>6AV2128-3QB36-0AX0</b>
<b>SIMATIC HMI MTP1900 Unified Comfort</b> 19" widescreen display	<b>6AV2128-3UB06-0AX0</b>	<b>6AV2128-3UB36-0AX0</b>
<b>SIMATIC HMI MTP2200 Unified Comfort</b> 22" widescreen display	<b>6AV2128-3XB06-0AX0</b>	<b>6AV2128-3XB36-0AX0</b>

Ordering data	Article No.	Article No.
<b>Starter Kits, Standard design</b> Each consisting of: <ul style="list-style-type: none"><li>• The corresponding Unified Comfort Panel</li><li>• WinCC Unified Comfort (TIA Portal)</li><li>• EDGE Runtime license</li><li>• Industrial Ethernet cable, for test purposes</li><li>• SIMATIC SD Card Indoor 32 GB</li><li>• 5 protective films</li></ul>		
<b>SIMATIC HMI MTP700 Unified Comfort</b>	<b>6AV2128-3GB06-0AP0</b>	<b>6AV2170-2BA00-0AA0</b>
<b>SIMATIC HMI MTP1000 Unified Comfort</b>	<b>6AV2128-3KB06-0AP0</b>	
<b>SIMATIC HMI MTP1200 Unified Comfort</b>	<b>6AV2128-3MB06-0AP0</b>	
<b>SIMATIC HMI MTP1500 Unified Comfort</b>	<b>6AV2128-3QB06-0AP0</b>	
<b>SIMATIC HMI MTP1900 Unified Comfort</b>	<b>6AV2128-3UB06-0AP0</b>	
<b>SIMATIC HMI MTP2200 Unified Comfort</b>	<b>6AV2128-3XB06-0AP0</b>	

## Technical specifications

Article number	6AV2128-3GB06-0AX0	6AV2128-3KB06-0AX0	6AV2128-3MB06-0AX0	6AV2128-3QB06-0AX0	6AV2128-3UB06-0AX0	6AV2128-3XB06-0AX0
	SIMATIC HMI MTP700 Unified Comfort	SIMATIC HMI MTP1000 Unified Comfort	SIMATIC HMI MTP1200 Unified Comfort	SIMATIC HMI MTP1500 Unified Comfort	SIMATIC HMI MTP1900 Unified Comfort	SIMATIC HMI MTP2200 Unified Comfort
<b>General information</b>						
Product type designation	MTP700 Unified Comfort	MTP1000 Unified Comfort	MTP1200 Unified Comfort	MTP1500 Unified Comfort	MTP1900 Unified Comfort	MTP2200 Unified Comfort
<b>Display</b>						
Design of display	TFT	TFT	TFT	TFT	TFT	TFT
Screen diagonal	7 in	10.1 in	12.1 in	15.6 in	18.5 in	21.5 in
Number of colors	16 777 216	16 777 216	16 777 216	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>						
• Horizontal image resolution	800 pixel	1 280 pixel	1 280 pixel	1 366 pixel	1 920 pixel	1 920 pixel
• Vertical image resolution	480 pixel	800 pixel	800 pixel	768 pixel	1 080 pixel	1 080 pixel
<b>Backlighting</b>						
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h	50 000 h; At 25°C	30 000 h; At 25°C
<b>Touch operation</b>						
• Design as touch screen	Yes	Yes	Yes	Yes	Yes	Yes
• Design as multi-touch screen	Yes	Yes	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>						
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes	Yes
<b>Supply voltage</b>						
Type of supply voltage	DC	DC	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V	24 V	24 V
<b>Type of output</b>						
Acoustics						
• Speaker	No	No	No	No	No	No

## Operator panels

Advanced HMI Panel-based  
Unified Comfort Panels

### SIMATIC HMI Unified Comfort Panels Standard

#### Technical specifications

Article number	<b>6AV2128-3GB06-0AX0</b>	<b>6AV2128-3KB06-0AX0</b>	<b>6AV2128-3MB06-0AX0</b>	<b>6AV2128-3QB06-0AX0</b>	<b>6AV2128-3UB06-0AX0</b>	<b>6AV2128-3XB06-0AX0</b>
	SIMATIC HMI MTP700 Unified Comfort	SIMATIC HMI MTP1000 Unified Comfort	SIMATIC HMI MTP1200 Unified Comfort	SIMATIC HMI MTP1500 Unified Comfort	SIMATIC HMI MTP1900 Unified Comfort	SIMATIC HMI MTP2200 Unified Comfort
<b>Time of day</b>						
<b>Clock</b>						
• Hardware clock (real-time)	Yes	Yes	Yes	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks					
• synchronizable	Yes	Yes	Yes	Yes	Yes	Yes
<b>Interfaces</b>						
Number of industrial Ethernet interfaces	2; 2 ports (switch) + independent port					
Number of RS 485 interfaces	1; RS 422 / 485 combined					
Number of USB interfaces	4; USB 3.1 Gen. 1 (type A)					
Number of SD card slots	2	2	2	2	2	2
<b>Industrial Ethernet</b>						
• Number of ports of the integrated switch	2	2	2	2	2	2
<b>Protocols</b>						
PROFINET	Yes	Yes	Yes	Yes	Yes	Yes
PROFIBUS	No	No	No	No	No	No
<b>Redundancy mode</b>						
<b>Media redundancy</b>						
- MRP	Yes	Yes	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>						
NEMA (front)						
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes	Yes
• Enclosure Type 12 at the front	No	No	No	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
KC approval	No; Available soon					
EAC (formerly Gost-R)	Yes	Yes	Yes	Yes	Yes	Yes
<b>Use in hazardous areas</b>						
• ATEX Zone 2	No; Available soon					
• ATEX Zone 22	No; Available soon					
• IECEx Zone 2	No; Available soon					
• IECEx Zone 22	No; Available soon					
• cULus Class I Zone 2, Division 2	No; Available soon					
• cULus Class II Division 2	No					
• FM Class I Division 2	No; Available soon					
• FM Class II Division 2	No	No	No	No	No	No
<b>Marine approval</b>						
• Germanischer Lloyd (GL)	No; Available soon					
• American Bureau of Shipping (ABS)	No; Available soon					
• Bureau Veritas (BV)	No; Available soon					
• Det Norske Veritas (DNV)	No; Available soon					
• Lloyds Register of Shipping (LRS)	No; Available soon					
• Nippon Kaiji Kyokai (Class NK)	No; Available soon					
• Chinese Classification Society (CCS)	No; Available soon					

**Technical specifications**

Article number	6AV2128-3GB06-0AX0	6AV2128-3KB06-0AX0	6AV2128-3MB06-0AX0	6AV2128-3QB06-0AX0	6AV2128-3UB06-0AX0	6AV2128-3XB06-0AX0
	SIMATIC HMI MTP700 Unified Comfort	SIMATIC HMI MTP1000 Unified Comfort	SIMATIC HMI MTP1200 Unified Comfort	SIMATIC HMI MTP1500 Unified Comfort	SIMATIC HMI MTP1900 Unified Comfort	SIMATIC HMI MTP2200 Unified Comfort
<b>Ambient conditions</b>						
Suited for indoor use	Yes	Yes	Yes	Yes	Yes	Yes
Suited for outdoor use	No	No	No	No	No	No
<b>Ambient temperature during operation</b>						
• Operation (vertical installation)						
- For vertical installation, min.	0 °C	0 °C	0 °C	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Relative humidity</b>						
• Operation, max.	90 %; no condensation					
<b>Configuration</b>						
<b>Configuration software</b>						
• WinCC Unified Comfort Engineering (TIA Portal)	Yes	Yes	Yes	Yes	Yes	Yes
• WinCC Unified PC Engineering (TIA Portal)	Yes	Yes	Yes	Yes	Yes	Yes
<b>Languages</b>						
<b>Online languages</b>						
• Number of online/runtime languages	32	32	32	32	32	32
<b>Functionality under WinCC Unified</b>						
Applications/options						
• Writer	Yes	Yes	Yes	Yes	Yes	Yes
• Calc	Yes					
• Web browser	Yes	Yes	Yes	Yes	Yes	Yes
• PDF Viewer	Yes					
• Media Player	Yes	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Audit	No	No	No	No	No	No
• Unified Collaboration	No	No	No	No	No	No
Number of Visual Basic Scripts	No					
JavaScript	Yes	Yes	Yes	Yes	Yes	Yes
Task planner						
• time-controlled	Yes	Yes	Yes	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes	Yes	Yes	Yes
<b>Message system</b>						
• Bit messages						
- Number of bit messages	9 000	9 000	9 000	9 000	9 000	9 000
• Analog messages						
- Number of analog messages	300	300	300	300	300	300
• Message buffer	Yes; Configured as alarm archive	Yes; Configured as alarm archive	Yes; Configured as alarm archive	Yes; Configured as alarm archive	Yes; Configured as alarm archive	Yes; Configured as alarm archive
- Circulating buffer	Yes	Yes	Yes	Yes	Yes	Yes
- retentive	Yes	Yes	Yes	Yes	Yes	Yes

## Operator panels

Advanced HMI Panel-based  
Unified Comfort Panels

### SIMATIC HMI Unified Comfort Panels Standard

#### Technical specifications

Article number	<b>6AV2128-3GB06-0AX0</b>	<b>6AV2128-3KB06-0AX0</b>	<b>6AV2128-3MB06-0AX0</b>	<b>6AV2128-3QB06-0AX0</b>	<b>6AV2128-3UB06-0AX0</b>	<b>6AV2128-3XB06-0AX0</b>
	SIMATIC HMI MTP700 Unified Comfort	SIMATIC HMI MTP1000 Unified Comfort	SIMATIC HMI MTP1200 Unified Comfort	SIMATIC HMI MTP1500 Unified Comfort	SIMATIC HMI MTP1900 Unified Comfort	SIMATIC HMI MTP2200 Unified Comfort
<b>Parameter set management (recipes)</b>						
• Number of parameter set types	750	750	750	750	750	750
• Size of internal parameter set memory	12 Mbyte			12 Mbyte		
• Parameter set memory expandable	Yes	Yes	Yes	Yes	Yes	Yes
<b>Variables</b>						
• Number of variables per device	8 000	8 000	8 000	8 000	8 000	8 000
• Number of variables per screen	600	600	600	800	800	800
<b>Images</b>						
• Number of configurable images	1 200	1 200	1 200	1 200	1 200	1 200
<b>Archiving</b>						
• Number of archives per device	50	50	50	50	50	50
<b>Security</b>						
• Number of roles	50	50	50	50	50	50
• Number of users	200	200	200	200	200	200
• Central user administration	No	No	No	No	No	No
<b>Transfer (upload/download)</b>						
• Ethernet	Yes	Yes	Yes	Yes	Yes	Yes
<b>Process coupling</b>						
• S7-1200	Yes	Yes	Yes	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes	Yes	Yes	Yes
• S7-200	No	No	No	No	No	No
• S7-300/400	Yes	Yes	Yes	Yes	Yes	Yes
• Number of S7 connections	16	16	16	16	16	16
• LOGO!	No	No	No	No	No	No
• SIMOTION	No	No	No	No	No	No
• OPC UA Client	No	No	No	No	No	No
• OPC UA Server	No	No	No	No	No	No
• Software Controller/Open Controller	No	No	No	No	No	No
<b>Peripherals/Options</b>						
Peripherals	Printer, barcode reader	Printer, barcode reader	Printer, barcode reader	Printer, barcode reader	Printer, barcode reader	Printer, barcode reader
Printer	Yes	Yes	Yes	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	No	No	No	No	No	No
SIMATIC HMI SD memory card: Secure Digital memory card	Yes	Yes	Yes	Yes	Yes	Yes
USB memory	Yes	Yes	Yes	Yes	Yes	Yes
Network camera	No	No	No	No	No	No
<b>Mechanics/material</b>						
Enclosure material (front)						
• Aluminum	Yes	Yes	Yes	Yes	Yes	Yes
<b>Dimensions</b>						
Width of the housing front	214 mm	280 mm	326 mm	398 mm	464 mm	529 mm
Height of housing front	158 mm	205 mm	237 mm	257 mm	294 mm	331 mm
Mounting cutout, width	197 mm	264 mm	310 mm	382 mm	448 mm	513 mm
Mounting cutout, height	141 mm	189 mm	221 mm	241 mm	278 mm	315 mm
Overall depth	64 mm	64 mm	64 mm	73 mm	73 mm	73 mm
<b>Weights</b>						
Weight (without packaging)	1.4 kg	2.1 kg	2.8 kg	4.3 kg	5.5 kg	6.9 kg

**More information**

Every Unified Comfort Panel is available in two different design variants.

- The standard design has Siemens and SIMATIC HMI branding on the front and a silver-colored aluminum frame.
- The neutral design has no branding on the front and a black aluminum frame.

For selected SIMATIC HMI Unified Comfort Panels, the option exists to apply the customer name or logo or to select the membrane color in accordance with the customer's corporate design. This is also possible for small quantities.

More information is available at:

<http://www.siemens.com/express-hmi-tool>

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Standard devices

#### Overview



#### **SIMATIC HMI Comfort Panels - Standard devices**

- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player and Web Server
- Dimmable displays from 0 to 100% via PROFlenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Data security in the event of a power failure for the device and for the SIMATIC HMI memory card
- Innovative service and commissioning concept
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22 and marine approvals
- All versions can be used as an OPC UA client or as a server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal engineering framework

#### Note:

A 7" and a 15" Comfort Outdoor version are available. These devices have been specially designed for outdoor applications in difficult environments. Best display quality, even under sunlight, UV-resistant fronts and much more.

For more information, please go to:

<http://www.siemens.com/comfort-panels>

#### Ordering data

#### Article No.

##### *SIMATIC HMI Comfort Panels*

##### *Key and touch devices*

##### **SIMATIC HMI KTP400 Comfort**

Key/touch operation;  
4" widescreen display

**6AV2124-2DC01-0AX0**

##### *Touch devices*

##### **SIMATIC HMI TP700 Comfort**

Touch operation;  
7" widescreen display

**6AV2124-0GC01-0AX0**

##### **SIMATIC HMI TP900 Comfort**

Touch operation;  
9" widescreen display

**6AV2124-0JC01-0AX0**

##### **SIMATIC HMI TP1200 Comfort**

Touch operation;  
12" widescreen display

**6AV2124-0MC01-0AX0**

##### **SIMATIC HMI TP1500 Comfort**

Touch operation;  
15" widescreen display

**6AV2124-0QC02-0AX1**

##### **SIMATIC HMI TP1900 Comfort**

Touch operation;  
19" widescreen display

**6AV2124-0UC02-0AX1**

##### **SIMATIC HMI TP2200 Comfort**

Touch operation;  
22" widescreen display

**6AV2124-0XC02-0AX1**

##### *Key devices*

##### **SIMATIC HMI KP400 Comfort**

Key operation;  
4" widescreen display

**6AV2124-1DC01-0AX0**

##### **SIMATIC HMI KP700 Comfort**

Key operation;  
7" widescreen display

**6AV2124-1GC01-0AX0**

##### **SIMATIC HMI KP900 Comfort**

Key operation;  
9" widescreen display

**6AV2124-1JC01-0AX0**

##### **SIMATIC HMI KP1200 Comfort**

Key operation;  
12" widescreen display

**6AV2124-1MC01-0AX0**

##### **SIMATIC HMI KP1500 Comfort**

Key operation;  
15" widescreen display

**6AV2124-1QC02-0AX1**

##### *Accessories*

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

**Technical specifications**

Article number	<b>6AV2124-2DC01-0AX0</b> SIMATIC HMI KTP400 Comfort	Article number	<b>6AV2124-2DC01-0AX0</b> SIMATIC HMI KTP400 Comfort
<b>General information</b>			
Product type designation	KTP400 Comfort	PROFINET	Yes
<b>Display</b>			
Design of display	TFT	IRT	No
Screen diagonal	4.3 in	PROFIBUS	Yes
Number of colors	16 777 216	MPI	Yes
<b>Resolution (pixels)</b>			
• Horizontal image resolution	480 pixel	<b>Redundancy mode</b>	
• Vertical image resolution	272 pixel	<b>Media redundancy</b>	
<b>Backlighting</b>		- MRP	
• MTBF backlighting (at 25 °C)	80 000 h	No	
<b>Control elements</b>			
<b>Keyboard fonts</b>		<b>Degree and class of protection</b>	
• Function keys		NEMA (front)	
- Number of function keys	4	• Enclosure Type 4x at the front	Yes
<b>Touch operation</b>			
• Design as touch screen	Yes	<b>Standards, approvals, certificates</b>	
<b>Installation type/mounting</b>			
Wall mounting/direct mounting	No	CE mark	Yes
Mounting in portrait format possible	Yes	cULus	Yes
<b>Supply voltage</b>			
Rated value (DC)	24 V	RCM (formerly C-TICK)	Yes
<b>Memory</b>			
Memory available for user data	4 Mbyte	KC approval	Yes
<b>Type of output</b>			
Acoustics		<b>Use in hazardous areas</b>	
• Speaker	No	• ATEX Zone 2	Yes
<b>Time of day</b>		• ATEX Zone 22	Yes
<b>Clock</b>		• IECEx Zone 2	Yes
• Hardware clock (real-time)	Yes	• IECEx Zone 22	Yes
• retentive	Yes; Back-up duration typically 6 weeks	• cULus Class I Zone 2, Division 2	Yes
• synchronizable	Yes	• FM Class I Division 2	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	1	<b>Marine approval</b>	
Number of RS 485 interfaces	1; RS 422 / 485 combined	• Germanischer Lloyd (GL)	Yes
Number of USB interfaces	1; USB 2.0	• American Bureau of Shipping (ABS)	Yes
• USB Mini B	1; 5-pole	• Bureau Veritas (BV)	Yes
Number of SD card slots	2	• Det Norske Veritas (DNV)	Yes
<b>Industrial Ethernet</b>		• Lloyds Register of Shipping (LRS)	Yes
• Number of ports of the integrated switch	1; No switch integrated	• Nippon Kaiji Kyokai (Class NK)	Yes
		• Polski Rejestr Statków (PRS)	No
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)		• Operation (vertical installation)	
- For vertical installation, min.		- For vertical installation, min.	0 °C
- For vertical installation, max.		- For vertical installation, max.	50 °C
<b>Relative humidity</b>			
• Operation, max.		90 %; no condensation	
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)		Yes; from V11	
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages		32	

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Standard devices

#### Technical specifications

Article number	6AV2124-2DC01-0AX0	Article number	6AV2124-2DC01-0AX0
<b>Functionality under WinCC (TIA Portal)</b>		SIMATIC HMI KTP400 Comfort	
Applications/options		<b>Process coupling</b>	
• Web browser	Yes	• S7-1200	Yes
• Pocket Word	Yes	• S7-1500	Yes
• Pocket Excel	Yes	• S7-200	Yes
• PDF Viewer	Yes	• S7-300/400	Yes
• Media Player	Yes	• LOGO!	Yes
• SIMATIC WinCC Sm@rtServer	Yes	• WinAC	Yes
• SIMATIC WinCC Audit	Yes	• SIMOTION	Yes
Number of Visual Basic Scripts	Yes	• Allen Bradley (EtherNet/IP)	Yes
Task planner		• Allen Bradley (DF1)	Yes
• time-controlled	Yes	• Mitsubishi (MC TCP/IP)	Yes
• task-controlled	Yes	• Mitsubishi (FX)	Yes
<b>Message system</b>		• OMRON (FINS TCP)	No
• Bit messages	Yes	• OMRON (LINK/Multilink)	Yes
- Number of bit messages	2 000	• Modicon (Modbus TCP/IP)	Yes
• Analog messages	Yes	• Modicon (Modbus)	Yes
- Number of analog messages	50	• OPC UA Client	Yes
• Message buffer		• OPC UA Server	Yes
- Number of entries	256		
- Circulating buffer	Yes		
- retentive	Yes		
<b>Recipe management</b>			
• Number of recipes	100	<b>Peripherals/Options</b>	
• Size of internal recipe memory	512 kbyte	Printer	Yes
• Recipe memory expandable	Yes	SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB
<b>Variables</b>		SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB
• Number of variables per device	1 024	USB memory	Yes
• Number of variables per screen	50	Network camera	Yes
<b>Images</b>			
• Number of configurable images	500	<b>Mechanics/material</b>	
<b>Archiving</b>		Enclosure material (front)	
• Number of archives per device	10	• Plastic	Yes
<b>Security</b>		• Aluminum	No
• Number of user groups	50	• Stainless steel	No
• Number of users	50		
• SIMATIC Logon	Yes	<b>Dimensions</b>	
<b>Logging through printer</b>		Width of the housing front	140 mm
• Alarms	Yes	Height of housing front	116 mm
• Report (shift log)	Yes	Mounting cutout, width	123 mm
• Hardcopy	Yes	Mounting cutout, height	99 mm
• Electronic print to file	Yes; PDF, HTML	Overall depth	49 mm
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	<b>Weights</b>	
• Ethernet	Yes	Weight (without packaging)	0.6 kg

**Technical specifications**

Article number	6AV2124-1DC01-0AX0	6AV2124-1GC01-0AX0	6AV2124-1JC01-0AX0	6AV2124-1MC01-0AX0	6AV2124-1QC02-0AX1
	SIMATIC HMI KP400 Comfort	SIMATIC HMI KP700 Comfort	SIMATIC HMI KP900 Comfort	SIMATIC HMI KP1200 Comfort	SIMATIC HMI KP1500 Comfort
<b>General information</b>					
Product type designation	KP400 Comfort	KP700 Comfort	KP900 Comfort	KP1200 Comfort	KP1500 Comfort
<b>Display</b>					
Design of display	TFT	TFT	TFT	TFT	TFT
Screen diagonal	4.3 in	7 in	9 in	12.1 in	15.4 in
Number of colors	16 777 216	16 777 216	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>					
• Horizontal image resolution	480 pixel	800 pixel	800 pixel	1 280 pixel	1 280 pixel
• Vertical image resolution	272 pixel	480 pixel	480 pixel	800 pixel	800 pixel
<b>Backlighting</b>					
• MTBF backlighting (at 25 °C)	80 000 h	80 000 h	80 000 h	80 000 h	80 000 h
<b>Control elements</b>					
<b>Keyboard fonts</b>					
• Function keys					
- Number of function keys	8	24	26	34	36
<b>Touch operation</b>					
• Design as touch screen	No	No	No	No	No
<b>Installation type/mounting</b>					
Wall mounting/direct mounting	No	No	No	No	No
Mounting in portrait format possible	No	No	No	No	No
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
<b>Memory</b>					
Memory available for user data	4 Mbyte	12 Mbyte	12 Mbyte	12 Mbyte	24 Mbyte
<b>Type of output</b>					
Acoustics					
• Speaker	No	Yes	Yes	Yes	Yes
<b>Time of day</b>					
<b>Clock</b>					
• Hardware clock (real-time)	Yes	Yes	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks				
• synchronizable	Yes	Yes	Yes	Yes	Yes
<b>Interfaces</b>					
Number of industrial Ethernet interfaces	1	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)	2; 2 ports (switch) + independent port
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	1; USB 2.0	2; USB 2.0	2; USB 2.0	2; USB 2.0	2; USB 2.0
• USB Mini B	1; 5-pole	1; 5-pole	1; 5-pole	1; 5-pole	
Number of SD card slots	2	2	2	2	2
<b>Industrial Ethernet</b>					
• Number of ports of the integrated switch	1; No switch integrated	2	2	2	2

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Standard devices

#### Technical specifications

Article number	<b>6AV2124-1DC01-0AX0</b> SIMATIC HMI KP400 Comfort	<b>6AV2124-1GC01-0AX0</b> SIMATIC HMI KP700 Comfort	<b>6AV2124-1JC01-0AX0</b> SIMATIC HMI KP900 Comfort	<b>6AV2124-1MC01-0AX0</b> SIMATIC HMI KP1200 Comfort	<b>6AV2124-1QC02-0AX1</b> SIMATIC HMI KP1500 Comfort
<b>Protocols</b>					
PROFINET	Yes	Yes	Yes	Yes	Yes
IRT	No	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes
PROFIBUS	Yes	Yes	Yes	Yes	Yes
MPI	Yes	Yes	Yes	Yes	Yes
<b>Redundancy mode</b>					
<b>Media redundancy</b>					
- MRP	No	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes
<b>Degree and class of protection</b>					
NEMA (front)					
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)					Yes
<b>Use in hazardous areas</b>					
• ATEX Zone 2	Yes	Yes	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes	Yes	Yes
• IECEx Zone 2	Yes	Yes	Yes	Yes	Yes
• IECEx Zone 22	Yes	Yes	Yes	Yes	Yes
• cULus Class I Zone 2, Division 2	Yes	Yes	Yes	Yes	Yes; For inscription on device rating plate No; Available soon
• cULus Class II Division 2					No; Available soon
• FM Class I Division 2	Yes	Yes	Yes	Yes	Yes; For inscription on device rating plate No; Available soon
• FM Class II Division 2					No; Available soon
<b>Marine approval</b>					
• Germanischer Lloyd (GL)	Yes	Yes	Yes	Yes; As of product version: 10	No
• American Bureau of Shipping (ABS)	Yes	Yes	Yes	Yes; As of product version: 10	No
• Bureau Veritas (BV)	Yes	Yes	Yes	Yes; As of product version: 10	No
• Det Norske Veritas (DNV)	Yes	Yes	Yes	Yes; As of product version: 10	No
• Korean Register of Shipping (KRS)					No
• Lloyds Register of Shipping (LRS)	Yes	Yes	Yes	Yes; As of product version: 10	No
• Nippon Kaiji Kyokai (Class NK)	Yes	Yes	Yes	Yes; As of product version: 10	No
• Polski Rejestr Statków (PRS)	No	No	No	No	No
• Chinese Classification Society (CCS)					No
<b>Ambient conditions</b>					
Suited for indoor use					Yes
Suited for outdoor use					No
<b>Ambient temperature during operation</b>					
• Operation (vertical installation)					
- For vertical installation, min.	0 °C	0 °C	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C	50 °C; (55 °C, see entry ID: 64847814)	50 °C; (55 °C, see entry ID: 64847814)	50 °C; (55 °C, see entry ID: 64847814)	50 °C; (55 °C, see entry ID: 64847814)
<b>Relative humidity</b>					
• Operation, max.	90 %; no condensation	90 %; no condensation			

**Technical specifications**

Article number	6AV2124-1DC01-0AX0	6AV2124-1GC01-0AX0	6AV2124-1JC01-0AX0	6AV2124-1MC01-0AX0	6AV2124-1QC02-0AX1
	SIMATIC HMI KP400 Comfort	SIMATIC HMI KP700 Comfort	SIMATIC HMI KP900 Comfort	SIMATIC HMI KP1200 Comfort	SIMATIC HMI KP1500 Comfort
<b>Configuration</b>					
<b>Configuration software</b>					
• WinCC Comfort (TIA Portal)	Yes; from V11	Yes; from V11	Yes; from V11	Yes; from V11	Yes; V14 SP1 HSP and higher
<b>Languages</b>					
<b>Online languages</b>					
• Number of online/runtime languages	32	32	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>					
Applications/options					
• Web browser	Yes	Yes	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes	Yes	Yes
Task planner					
• time-controlled	Yes	Yes	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes	Yes	Yes
<b>Message system</b>					
• Bit messages	Yes	Yes	Yes	Yes	
- Number of bit messages	2 000	4 000	4 000	4 000	6 000
• Analog messages	Yes	Yes	Yes	Yes	
- Number of analog messages	50	200	200	200	200
• Message buffer					
- Number of entries	256	1 024	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes	Yes	Yes
- retentive	Yes	Yes	Yes	Yes	Yes
<b>Recipe management</b>					
• Number of recipes	100	300	300	300	500
• Size of internal recipe memory	512 kbyte	2 Mbyte	2 Mbyte	2 Mbyte	4 Mbyte
• Recipe memory expandable	Yes	Yes	Yes	Yes	Yes
<b>Variables</b>					
• Number of variables per device	1 024	2 048	2 048	2 048	4 096
• Number of variables per screen	50	400	400	400	400
<b>Images</b>					
• Number of configurable images	500	500	500	500	750
<b>Archiving</b>					
• Number of archives per device	10	50	50	50	50
<b>Security</b>					
• Number of user groups	50	50	50	50	50
• Number of users	50	50	50	50	50
• SIMATIC Logon	Yes	Yes	Yes	Yes	Yes
<b>Logging through printer</b>					
• Alarms	Yes	Yes	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Standard devices

#### Technical specifications

Article number	6AV2124-1DC01-0AX0	6AV2124-1GC01-0AX0	6AV2124-1JC01-0AX0	6AV2124-1MC01-0AX0	6AV2124-1QC02-0AX1
	SIMATIC HMI KP400 Comfort	SIMATIC HMI KP700 Comfort	SIMATIC HMI KP900 Comfort	SIMATIC HMI KP1200 Comfort	SIMATIC HMI KP1500 Comfort
<b>Transfer (upload/download)</b>					
• MPI/PROFIBUS DP	Yes	Yes	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes	Yes	Yes
<b>Process coupling</b>					
• S7-1200	Yes	Yes	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes	Yes	Yes
<b>Peripherals/Options</b>					
Printer	Yes	Yes	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB			
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB			
USB memory	Yes	Yes	Yes	Yes	Yes
Network camera	Yes	Yes	Yes	Yes	Yes
<b>Mechanics/material</b>					
Enclosure material (front)					
• Plastic	Yes	No	No	No	No
• Aluminum	No	Yes	Yes	Yes	Yes
• Stainless steel	No	No	No	No	No
<b>Dimensions</b>					
Width of the housing front	152 mm	308 mm	362 mm	454 mm	483 mm
Height of housing front	188 mm	204 mm	230 mm	289 mm	310 mm
Mounting cutout, width	135 mm	281 mm	338 mm	434 mm	450 mm
Mounting cutout, height	171 mm	177 mm	206 mm	269 mm	291 mm
Overall depth	49 mm	63 mm	63 mm	65 mm	75 mm
<b>Weights</b>					
Weight (without packaging)	0.8 kg	2.2 kg	2.7 kg	4.4 kg	4.7 kg

**Technical specifications**

Article number	6AV2124-0GC01-0AX0	6AV2124-0JC01-0AX0	6AV2124-0MC01-0AX0	6AV2124-0QC02-0AX1	6AV2124-0UC02-0AX1	6AV2124-0XC02-0AX1
	SIMATIC HMI TP700 Comfort	SIMATIC HMI TP900 Comfort	SIMATIC HMI TP1200 Comfort	SIMATIC HMI TP1500 Comfort	SIMATIC HMI TP1900 Comfort	SIMATIC HMI TP2200 Comfort
<b>General information</b>						
Product type designation	TP700 Comfort	TP900 Comfort	TP1200 Comfort	TP1500 Comfort	TP1900 Comfort	TP2200 Comfort
<b>Display</b>						
Design of display	TFT	TFT	TFT	TFT	TFT	TFT
Screen diagonal	7 in	9 in	12.1 in	15.4 in	18.5 in	21.5 in
Number of colors	16 777 216	16 777 216	16 777 216	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>						
• Horizontal image resolution	800 pixel	800 pixel	1 280 pixel	1 280 pixel	1 366 pixel	1 920 pixel
• Vertical image resolution	480 pixel	480 pixel	800 pixel	800 pixel	768 pixel	1 080 pixel
<b>Backlighting</b>						
• MTBF backlighting (at 25 °C)	80 000 h	80 000 h	80 000 h	80 000 h	50 000 h	30 000 h
<b>Control elements</b>						
<b>Keyboard fonts</b>						
• Function keys						
- Number of function keys	0	0	0	0	0	0
<b>Touch operation</b>						
• Design as touch screen	Yes	Yes	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>						
Wall mounting/direct mounting	No	No	No			
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes	Yes
<b>Supply voltage</b>						
Rated value (DC)	24 V					
<b>Memory</b>						
Memory available for user data	12 Mbyte	12 Mbyte	12 Mbyte	24 Mbyte	24 Mbyte	24 Mbyte
<b>Type of output</b>						
Acoustics						
• Speaker	Yes	Yes	Yes	Yes	Yes	Yes
<b>Time of day</b>						
<b>Clock</b>						
• Hardware clock (real-time)	Yes	Yes	Yes	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks					
• synchronizable	Yes	Yes	Yes	Yes	Yes	Yes
<b>Interfaces</b>						
Number of industrial Ethernet interfaces	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port
Number of RS 485 interfaces	1; RS 422 / 485 combined					
Number of USB interfaces	2; USB 2.0					
• USB Mini B	1; 5-pole	1; 5-pole	1; 5-pole			
Number of SD card slots	2	2	2	2	2	2
<b>Industrial Ethernet</b>						
• Number of ports of the integrated switch	2	2	2	2	2	2

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Standard devices

#### Technical specifications

Article number	6AV2124-0GC01-0AX0	6AV2124-0JC01-0AX0	6AV2124-0MC01-0AX0	6AV2124-0QC02-0AX1	6AV2124-0UC02-0AX1	6AV2124-0XC02-0AX1
	SIMATIC HMI TP700 Comfort	SIMATIC HMI TP900 Comfort	SIMATIC HMI TP1200 Comfort	SIMATIC HMI TP1500 Comfort	SIMATIC HMI TP1900 Comfort	SIMATIC HMI TP2200 Comfort
<b>Protocols</b>						
PROFINET	Yes	Yes	Yes	Yes	Yes	Yes
IRT	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes	Yes	Yes
PROFIBUS	Yes	Yes	Yes	Yes	Yes	Yes
MPI	Yes	Yes	Yes	Yes	Yes	Yes
<b>Redundancy mode</b>						
<b>Media redundancy</b>						
- MRP	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes	Yes	Yes
<b>Degree and class of protection</b>						
NEMA (front)						
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)				Yes	Yes	Yes
<b>Use in hazardous areas</b>						
• ATEX Zone 2	Yes	Yes	Yes	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes	Yes	Yes	Yes
• IECEx Zone 2	Yes	Yes	Yes	Yes	Yes	Yes
• IECEx Zone 22	Yes	Yes	Yes	Yes	Yes	Yes
• cULus Class I Zone 2, Division 2	Yes	Yes	Yes	Yes; For inscription on device rating plate		
• cULus Class II Division 2				No; Available soon		
• FM Class I Division 2	Yes	Yes	Yes	Yes; For inscription on device rating plate		
• FM Class II Division 2				No; Available soon		
<b>Marine approval</b>						
• Germanischer Lloyd (GL)	Yes	Yes	Yes; As of product version: 10	No	No	No
• American Bureau of Shipping (ABS)	Yes	Yes	Yes; As of product version: 10	No	No	No
• Bureau Veritas (BV)	Yes	Yes	Yes; As of product version: 10	No	No	No
• Det Norske Veritas (DNV)	Yes	Yes	Yes; As of product version: 10	No	No	No
• Korean Register of Shipping (KRS)				No	No	No
• Lloyds Register of Shipping (LRS)	Yes	Yes	Yes; As of product version: 10	No	No	No
• Nippon Kaiji Kyokai (Class NK)	Yes	Yes	Yes; As of product version: 10	No	No	No
• Polski Rejestr Statków (PRS)	No	No	No	No	No	No
• Chinese Classification Society (CCS)				No	No	No
<b>Ambient conditions</b>						
Suited for indoor use				Yes	Yes	Yes
Suited for outdoor use				No	No	No
<b>Ambient temperature during operation</b>						
• Operation (vertical installation)						
- For vertical installation, min.	0 °C	0 °C	0 °C	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C; (55 °C, see entry ID: 64847814)	45 °C	45 °C			
<b>Relative humidity</b>						
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation			

**Technical specifications**

Article number	6AV2124-0GC01-0AX0	6AV2124-0JC01-0AX0	6AV2124-0MC01-0AX0	6AV2124-0QC02-0AX1	6AV2124-0UC02-0AX1	6AV2124-0XC02-0AX1
	SIMATIC HMI TP700 Comfort	SIMATIC HMI TP900 Comfort	SIMATIC HMI TP1200 Comfort	SIMATIC HMI TP1500 Comfort	SIMATIC HMI TP1900 Comfort	SIMATIC HMI TP2200 Comfort
<b>Configuration</b>						
<b>Configuration software</b>						
• WinCC Comfort (TIA Portal)	Yes; from V11	Yes; from V11	Yes; from V11	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher
<b>Languages</b>						
<b>Online languages</b>						
• Number of online/runtime languages	32	32	32	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>						
Applications/options						
• Web browser	Yes	Yes	Yes	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes	Yes	Yes	Yes
Task planner						
• time-controlled	Yes	Yes	Yes	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes	Yes	Yes	Yes
<b>Message system</b>						
• Bit messages	Yes	Yes	Yes			
- Number of bit messages	4 000	4 000	4 000	6 000	6 000	6 000
• Analog messages	Yes	Yes	Yes			
- Number of analog messages	200	200	200	200	200	200
• Message buffer						
- Number of entries	1 024	1 024	1 024	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes	Yes	Yes	Yes
- retentive	Yes	Yes	Yes	Yes	Yes	Yes
<b>Recipe management</b>						
• Number of recipes	300	300	300	500	500	500
• Size of internal recipe memory	2 Mbyte	2 Mbyte	2 Mbyte	4 Mbyte	4 Mbyte	4 Mbyte
• Recipe memory expandable	Yes	Yes	Yes	Yes	Yes	Yes
<b>Variables</b>						
• Number of variables per device	2 048	2 048	2 048	4 096	4 096	4 096
• Number of variables per screen	400	400	400	400	400	400
<b>Images</b>						
• Number of configurable images	500	500	500	750	750	750
<b>Archiving</b>						
• Number of archives per device	50	50	50	50	50	50
<b>Security</b>						
• Number of user groups	50	50	50	50	50	50
• Number of users	50	50	50	50	50	50
• SIMATIC Logon	Yes	Yes	Yes	Yes	Yes	Yes
<b>Logging through printer</b>						
• Alarms	Yes	Yes	Yes	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Standard devices

#### Technical specifications

Article number	6AV2124-0GC01-0AX0	6AV2124-0JC01-0AX0	6AV2124-0MC01-0AX0	6AV2124-0QC02-0AX1	6AV2124-0UC02-0AX1	6AV2124-0XC02-0AX1
	SIMATIC HMI TP700 Comfort	SIMATIC HMI TP900 Comfort	SIMATIC HMI TP1200 Comfort	SIMATIC HMI TP1500 Comfort	SIMATIC HMI TP1900 Comfort	SIMATIC HMI TP2200 Comfort
<b>Transfer (upload/download)</b>						
• MPI/PROFIBUS DP	Yes	Yes	Yes	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes	Yes	Yes	Yes
<b>Process coupling</b>						
• S7-1200	Yes	Yes	Yes	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes	Yes	Yes	Yes
<b>Peripherals/Options</b>						
Printer	Yes	Yes	Yes	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes	Yes	Yes	Yes
Network camera	Yes	Yes	Yes	Yes	Yes	Yes
<b>Mechanics/material</b>						
Enclosure material (front)						
• Plastic	No	No	No	No	No	No
• Aluminum	Yes	Yes	Yes	Yes	Yes	Yes
• Stainless steel	No	No	No	No	No	No
<b>Dimensions</b>						
Width of the housing front	214 mm	274 mm	330 mm	415 mm	483 mm	560 mm
Height of housing front	158 mm	190 mm	241 mm	310 mm	337 mm	380 mm
Mounting cutout, width	197 mm	251 mm	310 mm	396 mm	465 mm	542 mm
Mounting cutout, height	141 mm	166 mm	221 mm	291 mm	319 mm	362 mm
Overall depth	63 mm	63 mm	65 mm	75 mm	75 mm	75 mm
<b>Weights</b>						
Weight (without packaging)	1.4 kg	1.9 kg	2.8 kg	4.4 kg	5.6 kg	6.7 kg

More information is available on the Internet at:

<http://www.siemens.com/comfort-panels>

You can find an overview of approved printers, supply sources and printer settings on the Internet at:

<http://support.industry.siemens.com/cs/ww/en/view/11376409>

Certain SIMATIC HMI Comfort Panels allow the application of a customer name or logo, or selection of the membrane color in accordance with the customer's corporate design. This is also possible for small quantities.

More information is available at:

<http://www.siemens.com/express-hmi-tool>

**Overview**

- Excellent HMI functionality for demanding applications
- Widescreen TFT displays with 4", 7", 9", 12", 15", 19" and 22" diagonals (all 16 million colors) with up to 40% more visualization area as compared to the predecessor devices
- Integrated high-end functionality with archives, scripts, PDF/Word/Excel viewer, Internet Explorer, Media Player
- Dimmable displays from 0 to 100% via PROFlenergy, via the HMI project or via a controller
- Modern industrial design, cast aluminum fronts for 7" upwards
- Upright installation for all touch devices
- Optimal selection option: seven touch and five key versions are available
- Data security in the event of a power failure for the device and for the SIMATIC HMI memory card
- Innovative service and commissioning concept through second SD card (automatic backup)
- Easy project transfer via standard cable (standard Ethernet cable, standard USB cable)
- Maximum performance with short screen refresh times
- Suitable for extremely harsh industrial environments thanks to extended approvals such as ATEX 2/22
- Wide range of communication options: PROFIBUS and PROFINET onboard; 2x PROFINET with integrated switch for 7" models or larger; plus 1 additional PROFINET with Gigabit support for 15" models or larger
- All variants can be used as an OPC UA client or as an OPC DA server
- Key-operated devices with LED in every function key and new text input mechanism, similar to the keypads of mobile phones
- Key-operated devices with stamped keys for optimum tactile feedback
- All keys have a service life of 2 million operations
- Configuring with the WinCC engineering software of the TIA Portal

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products.

**SIPLUS extreme-specific information was added.**

**Ordering data****Article No.**

<i>SIPLUS HMI Comfort Panels, Keys and Touch</i>	
<b>SIPLUS HMI KTP400 Comfort</b>	<b>6AG1124-2DC01-4AX0</b>
<i>SIPLUS HMI Comfort Panels, Touch</i>	
<b>SIPLUS HMI TP700 Comfort</b>	<b>6AG1124-0GC01-4AX0</b>
<b>SIPLUS HMI TP900 Comfort</b>	<b>6AG1124-0JC01-4AX0</b>
<b>SIPLUS HMI TP1200 Comfort</b>	<b>6AG1124-0MC01-4AX0</b>
<b>SIPLUS HMI TP1500 Comfort</b>	<b>6AG1124-0QC02-4AX1</b>
<b>SIPLUS HMI TP1900 Comfort</b>	<b>6AG1124-0UC02-4AX1</b>
<b>SIPLUS HMI TP2200 Comfort</b>	<b>6AG1124-0XC02-4AX1</b>
<i>SIPLUS HMI Comfort Panels, Keys</i>	
<b>SIPLUS HMI KP400 Comfort</b>	<b>6AG1124-1DC01-4AX0</b>
<b>SIPLUS HMI KP700 Comfort</b>	<b>6AG1124-1GC01-4AX0</b>
<b>SIPLUS HMI KP900 Comfort</b>	<b>6AG1124-1JC01-4AX0</b>
<b>SIPLUS HMI KP1200 Comfort</b>	<b>6AG1124-1MC01-4AX0</b>
<b>SIPLUS HMI KP1500 Comfort</b>	<b>6AG1124-1QC02-4AX1</b>
<i>Accessories</i>	See HMI accessories

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### SIPLUS Comfort Panels Standard

#### Technical specifications

Article number	<b>6AG1124-2DC01-4AX0</b> SIPLUS HMI KTP400 COMFORT	<b>6AG1124-0GC01-4AX0</b> SIPLUS HMI TP700 COMFORT	<b>6AG1124-0JC01-4AX0</b> SIPLUS HMI TP900 COMFORT	<b>6AG1124-0MC01-4AX0</b> SIPLUS HMI TP1200 COMFORT
<b>Ambient conditions</b>				
Suited for indoor use	Yes	Yes	Yes	Yes
Suited for outdoor use	No	No	No	No
<b>Ambient temperature during operation</b>				
• Operation (vertical installation)				
- For vertical installation, min.	0 °C; = Tmin			
- For vertical installation, max.	50 °C; = Tmax			
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>				
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>				
<b>Coolants and lubricants</b>				
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>				
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request			
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *			
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *			
<b>Use on ships/at sea</b>				
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request			
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *			
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *			
<b>Usage in industrial process technology</b>				
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)			
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)			
<b>Remark</b>				
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>				
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability			
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection			
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A			

**Technical specifications**

Article number	<b>6AG1124-0QC02-4AX1</b> SIPLUS HMI TP1500 Comfort	<b>6AG1124-0UC02-4AX1</b> SIPLUS HMI TP1900 Comfort	<b>6AG1124-0XC02-4AX1</b> SIPLUS HMI TP2200 Comfort
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C; = Tmin	0 °C; = Tmin
- For vertical installation, max.	50 °C; (55 °C, see entry ID: 64847814)	45 °C; = Tmax	45 °C; = Tmax
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	5 000 m	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 080 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>			
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)	100 %; RH incl. condensation/frost (no commissioning under condensation conditions)
<b>Resistance</b>			
<b>Coolants and lubricants</b>			
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>			
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request		
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *	Yes; Class 3S4 incl. sand, dust; *
<b>Use on ships/at sea</b>			
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request		
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *		
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>			
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)		
<b>Remark</b>			
- Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>			
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

More information is available on the Internet at:

<http://www.siemens.com/comfort-panels>

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Outdoor

#### Overview



#### SIMATIC HMI Comfort Panels Outdoor

Special HMI Panels have been developed which are designed to withstand outdoor environments.

It's not only extreme temperatures which call for robust hardware. Direct sunlight, too, must not be allowed to impair display readability and the panel front must be protected from UV radiation.

The specially-bonded Outdoor fronts and the rugged hardware of the Outdoor Panels make the SIMATIC HMI Comfort Panels Outdoor a reliable partner in this environment.

- For outdoor operation without additional measures
- 7" and 15" daylight-readable display, widescreen
- Automatic, central or manual dimming of the backlight, with integrated sensor
- Panel front 100% UV protected
- Front resistant to salt mist
- Front IP66 and Nema4 x (indoor/outdoor)
- Numerous explosion protection and shipbuilding certifications
- Extended operating temperature range: from -30 °C to +60 °C at 3 000 m installation altitude
- TIA Portal central engineering tool (WinCC V13 SP1&HSP or higher)
- Comfort Panel functionality and performance

#### Notice:

The 7" Comfort Panel Outdoor corresponds to a 7" Comfort Panel Standard, the 15" Comfort Panel Outdoor corresponds to a 12" Comfort Panel Standard in respect of performance, functionality and quantity structure.

<http://www.siemens.com/comfort-panels-outdoor>

#### Ordering data

#### Article No.

**SIMATIC HMI Comfort Panels Outdoor**

**SIMATIC TP700 Comfort Panel Outdoor**

Touch operation, 7" widescreen TFT display, 16 million colors, PROFINET interface, MPI/PROFIBUS DP interface, 12 MB configuration memory, Windows CE 6.0, configurable as from WinCC Comfort V13, SP1, HSP

**6AV2124-0GC13-0AX0**

**SIMATIC TP1500 Comfort Panel Outdoor**

Touch operation, 15" widescreen TFT display, 16 million colors, PROFINET interface, MPI/PROFIBUS DP interface, 12 MB configuration memory, Windows CE 6.0, configurable as from WinCC Comfort V13, SP1, HSP

**6AV2124-0QC13-0AX0**

**Starter kit for SIMATIC HMI TP700 Comfort Panel Outdoor**

Contents:  
 • 1x touch panel  
 • 1x SD system outdoor card  
 • 1x touch pen system  
 • 1x SIMATIC WinCC Comfort

**6AV2124-0GC10-0SA0**

**Starter kit for SIMATIC HMI TP1500 Comfort Panel Outdoor**

Contents:  
 • 1x touch panel  
 • 1x SD system outdoor card  
 • 1x touch pen system  
 • 1x SIMATIC WinCC Comfort

**6AV2124-0QC10-0SA0**

**Accessories**

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

**Technical specifications**

Article number	<b>6AV2124-0GC13-0AX0</b> SIMATIC HMI TP700 Comfort Outdoor	<b>6AV2124-0QC13-0AX0</b> SIMATIC HMI TP1500 Comfort Outdoor
<b>General information</b>		
Product type designation	TP700 Comfort Outdoor	TP1500 Comfort Outdoor
<b>Display</b>		
Design of display	TFT, bonded, daylight-readable	TFT, bonded, daylight-readable
Screen diagonal	7 in	15.4 in
Number of colors	16 777 216	16 777 216
<b>Resolution (pixels)</b>		
• Horizontal image resolution	800 pixel	1 280 pixel
• Vertical image resolution	480 pixel	800 pixel
<b>Backlighting</b>		
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h
<b>Control elements</b>		
<b>Keyboard fonts</b>		
• Function keys		
- Number of function keys	0	0
<b>Touch operation</b>		
• Design as touch screen	Yes; analog, resistive	Yes; analog, resistive
<b>Installation type/mounting</b>		
Mounting in portrait format possible	Yes	Yes
<b>Supply voltage</b>		
Rated value (DC)	24 V	24 V
<b>Memory</b>		
Memory available for user data	12 Mbyte	12 Mbyte
<b>Type of output</b>		
Acoustics		
• Speaker	Yes	Yes
<b>Time of day</b>		
<b>Clock</b>		
• Hardware clock (real-time)	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes
<b>Interfaces</b>		
Number of industrial Ethernet interfaces	2	2
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0
• USB Mini B	1; 5-pole	1; 5-pole
Number of SD card slots	2	2
<b>Industrial Ethernet</b>		
• Number of ports of the integrated switch	2	2
<b>Protocols</b>		
PROFINET	Yes	Yes
IRT	Yes; WinCC V13 SP1 HSP or higher	Yes; WinCC V13 SP1 HSP or higher
PROFIBUS	Yes	Yes
MPI	Yes	Yes
<b>Redundancy mode</b>		
<b>Media redundancy</b>		
- MRP	Yes; WinCC V13 SP1 HSP or higher	Yes; WinCC V13 SP1 HSP or higher

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Outdoor

#### Technical specifications

Article number	<b>6AV2124-0GC13-0AX0</b> SIMATIC HMI TP700 Comfort Outdoor	<b>6AV2124-0QC13-0AX0</b> SIMATIC HMI TP1500 Comfort Outdoor
<b>Degree and class of protection</b>		
IP (at the front)	IP66	IP66
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
cULus	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• ATEX Zone 22	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• IECEx Zone 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• IECEx Zone 22	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• cULus Class I Zone 2, Division 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• FM Class I Division 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
<b>Marine approval</b>		
• Germanischer Lloyd (GL)	Yes	Yes
• American Bureau of Shipping (ABS)	Yes	Yes
• Bureau Veritas (BV)	Yes; Available soon	Yes; Available soon
• Det Norske Veritas (DNV)	Yes	Yes
• Korean Register of Shipping (KRS)	No; Available soon	No; Available soon
• Lloyds Register of Shipping (LRS)	Yes	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes; Available soon	Yes; Available soon
• Polski Rejestr Statków (PRS)	No	No
• Chinese Classification Society (CCS)	Yes; Available soon	Yes; Available soon
• Compass working clearance	5 m	5 m
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	Yes; Powder-coated, UV resistant	Yes; Powder-coated, UV resistant
<b>Ambient temperature during operation</b>		
• Operation (vertical installation)		
- For vertical installation, min.	-30 °C	-30 °C
- For vertical installation, max.	60 °C; (55 °C, see entry ID: 64847814)	60 °C; (55 °C, see entry ID: 64847814)
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	3 000 m; Depending on the operating temperature	3 000 m; Depending on the operating temperature
<b>Relative humidity</b>		
• Operation, max.	90 %; no condensation	90 %; no condensation
<b>Configuration</b>		
<b>Configuration software</b>		
• WinCC Comfort (TIA Portal)	Yes; WinCC V13 SP1 Update 7 + HSP or higher	Yes; WinCC V13 SP1 Update 7 + HSP or higher
<b>Languages</b>		
<b>Online languages</b>		
• Number of online/runtime languages	32	32

**Technical specifications**

Article number	<b>6AV2124-0GC13-0AX0</b> SIMATIC HMI TP700 Comfort Outdoor	<b>6AV2124-0QC13-0AX0</b> SIMATIC HMI TP1500 Comfort Outdoor
<b>Functionality under WinCC (TIA Portal)</b>		
Applications/options		
• Web browser	Yes	Yes
• Pocket Word	Yes	Yes
• Pocket Excel	Yes	Yes
• PDF Viewer	Yes	Yes
• Media Player	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes
Task planner		
• time-controlled	Yes	Yes
• task-controlled	Yes	Yes
<b>Message system</b>		
• Bit messages		
- Number of bit messages	4 000	4 000
• Analog messages		
- Number of analog messages	200	200
• Message buffer		
- Number of entries	1 024	1 024
- Circulating buffer	Yes	Yes
- retentive	Yes	Yes
<b>Recipe management</b>		
• Number of recipes	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes
<b>Variables</b>		
• Number of variables per device	2 048	2 048
• Number of variables per screen	400	400
<b>Images</b>		
• Number of configurable images	500	500
<b>Archiving</b>		
• Number of archives per device	50	50
<b>Security</b>		
• Number of user groups	50	50
• Number of users	50	50
• SIMATIC Logon	Yes	Yes
<b>Logging through printer</b>		
• Alarms	Yes	Yes
• Report (shift log)	Yes	Yes
• Hardcopy	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>		
• MPI/PROFIBUS DP	Yes	Yes
• Ethernet	Yes	Yes

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Outdoor

#### Technical specifications

Article number	<b>6AV2124-0GC13-0AX0</b>	<b>6AV2124-0QC13-0AX0</b>
	SIMATIC HMI TP700 Comfort Outdoor	SIMATIC HMI TP1500 Comfort Outdoor
<b>Process coupling</b>		
• S7-1200	Yes	Yes
• S7-1500	Yes	Yes
• S7-200	Yes	Yes
• S7-300/400	Yes	Yes
• LOGO!	Yes	Yes
• WinAC	Yes	Yes
• SIMOTION	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes
• Mitsubishi (FX)	Yes	Yes
• OMRON (FINS TCP)	No	No
• OMRON (LINK/Multilink)	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes
• Modicon (Modbus)	Yes	Yes
• OPC UA Client	Yes	Yes
• OPC UA Server	Yes	Yes
<b>Peripherals/Options</b>		
Printer	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes	Yes
SIMATIC HMI SD memory card: Secure Digital memory card	Yes	Yes
USB memory	Yes; e.g. USB RFID reader, see FAQ entry ID: 99808171	Yes; e.g. USB RFID reader, see FAQ entry ID: 99808171
Network camera	Yes; See FAQ Entry ID: 62383298 and entry ID: 65647473	Yes; See FAQ Entry ID: 62383298 and entry ID: 65647473
<b>Accessories</b>		
Expansion module	Optional e.g. USB RFID reader, see FAQ entry ID: 99808171	Optional e.g. USB RFID reader, see FAQ entry ID: 99808171
Further accessories are available	Yes; Mounting clips and 2-pin power supply connector	Yes; Mounting clips and 2-pin power supply connector
<b>Mechanics/material</b>		
Enclosure material (front)		
• Plastic	No	No
• Aluminum	Yes; Powder-coated, UV resistant	Yes; Powder-coated, UV resistant
• Stainless steel	No	No
<b>Dimensions</b>		
Width of the housing front	214 mm	415 mm
Height of housing front	158 mm	310 mm
Mounting cutout, width	197 mm	396 mm
Mounting cutout, height	141 mm	291 mm
Overall depth	67 mm	77 mm
<b>Weights</b>		
Weight (without packaging)	1.5 kg	4 kg
<b>Other</b>		
Note:	Power, quantity structure and performance correspond to a standard 7" Comfort Panel	Power, quantity structure and performance correspond to a standard 12" Comfort Panel

**Technical specifications**

Article number	<b>6AV2124-0GC10-0SA0</b> Starter kit TP700 Comfort Outdoor	<b>6AV2124-0QC10-0SA0</b> Starter kit TP1500 Comfort Outdoor
<b>General information</b>		
Product type designation	TP700 Outdoor	TP1500 Outdoor
<b>Display</b>		
Design of display	TFT, bonded, daylight-readable	TFT, bonded, daylight-readable
Screen diagonal	7 in	15.4 in
Number of colors	16 777 216	16 777 216
<b>Resolution (pixels)</b>		
• Horizontal image resolution	800 pixel	1 280 pixel
• Vertical image resolution	480 pixel	800 pixel
<b>Backlighting</b>		
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h
<b>Control elements</b>		
<b>Keyboard fonts</b>		
• Function keys		
- Number of function keys	0	0
<b>Touch operation</b>		
• Design as touch screen	Yes; analog, resistive	Yes; analog, resistive
<b>Installation type/mounting</b>		
Mounting in portrait format possible	Yes	Yes
<b>Supply voltage</b>		
Rated value (DC)	24 V	24 V
<b>Memory</b>		
Memory available for user data	12 Mbyte	12 Mbyte
<b>Type of output</b>		
Acoustics		
• Speaker	Yes	Yes
<b>Time of day</b>		
<b>Clock</b>		
• Hardware clock (real-time)	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes
<b>Interfaces</b>		
Number of industrial Ethernet interfaces	2	2
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0
• USB Mini B	1; 5-pole	1; 5-pole
Number of SD card slots	2	2
<b>Industrial Ethernet</b>		
• Number of ports of the integrated switch	2	2
<b>Protocols</b>		
PROFINET	Yes	Yes
IRT	Yes; WinCC V13 SP1 HSP or higher	Yes; WinCC V13 SP1 HSP or higher
PROFIBUS	Yes	Yes
MPI	Yes	Yes
<b>Redundancy mode</b>		
<b>Media redundancy</b>		
- MRP	Yes; WinCC V13 SP1 HSP or higher	Yes; WinCC V13 SP1 HSP or higher

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Outdoor

#### Technical specifications

Article number	<b>6AV2124-0GC10-0SA0</b> Starter kit TP700 Comfort Outdoor	<b>6AV2124-0QC10-0SA0</b> Starter kit TP1500 Comfort Outdoor
<b>Degree and class of protection</b>		
IP (at the front)	IP66	IP66
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
cULus	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes
KC approval	Yes	Yes
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• ATEX Zone 22	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• IECEx Zone 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• IECEx Zone 22	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• cULus Class I Zone 2, Division 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
• FM Class I Division 2	Yes; For inscription on device rating plate	Yes; For inscription on device rating plate
<b>Marine approval</b>		
• Germanischer Lloyd (GL)	Yes	Yes
• American Bureau of Shipping (ABS)	Yes	Yes
• Bureau Veritas (BV)	Yes; Available soon	Yes; Available soon
• Det Norske Veritas (DNV)	Yes	Yes
• Korean Register of Shipping (KRS)	No; Available soon	No; Available soon
• Lloyds Register of Shipping (LRS)	Yes	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes; Available soon	Yes; Available soon
• Polski Rejestr Statków (PRS)	No	No
• Chinese Classification Society (CCS)	Yes; Available soon	Yes; Available soon
• Compass working clearance	5 m	5 m
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	Yes; Powder-coated, UV resistant	Yes; Powder-coated, UV resistant
<b>Ambient temperature during operation</b>		
• Operation (vertical installation)		
- For vertical installation, min.	-30 °C	-30 °C
- For vertical installation, max.	60 °C; (55 °C, see entry ID: 64847814)	60 °C; (55 °C, see entry ID: 64847814)
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	3 000 m; Depending on the operating temperature	3 000 m; Depending on the operating temperature
<b>Relative humidity</b>		
• Operation, max.	90 %; no condensation	90 %; no condensation
<b>Configuration</b>		
<b>Configuration software</b>		
• WinCC Comfort (TIA Portal)	Yes; WinCC V13 SP1 Update 7 + HSP or higher	Yes; WinCC V13 SP1 Update 7 + HSP or higher
<b>Languages</b>		
<b>Online languages</b>		
• Number of online/runtime languages	32	32

**Technical specifications**

Article number	<b>6AV2124-0GC10-0SA0</b> Starter kit TP700 Comfort Outdoor	<b>6AV2124-0QC10-0SA0</b> Starter kit TP1500 Comfort Outdoor
<b>Functionality under WinCC (TIA Portal)</b>		
Applications/options		
• Web browser	Yes	Yes
• Pocket Word	Yes	Yes
• Pocket Excel	Yes	Yes
• PDF Viewer	Yes	Yes
• Media Player	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes
Task planner		
• time-controlled	Yes	Yes
• task-controlled	Yes	Yes
<b>Message system</b>		
• Bit messages		
- Number of bit messages	4 000	4 000
• Analog messages		
- Number of analog messages	200	200
• Message buffer		
- Number of entries	1 024	1 024
- Circulating buffer	Yes	Yes
- retentive	Yes	Yes
<b>Recipe management</b>		
• Number of recipes	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes
<b>Variables</b>		
• Number of variables per device	2 048	2 048
• Number of variables per screen	400	400
<b>Images</b>		
• Number of configurable images	500	500
<b>Archiving</b>		
• Number of archives per device	50	50
<b>Security</b>		
• Number of user groups	50	50
• Number of users	50	50
• SIMATIC Logon	Yes	Yes
<b>Logging through printer</b>		
• Alarms	Yes	Yes
• Report (shift log)	Yes	Yes
• Hardcopy	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>		
• MPI/PROFIBUS DP	Yes	Yes
• Ethernet	Yes	Yes

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels Outdoor

#### Technical specifications

Article number	<b>6AV2124-0GC10-0SA0</b>	<b>6AV2124-0QC10-0SA0</b>
	Starter kit TP700 Comfort Outdoor	Starter kit TP1500 Comfort Outdoor
<b>Process coupling</b>		
• S7-1200	Yes	Yes
• S7-1500	Yes	Yes
• S7-200	Yes	Yes
• S7-300/400	Yes	Yes
• LOGO!	Yes	Yes
• WinAC	Yes	Yes
• SIMOTION	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes
• Mitsubishi (FX)	Yes	Yes
• OMRON (FINS TCP)	No	No
• OMRON (LINK/Multilink)	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes
• Modicon (Modbus)	Yes	Yes
• OPC UA Client	Yes	Yes
• OPC UA Server	Yes	Yes
<b>Peripherals/Options</b>		
Printer	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes	Yes
SIMATIC HMI SD memory card: Secure Digital memory card	Yes	Yes
USB memory	Yes; e.g. USB RFID reader, see FAQ entry ID: 99808171	Yes; e.g. USB RFID reader, see FAQ entry ID: 99808171
Network camera	Yes; See FAQ Entry ID: 62383298 and entry ID: 65647473	Yes; See FAQ Entry ID: 62383298 and entry ID: 65647473
<b>Accessories</b>		
Expansion module	Optional e.g. USB RFID reader, see FAQ entry ID: 99808171	Optional e.g. USB RFID reader, see FAQ entry ID: 99808171
Further accessories are available	Yes; incl. 1x outdoor SD system card, 1x touch pen system for resistive and capacitive touch displays, and current engineering system WinCC Comfort	Yes; incl. 1x outdoor SD system card, 1x touch pen system for resistive and capacitive touch displays, and current engineering system WinCC Comfort
<b>Mechanics/material</b>		
Enclosure material (front)		
• Plastic	No	No
• Aluminum	Yes; Powder-coated, UV resistant	Yes; Powder-coated, UV resistant
• Stainless steel	No	No
<b>Dimensions</b>		
Width of the housing front	214 mm	415 mm
Height of housing front	158 mm	310 mm
Mounting cutout, width	197 mm	396 mm
Mounting cutout, height	141 mm	291 mm
Overall depth	67 mm	77 mm
<b>Weights</b>		
Weight (without packaging)	1.8 kg	4.3 kg
<b>Other</b>		
Note:	Power, quantity structure and performance correspond to a standard 7" Comfort Panel	Power, quantity structure and performance correspond to a standard 7" Comfort Panel

More information is available on the Internet at:

<http://www.siemens.com/comfort-panels-outdoor>

#### Note:

The TP700 Comfort Panel Outdoor is comparable with the TP700 Comfort Panel Standard.

The TP1500 Comfort Panel Outdoor is comparable with the TP1200 Comfort Panel Standard with a 15" display.

A TP1500 Comfort Standard unit with the maximum possible configuration cannot be installed on a TP1500 Comfort Panel Outdoor.

**Overview****SIPLUS HMI Comfort Panels Outdoor**

Special HMI Panels have been developed which are designed to withstand outdoor environments.

It's not only extreme temperatures which call for robust hardware. Direct sunlight, too, must not be allowed to impair display readability and the panel front must be protected from UV radiation. The specially-bonded Outdoor fronts and the rugged hardware of the Outdoor Panels make the SIMATIC HMI Comfort Panels Outdoor a reliable partner in this environment.

- For outdoor operation without additional measures
- 7" and 15" daylight-readable display, widescreen
- Automatic, central or manual dimming of the backlight, with integrated sensor
- Panel front 100% UV protected
- Front resistant to salt mist
- Front IP66 and Nema4 x (indoor/outdoor)
- Many explosion protection and shipbuilding certifications
- Extended operating temperature range: from -30 °C to +60 °C at 3 000 m installation altitude
- TIA Portal central engineering tool (WinCC V13 SP1&HSP or higher)
- Comfort Panel functionality and performance

Notice:

The SIPLUS HMI 7" Comfort Panel Outdoor corresponds to a SIPLUS HMI 7" Comfort Panel Standard, the SIPLUS HMI 15" Comfort Panel Outdoor corresponds to a SIPLUS HMI 12" Comfort Panel Standard in respect of performance, functionality and quantity structure.

<http://www.siemens.com/comfort-panels-outdoor>

Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

**Ordering data****Article No.***SIPLUS HMI Comfort Panel Outdoor***SIPLUS HMI TP700 Comfort Panel Outdoor**

6AG1124-0GC13-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -30 ... +60 °C

Touch operation, 7" widescreen TFT display, 16 million colors, PROFINET interface, MPI/PROFIBUS DP interface, 12 MB configuration memory, Windows CE 6.0, configurable as from WinCC Comfort V13, SP1, HSP

**SIPLUS HMI TP1500 Comfort Panel Outdoor**

6AG1124-0QC13-2AX0

For areas with extreme exposure to environmental substances (conformal coating); ambient temperature -30 ... +60 °C

Touch operation, 15" widescreen TFT display, 16 million colors, PROFINET interface, MPI/PROFIBUS DP interface, 12 MB configuration memory, Windows CE 6.0, configurable as from WinCC Comfort V13, SP1, HSP

*Accessories*

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### SIPLUS Comfort Panels Outdoor

#### Technical specifications

Article number	<b>6AG1124-0GC13-2AX0</b> SIPLUS HMI TP700 COMFORT OUTDOOR	<b>6AG1124-0QC13-2AX0</b> SIPLUS HMI TP1500 Comfort Outdoor
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	Yes; Powder-coated, UV resistant	Yes; Powder-coated, UV resistant
<b>Ambient temperature during operation</b>		
• Operation (vertical installation)		
- For vertical installation, min.	-30 °C; = Tmin	-30 °C; = Tmin
- For vertical installation, max.	60 °C; (55 °C, see entry ID: 64847814)	60 °C; (55 °C, see entry ID: 64847814)
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	5 000 m	5 000 m
• Ambient air temperature-barometric pressure-altitude	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m) // Tmin ... (Tmax - 10 K) at 795 hPa ... 658 hPa (+2 000 m ... +3 500 m) // Tmin ... (Tmax -20 K) at 658 hPa ... 540 hPa (+3 500 m ... +5 000 m)
<b>Relative humidity</b>		
• With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position	100 %; RH incl. condensation/frost (no commissioning when condensation present), vertical mounting position
<b>Resistance</b>		
<b>Coolants and lubricants</b>		
- Resistant to commercially available coolants and lubricants	Yes; Incl. diesel and oil droplets in the air	Yes; Incl. diesel and oil droplets in the air
<b>Use in stationary industrial systems</b>		
- to biologically active substances according to EN 60721-3-3	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
- to chemically active substances according to EN 60721-3-3	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-3	Yes; Class 3S4 incl. sand, dust, *	Yes; Class 3S4 incl. sand, dust, *
<b>Use on ships/at sea</b>		
- to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request	Yes; Class 6B2 mold and fungal spores (excluding fauna); Class 6B3 on request
- to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
- to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *	Yes; Class 6S3 incl. sand, dust; *
<b>Usage in industrial process technology</b>		
- Against chemically active substances acc. to EN 60654-4	Yes; Class 3 (excluding trichlorethylene)	Yes; Class 3 (excluding trichlorethylene)
- Environmental conditions for process, measuring and control systems acc. to ANSI/ISA-71.04	Yes; Level GX group A/B (excluding trichlorethylene; harmful gas concentrations up to the limits of EN 60721-3-3 class 3C4 permissible); level LC3 (salt spray) and level LB3 (oil)	
<b>Remark</b>	* The supplied plug covers must remain in place over the unused interfaces during operation!	* The supplied plug covers must remain in place over the unused interfaces during operation!
<b>Conformal coating</b>		
• Coatings for printed circuit board assemblies acc. to EN 61086	Yes; Class 2 for high reliability	Yes; Class 2 for high reliability
• Protection against fouling acc. to EN 60664-3	Yes; Type 1 protection	Yes; Type 1 protection
• Military testing according to MIL-I-46058C, Amendment 7	Yes; Discoloration of coating possible during service life	Yes; Discoloration of coating possible during service life
• Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A	Yes; Conformal coating, Class A	Yes; Conformal coating, Class A

Additional information is available on the Internet at:  
<http://www.siemens.com/comfort-panels-outdoor>

Note:

The SIPLUS HMI TP700 Comfort Panel Outdoor is comparable with the SIPLUS HMI TP700 Comfort Panel Standard.

The SIPLUS HMI TP1500 Comfort Panel Outdoor is comparable with the SIPLUS HMI TP1200 Comfort Panel Standard with a 15" display. A TP1500 Comfort Standard unit with the maximum possible configuration cannot be installed on a SIPLUS HMI TP1500 Comfort Panel Outdoor.

## Overview



**SIMATIC HMI Comfort PRO: The new Comfort Panel PRO with all-round IP65 protection – powerful, ready-to-use, and can be installed directly at the machine**

SIMATIC HMI Comfort Panels PRO with 12", 15", 19" and 22" widescreen format expand the Comfort Panel portfolio to include devices with glass fronts.

The rugged aluminum housing enables it to be used directly at the machine and guarantees durability, even in harsh and extreme operating environments.

Highlights:

- All-round IP65 protection
- Comfort Panel functionality and performance
- Rugged, industrial 12", 15", 19" and 22" widescreen displays
- Slim, modern design
- Can be adapted to support arm system of various manufacturers
- Integration of operator controls with Extension Units
- High degree of investment security
- Fast integration capability

12", 15", 19" and 22" SIMATIC HMI Comfort Panels PRO are available in three different versions, depending on the application:

- For support arm (extendable, round tube): mounting by means of standard 48 mm round tube or Siemens round tube adapter
- For support arm (not extendable, flange on top): mounting by means of basic adapter and flange on top, included in scope of delivery
- For pedestal (extendable, flange below): mounting by means of basic adapter and flange below, included in scope of delivery

For more information, please go to:

<http://siemens.com/simatic-hmi-pro>

**System components for fully-enclosed IP65-protected devices**

System components for PRO devices are only suitable for SIMATIC HMI/IPC PRO devices.

In combination with the SIMATIC HMI PRO basic devices, these components enable easy adaptation to individual customer requirements for operator control and monitoring at the machine level, as well as offering a versatile and attractive solution for visualization and automation without a control cabinet.

The following system components are available:

- Fixing elements
  - Adapter sets
  - Basic adapter
  - Round tube adapter
- Extension Units 12" - 22" with operator controls
- Extension components
  - Stainless steel keyboard
  - Tool and keyboard tray

For more detailed information about system components refer to "PC-based Automation" -> "Devices for special requirements" -> "System components".

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels PRO

Ordering data	Article No.	Article No.
<b>Comfort Panels PRO</b>		
<b>TP1200 Comfort PRO</b>		
12.1" TFT display, 1 280 x 800 pixels, 16 M colors; touch screen; 1 x MPI/PROFIBUS DP, 1 x PROFINET/Industrial Ethernet interface with MRP and RT/IRT support (2 ports); 1 x Ethernet (Gigabit); 2 x SD card slots; 2 x USB		
• For support arm (not extendable, flange on top)	<b>6AV2124-0MC24-0AX0</b>	<b>6AV2124-0UC24-0AX0</b>
• For support arm (extendable, round tube)	<b>6AV2124-0MC24-0BX0</b>	<b>6AV2124-0UC24-0BX0</b>
• For pedestal (extendable, flange below)	<b>6AV2124-0MC24-1AX0</b>	<b>6AV2124-0UC24-1AX0</b>
<b>TP1500 Comfort PRO</b>		
15.6" TFT display, 1 366 x 768 pixels, 16 M colors; touch screen; 1 x MPI/PROFIBUS DP, 1 x PROFINET/Industrial Ethernet Interface with MRP and RT/IRT support (2 ports); 1 x Ethernet (Gigabit); 2 x SD card slots; 2 x USB		
• For support arm (not extendable, flange on top)	<b>6AV2124-0QC24-0AX0</b>	<b>6AV2124-0XC24-0AX0</b>
• For support arm (extendable, round tube)	<b>6AV2124-0QC24-0BX0</b>	<b>6AV2124-0XC24-0BX0</b>
• For pedestal (extendable, flange below)	<b>6AV2124-0QC24-1AX0</b>	<b>6AV2124-0XC24-1AX0</b>
<b>TP1900 Comfort PRO</b>		
18.5" TFT display, 1 366 x 768 pixels, 16 M colors; touch screen; 1 x MPI/PROFIBUS DP, 1 x PROFINET/Industrial Ethernet Interface with MRP and RT/IRT support (2 ports); 1 x Ethernet (Gigabit); 2 x SD card slots; 2 x USB		
• For support arm (not extendable, flange on top)		
• For support arm (extendable, round tube)		
• For pedestal (extendable, flange below)		
<b>TP2200 Comfort PRO</b>		
21.5" TFT display, 1 920 x 1 080 pixels, 16 M colors; touch screen; 1 x MPI/PROFIBUS DP, 1 x PROFINET/Industrial Ethernet Interface with MRP and RT/IRT support (2 ports); 1 x Ethernet (Gigabit); 2 x SD card slots; 2 x USB		
• For support arm (not extendable, flange on top)		
• For support arm (extendable, round tube)		
• For pedestal (extendable, flange below)		

### Technical specifications

Article number	<b>6AV2124-0MC24-0AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-1AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-0BX0</b> SIMATIC HMI TP1200 Comfort Pro
<b>General information</b>			
Product type designation	TP1200 PRO	TP1200 PRO	TP1200 PRO
<b>Display</b>			
Design of display	TFT	TFT	TFT
Screen diagonal	12.1 in	12.1 in	12.1 in
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	1 280 pixel	1 280 pixel	1 280 pixel
• Vertical image resolution	800 pixel	800 pixel	800 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	80 000 h	80 000 h	80 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	0	0	0
<b>Touch operation</b>			
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
<b>Installation type/mounting</b>			
Mounting	Support arm	Pedestal	Support arm
Mounting in portrait format possible	No	No	No

**Technical specifications**

Article number	<b>6AV2124-0MC24-0AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-1AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-0BX0</b> SIMATIC HMI TP1200 Comfort Pro
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	12 Mbyte	12 Mbyte	12 Mbyte
<b>Type of output</b>			
Acoustics			
• Speaker	Yes	Yes	Yes
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0	2; USB 2.0
Number of SD card slots	2	2	2
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2	2	2
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
IRT	Yes	Yes	Yes
PROFIBUS	Yes	Yes	Yes
MPI	Yes	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes	Yes	Yes
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No; Available soon	No; Available soon	No; Available soon
EAC (formerly Gost-R)	No; Available soon	No; Available soon	No; Available soon
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C	0 °C
- For vertical installation, max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation

# Operator panels

Advanced HMI Panel-based  
Comfort Panels

## Comfort Panels PRO

### Technical specifications

Article number	<b>6AV2124-0MC24-0AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-1AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-0BX0</b> SIMATIC HMI TP1200 Comfort Pro
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options			
• Web browser	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner			
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Message system</b>			
• Bit messages			
- Number of bit messages	4 000	4 000	4 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer			
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes
<b>Recipe management</b>			
• Number of recipes	300	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes	Yes
<b>Variables</b>			
• Number of variables per device	2 048	2 048	2 048
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	500	500	500
<b>Archiving</b>			
• Number of archives per device	50	50	50
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Logging through printer</b>			
• Alarms	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML

**Technical specifications**

Article number	<b>6AV2124-0MC24-0AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-1AX0</b> SIMATIC HMI TP1200 Comfort Pro	<b>6AV2124-0MC24-0BX0</b> SIMATIC HMI TP1200 Comfort Pro
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes
<b>Peripherals/Options</b>			
Printer	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes
Network camera	Yes	Yes	Yes
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	No	No	No
• Aluminum	Yes	Yes	Yes
• Stainless steel	No	No	No
<b>Dimensions</b>			
Width of the housing front	313 mm	313 mm	313 mm
Height of housing front	226 mm; Without basic adapter	226 mm; Without basic adapter	226 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	4.9 kg	4.9 kg	4.5 kg

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels PRO

#### Technical specifications

Article number	<b>6AV2124-0QC24-0AX0</b> SIMATIC HMI TP1500 Comfort PRO	<b>6AV2124-0QC24-0BX0</b> SIMATIC HMI TP1500 Comfort PRO	<b>6AV2124-0QC24-1AX0</b> SIMATIC HMI TP1500 Comfort PRO
<b>General information</b>			
Product type designation	TP1500 Comfort PRO	TP1500 Comfort PRO	TP1500 Comfort PRO
<b>Display</b>			
Design of display	TFT	TFT	TFT
Screen diagonal	15.6 in	15.6 in	15.6 in
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	1 366 pixel	1 366 pixel	1 366 pixel
• Vertical image resolution	768 pixel	768 pixel	768 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h	50 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	0	0	0
<b>Touch operation</b>			
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
<b>Installation type/mounting</b>			
Mounting	Support arm	Support arm	Pedestal
Mounting in portrait format possible	No	No	No
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	24 Mbyte	24 Mbyte	24 Mbyte
<b>Type of output</b>			
Acoustics			
• Speaker	Yes	Yes	Yes
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0	2; USB 2.0
Number of SD card slots	2	2	2
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2	2	2
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
IRT	Yes	Yes	Yes
PROFIBUS	Yes	Yes	Yes
MPI	Yes	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes	Yes	Yes

**Technical specifications**

Article number	<b>6AV2124-0QC24-0AX0</b> SIMATIC HMI TP1500 Comfort PRO	<b>6AV2124-0QC24-0BX0</b> SIMATIC HMI TP1500 Comfort PRO	<b>6AV2124-0QC24-1AX0</b> SIMATIC HMI TP1500 Comfort PRO
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No; Available soon	No; Available soon	No; Available soon
EAC (formerly Gost-R)	No; Available soon	No; Available soon	No; Available soon
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C	0 °C
- For vertical installation, max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options			
• Web browser	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner			
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Message system</b>			
• Bit messages			
- Number of bit messages	6 000	6 000	6 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer			
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes
<b>Recipe management</b>			
• Number of recipes	500	500	500
• Size of internal recipe memory	4 Mbyte	4 Mbyte	4 Mbyte
• Recipe memory expandable	Yes	Yes	Yes

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels PRO

#### Technical specifications

Article number	<b>6AV2124-0QC24-0AX0</b> SIMATIC HMI TP1500 Comfort PRO	<b>6AV2124-0QC24-0BX0</b> SIMATIC HMI TP1500 Comfort PRO	<b>6AV2124-0QC24-1AX0</b> SIMATIC HMI TP1500 Comfort PRO
<b>Variables</b>			
• Number of variables per device	4 096	4 096	4 096
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	750	750	750
<b>Archiving</b>			
• Number of archives per device	50	50	50
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Logging through printer</b>			
• Alarms	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes
<b>Peripherals/Options</b>			
Printer	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes
Network camera	Yes	Yes	Yes
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	No	No	No
• Aluminum	Yes	Yes	Yes
• Stainless steel	No	No	No
<b>Dimensions</b>			
Width of the housing front	396 mm	396 mm	396 mm
Height of housing front	256 mm; Without basic adapter	256 mm; Without basic adapter	256 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	6.3 kg	6.3 kg	6.3 kg

**Technical specifications**

Article number	<b>6AV2124-0UC24-0AX0</b> SIMATIC HMI TP1900 Comfort PRO	<b>6AV2124-0UC24-0BX0</b> SIMATIC HMI TP1900 Comfort PRO	<b>6AV2124-0UC24-1AX0</b> SIMATIC HMI TP1900 Comfort PRO
<b>General information</b>			
Product type designation	TP1900 Comfort PRO	TP1900 Comfort PRO	TP1900 Comfort PRO
<b>Display</b>			
Design of display	TFT	TFT	TFT
Screen diagonal	18.5 in	18.5 in	18.5 in
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	1 366 pixel	1 366 pixel	1 366 pixel
• Vertical image resolution	768 pixel	768 pixel	768 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h	50 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	0	0	0
<b>Touch operation</b>			
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
<b>Installation type/mounting</b>			
Mounting	Support arm	Support arm	Pedestal
Mounting in portrait format possible	No	No	No
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	24 Mbyte	24 Mbyte	24 Mbyte
<b>Type of output</b>			
Acoustics			
• Speaker	Yes	Yes	Yes
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0	2; USB 2.0
Number of SD card slots	2	2	2
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2	2	2
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
IRT	Yes	Yes	Yes
PROFIBUS	Yes	Yes	Yes
MPI	Yes	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes	Yes	Yes

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels PRO

#### Technical specifications

Article number	<b>6AV2124-0UC24-0AX0</b> SIMATIC HMI TP1900 Comfort PRO	<b>6AV2124-0UC24-0BX0</b> SIMATIC HMI TP1900 Comfort PRO	<b>6AV2124-0UC24-1AX0</b> SIMATIC HMI TP1900 Comfort PRO
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No; Available soon	No; Available soon	No; Available soon
EAC (formerly Gost-R)	No; Available soon	No; Available soon	No; Available soon
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C	0 °C
- For vertical installation, max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options			
• Web browser	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner			
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Message system</b>			
• Bit messages			
- Number of bit messages	6 000	6 000	6 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer			
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes

**Technical specifications**

Article number	<b>6AV2124-0UC24-0AX0</b> SIMATIC HMI TP1900 Comfort PRO	<b>6AV2124-0UC24-0BX0</b> SIMATIC HMI TP1900 Comfort PRO	<b>6AV2124-0UC24-1AX0</b> SIMATIC HMI TP1900 Comfort PRO
<b>Recipe management</b>			
• Number of recipes	500	500	500
• Size of internal recipe memory	4 Mbyte	4 Mbyte	4 Mbyte
• Recipe memory expandable	Yes	Yes	Yes
<b>Variables</b>			
• Number of variables per device	4 096	4 096	4 096
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	750	750	750
<b>Archiving</b>			
• Number of archives per device	50	50	50
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Logging through printer</b>			
• Alarms	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes
<b>Peripherals/Options</b>			
Printer	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes
Network camera	Yes	Yes	Yes
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	No	No	No
• Aluminum	Yes	Yes	Yes
• Stainless steel	No	No	No
<b>Dimensions</b>			
Width of the housing front	462 mm	462 mm	462 mm
Height of housing front	296 mm; Without basic adapter	296 mm; Without basic adapter	296 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	7.4 kg	7.4 kg	7.4 kg

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels PRO

#### Technical specifications

Article number	<b>6AV2124-0XC24-0AX0</b> SIMATIC HMI TP2200 Comfort PRO	<b>6AV2124-0XC24-0BX0</b> SIMATIC HMI TP2200 Comfort PRO	<b>6AV2124-0XC24-1AX0</b> SIMATIC HMI TP2200 Comfort PRO
<b>General information</b>			
Product type designation	TP2200 Comfort PRO	TP2200 Comfort PRO	TP2200 Comfort PRO
<b>Display</b>			
Design of display	TFT	TFT	TFT
Screen diagonal	21.5 in	21.5 in	21.5 in
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	1 920 pixel	1 920 pixel	1 920 pixel
• Vertical image resolution	1 080 pixel	1 080 pixel	1 080 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	30 000 h	30 000 h	30 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	0	0	0
<b>Touch operation</b>			
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
<b>Installation type/mounting</b>			
Mounting	Support arm	Support arm	Pedestal
Mounting in portrait format possible	No	No	No
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	24 Mbyte	24 Mbyte	24 Mbyte
<b>Type of output</b>			
Acoustics			
• Speaker	Yes	Yes	Yes
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port	2; 2 ports (switch) + independent port
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0	2; USB 2.0
Number of SD card slots	2	2	2
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2	2	2
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
IRT	Yes	Yes	Yes
PROFIBUS	Yes	Yes	Yes
MPI	Yes	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes	Yes	Yes

**Technical specifications**

Article number	<b>6AV2124-0XC24-0AX0</b> SIMATIC HMI TP2200 Comfort PRO	<b>6AV2124-0XC24-0BX0</b> SIMATIC HMI TP2200 Comfort PRO	<b>6AV2124-0XC24-1AX0</b> SIMATIC HMI TP2200 Comfort PRO
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No; Available soon	No; Available soon	No; Available soon
EAC (formerly Gost-R)	No; Available soon	No; Available soon	No; Available soon
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C	0 °C
- For vertical installation, max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher	Yes; V14 SP1 HSP and higher
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options			
• Web browser	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner			
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Message system</b>			
• Bit messages			
- Number of bit messages	6 000	6 000	6 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer			
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes
<b>Recipe management</b>			
• Number of recipes	500	500	500
• Size of internal recipe memory	4 Mbyte	4 Mbyte	4 Mbyte
• Recipe memory expandable	Yes	Yes	Yes

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels PRO

#### Technical specifications

Article number	<b>6AV2124-0XC24-0AX0</b> SIMATIC HMI TP2200 Comfort PRO	<b>6AV2124-0XC24-0BX0</b> SIMATIC HMI TP2200 Comfort PRO	<b>6AV2124-0XC24-1AX0</b> SIMATIC HMI TP2200 Comfort PRO
<b>Variables</b>			
• Number of variables per device	4 096	4 096	4 096
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	750	750	750
<b>Archiving</b>			
• Number of archives per device	50	50	50
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Logging through printer</b>			
• Alarms	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes
<b>Peripherals/Options</b>			
Printer	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes
Network camera	Yes	Yes	Yes
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	No	No	No
• Aluminum	Yes	Yes	Yes
• Stainless steel	No	No	No
<b>Dimensions</b>			
Width of the housing front	527 mm	527 mm	527 mm
Height of housing front	330 mm; Without basic adapter	330 mm; Without basic adapter	330 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	8.5 kg	8.5 kg	8.5 kg

**Comfort Panels INOX and INOX PCT**

**Overview**



SIMATIC HMI TP1200 Comfort INOX PCT

**SIMATIC HMI TP Comfort Panels INOX and INOX PCT (PCT = Projected Capacitive Touchscreen)**

Panels with touch screens (analog-resistive or projective-capacitive) and stainless steel fronts are designed for use in the food, beverages and tobacco industry, the pharmaceutical industry, fine chemicals and in other hygiene areas for machine-level operator control and monitoring.

For this reason, the devices with stainless steel front have been developed in compliance with EN 1672-2 "Food processing machinery – Safety and Hygiene Requirements".

<http://www.siemens.com/comfort-panels-inox>

**Ordering data**

**Article No.**

**SIMATIC HMI TP Comfort Panel INOX**

*With analog-resistive touch and front film*

**SIMATIC HMI TP700 Comfort Panel INOX**

With accessory pack consisting of: clamping frame, device seal, mounting clamps, connection terminal, as well as installation instructions.

6AV2144-8GC10-0AA0

**SIMATIC HMI TP900 Comfort Panel INOX**

With accessory pack consisting of: clamping frame, device seal, mounting clamps, connection terminal, as well as installation instructions.

6AV2144-8JC10-0AA0

**SIMATIC HMI TP1200 Comfort Panel INOX**

With accessory pack consisting of: clamping frame, device seal, mounting clamps, connection terminal, as well as installation instructions.

6AV2144-8MC10-0AA0

**SIMATIC HMI TP Comfort Panel INOX PCT**

*With projective-capacitive touch and front glass*

**SIMATIC HMI TP700 Comfort Panel INOX PCT**

Stainless steel front, glass pane, capacitive touch, IP69K degree of protection front, 7" widescreen TFT display, PROFINET interface, MPI/PROFIBUS DP interface, 12 MB configuration memory, Windows CE 6.0, Windows CE 6.0, WinCC Comfort V15.1

6AV2144-8GC20-0AA0

**SIMATIC HMI TP900 Comfort Panel INOX PCT**

With accessory pack consisting of: clamping frame, device seal, mounting clamps, connection terminal, as well as installation instructions.

6AV2144-8JC20-0AA0

**SIMATIC HMI TP1200 Comfort Panel INOX PCT**

With accessory pack consisting of: clamping frame, device seal, mounting clamps, connection terminal, as well as installation instructions.

6AV2144-8MC20-0AA0

**Comfort Panels Large Front**

**SIMATIC HMI TP1200 Comfort INOX LF**

12" widescreen TFT display with long stainless steel front, decorative membrane, IP66K degree of protection front, PROFINET interface, MPI/PROFIBUS DP interface, 12 MB configuration memory, Windows CE 6.0 (Microsoft support including safety updates set), configurable as from WinCC Comfort V11 or higher

6AV2144-8MC10-0AC0

**Accessories**

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

The device seals can be replaced using the corresponding service packages from the accessories.

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels INOX and INOX PCT

#### Technical specifications

Article number	<b>6AV2144-8GC10-0AA0</b> SIMATIC HMI TP700 COMFORT INOX	<b>6AV2144-8JC10-0AA0</b> SIMATIC HMI TP900 COMFORT INOX	<b>6AV2144-8MC10-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX
<b>General information</b>			
Product type designation	TP700 Comfort INOX	TP900 INOX	TP1200 Comfort INOX
<b>Display</b>			
Design of display	TFT	TFT	TFT
Screen diagonal	7 in	9 in	12.1 in
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	800 pixel	800 pixel	1 280 pixel
• Vertical image resolution	480 pixel	480 pixel	800 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	80 000 h	80 000 h	80 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	0	0	0
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	12 Mbyte	12 Mbyte	12 Mbyte
<b>Type of output</b>			
Acoustics			
• Speaker	Yes	Yes	Yes
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0	2; USB 2.0
• USB Mini B	1; 5-pole	1; 5-pole	1; 5-pole
Number of SD card slots	2	2	2
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2	2	2
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
IRT	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes; As of WinCC V12
PROFIBUS	Yes	Yes	Yes
MPI	Yes	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes; As of WinCC V12	Yes; As of WinCC V12	Yes; As of WinCC V12

**Technical specifications**

Article number	<b>6AV2144-8GC10-0AA0</b> SIMATIC HMI TP700 COMFORT INOX	<b>6AV2144-8JC10-0AA0</b> SIMATIC HMI TP900 COMFORT INOX	<b>6AV2144-8MC10-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes; indoor use only	Yes; indoor use only	Yes; indoor use only
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes		Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes		Yes
EAC (formerly Gost-R)	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes
• IECEx Zone 2	Yes	Yes	Yes
• IECEx Zone 22	Yes	Yes	Yes
• cULus Class I Zone 2, Division 2	Yes	Yes	Yes
• FM Class I Division 2	Yes	No	Yes
<b>Marine approval</b>			
• Germanischer Lloyd (GL)	No	No	No
• American Bureau of Shipping (ABS)	No	No	No
• Bureau Veritas (BV)	No	No	No
• Det Norske Veritas (DNV)	No	No	No
• Korean Register of Shipping (KRS)			No
• Lloyds Register of Shipping (LRS)	No	No	No
• Nippon Kaiji Kyokai (Class NK)	No	No	No
• Polski Rejestr Statków (PRS)	No	No	No
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)			
- For vertical installation, min.	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C	50 °C	50 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	80 %; no condensation
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)	Yes; from V11	Yes; from V11	Yes; from V11
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels INOX and INOX PCT

#### Technical specifications

Article number	<b>6AV2144-8GC10-0AA0</b> SIMATIC HMI TP700 COMFORT INOX	<b>6AV2144-8JC10-0AA0</b> SIMATIC HMI TP900 COMFORT INOX	<b>6AV2144-8MC10-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options			
• Web browser	Yes	Yes	Yes
• Pocket Word	Yes	Yes	Yes
• Pocket Excel	Yes	Yes	Yes
• PDF Viewer	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner			
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Message system</b>			
• Bit messages			
- Number of bit messages	4 000	4 000	4 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer			
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes
<b>Recipe management</b>			
• Number of recipes	300	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes	Yes
<b>Variables</b>			
• Number of variables per device	2 048	2 048	2 048
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	500	500	500
<b>Archiving</b>			
• Number of archives per device	50	50	50
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Logging through printer</b>			
• Alarms	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes
• Electronic print to file	Yes; PDF, HTML	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes

**Technical specifications**

Article number	<b>6AV2144-8GC10-0AA0</b> SIMATIC HMI TP700 COMFORT INOX	<b>6AV2144-8JC10-0AA0</b> SIMATIC HMI TP900 COMFORT INOX	<b>6AV2144-8MC10-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes
<b>Peripherals/Options</b>			
Printer	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes
Network camera	Yes	Yes	Yes
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	No	No	No
• Aluminum	No	No	No
• Stainless steel	Yes	Yes	Yes
<b>Dimensions</b>			
Width of the housing front	214 mm	274 mm	330 mm
Height of housing front	158 mm	190 mm	241 mm
Mounting cutout, width	197 mm	250 mm	310 mm
Mounting cutout, height	141 mm	166 mm	221 mm
Overall depth	65 mm	65 mm	67 mm
<b>Weights</b>			
Weight (without packaging)	1.9 kg	2.5 kg	3.6 kg

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels INOX and INOX PCT

#### Technical specifications

Article number	<b>6AV2144-8GC20-0AA0</b> SIMATIC HMI TP700 Comfort INOX PCT	<b>6AV2144-8JC20-0AA0</b> SIMATIC HMI TP900 COMFORT INOX PCT	<b>6AV2144-8MC20-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX PCT
<b>General information</b>			
Product type designation	TP700 Comfort INOX PCT	TP900 Comfort INOX PCT	TP1200 Comfort INOX PCT
<b>Display</b>			
Design of display	TFT	TFT	TFT
Screen diagonal	7 in	9 in	12.1 in
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	800 pixel	800 pixel	1 280 pixel
• Vertical image resolution	480 pixel	480 pixel	800 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	80 000 h	80 000 h	80 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	0	0	0
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
• Design as multi-touch screen	No	No	No
• Monitor keyboard	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Mounting in portrait format possible	No	Yes	Yes
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	12 Mbyte	12 Mbyte	12 Mbyte
<b>Type of output</b>			
Acoustics	Speaker	Speaker	Speaker
• Speaker	Yes	Yes	Yes
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
• retentive	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks	Yes; Back-up duration typically 6 weeks
• synchronizable	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	1; 2 ports (switch)	1; 2 ports (switch)	1; 2 ports (switch)
Number of RS 485 interfaces	1; RS 422 / 485 combined	1; RS 422 / 485 combined	1; RS 422 / 485 combined
Number of USB interfaces	2; USB 2.0	2; USB 2.0	2; USB 2.0
• USB Mini B	1; 5-pole	1; 5-pole	1; 5-pole
Number of SD card slots	2	2	2
<b>Industrial Ethernet</b>			
• Number of ports of the integrated switch	2	2	2
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
IRT	Yes; As of WinCC V15.1	Yes; As of WinCC V15	Yes; As of WinCC V15
PROFIBUS	Yes	Yes	Yes
MPI	Yes	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes; As of WinCC V15.1	Yes; As of WinCC V15	Yes; As of WinCC V15

**Technical specifications**

Article number	6AV2144-8GC20-0AA0 SIMATIC HMI TP700 Comfort INOX PCT	6AV2144-8JC20-0AA0 SIMATIC HMI TP900 COMFORT INOX PCT	6AV2144-8MC20-0AA0 SIMATIC HMI TP1200 COMFORT INOX PCT
<b>Degree and class of protection</b>			
IP (at the front)	IP66 / IPx6K and IP69 / IPx9K	IP66 / IPx6K and IP69 / IPx9K	IP66 / IPx6K and IP69 / IPx9K
NEMA (front)			NEMA 4, NEMA 12 (when installed)
• Enclosure Type 4x at the front		No	Yes
• Enclosure Type 12 at the front	No	No	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No	No	No
EAC (formerly Gost-R)	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes
• IECEx Zone 2	Yes	Yes	Yes
• IECEx Zone 22	Yes	Yes	Yes
• cULus Class I Zone 2, Division 2	Yes	Yes	Yes
• cULus Class II Division 2	No	No	No
• FM Class I Division 2	No	No	No
• FM Class II Division 2	No	No	No
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No	No	No
<b>Ambient temperature during operation</b>			
• Operation (vertical installation)	0 to +50 °C	0 to +50 °C	0 to +50 °C
- For vertical installation, min.	0 °C	0 °C	0 °C
- For vertical installation, max.	50 °C; (55 °C, see entry ID: 64847814)	50 °C; (55 °C, see entry ID: 64847814)	50 °C
<b>Altitude during operation relating to sea level</b>			
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Configuration</b>			
<b>Configuration software</b>			
• WinCC Comfort (TIA Portal)	Yes; From WinCC V15.1 HSP	Yes; As of WinCC V15	Yes; As of WinCC V15
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels INOX and INOX PCT

#### Technical specifications

Article number	<b>6AV2144-8GC20-0AA0</b> SIMATIC HMI TP700 Comfort INOX PCT	<b>6AV2144-8JC20-0AA0</b> SIMATIC HMI TP900 COMFORT INOX PCT	<b>6AV2144-8MC20-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX PCT
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options	Internet Explorer, PDF/Word/Excel Viewer, Sm@rtService, Sm@rtAccess, ProAgent	Internet Explorer, PDF/Word/Excel Viewer, Sm@rtService, Sm@rtAccess, ProAgent	Internet Explorer, PDF/Word/Excel Viewer, Sm@rtService, Sm@rtAccess, ProAgent
• Web browser	Yes	Yes	Yes
• Pocket Word	Yes; Viewer	Yes; Viewer	Yes; Viewer
• Pocket Excel	Yes; Viewer	Yes; Viewer	Yes; Viewer
• PDF Viewer	Yes	Yes	Yes
• Media Player	Yes	Yes	Yes
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner	Yes	Yes	Yes
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Message system</b>			
• Bit messages			
- Number of bit messages	4 000	4 000	4 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer	Ring buffer (n x 1024 entries), retentive, maintenance-free	Ring buffer (n x 1024 entries), retentive, maintenance-free	Ring buffer (n x 1024 entries), retentive, maintenance-free
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes
<b>Recipe management</b>			
• Number of recipes	300	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes	Yes
<b>Variables</b>			
• Number of variables per device	2 048	2 048	2 048
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	500	500	500
<b>Archiving</b>			
• Number of archives per device	50	50	50
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Logging through printer</b>			
• Alarms	Yes	Yes	Yes
• Report (shift log)	Yes	Yes	Yes
• Hardcopy	Yes	Yes	Yes
• Electronic print to file	No	Yes; PDF, HTML	Yes; PDF, HTML
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes	Yes	Yes
• Ethernet	Yes	Yes	Yes

**Technical specifications**

Article number	<b>6AV2144-8GC20-0AA0</b> SIMATIC HMI TP700 Comfort INOX PCT	<b>6AV2144-8JC20-0AA0</b> SIMATIC HMI TP900 COMFORT INOX PCT	<b>6AV2144-8MC20-0AA0</b> SIMATIC HMI TP1200 COMFORT INOX PCT
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	Yes	Yes	Yes
• SIMOTION	Yes	Yes	Yes
• Allen Bradley (EtherNet/IP)	Yes	Yes	Yes
• Allen Bradley (DF1)	Yes	Yes	Yes
• Mitsubishi (MC TCP/IP)	Yes	Yes	Yes
• Mitsubishi (FX)	Yes	Yes	Yes
• OMRON (FINS TCP)	No	No	No
• OMRON (LINK/Multilink)	Yes	Yes	Yes
• Modicon (Modbus TCP/IP)	Yes	Yes	Yes
• Modicon (Modbus)	Yes	Yes	Yes
• OPC UA Client	Yes	Yes	Yes
• OPC UA Server	Yes	Yes	Yes
<b>Peripherals/Options</b>			
Printer	Yes	Yes	Yes
SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB	Yes; Up to 128 MB	Yes; Up to 128 MB
SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB	Yes; Up to 2 GB	Yes; Up to 2 GB
USB memory	Yes	Yes	Yes
Network camera	Yes	Yes	Yes
<b>Accessories</b>			
Further accessories are available	Yes; Service Pack (seal, mounting clips, clamping frame, power supply connector)	Yes; Service Pack (seal, mounting clips, clamping frame, power supply connector)	Yes; Service Pack (seal, mounting clips, clamping frame, power supply connector)
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	No	No	No
• Aluminum	No	No	No
• Stainless steel	Yes	Yes	Yes
<b>Dimensions</b>			
Width of the housing front	214 mm	274 mm	330 mm
Height of housing front	158 mm	190 mm	241 mm
Mounting cutout, width	197 mm	251 mm	310 mm
Mounting cutout, height	141 mm	166 mm	221 mm
Overall depth	66 mm	66 mm	65 mm
<b>Weights</b>			
Weight (without packaging)	2 kg	2.9 kg	4.2 kg

## Operator panels

Advanced HMI Panel-based  
Comfort Panels

### Comfort Panels INOX and INOX PCT

#### Technical specifications

Article number	<b>6AV2144-8MC10-0AC0</b> SIMATIC HMI TP1200 COMFORT INOX LF	Article number	<b>6AV2144-8MC10-0AC0</b> SIMATIC HMI TP1200 COMFORT INOX LF
<b>General information</b>			
Product type designation	TP1200 Comfort INOX LF		
<b>Display</b>		<b>Degree and class of protection</b>	
Design of display	TFT	NEMA (front)	
Screen diagonal	12.1 in	• Enclosure Type 4x at the front	Yes; indoor use only
Number of colors	16 777 216	<b>Standards, approvals, certificates</b>	
<b>Resolution (pixels)</b>		CE mark	Yes
• Horizontal image resolution	1 280 pixel	cULus	Yes
• Vertical image resolution	800 pixel	FM approval	No
<b>Backlighting</b>		RCM (formerly C-TICK)	No
• MTBF backlighting (at 25 °C)	80 000 h	KC approval	No
<b>Control elements</b>		EAC (formerly Gost-R)	Yes
<b>Keyboard fonts</b>		<b>Use in hazardous areas</b>	
• Function keys		• ATEX Zone 2	Yes
- Number of function keys	0	• ATEX Zone 22	Yes
<b>Touch operation</b>		• IECEx Zone 2	Yes
• Design as touch screen	Yes	• IECEx Zone 22	Yes
<b>Installation type/mounting</b>		• cULus Class I Zone 2, Division 2	Yes
Mounting in portrait format possible	Yes	• FM Class I Division 2	No
<b>Supply voltage</b>		<b>Marine approval</b>	
Rated value (DC)	24 V	• Germanischer Lloyd (GL)	No
<b>Memory</b>		• American Bureau of Shipping (ABS)	No
Memory available for user data	12 Mbyte	• Bureau Veritas (BV)	No
<b>Type of output</b>		• Det Norske Veritas (DNV)	No
Acoustics		• Korean Register of Shipping (KRS)	No
• Speaker	Yes	• Lloyds Register of Shipping (LRS)	No
<b>Time of day</b>		• Nippon Kaiji Kyokai (Class NK)	No
<b>Clock</b>		• Polski Rejestr Statków (PRS)	No
• Hardware clock (real-time)	Yes	<b>Ambient conditions</b>	
• retentive	Yes; Back-up duration typically 6 weeks	<b>Ambient temperature during operation</b>	
• synchronizable	Yes	• Operation (vertical installation) - For vertical installation, min.	0 °C
<b>Interfaces</b>		• For vertical installation, max.	50 °C
Number of industrial Ethernet interfaces	1; 2 ports (switch)	<b>Relative humidity</b>	
Number of RS 485 interfaces	1; RS 422 / 485 combined	• Operation, max.	80 %; no condensation
Number of USB interfaces	2; USB 2.0	<b>Configuration</b>	
• USB Mini B	1; 5-pole	<b>Configuration software</b>	
Number of SD card slots	2	• WinCC Comfort (TIA Portal)	Yes; from V11
<b>Industrial Ethernet</b>		<b>Languages</b>	
• Number of ports of the integrated switch	2	<b>Online languages</b>	
<b>Protocols</b>		• Number of online/runtime languages	32
PROFINET	Yes		
IRT	Yes; As of WinCC V12		
PROFIBUS	Yes		
MPI	Yes		
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	Yes; As of WinCC V12		

**Technical specifications**

Article number	<b>6AV2144-8MC10-0AC0</b> SIMATIC HMI TP1200 COMFORT INOX LF	Article number	<b>6AV2144-8MC10-0AC0</b> SIMATIC HMI TP1200 COMFORT INOX LF
<b>Functionality under WinCC (TIA Portal)</b>		<b>Process coupling</b>	
Applications/options		• S7-1200	Yes
• Web browser	Yes	• S7-1500	Yes
• Pocket Word	Yes	• S7-200	Yes
• Pocket Excel	Yes	• S7-300/400	Yes
• PDF Viewer	Yes	• LOGO!	Yes
• Media Player	Yes	• WinAC	Yes
• SIMATIC WinCC Sm@rtServer	Yes	• SIMOTION	Yes
• SIMATIC WinCC Audit	Yes	• Allen Bradley (EtherNet/IP)	Yes
Number of Visual Basic Scripts	Yes	• Allen Bradley (DF1)	Yes
Task planner		• Mitsubishi (MC TCP/IP)	Yes
• time-controlled	Yes	• Mitsubishi (FX)	Yes
• task-controlled	Yes	• OMRON (FINS TCP)	No
<b>Message system</b>		• OMRON (LINK/Multilink)	Yes
• Bit messages		• Modicon (Modbus TCP/IP)	Yes
- Number of bit messages	4 000	• Modicon (Modbus)	Yes
• Analog messages		• OPC UA Client	Yes
- Number of analog messages	200	• OPC UA Server	Yes
• Message buffer		<b>Peripherals/Options</b>	
- Number of entries	1 024	Printer	Yes
- Circulating buffer	Yes	SIMATIC HMI MM memory card: Multi Media Card	Yes; Up to 128 MB
- retentive	Yes	SIMATIC HMI SD memory card: Secure Digital memory card	Yes; Up to 2 GB
<b>Recipe management</b>		USB memory	Yes
• Number of recipes	300	Network camera	Yes
• Size of internal recipe memory	2 Mbyte	<b>Mechanics/material</b>	
• Recipe memory expandable	Yes	Enclosure material (front)	
<b>Variables</b>		• Plastic	No
• Number of variables per device	2 048	• Aluminum	No
• Number of variables per screen	400	• Stainless steel	Yes
<b>Images</b>		<b>Dimensions</b>	
• Number of configurable images	500	Width of the housing front	330 mm
<b>Archiving</b>		Height of housing front	269 mm
• Number of archives per device	50	Mounting cutout, width	310 mm
<b>Security</b>		Mounting cutout, height	248 mm
• Number of user groups	50	Overall depth	67 mm
• Number of users	50	<b>Weights</b>	
• SIMATIC Logon	Yes	Weight (without packaging)	4.2 kg
<b>Logging through printer</b>			
• Alarms	Yes		
• Report (shift log)	Yes		
• Hardcopy	Yes		
• Electronic print to file	Yes; PDF, HTML		
<b>Transfer (upload/download)</b>			
• MPI/PROFIBUS DP	Yes		
• Ethernet	Yes		

**More information:**Customer-specific modifications

- Customized design (logo, type designation and background color)
- Protection against condensation and corrosive gases

More information is available on the Internet at:

<http://www.siemens.com/comfort-panels-inox>

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Introduction

#### Overview

##### **SIMATIC Mobile Panels**

##### **Mobile Panels 2<sup>nd</sup> Generation**

The second generation of SIMATIC HMI Mobile Panels impresses with its convenience, performance and quality.

The highlights: A brilliant widescreen display, particularly simple configuration and the unique illuminated emergency stop button.

This series of devices offers Panels with 7", 9" and 10" displays, some of which are available with or without safety-related operator controls.

The Mobile Panels of the 2<sup>nd</sup> Generation are the successors to the SIMATIC HMI Mobile Panels x77 with cable connections.

- SIMATIC HMI KTP400F Mobile
- SIMATIC HMI KTP700 Mobile
- SIMATIC HMI KTP700F Mobile
- SIMATIC HMI KTP700F Mobile HW
- SIMATIC HMI KTP700F Mobile HW/OR
- SIMATIC HMI KTP900 Mobile
- SIMATIC HMI KTP900F Mobile
- SIMATIC HMI TP1000F Mobile

##### **Mobile Panels for low-temperature environment**

SIMATIC HMI KTP700F Mobile Arctic is designed for use in weather-protected areas with low ambient temperatures down to -28 °C.

For optimum operation even at low temperatures, a touch pen has been integrated in the front panel at the center underneath the display.

The operator panel has the same functionality as the SIMATIC HMI Mobile Panels 2<sup>nd</sup> Generation and is integrated in the "Totally Integrated Automation Portal" engineering framework.

**Overview**

- SIMATIC HMI KTP700F Mobile HW
- SIMATIC HMI KTP700F Mobile HW/OR
- SIMATIC HMI TP1000F Mobile
- SIMATIC HMI KTP400F Mobile
- SIMATIC HMI KTP700 Mobile
- SIMATIC HMI KTP700F Mobile
- SIMATIC HMI KTP900 Mobile
- SIMATIC HMI KTP900F Mobile

**Ordering data****Article No.**

*SIMATIC Mobile Panels for 2<sup>nd</sup> Generation<sup>1)</sup>*

**SIMATIC HMI KTP700F Mobile HW**  
7.0" TFT display, 800 x 480 pixels,  
16 million colors, key and touch  
operation, 6 function keys,  
2 illuminated pushbuttons,  
1x PROFINET/Industrial Ethernet  
interface, 1x Multimedia card,  
1x USB, key-operated switch,  
acknowledgment button,  
emergency stop/stop button,  
handwheel, configurable as from  
WinCC Comfort V15

**6AV2145-8GB00-0AA0**

**SIMATIC HMI KTP700F Mobile HW/OR**

7.0" TFT display, 800 x 480 pixels,  
16 million colors, key and touch  
operation, 6 function keys,  
2 illuminated pushbuttons,  
1x PROFINET/Industrial Ethernet  
interface, 1x Multimedia card,  
1x USB, key-operated switch,  
acknowledgment button,  
emergency stop/stop button,  
handwheel and override,  
configurable as from  
WinCC Comfort V15

**6AV2145-8GB01-0AA0**

**SIMATIC HMI TP1000F Mobile**

10.0" TFT display,  
1 280 x 800 pixels, 16 million  
colors, touch operation, touch pen,  
1x PROFINET/Industrial Ethernet  
interface, 1x Multimedia card,  
1x USB, key-operated switch,  
acknowledgment button,  
emergency stop/stop button,  
configurable as from  
WinCC Comfort V14

**6AV2145-6KB20-0AS0**

**KTP400F Mobile**

**6AV2125-2DB23-0AX0**

**KTP700 Mobile**

**6AV2125-2GB03-0AX0**

**KTP700F Mobile**

**6AV2125-2GB23-0AX0**

**KTP900 Mobile**

**6AV2125-2JB03-0AX0**

**KTP900F Mobile**

**6AV2125-2JB23-0AX0**

**Starter kit Mobile Panel**

Consisting of:  
1x KTP700F Mobile,  
1x connection box standard,  
1x connecting cable 2 m,  
1x wall bracket,  
1x WinCC Comfort (TIA Portal)

**6AV2133-5GA00-0AA0**

**Accessories**

**Connecting cable and accessories for Mobile Panels**

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

<sup>1)</sup> The system components (connecting cables and connection boxes) must be ordered separately.

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Mobile Panels 2nd Generation

#### Technical specifications

Article number	<b>6AV2125-2DB23-0AX0</b> SIMATIC HMI KTP400F Mobile	<b>6AV2125-2GB03-0AX0</b> SIMATIC HMI KTP700 Mobile	<b>6AV2125-2GB23-0AX0</b> SIMATIC HMI KTP700F Mobile	<b>6AV2125-2JB03-0AX0</b> SIMATIC HMI KTP900 Mobile	<b>6AV2125-2JB23-0AX0</b> SIMATIC HMI KTP900F Mobile
<b>General information</b>					
Product type designation	KTP400F Mobile	KTP700 Mobile	KTP700F Mobile	KTP900 Mobile	KTP900F Mobile
<b>Display</b>					
Design of display	TFT	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	4.3 in	7 in	7 in	9 in	9 in
Number of colors	16 777 216	16 777 216	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>					
• Horizontal image resolution	480 pixel	800 pixel	800 pixel	800 pixel	800 pixel
• Vertical image resolution	272 pixel	480 pixel	480 pixel	480 pixel	480 pixel
<b>Backlighting</b>					
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h	50 000 h	50 000 h	50 000 h
<b>Control elements</b>					
<b>Keyboard fonts</b>					
• Function keys					
- Number of function keys	4	8	8	10	10
<b>Touch operation</b>					
• Design as touch screen	Yes	Yes	Yes	Yes	Yes
• Design as multi-touch screen	No	No	No	No	No
<b>Special operator controls</b>					
• Stop button (forced blocking)	Yes	No	Yes	No	Yes
• Emergency stop button (illuminated and forced blocking)	Yes	No	Yes	No	Yes
• Acknowledgement button (3-stage)	Yes	No	Yes	No	Yes
• Key-operated switch	No	No	Yes	No	Yes
• Illuminated pushbutton	Yes	Yes	Yes	Yes	Yes
<b>Camera</b>					
• integrated camera	No	No	No	No	No
<b>Expansions for operator control of the process</b>					
• DP direct LEDs (LEDs as S7 output I/O)					
- F1...Fx	4	8	8	10	10
• Direct keys (keys as S7 input I/O)					
- F1...Fx	4	8	8	10	10
• Direct keys (touch buttons as S7 input I/O)	32	32	32	32	32
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
<b>Memory</b>					
Memory available for user data	4 Mbyte	12 Mbyte	12 Mbyte	12 Mbyte	12 Mbyte
<b>Time of day</b>					
<b>Clock</b>					
• Hardware clock (real-time)	Yes	Yes	Yes	Yes	Yes
<b>Interfaces</b>					
Number of industrial Ethernet interfaces	1	1	1	1	1
Number of PROFINET interfaces	1	1	1	1	1
Number of RS 485 interfaces	0	0	0	0	0
Number of USB interfaces	1; USB 2.0	1; USB 2.0	1; USB 2.0	1; USB 2.0	1; USB 2.0
Number of wireless interfaces	0	0	0	0	0
Number of SD card slots	0	1	1	1	1

**Technical specifications**

Article number	6AV2125-2DB23-0AX0	6AV2125-2GB03-0AX0	6AV2125-2GB23-0AX0	6AV2125-2JB03-0AX0	6AV2125-2JB23-0AX0
	SIMATIC HMI KTP400F Mobile	SIMATIC HMI KTP700 Mobile	SIMATIC HMI KTP700F Mobile	SIMATIC HMI KTP900 Mobile	SIMATIC HMI KTP900F Mobile
<b>Protocols</b>					
PROFINET	Yes	Yes	Yes	Yes	Yes
PROFIsafe	Yes	No	Yes	No	Yes
PROFIBUS	No	No	No	No	No
EtherNet/IP	Yes	Yes	Yes	Yes	Yes
<b>Protocols (Ethernet)</b>					
• TCP/IP	Yes	Yes	Yes	Yes	Yes
• DHCP	Yes	Yes	Yes	Yes	Yes
• SNMP	Yes	Yes	Yes	Yes	Yes
• DCP	Yes	Yes	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes	Yes	Yes
<b>WEB characteristics</b>					
• HTTP	Yes	Yes	Yes	Yes	Yes
• HTTPS	Yes	Yes	Yes	Yes	Yes
• HTML	Yes	Yes	Yes	Yes	Yes
• XML	No	No	No	No	No
• CSS	Yes	Yes	Yes	Yes	Yes
• Active X	No	No	No	No	No
• JavaScript	Yes	Yes	Yes	Yes	Yes
• Java VM	No	No	No	No	No
<b>Further protocols</b>					
• MODBUS	Yes	Yes	Yes	Yes	Yes
<b>Communication functions</b>					
<b>Wireless communication</b>					
• supported standards					
- Radio standard WLAN 802.11	No	No	No	No	No
- Bluetooth radio standard	No	No	No	No	No
<b>Degree and class of protection</b>					
IP65 (all-round)	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes
KC approval	No; Available soon	No; Available soon	No; Available soon	No; Available soon	No; Available soon
Suitable for safety functions	Yes	No	Yes	No	Yes
Marine approval	Yes	Yes	Yes	Yes	Yes
<b>Highest safety class achievable in safety mode</b>					
• Performance level according to ISO 13849-1	PLe	none	PLe	none	PLe
• SIL acc. to IEC 61508	SIL 3	No	SIL 3	No	SIL 3
<b>Use in hazardous areas</b>					
• ATEX Zone 2	No	No	No	No	No
• ATEX Zone 22	No	No	No	No	No
• IECEx Zone 2	No	No	No	No	No
• IECEx Zone 22	No	No	No	No	No
• cULus Class I Zone 2, Division 2	No	No	No	No	No
• FM Class I Division 2	No	No	No	No	No

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Mobile Panels 2nd Generation

#### Technical specifications

Article number	<b>6AV2125-2DB23-0AX0</b> SIMATIC HMI KTP400F Mobile	<b>6AV2125-2GB03-0AX0</b> SIMATIC HMI KTP700 Mobile	<b>6AV2125-2GB23-0AX0</b> SIMATIC HMI KTP700F Mobile	<b>6AV2125-2JB03-0AX0</b> SIMATIC HMI KTP900 Mobile	<b>6AV2125-2JB23-0AX0</b> SIMATIC HMI KTP900F Mobile
<b>Ambient conditions</b>					
Free fall					
• Fall height, max.	1.2 m	1.2 m	1.2 m	1.2 m	1.2 m
<b>Ambient temperature during operation</b>					
• min.	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	45 °C	45 °C	45 °C	45 °C	45 °C
<b>Relative humidity</b>					
• Operation, max.	90 %	90 %	90 %	90 %	90 %
<b>Languages</b>					
Online languages					
• Number of online/runtime languages	32	32	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>					
Applications/options					
• Web browser	Yes	Yes	Yes	Yes	Yes
• Pocket Word	No	No	No	No	No
• Pocket Excel	No	No	No	No	No
• PDF Viewer	Yes	Yes	Yes	Yes	Yes
• Media Player	No	No	No	No	No
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes	Yes	Yes
Task planner					
• time-controlled	Yes	Yes	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes	Yes	Yes
<b>Multiproject</b>					
• Number of projects (internal)	0	0	0	0	0
• Number of projects (external)	0	0	0	0	0
<b>Message system</b>					
• Bit messages					
- Number of bit messages	4 000	4 000	4 000	4 000	4 000
• Analog messages					
- Number of analog messages	200	200	200	200	200
• Message buffer					
- Number of entries	1 024	1 024	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes	Yes	Yes
- retentive	Yes	Yes	Yes	Yes	Yes
<b>Recipe management</b>					
• Number of recipes	300	300	300	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte	2 Mbyte	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes	Yes	Yes	Yes
<b>Variables</b>					
• Number of variables per device	2 048	2 048	2 048	2 048	2 048
• Number of variables per screen	50	400	400	400	400
<b>Images</b>					
• Number of configurable images	500	500	500	500	500
<b>Archiving</b>					
• Number of archives per device	50	50	50	50	50
• Number of entries per archive	20 000	20 000	20 000	20 000	20 000

**Technical specifications**

Article number	6AV2125-2DB23-0AX0	6AV2125-2GB03-0AX0	6AV2125-2GB23-0AX0	6AV2125-2JB03-0AX0	6AV2125-2JB23-0AX0
	SIMATIC HMI KTP400F Mobile	SIMATIC HMI KTP700 Mobile	SIMATIC HMI KTP700F Mobile	SIMATIC HMI KTP900 Mobile	SIMATIC HMI KTP900F Mobile
<b>Security</b>					
• Number of user groups	50	50	50	50	50
• Number of users	50	50	50	50	50
• SIMATIC Logon	Yes	Yes	Yes	Yes	Yes
<b>Process coupling</b>					
• S7-1200	Yes	Yes	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes	Yes	Yes
• WinAC	Yes; WinAC RTX	Yes; WinAC RTX	Yes; WinAC RTX	Yes; WinAC RTX	Yes; WinAC RTX
• SIMOTION	Yes	Yes	Yes	Yes	Yes
<b>Peripherals/Options</b>					
SIMATIC HMI MM memory card: Multi Media Card	No	Yes	Yes	Yes	Yes
SIMATIC HMI SD memory card: Secure Digital memory card	No	Yes	Yes	Yes	Yes
USB memory	Yes	Yes	Yes	Yes	Yes
<b>Mechanics/material</b>					
Enclosure material (front)					
• Plastic	Yes	Yes	Yes	Yes	Yes
• Aluminum	No	No	No	No	No
• Stainless steel	No	No	No	No	No
<b>Dimensions</b>					
Width of the housing front	194 mm	248.4 mm	248.4 mm	307.5 mm	307.5 mm
Height of housing front	166 mm	171.7 mm	194.9 mm	200.9 mm	223.5 mm
<b>Weights</b>					
Weight (without packaging)	0.7 kg	1.2 kg	1.3 kg	1.5 kg	1.6 kg

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Mobile Panels 2nd Generation

#### Technical specifications

Article number	<b>6AV2145-8GB00-0AA0</b> SIMATIC HMI KTP700F Mobile HW	<b>6AV2145-8GB01-0AA0</b> SIMATIC HMI KTP700F Mobile HW/OR	<b>6AV2145-6KB20-0AS0</b> SIMATIC HMI TP1000F MOBILE
<b>General information</b>			
Product type designation	KTP700F	KTP700F	TP1000F Mobile
<b>Display</b>			
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	7 in	7 in	10.1 in
Number of colors	16 000 000	16 000 000	16 777 216
<b>Resolution (pixels)</b>			
• Horizontal image resolution	800 pixel	800 pixel	1 280 pixel
• Vertical image resolution	480 pixel	480 pixel	800 pixel
<b>Backlighting</b>			
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h	50 000 h
<b>Control elements</b>			
<b>Keyboard fonts</b>			
• Function keys			
- Number of function keys	6	6	0
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
• Design as multi-touch screen	No	No	No
<b>Special operator controls</b>			
• Stop button (forced blocking)	Yes	Yes	Yes
• Emergency stop button (illuminated and forced blocking)	Yes	Yes	Yes
• Acknowledgement button (3-stage)	Yes	Yes	Yes
• Key-operated switch	Yes	Yes	Yes
• Illuminated pushbutton	Yes	Yes	Yes
• Handwheel	Yes	Yes	No
<b>Camera</b>			
• integrated camera	No	No	No
<b>Expansions for operator control of the process</b>			
• DP direct LEDs (LEDs as S7 output I/O)			
- F1...Fx	6	6	0
• Direct keys (keys as S7 input I/O)			
- F1...Fx	6	6	0
• Direct keys (touch buttons as S7 input I/O)	32	32	0
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Memory</b>			
Memory available for user data	12 Mbyte	12 Mbyte	12 Mbyte
<b>Time of day</b>			
<b>Clock</b>			
• Hardware clock (real-time)	Yes	Yes	Yes
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	1	1	1
Number of PROFINET interfaces	1	1	1
Number of RS 485 interfaces	0	0	0
Number of USB interfaces	1; USB 2.0	1; USB 2.0	1; USB 2.0
Number of wireless interfaces	0	0	0
Number of SD card slots	1	1	1

**Technical specifications**

Article number	<b>6AV2145-8GB00-0AA0</b> SIMATIC HMI KTP700F Mobile HW	<b>6AV2145-8GB01-0AA0</b> SIMATIC HMI KTP700F Mobile HW/OR	<b>6AV2145-6KB20-0AS0</b> SIMATIC HMI TP1000F MOBILE
<b>Protocols</b>			
PROFINET	Yes	Yes	Yes
PROFIsafe	Yes	Yes	Yes
PROFIBUS	No	No	No
EtherNet/IP	Yes	Yes	Yes
<b>Protocols (Ethernet)</b>			
• TCP/IP	Yes	Yes	Yes
• DHCP	Yes	Yes	Yes
• SNMP	Yes	Yes	Yes
• DCP	Yes	Yes	Yes
• LLDP	Yes	Yes	Yes
<b>WEB characteristics</b>			
• HTTP	Yes	Yes	Yes
• HTTPS	Yes	Yes	Yes
• HTML	Yes	Yes	Yes
• XML	No	No	No
• CSS	Yes	Yes	Yes
• Active X	No	No	No
• JavaScript	Yes	Yes	Yes
• Java VM	No	No	No
<b>Further protocols</b>			
• MODBUS	Yes	Yes	Yes
<b>Communication functions</b>			
<b>Wireless communication</b>			
• supported standards			
- Radio standard WLAN 802.11	No	No	No
- Bluetooth radio standard	No	No	No
<b>Degree and class of protection</b>			
IP65 (all-round)	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
UL approval	Yes	Yes	
cULus	Yes	Yes	Yes
FM approval	No	No	
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No	No	No
EAC (formerly Gost-R)	Yes	Yes	
Suitable for safety functions	Yes	Yes	Yes
Marine approval	No	No	No
<b>Highest safety class achievable in safety mode</b>			
• Performance level according to ISO 13849-1	PLe	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3	SIL 3
<b>Use in hazardous areas</b>			
• ATEX Zone 2	No	No	No
• ATEX Zone 22	No	No	No
• IECEx Zone 2	No	No	No
• IECEx Zone 22	No	No	No
• cULus Class I Zone 2, Division 2	No	No	No
• cULus Class II Division 2	No	No	
• FM Class I Division 2	No	No	No
• FM Class II Division 2	No	No	

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Mobile Panels 2nd Generation

#### Technical specifications

Article number	<b>6AV2145-8GB00-0AA0</b> SIMATIC HMI KTP700F Mobile HW	<b>6AV2145-8GB01-0AA0</b> SIMATIC HMI KTP700F Mobile HW/OR	<b>6AV2145-6KB20-0AS0</b> SIMATIC HMI TP1000F MOBILE
<b>Ambient conditions</b>			
<b>Free fall</b>			
• Fall height, max.	1.2 m	1.2 m	1.2 m
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	32	32	32
<b>Functionality under WinCC (TIA Portal)</b>			
Applications/options			
• Web browser	Yes	Yes	Yes
• Pocket Word	No	No	No
• Pocket Excel	No	No	No
• PDF Viewer	Yes	Yes	Yes
• Media Player	No	No	No
• SIMATIC WinCC Sm@rtServer	Yes	Yes	Yes
• SIMATIC WinCC Audit	Yes	Yes	Yes
Number of Visual Basic Scripts	Yes	Yes	Yes
Task planner			
• time-controlled	Yes	Yes	Yes
• task-controlled	Yes	Yes	Yes
<b>Multiproject</b>			
• Number of projects (internal)	0	0	0
• Number of projects (external)	0	0	0
<b>Message system</b>			
• Bit messages			
- Number of bit messages	4 000	4 000	4 000
• Analog messages			
- Number of analog messages	200	200	200
• Message buffer			
- Number of entries	1 024	1 024	1 024
- Circulating buffer	Yes	Yes	Yes
- retentive	Yes	Yes	Yes
<b>Recipe management</b>			
• Number of recipes	300	300	300
• Size of internal recipe memory	2 Mbyte	2 Mbyte	2 Mbyte
• Recipe memory expandable	Yes	Yes	Yes
<b>Variables</b>			
• Number of variables per device	2 048	2 048	2 048
• Number of variables per screen	400	400	400
<b>Images</b>			
• Number of configurable images	500	500	500
<b>Archiving</b>			
• Number of archives per device	50	50	50
• Number of entries per archive	20 000	20 000	20 000

**Technical specifications**

Article number	<b>6AV2145-8GB00-0AA0</b> SIMATIC HMI KTP700F Mobile HW	<b>6AV2145-8GB01-0AA0</b> SIMATIC HMI KTP700F Mobile HW/OR	<b>6AV2145-6KB20-0AS0</b> SIMATIC HMI TP1000F MOBILE
<b>Security</b>			
• Number of user groups	50	50	50
• Number of users	50	50	50
• SIMATIC Logon	Yes	Yes	Yes
<b>Process coupling</b>			
• S7-1200	Yes	Yes	Yes
• S7-1500	Yes	Yes	Yes
• S7-200	Yes	Yes	Yes
• S7-300/400	Yes	Yes	Yes
• LOGO!	Yes	Yes	Yes
• WinAC	No	No	Yes; WinAC RTX
• SIMOTION	Yes	Yes	Yes
<b>Peripherals/Options</b>			
SIMATIC HMI MM memory card: Multi Media Card	Yes	Yes	Yes
SIMATIC HMI SD memory card: Secure Digital memory card	Yes	Yes	Yes
USB memory	Yes	Yes	Yes
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	Yes	Yes	Yes
• Aluminum	No	No	No
• Stainless steel	No	No	No
<b>Dimensions</b>			
Width of the housing front			307.5 mm
Height of housing front			223.5 mm
<b>Weights</b>			
Weight (without packaging)	1.48 kg	1.48 kg	1.6 kg

More information is available on the Internet at:

<http://www.siemens.com/mobile-panels>

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Mobile Panels for low-temperature environment

#### Overview



SIMATIC HMI KTP700F MOBILE ARCTIC

#### **SIMATIC HMI KTP700F Mobile Arctic**

The operator panel with glass touch screen is designed for use in weather-protected areas with low ambient temperatures, e.g. in cooling technology.

It has the same functionality as the SIMATIC HMI Mobile Panels 2<sup>nd</sup> Generation and is configured exclusively with the innovative HMI software WinCC.

The engineering software is integrated into the "Totally Integrated Automation Portal" engineering framework. WinCC (TIA Portal) as of V15.1 is required to configure the device.

#### Technical specifications

Article number	<b>6AV2145-6GB06-0AA0</b> SIMATIC HMI KTP700F Mobile Arctic
<b>General information</b>	
Product type designation	KTP700F Mobile Arctic
<b>Display</b>	
Design of display	TFT, bonded, daylight-readable
Screen diagonal	7 in
Number of colors	16 000 000
<b>Resolution (pixels)</b>	
• Horizontal image resolution	800 pixel
• Vertical image resolution	480 pixel
<b>Backlighting</b>	
• MTBF backlighting (at 25 °C)	50 000 h
<b>Control elements</b>	
<b>Keyboard fonts</b>	
• Function keys	
- Number of function keys	8
<b>Touch operation</b>	
• Design as touch screen	Yes
• Design as multi-touch screen	No
<b>Special operator controls</b>	
• Stop button (forced blocking)	Yes
• Emergency stop button (illuminated and forced blocking)	Yes
• Acknowledgement button (3-stage)	Yes
• Key-operated switch	Yes
• Illuminated pushbutton	Yes
<b>Camera</b>	
• integrated camera	No
<b>Expansions for operator control of the process</b>	
• DP direct LEDs (LEDs as S7 output I/O)	
- F1...Fx	8
• Direct keys (keys as S7 input I/O)	
- F1...Fx	8
• Direct keys (touch buttons as S7 input I/O)	32
<b>Supply voltage</b>	
Rated value (DC)	24 V
<b>Memory</b>	
Memory available for user data	12 Mbyte
<b>Time of day</b>	
<b>Clock</b>	
• Hardware clock (real-time)	Yes
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	1
Number of PROFINET interfaces	1
Number of RS 485 interfaces	0
Number of USB interfaces	1; USB 2.0
Number of wireless interfaces	0
Number of SD card slots	1

#### Ordering data

#### Article No.

<b>SIMATIC HMI KTP700F Mobile Arctic</b>	<b>6AV2145-6GB06-0AA0</b>
Extended operating temperature range, 7.0" TFT display, 800 x 480 pixels, 16 million colors, key and touch operation, 8 function keys, 1x PROFINET/Industrial Ethernet interface, 1x Multimedia card, 1x USB, 1x touch pen, key-operated switch, acknowledgment button, emergency stop/stop button, configurable as of WinCC Comfort V15.1	
<b>Accessories</b>	
<b>Connection boxes, Compact and Advanced</b>	See System components for Mobile Panels
<b>Connecting cable</b>	Connecting cable KTP Mobile

Mobile Panels for low-temperature environment

### Technical specifications

Article number	<b>6AV2145-6GB06-0AA0</b> SIMATIC HMI KTP700F Mobile Arctic	Article number	<b>6AV2145-6GB06-0AA0</b> SIMATIC HMI KTP700F Mobile Arctic
<b>Protocols</b>			
PROFINET	Yes	Free fall	1.2 m
PROFIsafe	Yes	Ambient temperature during operation	
PROFIBUS	No	• min.	-28 °C
EtherNet/IP	Yes	• max.	45 °C
<b>Protocols (Ethernet)</b>			
• TCP/IP	Yes	Relative humidity	
• DHCP	Yes	• Operation, max.	90 %; no condensation
• SNMP	Yes	<b>Languages</b>	
• DCP	Yes	<b>Online languages</b>	
• LLDP	Yes	• Number of online/runtime languages	32
<b>WEB characteristics</b>			
• HTTP	Yes	<b>Functionality under WinCC (TIA Portal)</b>	
• HTTPS	Yes	Applications/options	
• HTML	Yes	• Web browser	Yes
• XML	No	• Pocket Word	No
• CSS	Yes	• Pocket Excel	No
• Active X	No	• PDF Viewer	Yes
• JavaScript	Yes	• Media Player	No
• Java VM	No	• SIMATIC WinCC Sm@rtServer	Yes
<b>Further protocols</b>		• SIMATIC WinCC Audit	Yes
• MODBUS	Yes	Number of Visual Basic Scripts	Yes
<b>Communication functions</b>		Task planner	
<b>Wireless communication</b>		• time-controlled	Yes
• supported standards		• task-controlled	Yes
- Radio standard WLAN 802.11	No	<b>Multiproject</b>	
- Bluetooth radio standard	No	• Number of projects (internal)	0
<b>Degree and class of protection</b>		• Number of projects (external)	0
IP65 (all-round)	Yes	<b>Message system</b>	
<b>Standards, approvals, certificates</b>		• Bit messages	
CE mark	Yes	• Number of bit messages	4 000
cULus	Yes	• Analog messages	
FM approval	No	• Number of analog messages	200
RCM (formerly C-TICK)	Yes	• Message buffer	
KC approval	No	• Number of entries	1 024
Suitable for safety functions	Yes	• Circulating buffer	Yes
Marine approval	No	• retentive	Yes
<b>Highest safety class achievable in safety mode</b>		<b>Recipe management</b>	
• Performance level according to ISO 13849-1	PLe	• Number of recipes	300
• SIL acc. to IEC 61508	SIL 3	• Size of internal recipe memory	2 Mbyte
<b>Use in hazardous areas</b>		• Recipe memory expandable	Yes
• ATEX Zone 2	No	<b>Variables</b>	
• ATEX Zone 22	No	• Number of variables per device	2 048
• IECEx Zone 2	No	• Number of variables per screen	400
• IECEx Zone 22	No	<b>Images</b>	
• cULus Class I Zone 2, Division 2	No	• Number of configurable images	500
• cULus Class II Division 2	No	<b>Archiving</b>	
• FM Class I Division 2	No	• Number of archives per device	50
• FM Class II Division 2	No	• Number of entries per archive	20 000

## Operator panels

Advanced HMI Panel-based  
Mobile Panels

### Mobile Panels for low-temperature environment

#### Technical specifications

Article number	<b>6AV2145-6GB06-0AA0</b> SIMATIC HMI KTP700F Mobile Arctic
<b>Security</b>	
• Number of user groups	50
• Number of users	50
• SIMATIC Logon	Yes
<b>Process coupling</b>	
• S7-1200	Yes
• S7-1500	Yes
• S7-200	Yes
• S7-300/400	Yes
• LOGO!	Yes
• WinAC	Yes; WinAC RTX
• SIMOTION	Yes
<b>Peripherals/Options</b>	
SIMATIC HMI MM memory card: Multi Media Card	Yes
SIMATIC HMI SD memory card: Secure Digital memory card	Yes
USB memory	Yes
<b>Mechanics/material</b>	
Enclosure material (front)	Yes
• Plastic	Yes
• Aluminum	No
• Stainless steel	No
<b>Dimensions</b>	
Width of the housing front	307.5 mm
Height of housing front	223.5 mm
<b>Weights</b>	
Weight (without packaging)	1.4 kg

#### More information

You can find more information on the Internet at:

<http://www.siemens.com/mobile-panels>

**Connection box for Mobile Panels (2nd Generation) and Arctic Panel****Overview****Ordering data****Article No.****Connection boxes for SIMATIC Mobile Panels for 2<sup>nd</sup> Generation and Arctic Panel**

- Connection Box, Compact
- Connection Box, Standard
- Connection Box, Advanced

**6AV2125-2AE03-0AX0  
6AV2125-2AE13-0AX0  
6AV2125-2AE23-0AX0**

**Connecting cable and accessories for Mobile Panels**

See "SIMATIC HMI operator control and monitoring systems" -> "Accessories"

Mobile Panels with emergency stop/stop buttons can be wired into the emergency stop circuit of a machine or plant by means of the connection boxes.

Pressing the emergency stop/stop button on the Mobile Panel activates the emergency stop function.

The emergency stop/stop button on the Mobile Panel supplements, but does not replace, the emergency stop equipment permanently installed on the machine.

## Operator panels

Advanced HMI Panel-based

Mobile Panels

System components for Mobile Panels

### Connection box for Mobile Panels (2nd Generation) and Arctic Panel

#### Technical specifications

Article number	<b>6AV2125-2AE03-0AX0</b> SIMATIC HMI Connection Box Compact	<b>6AV2125-2AE13-0AX0</b> SIMATIC HMI Connection Box Standard	<b>6AV2125-2AE23-0AX0</b> SIMATIC HMI Connection Box Advanced
<b>General information</b>			
Product type designation	Compact	Standard	Connection Box Advanced
<b>Product function</b>			
• Web-based management	No	Yes	Yes
<b>FH technology</b>			
Safety evaluation through direct wiring			
• Reconnection without emergency stop circuit interruption	No	No	Yes
• Reconnection with emergency stop circuit interruption	Yes	Yes	No
• Monitoring the STOP button	Yes	Yes	Yes
• Monitoring of emergency stop button	Yes	Yes	Yes
• Monitoring of acknowledgement button	Yes	Yes	Yes
Safety evaluation via PROFIsafe			
• Reconnection without emergency stop circuit interruption	Yes	Yes	Yes
• Reconnection with emergency stop circuit interruption	No	No	No
• Monitoring the STOP button	Yes	Yes	Yes
• Monitoring of emergency stop button	Yes	Yes	Yes
• Monitoring of acknowledgement button	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Wall mounting/direct mounting	No	Yes	Yes
Control cabinet installation	Yes	No	No
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Input current</b>			
Current consumption (rated value)	18 mA	96 mA	95 mA
Starting current inrush $I^2t$	0.003 A $^2$ s	0.15 A $^2$ s	0.16 A $^2$ s
<b>Power</b>			
Active power input, typ.	0.43 W	2.3 W	2.3 W
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2	3	3
Number of PROFINET interfaces	2	3	3
Connection point identification	Yes	Yes	Yes
<b>Industrial Ethernet</b>			
• Industrial Ethernet status LED	0	3	3
<b>Protocols</b>			
PROFINET	Yes; No switch functionality	Yes	Yes
IRT	No	No	Yes
PROFIsafe	Yes; No switch functionality	Yes	Yes
EtherNet/IP	Yes	Yes	Yes
AS-Interface	No	No	No
EIB/KNX	No	No	No
<b>Protocols (Ethernet)</b>			
• TCP/IP	Yes; No switch functionality	Yes	Yes
• DHCP	No	Yes	Yes
• SNMP	No	Yes	Yes
• DCP	No	Yes	Yes
• LLDP	No	Yes	Yes
<b>Redundancy mode</b>			
<b>Media redundancy</b>			
- MRP	No	No	Yes
<b>Further protocols</b>			
• MODBUS	Yes	Yes	Yes
• other bus systems	No	No	No
<b>Degree and class of protection</b>			
IP65 (all-round)		Yes	Yes
IP (at the front)	IP65		

**Connection box for Mobile Panels (2nd Generation) and Arctic Panel**

**Technical specifications**

Article number	<b>6AV2125-2AE03-0AX0</b> SIMATIC HMI Connection Box Compact	<b>6AV2125-2AE13-0AX0</b> SIMATIC HMI Connection Box Standard	<b>6AV2125-2AE23-0AX0</b> SIMATIC HMI Connection Box Advanced
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	No; Available soon	No; Available soon	No; Available soon
Suitable for safety functions	Yes	Yes	Yes
<b>Highest safety class achievable in safety mode</b>			
• Performance level according to ISO 13849-1	PLe	PLe	PLe
• SIL acc. to IEC 61508	SIL 3	SIL 3	SIL 3
<b>Use in hazardous areas</b>			
• ATEX Zone 2	No	No	No
• ATEX Zone 22	No	No	No
• cULus Class I Zone 2, Division 2	No	No	No
• FM Class I Division 2	No	No	No
<b>Marine approval</b>			
• Germanischer Lloyd (GL)	Yes	Yes	Yes
• American Bureau of Shipping (ABS)	Yes	Yes	Yes
• Bureau Veritas (BV)	No; Available soon	No; Available soon	No; Available soon
• Det Norske Veritas (DNV)	Yes	Yes	Yes
• Korean Register of Shipping (KRS)	No	No	No
• Lloyds Register of Shipping (LRS)	Yes	Yes	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes	Yes	Yes
• Polski Rejestr Statków (PRS)	No	No	No
• Chinese Classification Society (CCS)	No	No	No
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Configuration</b>			
<b>Configuration software</b>			
• STEP 7 Professional (TIA Portal)	No	No	No
• WinCC Comfort (TIA Portal)	No	Yes; Optional	Yes; Optional
• WinCC Advanced (TIA Portal)	No	Yes; Optional	Yes; Optional
• WinCC Professional (TIA Portal)	No	Yes; Optional	Yes; Optional
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	Yes	Yes	Yes
• Aluminum	No	No	No
• Stainless steel	No	No	No
<b>Dimensions</b>			
Width of the housing front	96 mm	230 mm	230 mm
Height of housing front	125 mm	145 mm	145 mm
Depth of housing	78 mm	76 mm	76 mm
Mounting cutout, width	77.5 mm		
Mounting cutout, height	106.5 mm		
Overall depth	30 mm		
<b>Weights</b>			
Weight (without packaging)	0.25 kg	0.72 kg	0.72 kg

More information is available on the Internet at:

<http://www.siemens.com/mobile-panels>

## Operator panels

Advanced HMI PC-based

### Advanced HMI PC-based

#### Overview



#### **SIMATIC HMI Advanced – efficient realization of even the most demanding and sophisticated HMI tasks**

A PC-based system is recommended if the production places particularly high demands on the quantity and type of information to be processed and documented.

It offers the appropriate options for sufficient storage space, processor performance and data connection. The user can either opt for a centralized solution in which the visualization and PC are combined in a single unit, or for a distributed solution with an industrial monitor as thin client.

#### [SIMATIC Industrial Panel PCs \(see chapter 5\)](#)

The most complex visualization and control tasks can be realized centrally on the machine with extremely compact industrial panel PCs. You can always find an optimum solution in our portfolio – from the embedded to the high-end industrial PC – to meet the many requirements of manufacturing and process automation.

#### [SIMATIC IFP and SIMATIC ITC \(see chapter 5\)](#)

Two innovative options are available for distributed control concepts. SIMATIC industrial monitors and thin clients are used as desktop devices for control centers, as built-in devices for operator panels or as PC-based visualization and control solutions, in which the control unit is operated separately.

The following modules are available:

- Panel PC
- Industrial monitors and thin clients
- Embedded bundles/software packages

### Overview

The SIMATIC Basic Panel, Comfort Panel and Mobile Panel offer HMI functionality for the control systems:

- SIMATIC S7
- Non-Siemens controllers:
  - Allen Bradley
  - Mitsubishi
  - Modicon
  - Omron

For more detailed information, refer to the WinCC (TIA Portal) user manual, the "Windows-based systems communication" manual, or the WinCC (TIA Portal) online help.

OPC communication and HTTP communication are offered for Comfort Panels and Mobile Panels with an integrated Ethernet interface. Both OPC and HTTP communication can be used in parallel with the process links to SIMATIC S7 or non-Siemens PLCs.

Note:

Interface options for HMI devices: See the individual device descriptions.

### OPC communication

OPC Data Access is an open standard for exchanging both local and remote variables between various applications via Industrial Ethernet.

### **HTTP communication for variable exchange between SIMATIC HMI systems**

Communication based on HTTP message frames enables variables to be exchanged between SIMATIC HMI systems.

Communication standard	SIMATIC HMI		
	Version	Comfort Panel	Mobile Panel KTPx00
<b>OPC Data Access V2.05a</b>			
+ <b>OPC UA Data Access V1.01</b>			
+ <b>OPC Data Access XML V1.00</b>			
OPC DA client (COM/DCOM)	–	–	•
OPC DA server (COM/DCOM)	–	–	•
OPC UA DA client	•	•	•
OPC UA DA server	•	•	•
<b>HTTP communication for variable exchange between SIMATIC HMI systems</b>			
HTTP client	•	•	•
HTTP server	•	•	•

- System interface possible
- System interface not possible

## Operator panels

System interfaces with WinCC (TIA Portal)

### SIMATIC S7

#### Overview

The following types of interface are differentiated in respect of the link between the SIMATIC Panels and SIMATIC S7 controllers:

- PROFINET interface:  
Coupling of SIMATIC Panel to SIMATIC S7 controllers via Industrial Ethernet TCP/IP using the integrated PROFINET interface of the CPU or, alternatively, a PROFINET interface module.
- MPI/PROFIBUS interface:  
Coupling of SIMATIC Panel to SIMATIC S7 controllers via MPI/PROFIBUS using the integrated MPI/PROFIBUS interface of the CPU or the integrated PPI interface of the CPU in the case of S7-200 or, alternatively, a PROFIBUS interface module in the case of S7-1200, S7-1500, S7-300 and S7-400.
- PPI interface:  
Coupling of SIMATIC Panel to SIMATIC S7-200 via PPI network using the integrated PPI interface of the CPU.

The maximum possible number of S7 connections of one CPU is determined by its performance capacity (see Catalog ST 70); from the point of view of the SIMATIC Panel, the following restrictions apply:

- Basic Panel, Comfort Panel 4", Mobile Panel 177:  
max. 4 connections
- Comfort Panels from 7" to 22" (incl. Outdoor),  
Mobile Panel 2<sup>nd</sup> Generation: max. 8 connections
- Mobile Panel 277: max. 6 connections
- PC with WinCC Runtime Advanced: max. 8 connections

SIMATIC HMI				
Controller	Basic Panel	Comfort Panel	KTPx00(F) Mobile <sup>1)</sup>	WinCC Runtime Advanced
<b>Target hardware (PROTOCOL) (physics)</b>				
<b>SIMATIC S7-1200 <sup>2)</sup></b>				
over Ethernet (TCP/IP)	• <sup>3)</sup>	•	•	•
over MPI or PROFIBUS network	• <sup>4)</sup>	•	–	• <sup>5)</sup>
<b>SIMATIC S7-1500 <sup>2)</sup></b>				
over Ethernet (TCP/IP)	• <sup>3)</sup>	•	•	•
over PROFIBUS network	• <sup>3)</sup>	•	–	• <sup>5)</sup>
<b>SIMATIC S7-300, -400, Win AC <sup>2)</sup></b>				
over Ethernet (TCP/IP)	• <sup>3)</sup>	•	•	•
over MPI or PROFIBUS network		•	–	• <sup>5)</sup>
<b>SIMATIC S7-200 <sup>2)</sup></b>				
over Ethernet (TCP/IP) (MPI protocol)	• <sup>3)</sup>	•	•	•
over MPI or PROFIBUS network	• <sup>4)</sup>	• <sup>6)</sup>	–	• <sup>5) 6)</sup>
over PPI network (MPI protocol)	• <sup>4)</sup>	–	–	–
over PPI network (PPI protocol)	–	• <sup>7)</sup>	–	• <sup>5) 7)</sup>

- System interface possible
- System interface not possible

<sup>1)</sup> Mobile Panel connection via special connecting cable and connection box (see Mobile Panels), see Manual for cable assignment

<sup>2)</sup> Controllers can be combined as desired

<sup>3)</sup> Basic Panel PN only

<sup>4)</sup> Basic Panel DP only

<sup>5)</sup> Connection via integrated MPI/PROFIBUS interface; in the case of a standard PC, a communications processor (CP) is to be used (e.g. CP 5612/5622)

<sup>6)</sup> Only on passive S7-200

<sup>7)</sup> Can be interfaced via PPI to max. 1 x S7-200 (PPI); network operation (parallel PG, etc.) is possible

#### Note:

For detailed information on cable assignment, refer to WinCC Online Help.

#### PPI interface

The PPI interface is a point-to-point connection between a SIMATIC Panel (PPI master) or alternatively a PG (PPI master) and an S7-200 (PPI slave).

#### MPI/PROFIBUS interface or PROFINET interface

The corresponding multipoint-enabled SIMATIC Panel and SIMATIC S7 communication interfaces are used.

The following are possible:

- Interface between one or more SIMATIC Panels (MPI master) and one or more S7-1200/S7-1500/S7-300/S7-400s or WinAC (MPI master) (possible network topology: MPI/PROFIBUS or Industrial Ethernet TCP/IP)
- Interface between one or more SIMATIC Panels (MPI master) and one or more S7-200s (MPI slave)<sup>1)</sup> (possible network topology: PPI, MPI/PROFIBUS)

Unlike PPI connections, MPI connections are static connections that are set up during booting and then monitored.

In principle this type of information exchange between SIMATIC Panels and SIMATIC S7 is independent of the network used, PPI, MPI/PROFIBUS or Industrial Ethernet:  
SIMATIC Panels are S7 clients and SIMATIC S7 CPUs are S7 servers.

# Operator panels

## System interfaces with WinCC (TIA Portal)

### Controllers from other manufacturers

#### Overview

The SIMATIC Basic Panels, Comfort Panels and Mobile Panels, as well as the SIMATIC HMI software package for PC WinCC Runtime Advanced support the following protocols for linking the control systems of other manufacturers:

- Allen Bradley
  - Ethernet IP protocol
  - DF1 protocol
- Mitsubishi
  - MC TCP/IP protocol
  - FX protocol
- Modicon
  - Modbus TCP/IP protocol
  - Modbus RTU protocol
- Omron
  - Link/Multi-Link protocol

The following table contains more detailed information.

#### Connection overview

Controller	SIMATIC HMI			
Target hardware (PROTOCOL) (physics)	Basic Panel	Comfort Panel Outdoor	KTPx00(F) Mobile	WinCC Runtime Advanced
<b>Allen Bradley (Ethernet IP)</b>				
via Ethernet TCP/IP network to max. 4 controllers <sup>2)</sup>	• <sup>3)</sup>	•	•	•
<ul style="list-style-type: none"> <li>• ControllLogix 1756-L6x, -L6xS with Ethernet module 1756-ENBT</li> <li>• GuardLogix System</li> <li>• CompactLogix 1769-L2xE, -L3xE</li> <li>• CompactLogix 1769-L4x with Ethernet module 1768-ENBT</li> <li>• SLC 5/05</li> <li>• MicroLogix 1100, 1400</li> </ul>				
<b>Allen Bradley (DF1)</b>				
to max. 1 x controller	• <sup>4)</sup> <sup>5)</sup>	• <sup>4)</sup>	–	• <sup>6)</sup>
• SLC 5/03, /04, /05				
• MicroLogix (RS 232)				
to max. 1 x controller	• <sup>4)</sup> <sup>5)</sup>	• <sup>4)</sup>	–	• <sup>7)</sup>
• PLC5/11, /20, /30, /40, /60, /80 (RS 232)				
via KF2 gateway and DH+ network to max. 4 x controllers <sup>2)</sup>	• <sup>4)</sup> <sup>5)</sup>	• <sup>4)</sup>	–	• <sup>7)</sup> <sup>8)</sup>
• SLC 5/04				
• PLC5/11, /20, /30, /40, /60, /80 (RS 232)				
via KF2 gateway and DH+ network to max. 4 x controllers <sup>2)</sup>	• <sup>5)</sup>	•	–	–
• SLC 5/04				
• PLC5/11, /20, /30, /40, /60, /80 (RS 422)				
via KF3 gateway and DH485 network to max. 4 x controllers <sup>2)</sup>	• <sup>4)</sup> <sup>5)</sup>	• <sup>4)</sup>	–	• <sup>7)</sup> <sup>8)</sup>
• SLC 500				
• MicroLogix (RS 232)				
• System interface possible				
– System interface not possible				

<sup>1)</sup> Mobile Panel connection via special connecting cable and connection box (see Mobile Panels), see Manual for cable assignment

<sup>2)</sup> The following listed controllers can be combined as required

<sup>3)</sup> Basic Panel PN only

<sup>4)</sup> The RS 422/RS 232 adapter 6AV6671-8XE00-0AX0 is required for Basic Panels and Comfort Panels

<sup>5)</sup> Basic Panel DP only

<sup>6)</sup> Connection via Allen Bradley PC cable 1747 CP3

<sup>7)</sup> Connection via Allen Bradley PC cable 1784 CP10

<sup>8)</sup> For connection to KF2/KF3 gateway, a gender-changer (25-pin socket/25-pin socket) is required on the gateway side

#### Note:

For detailed information on cable assignment, refer to WinCC Online Help; see also FAQs:

<http://support.automation.siemens.com/WW/view/en/29034071>

## Operator panels

System interfaces with WinCC (TIA Portal)

### Controllers from other manufacturers

#### Overview

Controller	SIMATIC HMI			
Target hardware (PROTOCOL) (physics)	Basic Panel	Comfort Panel Outdoor	KTPx00(F) Mobile	WinCC Runtime Advanced
<b>Mitsubishi (MC TCP/IP)</b>				
via Ethernet IP network to max. 4 x controllers <sup>2)</sup> • FX series FX3G, FX3U, FX3UC with Ethernet module FX3U ENET, • Series Q with Ethernet module QJ71E71-100 • iQ series/QnUD QnUDEH	• <sup>3)</sup>	•	•	•
<b>Mitsubishi FX (serial)</b>				
to max. 1 x controller FX series FX1N, FX2N (RS 232)	• <sup>4)</sup>	•	—	• <sup>5)</sup>

- System interface possible
- System interface not possible

1) Mobile Panel connection via special connecting cable and connection box (see Mobile Panels), see Manual for cable assignment

2) The following listed controllers can be combined as required

3) Basic Panel PN only

4) Basic Panel DP only

5) Connection using a Mitsubishi PC cable SC-09 with integrated level converter RS 232/RS 422

#### Note:

For detailed information on cable assignment, refer to WinCC Online Help; see also FAQs:

<http://support.automation.siemens.com/WW/view/en/29034071>

Controller	SIMATIC HMI			
Target hardware (PROTOCOL) (physics)	Basic Panel	Comfort Panel Outdoor	KTPx00(F) Mobile	WinCC Runtime Advanced
<b>Modicon (MODBUS TCP/IP)</b>				
via MODBUS TCP/IP network to max. 4 x controllers <sup>2)</sup> • Concept Quantum, Unity Quantum • Momentum • Premium (TSX57) • TSX Micro (TSX37) • Modicon M340 20x0 (except 2010)  via TCP/IP Modbus Plus Bridge 174 CEV 200 40 and MODBUS PLUS network to max. 4 x controllers <sup>2)</sup> • Concept Quantum, Unity Quantum • Momentum • Compact	• <sup>3)</sup>	•	•	•
<b>Modicon (MODBUS RTU)</b>				
to max. 1 x controller • Concept Quantum • Momentum • Compact (RS 232)  via bridge BM85-000 or PLC with bridge functionality and MODBUS PLUS network to max. 4 x controllers <sup>2)</sup> • Concept Quantum • Compact (RS 232)	• <sup>4)</sup> <sup>5)</sup>	• <sup>4)</sup>	—	• •

• System interface possible

- System interface not possible

1) Mobile Panel connection via special connecting cable and connection box (see Mobile Panels), see Manual for cable assignment

2) The following listed controllers can be combined as required

3) Basic Panel PN only

4) The RS 422/RS 232 adapter 6AV6671-8XE00-0AX0 is required for Basic Panels and Mobile Panels

5) Basic Panel DP only

#### Note:

For detailed information on cable assignment, refer to WinCC Online Help; see also FAQs:

<http://support.automation.siemens.com/WW/view/en/29034071>

# Operator panels

## System interfaces with WinCC (TIA Portal)

### Controllers from other manufacturers

#### Overview

Controller	SIMATIC HMI			
Target hardware (PROTOCOL (physics))	Basic Panel	Comfort Panel Outdoor	KTPx00(F) Mobile	WinCC Runtime Advanced
<b>Omron (Link/Multi Link)</b>				
to max. 1 x controller	-	• <sup>3)</sup>	-	•
<ul style="list-style-type: none"> <li>• CP1L, CP1H, CP1E</li> <li>• CJ1M, CJ1H, CJ1G</li> <li>• CJ2H</li> <li>• CS1G, CS1H, CS1D</li> <li>• CP2MC (RS 232)</li> </ul>				
via converter NT-AL001 and RS 422 network to max. 4 x controllers <sup>2)</sup>	-	• <sup>3)</sup>	-	•
<ul style="list-style-type: none"> <li>• CP1L, CP1H, CP1E</li> <li>• CJ1M, CJ1H, CJ1G</li> <li>• CJ2H</li> <li>• CS1G, CS1H, CS1D</li> <li>• CP2MC (RS 232)</li> </ul>				
via RS 422 network to max. 4 x controllers <sup>2)</sup>	• <sup>4)</sup>	•	-	-
<ul style="list-style-type: none"> <li>• CP1L, CP1H, CP1E</li> <li>• CJ1M, CJ1H, CJ1G (RS 422)</li> </ul>				
via RS422 network to max. 4 x controllers <sup>2)</sup>	-	-	-	-
<ul style="list-style-type: none"> <li>• CJ2H</li> <li>• CS1G, CS1H, CS1D</li> <li>• CP2MC (RS 422)</li> </ul>				

- System interface possible
- System interface not possible

<sup>1)</sup> Mobile Panel connection via special connecting cable and connection box (see Mobile Panels), see Manual for cable assignment

<sup>2)</sup> The controllers listed below can be combined in any way required; connection via RS 422 interface of the controller or via RS 422 module

<sup>3)</sup> The RS 422/RS 232 adapter 6AV6671-8XE00-0AX0 is required for Basic Panels and Mobile Panels

<sup>4)</sup> Basic Panel DP only

#### Note:

For detailed information on cable assignment, refer to WinCC Online Help; see also FAQs:

<http://support.automation.siemens.com/WW/view/en/29034071>

## Operator panels

### Notes

2

## HMI software and automation software



<b>3/2</b>	<b>HMI software</b>	
<b>3/2</b>	<b>TIA Portal</b>	
3/2	SIMATIC WinCC Unified (TIA Portal)	
3/3	SIMATIC WinCC Unified Engineering	
3/4	SIMATIC WinCC Unified Runtime	
3/7	WinCC Unified (TIA Portal) options	
3/8	WinCC Unified Clients	
3/9	WinCC Unified Database options	
3/10	WinCC Unified Logging	
3/11	WinCC Unified Parameter Control	
3/12	WinCC Unified Report Execution	
3/13	WinCC Unified Collaboration	
3/14	SIMATIC WinCC Unified PI options	
3/14	WinCC Unified Calendar	
3/15	WinCC Unified Performance Insight	
<b>3/16</b>	<b>SIMATIC WinCC (TIA Portal)</b>	
3/17	SIMATIC WinCC (TIA Portal) Engineering	
3/20	SIMATIC WinCC (TIA Portal) Runtime	
3/21	WinCC Runtime Advanced	
3/25	WinCC Runtime Professional	
3/30	WinCC Runtime Communication	
3/36	SIMATIC WinCC (TIA Portal) options	
3/38	SIMATIC Logon	
3/39	WinCC Audit	
3/40	WinCC DataMonitor	
3/42	WinCC Logging	
3/44	WinCC Recipes	
3/45	WinCC Redundancy	
3/46	WinCC Server / WinCC Client	
3/48	WinCC Sm@rtServer	
3/50	WinCC WebNavigator	
<b>3/52</b>	<b>TIA Portal Optionen</b>	
3/52	SIMATIC Visualisation Architect	
3/53	SIMATIC ProDiag	
<b>3/54</b>	<b>SIMATIC WinCC V7</b>	
3/55	SIMATIC WinCC V7 basic software	
3/64	SIMATIC WinCC options	
3/65	SIMATIC TeleControl	
3/67	WinCC/Audit & WinCC/ChangeControl	
3/68	WinCC/Calendar Scheduler	
3/69	WinCC/Connectivity Pack &	
	WinCC Connectivity Station	
3/70	WinCC/Event Notifier	
3/71	WinCC/Open Development Kit (ODK)	
3/72	WinCC/PerformanceMonitor	
3/74	WinCC/Redundancy	
3/75	WinCC/Server	
3/76	WinCC/SES	
3/77	WinCC/User Archives	
<b>3/78</b>	<b>SIMATIC WinCC flexible</b>	
3/79	SIMATIC WinCC flexible ES	
3/81	SIMATIC WinCC flexible RT	
3/84	SIMATIC WinCC flexible options	
3/85	WinCC flexible /ChangeControl	
3/86	WinCC flexible /Archives	
3/87	WinCC flexible /Recipes	
3/88	WinCC flexible /Audit	
3/89	SIMATIC Logon for WinCC flexible	
3/90	WinCC flexible /Sm@rtAccess	
3/91	WinCC flexible /Sm@rtService	
3/92	WinCC flexible /OPC-Server	
3/93	WinCC flexible /ProAgent	
<b>3/94</b>	<b>SIMATIC ProAgent process diagnostics software</b>	
<b>3/95</b>	<b>Notification software for mobile devices</b>	
3/95	SIMATIC Notifier	
<b>3/96</b>	<b>SIMATIC WinCC OA</b>	
3/97	SIMATIC WinCC OA Software V3.18 <b>NEW</b>	
3/100	WinCC OA Single Station	
3/101	WinCC OA Server	
3/105	WinCC OA User Interfaces	
3/112	WinCC OA Drivers	
3/119	WinCC OA Add-ons	
3/130	WinCC OA Runtime Packages	
3/132	WinCC OA Development Packages	
3/133	WinCC OA Solution Frameworks	
3/136	WinCC OA Services	
3/137	WinCC OA Support	
3/140	WinCC OA Consulting	
3/141	WinCC OA Solution	
3/142	WinCC OA Trainings	
3/145	WinCC OA Travel costs	
3/146	WinCC OA Trade goods	
3/148	WinCC OA IOT Suite	
3/149	WinCC OA IOT Box	
3/151	WinCC OA IOT OPA	
<b>3/152</b>	<b>SCADA software</b>	
3/152	SIMATIC Information Server	
3/154	SIMATIC Process Historian	
3/156	WinCC IndustrialDataBridge	
3/157	WinCC WebUX	
3/159	Process management - Add-ons	
	WinCC Premium Add-ons	
3/160	PM-CONTROL	
3/161	PM-QUALITY	
3/162	PM-ANALYZE	
3/163	PM-MAINT	
3/164	PM-MES Interface	
3/165	PM-LOGON	
3/166	PM-OPEN EXPORT	
3/167	PM-OPEN IMPORT	
3/168	PM-OPEN MINDCONNECT	
3/169	PM-AGENT	
3/170	UNIVERSAL PM-PACKAGE	
3/171	COPYPROJECT	
3/172	PM-GRID CONTROL	
3/173	WinCC Add-ons and partner management	
<b>3/175</b>	<b>BRAUMAT</b>	
3/175	BRAUMAT / SISTAR	
<b>3/178</b>	<b>Software for energy management</b>	
3/179	SIMATIC Energy Suite	
3/181	SIMATIC Energy Manager	


## HMI software

TIA Portal

SIMATIC WinCC Unified (TIA Portal)

### Introduction

#### Overview

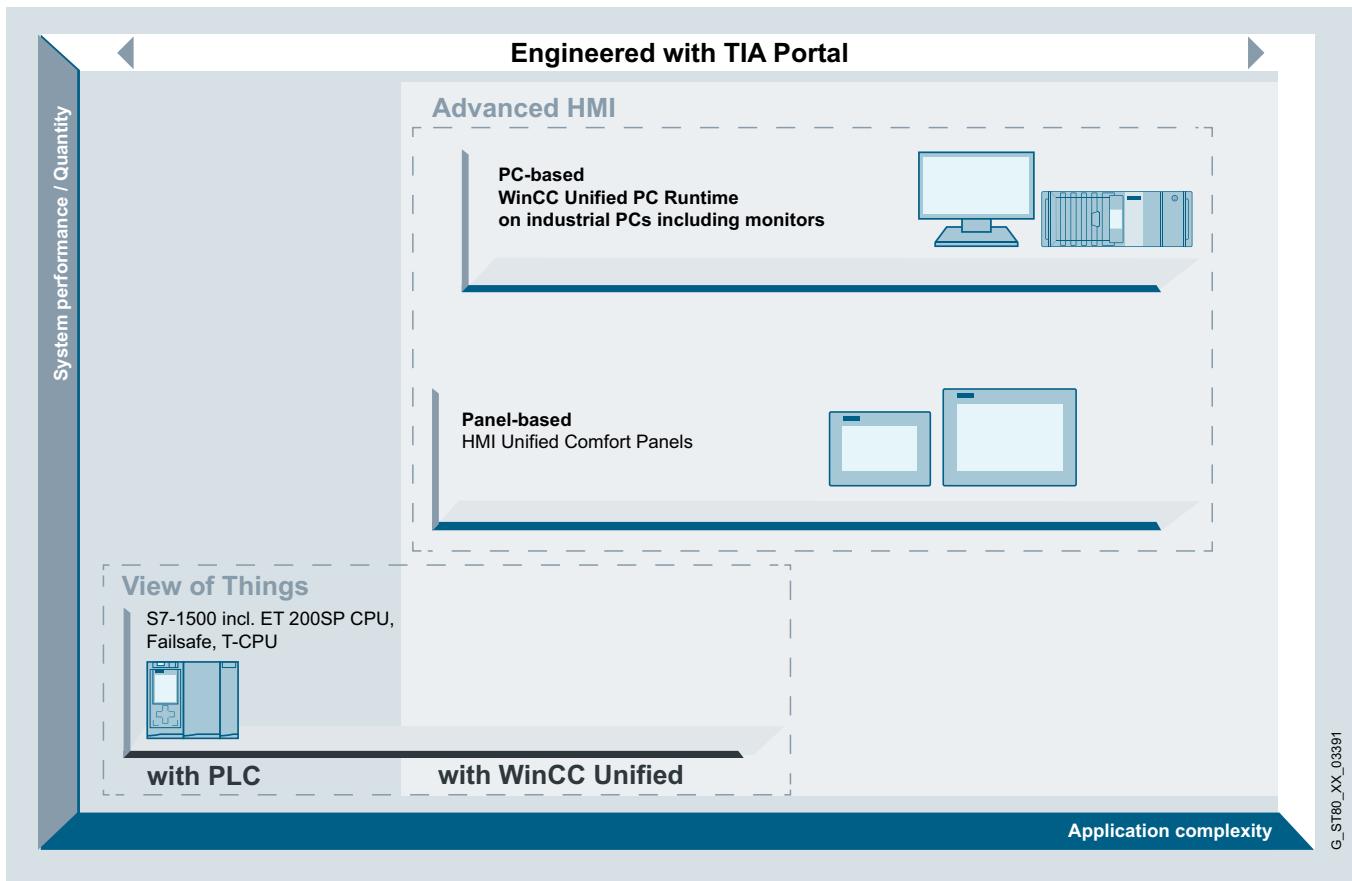

#### SIMATIC WinCC Unified (TIA Portal)

SIMATIC WinCC Unified is the new visualization system which permits users to competently meet the challenges of digitalization in machine and plant construction.

SIMATIC WinCC Unified combines the know-how accumulated from more than 30 years of experience in the area of Human Machine Interface with state-of-the-art hardware and software technologies.

##### Highlights:

- The latest technology with proven engineering
  - The runtime of the newly developed SIMATIC WinCC Unified visualization software is based on native web technologies such as HTML5, SVG and JavaScript.
  - Visualization is created simply and efficiently with SIMATIC WinCC Unified Engineering in the proven Totally Integrated Automation Portal (TIA Portal).

- Simple and unlimited scalability
  - Simple and consistently scalable for all applications, from the operator panel directly on the machine through to the complex SCADA solution.
  - SIMATIC Unified Comfort Panels and SIMATIC IPCs are provided to ensure optimum utilization of the performance capability of WinCC Unified.
  - Expandable to meet every demand and diverse possibilities for the implementation of requirements using open interfaces.
  - Through flexible data exchange, the system facilitates the interaction of all devices during operation and allows direct access to authorized users from any modern web browser – without the need for any additional installation.

[www.siemens.com/wincc-unified-system](http://www.siemens.com/wincc-unified-system)

**Overview****SIMATIC WinCC Unified Engineering**

- Proven engineering in the TIA Portal allows a consistent, efficient, and intuitive solution for all automation tasks.
- Together with the STEP 7 (TIA Portal) products, WinCC (TIA Portal) forms the optimum solution for integrated engineering.

- WinCC Unified Engineering is the configuration software for all applications, from the operator panel directly on the machine through to the complex SCADA solution.
- WinCC Unified Engineering also supports configuration of the SIMATIC Basic Panel, SIMATIC Comfort Panel and WinCC Runtime Advanced.

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC Unified Engineering System</b>		
<b>Base Packages V17</b>		
Data storage medium		
• WinCC Unified Comfort V17	<b>6AV2151-0XB01-7AA5</b>	<b>6AV2151-0XB01-6AA5</b>
• WinCC Unified PC (10k) ES V17	<b>6AV2153-2FB01-7AA5</b>	<b>6AV2153-2FB01-6AA5</b>
• WinCC Unified PC (100k) ES V17	<b>6AV2153-2GB01-7AA5</b>	<b>6AV2153-2GB01-6AA5</b>
• WinCC Unified PC (max.) ES V17	<b>6AV2153-0XB01-7AA5</b>	<b>6AV2153-0XB01-6AA5</b>
Download <sup>1)</sup>		
• WinCC Unified Comfort V17	<b>6AV2151-0XB01-7LA5</b>	<b>6AV2151-0XB01-6LA5</b>
• WinCC Unified PC (10k) ES V17	<b>6AV2153-2FB01-7LA5</b>	<b>6AV2153-2FB01-6LA5</b>
• WinCC Unified PC (100k) ES V17	<b>6AV2153-2GB01-7LA5</b>	<b>6AV2153-2GB01-6LA5</b>
• WinCC Unified PC (max.) ES V17	<b>6AV2153-0XB01-7LA5</b>	<b>6AV2153-0XB01-6LA5</b>
<b>PowerPacks V17</b>		
Data storage medium		
• WinCC Comfort -> WinCC Unified PC (10k)	<b>6AV2153-2FB20-0AB5</b>	<b>6AV2153-2FB21-6AB5</b>
• WinCC Unified PC (10k) -> WinCC Unified PC (100k)	<b>6AV2153-2GB20-0AB5</b>	<b>6AV2153-2GB21-6AB5</b>
• WinCC Unified PC (100k) -> WinCC Unified PC (max.)	<b>6AV2153-0XB20-0AB5</b>	<b>6AV2153-0XB21-6AB5</b>
• WinCC Advanced and WinCC Prof. 512..4096 -> WinCC Unified PC (100k)	<b>6AV2153-2GB60-0AB5</b>	
• WinCC Prof. max -> WinCC Unified PC (max.)	<b>6AV2153-0XB60-0AB5</b>	
Download <sup>1)</sup>		
• WinCC Comfort -> WinCC Unified PC (10k)	<b>6AV2153-2FB20-0LB5</b>	<b>6AV2153-2FB21-6LB5</b>
• WinCC Unified PC (10k) -> WinCC Unified PC (100k)	<b>6AV2153-2GB20-0LB5</b>	<b>6AV2153-2GB21-6LB5</b>
• WinCC Unified PC (100k) -> WinCC Unified PC (max.)	<b>6AV2153-0XB20-0LB5</b>	<b>6AV2153-0XB21-6LB5</b>
• WinCC Advanced and WinCC Prof. 512..4096 -> WinCC Unified PC (100k)	<b>6AV2153-2GB60-0LB5</b>	
• WinCC Prof. max -> WinCC Unified PC (max.)	<b>6AV2153-0XB60-0LB5</b>	
<b>Software Update Service</b>		
Download <sup>1)</sup>		
• WinCC Unified Comfort ES		<b>6AV2151-0XB00-0LY5</b>
• WinCC Unified PC (100k) ES		<b>6AV2153-2GB00-0LY5</b>
• WinCC Unified PC (10k) ES		<b>6AV2153-2FB00-0LY5</b>
• WinCC Unified PC (max.) ES		<b>6AV2153-0XB00-0LY5</b>

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

Additional information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

**HMI software**

TIA Portal

SIMATIC WinCC Unified (TIA Portal)

**SIMATIC WinCC Unified Runtime****Overview*****SIMATIC WinCC Unified Runtime***

A simple and consistently scalable PC-based visualization system for all applications, from single-user solutions directly on the machine through to complex SCADA solutions.

The basic package includes visualization, communication, alarms/messages, report creation, system structuring, and user administration.

Furthermore, a client for local operation, an additional WinCC Unified Client Operate for remote operator control and monitoring, and a WinCC Unified Client Monitor for monitoring only are also included in the basic package. Additional clients can be enabled with a license.

SIMATIC WinCC Unified is based on native web technologies such as HTML5, SVG and JavaScript. The visualization can be accessed via any modern web browser – without the need for additional installation.

Open interfaces and option packages allow the expansion and implementation of industry-specific application cases. Once created, components can be used comprehensively on all platforms, whether Panel or PC.

**Ordering data****Article No.***SIMATIC WinCC Unified Runtime System  
V17***Base Packages**

Data storage medium

- WinCC Unified PC (150) RT
- WinCC Unified PC (500) RT
- WinCC Unified PC (1 000) RT
- WinCC Unified PC (2 500) RT
- WinCC Unified PC (5 000) RT
- WinCC Unified PC (10k) RT
- WinCC Unified PC (50k) RT
- WinCC Unified PC (100k) RT
- WinCC Unified PC (max.) RT

Download<sup>1)</sup>

- WinCC Unified PC (150) RT
- WinCC Unified PC (500) RT
- WinCC Unified PC (1 000) RT
- WinCC Unified PC (2 500) RT
- WinCC Unified PC (5 000) RT
- WinCC Unified PC (10k) RT
- WinCC Unified PC (50k) RT
- WinCC Unified PC (100k) RT
- WinCC Unified PC (max.) RT

**17 ASIA**

Data storage medium

- WinCC Unified PC (150) RT
- WinCC Unified PC (500) RT
- WinCC Unified PC (1 000) RT
- WinCC Unified PC (2 500) RT
- WinCC Unified PC (5 000) RT
- WinCC Unified PC (10k) RT
- WinCC Unified PC (50k) RT
- WinCC Unified PC (100k) RT
- WinCC Unified PC (max.) RT

**Ordering data****Article No.****Article No.**

**SIMATIC WinCC Unified Runtime System V16**

**Base Packages**

Data storage medium

- WinCC Unified PC (150) RT
- WinCC Unified PC (500) RT
- WinCC Unified PC (1 000) RT
- WinCC Unified PC (2 500) RT
- WinCC Unified PC (5 000) RT
- WinCC Unified PC (10k) RT
- WinCC Unified PC (50k) RT
- WinCC Unified PC (100k) RT
- WinCC Unified PC (max.) RT

Download <sup>1)</sup>

- WinCC Unified PC (150) RT
- WinCC Unified PC (500) RT
- WinCC Unified PC (1 000) RT
- WinCC Unified PC (2 500) RT
- WinCC Unified PC (5 000) RT
- WinCC Unified PC (10k) RT
- WinCC Unified PC (50k) RT
- WinCC Unified PC (100k) RT
- WinCC Unified PC (max.) RT

**Upgrades**

WinCC Unified PC RT Upgrade V16 -> V17

- Data storage medium
- Download <sup>1)</sup>

**6AV2154-3DB01-6AA0****6AV2154-1EB01-6AA0****6AV2154-2EB01-6AA0****6AV2154-2MB01-6AA0****6AV2154-1FB01-6AA0****6AV2154-2FB01-6AA0****6AV2154-1GB01-6AA0****6AV2154-2GB01-6AA0****6AV2154-0XB01-6AA0****6AV2154-3DB01-6LA0****6AV2154-1EB01-6LA0****6AV2154-2EB01-6LA0****6AV2154-2MB01-6LA0****6AV2154-1FB01-6LA0****6AV2154-2FB01-6LA0****6AV2154-1GB01-6LA0****6AV2154-2GB01-6LA0****6AV2154-0XB01-6LA0****6AV2154-0BB31-7AA0****6AV2154-0BB31-7LA0****PowerPacks**

Data storage medium

- WinCC Unified PC (150->500) RT PowerPack (V16..V17)
- WinCC Unified PC (500->1k) RT PowerPack (V16..V17)
- WinCC Unified PC (1k->2.5k) RT PowerPack (V16..V17)
- WinCC Unified PC (2.5k->5k) RT PowerPack (V16..V17)
- WinCC Unified PC (5k->10k) RT PowerPack (V16..V17)
- WinCC Unified PC (10k->50k) RT PowerPack (V16..V17)
- WinCC Unified PC (50k->100k) RT PowerPack (V16..V17)
- WinCC Unified PC (100k->max.) RT PowerPack (V16..V17)

Download <sup>1)</sup>

- WinCC Unified PC (150->500) RT PowerPack (V16..V17)
- WinCC Unified PC (500->1k) RT PowerPack (V16..V17)
- WinCC Unified PC (1k->2.5k) RT PowerPack (V16..V17)
- WinCC Unified PC (2.5k->5k) RT PowerPack (V16..V17)
- WinCC Unified PC (5k->10k) RT PowerPack (V16..V17)
- WinCC Unified PC (10k->50k) RT PowerPack (V16..V17)
- WinCC Unified PC (50k->100k) RT PowerPack (V16..V17)
- WinCC Unified PC (100k->max.) RT PowerPack (V16..V17)

**6AV2154-1EB20-0AB0****6AV2154-2EB20-0AB0****6AV2154-2MB20-0AB0****6AV2154-1FB20-0AB0****6AV2154-2FB20-0AB0****6AV2154-1GB20-0AB0****6AV2154-2GB20-0AB0****6AV2154-0XB20-0AB0****6AV2154-1EB20-0LB0****6AV2154-2EB20-0LB0****6AV2154-2MB20-0LB0****6AV2154-1FB20-0LB0****6AV2154-2FB20-0LB0****6AV2154-1GB20-0LB0****6AV2154-2GB20-0LB0****6AV2154-0XB20-0LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

# HMI software

TIA Portal

SIMATIC WinCC Unified (TIA Portal)

## SIMATIC WinCC Unified Runtime

### Technical specifications

#### Requirements

##### SIMATIC WinCC Unified Runtime Station:

The performance is determined primarily by the hardware equipment. A powerful processor and more work memory should be selected for larger projects and visualization tasks, in particular. Depending on the options used, e.g. logging, additional free hard disk memory is required.

Technical specifications	SIMATIC WinCC Unified Runtime
<b>Hardware requirements (PC systems)</b>	
Processor type	<ul style="list-style-type: none"> <li>• x64 processor, Intel Core i3 or better is recommended</li> <li>• for small applications, also Intel Atom or Intel Celeron</li> </ul>
RAM	4 GB or better
Free hard disk space	10 GB, 8GB CF or better
<b>Operating systems (PC systems)</b>	<b>SIMATIC WinCC Unified Runtime V17</b>
Windows 10 Pro	<ul style="list-style-type: none"> <li>• Windows 10 Pro Version 1909 (64-bit)</li> <li>• Windows 10 Pro Version 2004 (64-bit)</li> <li>• Windows 10 Pro Version 2009/20H2 (64-bit)</li> </ul>
Windows 10 Enterprise	<ul style="list-style-type: none"> <li>• Windows 10 Enterprise Version 1909 (64-bit)</li> <li>• Windows 10 Enterprise Version 2004 (64-bit)</li> <li>• Windows 10 Enterprise Version 2009 (64-bit)</li> <li>• Windows 10 Enterprise Version 20H2 (64-bit)</li> </ul>
Windows 10 IoT Enterprise LTSB (Test for IPC)	<ul style="list-style-type: none"> <li>• Windows 10 IoT Enterprise 2016 LTSB (64-bit)</li> <li>• Windows 10 IoT Enterprise 2019 LTSC (64-bit)</li> </ul>
Windows Server 2016 Standard	Full installation (64-bit)
Windows Server 2019 Standard	Full installation (64-bit)
<b>Operating systems (PC systems)</b>	<b>SIMATIC WinCC Unified Runtime V16</b>
Windows 10 Pro	<ul style="list-style-type: none"> <li>• Windows 10 Pro Version 1809 (64-bit)</li> <li>• Windows 10 Pro Version 1903 (64-bit)</li> </ul>
Windows 10 Enterprise	<ul style="list-style-type: none"> <li>• Windows 10 Enterprise Version 1809 (64-bit)</li> <li>• Windows 10 Enterprise Version 1903 (64-bit)</li> </ul>
Windows 10 IoT Enterprise LTSB (Test for IPC)	<ul style="list-style-type: none"> <li>• Windows 10 IoT Enterprise 2015 LTSB (64-bit)</li> <li>• Windows 10 IoT Enterprise 2016 LTSB (64-bit)</li> <li>• Windows 10 IoT Enterprise 2019 LTSC (64-bit)</li> </ul>
Windows Server 2012 R2 StdE	Full installation (64-bit)
Windows Server 2016 Standard	Full installation (64-bit)
Windows Server 2019 Standard	Full installation (64-bit)

### SIMATIC WinCC Unified Runtime Client

An installed HTML5-capable web browser is required on a client to display the graphical user interface of the WinCC Unified Runtime. In principle, use of the latest available version of the respective browser is recommended.

### Technical specifications

Operating system SIMATIC WinCC Unified Runtime Client	Recommended browser
Microsoft Windows	<ul style="list-style-type: none"> <li>• Google Chrome (preferred) - Version 77 or newer</li> <li>• Microsoft Edge Chromium - Version 88 or newer</li> <li>• Mozilla Firefox - Version 78 or newer</li> <li>• Mozilla Firefox ESR - Version 78.6 or newer</li> </ul>
Android	<ul style="list-style-type: none"> <li>• Google Chrome (preferred)</li> <li>• Firefox</li> <li>• Edge</li> </ul>
iOS, Max	<ul style="list-style-type: none"> <li>• Safari (preferred)</li> <li>• Google Chrome</li> <li>• Firefox</li> <li>• Microsoft Edge</li> </ul>

### More information

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

## Overview

### **SIMATIC WinCC Unified options**

#### **WinCC Unified Client**

The WinCC Unified Client is the graphical interface for the WinCC Unified Runtime for operator control and monitoring.

The WinCC Unified Client accesses the WinCC Unified Runtime via web mechanisms (on the Runtime Station itself or via a network) to operate and monitor machines and plants. Using the standard web mechanisms, the WinCC Unified images can be displayed on any PCs or mobile devices in the HTML5-capable browser.

No additional know-how of the web is necessary for engineering of the WinCC Unified Screens in the TIA Portal.

#### Licensing:

A (server-based) license of WinCC Unified Runtime is required for the WinCC Unified Client.

This WinCC Unified Runtime licensing contains two WinCC Unified Client licenses – for local operation on the runtime station and for operation using an additional independent client.

The client licenses are provided on the runtime station (the server) and are graded in accordance with the number of simultaneous WinCC Unified Web Client access operations. The number can be increased at any time via additive WinCC Unified Client licenses (countable licenses).

The version-independent license packages are divided into 1, 3, 10, 30 and 100 WinCC Unified Clients.

#### **WinCC Unified Database Storage**

WinCC Unified PC uses a file-based database (SQLite) in the basic system for the archiving of process values and messages. The WinCC Unified Databased Storage option is available for use with greater quantity frameworks or lengthy archiving periods. All archive data is stored in an MS SQL server after installing the option and the license.

#### Licensing:

WinCC Unified PC:

- One license per WinCC Unified PC Runtime is required for activating the functionality.

#### **WinCC Unified Logging**

Option for WinCC Unified for archiving of process values and messages. Process value archiving for the recording, compression and storage of measured values and alarm logging to record events. Online evaluation of process value archives and alarm logs with display and possible operations, for example representation of trends and display of tables, as well as further processing. Powerful standard functions permit user-friendly and flexible utilization of the logs.

#### Licensing:

SIMATIC Unified Comfort Panels:

- Messages can be logged without an additional license.
- Process values (tags) can be archived without an additional license.
- Utilization of file-based archiving, with the possibility of a maximum 5 000 logging tags

WinCC Unified PC:

- Messages can be logged without an additional license.
- Graded licenses for the number of logging tags used are available for the archiving of process values (tags). This number can be increased at any time via additive WinCC Unified Logging Tags (countable licenses).
- The licenses are divided into 100, 500, 1 000, 5 000, 10 000 and 30 000 logging tags.
- A maximum of 5 000 logging tags are possible with utilization of the file-based archiving (default)
- When using the database-based archiving (optional), the number of logging tags is limited by the performance capability of the PC system being used.

#### **WinCC Unified Parameter Control**

Option for SIMATIC WinCC Unified for the generation and management of parameter sets which contain associated machine or production data. The structure of a user data type (PLC UDT or HMI UDT) can be adopted for one or more parameter set types and can be changed automatically using a new user data type version.

#### Licensing:

SIMATIC Unified Comfort Panels:

- No license is required

WinCC Unified PC:

- One license per WinCC Unified PC Runtime is required for activating the functionality.

#### **WinCC Unified Report Execution**

Excel Addin is included in the scope of supply of WinCC Unified to connect WinCC Unified Tags, Logging Tags and Alarms with an Excel report template. The report templates are imported into the WinCC Unified Runtime without the engineering system at runtime, and connected with execution parameters. Afterwards, reports are automatically created cyclically, needs-oriented or event-oriented, stored in Excel and/or PDF format and/or sent by email.

#### Licensing:

No license is required for the creation of reports in Excel and manual execution of the reports in Excel or from the Report Runtime Control. A WinCC Unified Report Execution license is required for the automated cyclic report dependent on requirements and events.

#### **WinCC Unified Collaboration**

#### Licensing:

Each WinCC Unified Station (Panel or PC) to be connected via collaboration requires a corresponding license. The scope and type of exchanged data is not limited. The configuration of Collaboration in the engineering system does not require additional licensing.

## HMI software

SIMATIC WinCC Unified (TIA Portal)

SIMATIC WinCC Unified options

### WinCC Unified Clients

#### Overview

##### **WinCC Unified Clients**

The WinCC Unified Client is the graphical interface for the WinCC Unified Runtime.

The WinCC Unified Client accesses the WinCC Unified Runtime via web mechanisms (on the Runtime Station itself or via a network) to operate and monitor machines and plants. Using the standard web mechanisms, the WinCC Unified images can be displayed on any PCs or mobile devices in the HTML5-capable browser.

No additional know-how of the web is necessary for engineering of the WinCC Unified Screens in the TIA Portal.

Two types of clients are available:

- WinCC Unified Client for operator control and monitoring processes
- WinCC Unified Client Monitor for monitoring only (View-Only)

#### **Licensing**

##### SIMATIC HMI Unified Comfort Panels:

A (Panel-based) license of the Panel is required for the WinCC Unified Client. A WinCC Unified Client (Operate) license is already included with each Panel. It can be extended with the WinCC Unified Client licenses. Three clients are permissible on the WinCC Unified Comfort Panel.

##### SIMATIC WinCC Unified PC:

A (server-based) license of WinCC Unified PC Runtime is required for the WinCC Unified Client.

Two WinCC Unified Client licenses and one WinCC Unified Client Monitor license are already included with each WinCC Unified PC Runtime licensing:

- For local operation on the runtime station
- For remote operation via an additional independent client.
- For local or remote monitoring via an additional independent Monitor client.

The client licenses are located on the WinCC Unified RT Station or the Unified Comfort Panel and are graded according to the number of simultaneous WinCC Unified web client access operations.

The number can be increased at any time via additive WinCC Unified Client licenses (countable licenses).

Version-independent license packages are available with 1, 3, 10, 30 or 100 WinCC Unified Clients or 1, 3, 10 WinCC Unified Monitor Clients.

#### **Ordering data**

#### **Article No.**

##### SIMATIC WinCC Unified options

##### **WinCC Unified Client (Operate)**

Data storage medium

- WinCC Unified Clients Operate (1)
- WinCC Unified Clients Operate (3)
- WinCC Unified Clients Operate (10)
- WinCC Unified Clients Operate (30)
- WinCC Unified Clients Operate (100)

Download <sup>1)</sup>

- WinCC Unified Clients Operate (1)
- WinCC Unified Clients Operate (3)
- WinCC Unified Clients Operate (10)
- WinCC Unified Clients Operate (30)
- WinCC Unified Clients Operate (100)

**6AV2157-1JW00-0AB0**

**6AV2157-3JW00-0AB0**

**6AV2157-2CW00-0AB0**

**6AV2157-6CW00-0AB0**

**6AV2157-2DW00-0AB0**

**6AV2157-1JW00-0LB0**

**6AV2157-3JW00-0LB0**

**6AV2157-2CW00-0LB0**

**6AV2157-6CW00-0LB0**

**6AV2157-2DW00-0LB0**

##### **WinCC Unified Client (Monitor)**

Data storage medium

- WinCC Unified Clients Monitor (1)
- WinCC Unified Clients Monitor (3)
- WinCC Unified Clients Monitor (10)

Download <sup>1)</sup>

- WinCC Unified Clients Monitor (1)
- WinCC Unified Clients Monitor (3)
- WinCC Unified Clients Monitor (10)

**6AV2157-1JM00-0AB0**

**6AV2157-3JM00-0AB0**

**6AV2157-2CM00-0AB0**

**6AV2157-1JM00-0LB0**

**6AV2157-3JM00-0LB0**

**6AV2157-2CM00-0LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### **More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

**SIMATIC WinCC Unified Database options****Overview****WinCC Unified Database Storage**

SIMATIC WinCC Unified PC uses a file-based database (SQLite) in the basic system for the archiving of process values and messages.

The WinCC Unified Databased Storage option is available for use with greater quantity frameworks or lengthy archiving periods. All archive data is stored in an MS SQL server after installing the option and the license.

**Licensing****SIMATIC WinCC Unified PC:**

- One license per WinCC Unified PC Runtime is required for activating the functionality.
- Alarms can be logged without an additional license.
- Licenses for the number of logging tags used are required for the archiving of process values (tags).

This number can be increased at any time via additive WinCC Unified logging tags (countable licenses).

**Ordering data****Article No.****SIMATIC WinCC Unified options****WinCC Unified Database V17**

- Data storage medium
- Download <sup>1)</sup>

**6AV2154-0BS01-7AA0**  
**6AV2154-0BS01-7LA0**

**WinCC Unified Database Upgrade****V16 → V17**

- Data storage medium
- Download <sup>1)</sup>

**6AV2154-0BS31-7AA0**  
**6AV2154-0BS31-7LA0**

**WinCC Unified Database V16****Data storage medium**

- Data storage medium
- Download <sup>1)</sup>

**6AV2154-0BS01-6AA0**  
**6AV2154-0BS01-6LA0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

## HMI software

SIMATIC WinCC Unified (TIA Portal)

SIMATIC WinCC Unified options

### WinCC Unified Logging

#### Overview

##### **WinCC Unified Logging**

Option for WinCC Unified for archiving of process values and messages. Process value archiving for the recording, compression and storage of measured values and alarm logging to record events. Online evaluation of process value archives and alarm logs with display and possible operations, for example representation of trends and display of tables, as well as further processing. Powerful standard functions permit user-friendly and flexible utilization of the logs.

#### Licensing

##### SIMATIC HMI Unified Comfort Panels:

- Messages can be logged without an additional license.
- Process values (tags) can be archived without an additional license.
- Utilization of file-based archiving, with the possibility of a maximum 5 000 logging tags

##### SIMATIC WinCC Unified PC:

- Messages can be logged without an additional license.
- Graded licenses for the number of logging tags used are available for the archiving of process values (tags). This number can be increased at any time via additive WinCC Unified Logging Tags (countable licenses).
- The licenses are divided into 100, 500, 1 000, 5 000, 10 000 and 30 000 logging tags.
- A maximum of 5 000 logging tags are possible with utilization of the file-based archiving (default)
- When using the database-based archiving (optional), the number of logging tags is limited by the performance capability of the PC system being used.

#### Ordering data

#### Article No.

##### *SIMATIC WinCC Unified options*

##### **WinCC Unified Logging**

Data storage medium

- WinCC Unified Logging Tags (100)
- WinCC Unified Logging Tags (500)
- WinCC Unified Logging Tags (1000)
- WinCC Unified Logging Tags (5000)
- WinCC Unified Logging Tags (10k)
- WinCC Unified Logging Tags (30k)

Download<sup>1)</sup>

- WinCC Unified Logging Tags (100)
- WinCC Unified Logging Tags (500)
- WinCC Unified Logging Tags (1000)
- WinCC Unified Logging Tags (5000)
- WinCC Unified Logging Tags (10k)
- WinCC Unified Logging Tags (30k)

**6AV2157-2DA00-0AB0**

**6AV2157-1EA00-0AB0**

**6AV2157-2EA00-0AB0**

**6AV2157-1FA00-0AB0**

**6AV2157-2FA00-0AB0**

**6AV2157-6FA00-0AB0**

**6AV2157-2DA00-0LB0**

**6AV2157-1EA00-0LB0**

**6AV2157-2EA00-0LB0**

**6AV2157-1FA00-0LB0**

**6AV2157-2FA00-0LB0**

**6AV2157-6FA00-0LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### More information

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

**Overview****WinCC Unified Parameter Control**

Option for SIMATIC WinCC Unified for the generation and management of parameter sets which contain associated machine or production data. The structure of a user data type (PLC UDT or HMI UDT) can be adopted for one or more parameter set types and can be changed automatically using a new user data type version.

Licensing:

SIMATIC HMI Unified Comfort Panels:

- No license is required

SIMATIC WinCC Unified PC:

- One license per WinCC Unified PC Runtime is required for activating the functionality.

**Ordering data****Article No.***SIMATIC WinCC Unified options***WinCC Unified Parameter Control V17**

Data storage medium

- WinCC Unified Parameter Control (PC) V17
- WinCC Unified Parameter Control (PC), Upgrade V16->V17

Download<sup>1)</sup>

- WinCC Unified Parameter Control (PC) V17
- WinCC Unified Parameter Control (PC), Upgrade V16->V17

**6AV2154-0BP01-7AB0****6AV2154-0BP31-7AB0****6AV2154-0BP01-7LB0****6AV2154-0BP31-7LB0****WinCC Unified Parameter Control V16**

Data storage medium

- WinCC Unified Parameter Control (PC)

Download<sup>1)</sup>

- WinCC Unified Parameter Control (PC)

**6AV2154-0BP01-6AB0****6AV2154-0BP01-6LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

## HMI software

SIMATIC WinCC Unified (TIA Portal)  
SIMATIC WinCC Unified options

### WinCC Unified Report Execution

#### Overview

##### **WinCC Unified Report Execution**

Excel Addin is included in the scope of supply of WinCC Unified to connect WinCC Unified Tags, Logging Tags and Alarms with an Excel report template. The report templates are imported into the WinCC Unified Runtime without the engineering system at runtime, and connected with execution parameters. Reports are automatically created cyclically, dependent on requirements and events, and then stored in Excel or PDF format. The created report can be sent by secured or unsecured email. The email contacts are created during WinCC Unified Runtime.

##### Licensing:

No license is required for the creation of reports in Excel and manual execution of the reports in Excel or from the Report Runtime Control. A WinCC Unified Report Execution license is required for the automated cyclic report dependent on requirements and events.

3

#### Ordering data

#### Article No.

##### *SIMATIC WinCC Unified options*

##### **WinCC Unified Report Execution**

##### V17

Data storage medium

- WinCC Unified Report Execution

Download<sup>1)</sup>

- WinCC Unified Report Execution

**6AV2157-0BQ01-7AB0**

**6AV2157-0BQ01-7LB0**

##### V16

Data storage medium

- WinCC Unified Report Execution

Download<sup>1)</sup>

- WinCC Unified Report Execution

**6AV2157-0BQ01-6AB0**

**6AV2157-0BQ01-6LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### More information

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

**Overview****WinCC Unified Runtime Collaboration**

The option for Unified Collaboration offers the possibility to connect several Unified systems (Panels and PC) with each other and to exchange data in runtime.

For example, process displays from other stations can be referenced and shown in a display window to easily and efficiently create plant overview displays.

**Licensing**

SIMATIC HMI Unified Comfort Panels and  
SIMATIC WinCC Unified PC:

Each WinCC Unified Station (Panel or PC) to be connected via collaboration requires a corresponding license.

The volume and type of data exchanged is not limited.  
The configuration of Collaboration in the engineering system does not require additional licensing.

**Ordering data****Article No.****SIMATIC WinCC Unified options****WinCC Unified Collaboration V17**

Data storage medium

- WinCC Unified Collaboration (PC & Panel)
- Upgrade V16->V17  
WinCC Unified Collaboration (PC & Panel)

Download<sup>1)</sup>

- WinCC Unified Collaboration (PC & Panel)
- Upgrade V16->V17  
WinCC Unified Collaboration (PC & Panel)

**6AV2154-0BR01-7AB0****6AV2154-0BR31-7AB0****6AV2154-0BR01-7LB0****6AV2154-0BR31-7LB0****WinCC Unified Collaboration V16**

Data storage medium

- WinCC Unified Collaboration (PC)

Download<sup>1)</sup>

- WinCC Unified Collaboration (PC)

**6AV2154-0BR01-6AB0****6AV2154-0BR01-6LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

## HMI software

SIMATIC WinCC Unified (TIA Portal)

SIMATIC WinCC Unified Plant Intelligence options

### WinCC Unified Calendar

#### Overview

##### **Plant Intelligence options**

With the SIMATIC WinCC Unified Plant Intelligence options, it is possible to expand SIMATIC WinCC Unified Runtime in line with the requirements on the production plant and visualize it in HMI.

The options allow you to plan production processes and analyze and optimize the overall effectiveness of your plant. Furthermore, flexible production sequences can be designed, and complex and chained production sequences in the plant can be coordinated.

##### Note:

The SIMATIC WinCC Unified Plant Intelligence options can be used on a PC system. The technological plant hierarchy is a prerequisite for using the SIMATIC WinCC Unified Plant Intelligence options.

3

#### Overview

##### **WinCC Unified Calendar**

Recurring, calendar-related working times (shifts) and processes (switching commands) can be planned and modified in advance using the WinCC Unified Calendar.

Planning is based on predefined templates and a time model. This time model is used equally for the "WinCC Unified Calendar" and "WinCC Unified Performance Insight" options.

A technological system hierarchy for the project is created in the TIA Portal. One main calendar is assigned to one branch (main node or root node) within this hierarchy. For runtime (within WinCC Unified Runtime), templates can be created for this main calendar and planning for working times and processes can be defined. Planning takes effect automatically for its "hierarchical children"; they can be supplemented or modified there.

The "WinCC Unified Calendar" option is only available for the WinCC Unified PC system.

#### Ordering data

#### Article No.

<b>WinCC Unified Calendar V17</b>	
<a href="#">Download<sup>1)</sup></a>	
• WinCC Unified Calendar Base	<b>6AV2156-0BC01-7LA0</b>
<b>WinCC Unified Calendar Extension (1)</b>	<b>6AV2156-1JC00-0AB0</b>
<a href="#">Download<sup>1)</sup></a>	
<b>Upgrade V16 -&gt; V17</b>	<b>6AV2156-1BC31-7LA0</b>
<a href="#">Download<sup>1)</sup></a>	
<b>WinCC Unified Calendar V16</b>	
<a href="#">Download<sup>1)</sup></a>	
• WinCC Unified Calendar Base	<b>6AV2156-0BC01-6LA0</b>

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### More information

Additional information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

**WinCC Unified Performance Insight****Overview****WinCC Unified Performance Insight**

The WinCC Unified Performance Insight can be used to calculate and analyze plant-specific indicators for individual plant units, machines or entire production lines in machine or line-oriented production plants with WinCC Unified PC systems.

**Ordering data****Article No.****WinCC Unified Performance Insight****Data storage medium**

- WinCC Unified Performance Insight (PC) Base incl. 3 analyzed plant objects
- 10 analyzed plant objects
- 30 analyzed plant objects
- 100 analyzed plant objects
- 300 analyzed plant objects

**Download<sup>1)</sup>**

- WinCC Unified Performance Insight (PC) Base incl. 3 analyzed plant objects
- 10 analyzed plant objects
- 30 analyzed plant objects
- 100 analyzed plant objects
- 300 analyzed plant objects

**6AV2156-0BP01-6AA0****6AV2156-2CP00-0AB0****6AV2156-6CP00-0AB0****6AV2156-2DP00-0AB0****6AV2156-0XP00-0AB0****6AV2156-0BP01-6LA0****6AV2156-2CP00-0LB0****6AV2156-6CP00-0LB0****6AV2156-2DP00-0LB0****6AV2156-0XP00-0LB0**

<sup>1)</sup> Current information and availability regarding the new type of delivery is available at: <http://www.siemens.com/tia-online-software-delivery>

**More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-unified-system>

## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal)

#### Overview



#### ***SIMATIC WinCC (TIA Portal) engineering software***

Family of configuration systems with WinCC Basic, Comfort, Advanced and Professional for SIMATIC operator panels, as well as for the WinCC Runtime Advanced and WinCC Runtime Professional PC-based visualization systems.

#### **SIMATIC WinCC Runtime Advanced visualization software**

- PC-based operator control and monitoring solution for single-user systems directly at the machine
- Basic package for visualization, reporting and logging, user administration, can be expanded flexibly with VB scripts
- Basic package expandable by means of option packages
- Can be integrated into automation solutions based on TCP/IP networks
- Expanded service concepts with remote operation, diagnostics and administration over the intranet and Internet in combination with email communication

<http://www.siemens.com/wincc-advanced>

#### **SIMATIC WinCC Runtime Professional visualization software**

- PC-based operator control and monitoring system for visualization and operator control of processes, production flows, machines and plants in all sectors – from the simple single-user station through to distributed multi-user systems and cross-location solutions with web clients. WinCC Runtime Professional is the information hub for corporation-wide vertical integration.
- Industry-standard functions for signaling and acknowledging events, archiving of messages and measured values, logging of all process and configuration data, user administration, can be expanded flexibly with VB and C scripts
- Basic package expandable by means of option packages
- Also included are APIs for the Runtime to utilize the open programming interfaces

<http://www.siemens.com/wincc-professional>

**SIMATIC WinCC (TIA Portal) Engineering****Overview**

- Integrated family of engineering tools for configuring SIMATIC HMI operator panels, as well as for the PC-based visualization systems WinCC Runtime Advanced and WinCC Runtime Professional.
- WinCC (TIA Portal) is based on the new central engineering framework Totally Integrated Automation Portal (TIA Portal), which offers the user a uniform, efficient and intuitive solution to all automation tasks.
- WinCC (TIA Portal) also offers uniform engineering from the Basic Panel through to SCADA applications.
- Together with the STEP 7 (TIA Portal) products, WinCC (TIA Portal) forms the optimum solution for integrated, efficient engineering.

Current version:

- SIMATIC WinCC Basic V17
- SIMATIC WinCC Comfort V17
- SIMATIC WinCC Advanced V17
- SIMATIC WinCC Professional V17

**Ordering data****Article No.**

<b>SIMATIC WinCC V17</b>	
<b>SIMATIC WinCC Basic V17</b>	<b>6AV2100-0AA07-0AA5</b> <b>6AV2100-0AA07-0AH5</b>
<b>SIMATIC WinCC Comfort V17</b>	<b>6AV2101-0AA07-0AA5</b> <b>6AV2101-0AA07-0AH5</b>
<b>SIMATIC WinCC Advanced V17</b>	<b>6AV2102-0AA07-0AA5</b> <b>6AV2102-0AA07-0AH5</b>
<b>SIMATIC WinCC Professional V17</b>	
Data storage medium	
• 512 PowerTags	<b>6AV2103-0DA07-0AA5</b>
• 4 096 PowerTags	<b>6AV2103-0HA07-0AA5</b>
• Max. PowerTags	<b>6AV2103-0XA07-0AA5</b>
Download <sup>1)</sup>	
• 512 PowerTags	<b>6AV2103-0DA07-0AH5</b>
• 4 096 PowerTags	<b>6AV2103-0HA07-0AH5</b>
• Max. PowerTags	<b>6AV2103-0XA07-0AH5</b>
<b>SIMATIC STEP 7 / SIMATIC WinCC trial licenses</b>	
<b>SIMATIC STEP 7 Basic/Professional; SIMATIC WinCC Basic/Comfort/Advanced V17, trial license, on data storage medium, 21 day trial</b>	<b>6AV2102-0AA07-0AA7</b>
<b>SIMATIC STEP 7 Basic/Professional; SIMATIC WinCC Professional V17, trial license on data storage medium, 21 day trial</b>	<b>6AV2103-0AA07-0AA7</b>
<b>SIMATIC 50 h Engineering V17</b> with STEP 7 Professional Combo, WinCC Professional (incl. WinCC flexible 2008) and STEP 7 Safety Advanced (incl. Distributed Safety)	<b>6ES7823-1GE07-0YA5</b>

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**HMI software**

TIA Portal

SIMATIC WinCC (TIA Portal)

**SIMATIC WinCC (TIA Portal) Engineering**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>PowerPacks (without version change)</b>		
<b>SIMATIC WinCC Basic -&gt; Comfort</b>		
• Data storage medium • Download <sup>1)</sup>	<b>6AV2101-2AA00-0BD5</b> <b>6AV2101-2AA00-0BJ5</b>	<b>SIMATIC WinCC V16</b> • Data storage medium • Download <sup>1)</sup>
<b>SIMATIC WinCC Comfort -&gt; Advanced</b>		<b>SIMATIC WinCC Comfort V16</b> • Data storage medium • Download <sup>1)</sup>
• Data storage medium • Download <sup>1)</sup>	<b>6AV2102-2AA00-0BD5</b> <b>6AV2102-2AA00-0BJ5</b>	<b>SIMATIC WinCC Advanced V16</b> • Data storage medium • Download <sup>1)</sup>
<b>SIMATIC WinCC Advanced -&gt; Professional</b>		<b>SIMATIC WinCC Professional V16</b> Data storage medium • 512 PowerTags • 4 096 PowerTags • Max. PowerTags Download <sup>1)</sup> • 512 PowerTags • 4 096 PowerTags • Max. PowerTags
Data storage medium • 512 PowerTags • 4 096 PowerTags • Max. PowerTags Download <sup>1)</sup> • 512 PowerTags • 4 096 PowerTags • Max. PowerTags	<b>6AV2103-2AD00-0BD5</b> <b>6AV2103-2DH00-0BD5</b> <b>6AV2103-2HX00-0BD5</b>  <b>6AV2103-2AD00-0BJ5</b> <b>6AV2103-2DH00-0BJ5</b> <b>6AV2103-2HX00-0BJ5</b>	<b>6AV2103-0DA06-0AA5</b> <b>6AV2103-0HA06-0AA5</b> <b>6AV2103-0XA06-0AA5</b>  <b>6AV2103-0DA06-0AH5</b> <b>6AV2103-0HA06-0AH5</b> <b>6AV2103-0XA06-0AH5</b>
<b>Upgrades</b>		
<b>WinCC V11..16 -&gt; WinCC V17</b>		
Data storage medium • SIMATIC WinCC Basic • SIMATIC WinCC Comfort • SIMATIC WinCC Advanced • SIMATIC WinCC Professional 512 PowerTags • SIMATIC WinCC Professional 4 096 PowerTags • SIMATIC WinCC Professional max. PowerTags Download <sup>1)</sup> • SIMATIC WinCC Basic • SIMATIC WinCC Comfort • SIMATIC WinCC Advanced • SIMATIC WinCC Professional 512 PowerTags • SIMATIC WinCC Professional 4 096 PowerTags • SIMATIC WinCC Professional max. PowerTags	<b>6AV2100-3AA07-0AE5</b> <b>6AV2101-3AA07-0AE5</b> <b>6AV2102-3AA07-0AE5</b> <b>6AV2103-3DA07-0AE5</b>  <b>6AV2103-3HA07-0AE5</b>  <b>6AV2103-3XA07-0AE5</b>  <b>6AV2100-3AA07-0AK5</b> <b>6AV2101-3AA07-0AK5</b> <b>6AV2102-3AA07-0AK5</b> <b>6AV2103-3DA07-0AK5</b>  <b>6AV2103-3HA07-0AK5</b>  <b>6AV2103-3XA07-0AK5</b>	<b>SIMATIC STEP 7 / SIMATIC WinCC trial licenses</b> <b>SIMATIC STEP 7 Basic/Professional; SIMATIC WinCC Basic/Comfort/Advanced V16, trial license on DVD, 21 day trial</b> <b>SIMATIC STEP 7 Professional; SIMATIC WinCC Professional V16, trial license on DVD, 21 day trial</b> <b>SIMATIC 50 h Engineering V16</b> with STEP 7 Professional Combo, WinCC Professional (incl. WinCC flexible 2008) and STEP 7 Safety Advanced (incl. Distributed Safety)

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

Ordering data	Article No.	Article No.
<p><b>Software Update Service</b>  For a period of 12 months and for a fixed price, the customer is automatically provided with all upgrades and Service Packs for each installed WinCC engineering system or option. The contract is automatically extended by a further year unless canceled at least 12 weeks prior to expiration.</p>	<p><b>Software Update Service (Standard Edition)</b>  The delivery is implemented according to the number of ordered SUS products (e.g. 10 upgrade packages with 10 DVDs, 10 USB flash drives, etc.)</p> <ul style="list-style-type: none"> <li>• SIMATIC WinCC Comfort</li> <li>• SIMATIC WinCC Advanced</li> <li>• SIMATIC WinCC Professional 512 PowerTags</li> <li>• SIMATIC WinCC Professional 4 096 PowerTags</li> <li>• SIMATIC WinCC Professional max. PowerTags</li> </ul>	<p><b>Software Update Service (Compact Edition)</b>  The delivery items are combined. For several contracts, only 1 package with 1 data storage medium set, 1 USB flash drive with the corresponding number of licenses and the corresponding number of CoLs will be supplied.  Delivery items to be combined must be ordered as one item.</p> <ul style="list-style-type: none"> <li>• SIMATIC WinCC Comfort</li> <li>• SIMATIC WinCC Advanced</li> <li>• SIMATIC WinCC Professional 512 PowerTags</li> <li>• SIMATIC WinCC Professional 4 096 PowerTags</li> <li>• SIMATIC WinCC Professional max. PowerTags</li> </ul> <p>Download <sup>1)</sup>  Email address required for delivery</p> <ul style="list-style-type: none"> <li>• SIMATIC WinCC Comfort</li> <li>• SIMATIC WinCC Advanced</li> <li>• SIMATIC WinCC Professional 512 PowerTags</li> <li>• SIMATIC WinCC Professional 4 096 PowerTags</li> <li>• SIMATIC WinCC Professional max. PowerTags</li> </ul>
	<p><b>6AV6612-0AA00-0AL0</b>  <b>6AV6613-0AA00-0AL0</b>  <b>6AV2103-0DA00-0AL0</b></p> <p><b>6AV2103-0HA00-0AL0</b>  <b>6AV2103-0XA00-0AL0</b></p>	<p><b>6AV6612-0AA00-0AM0</b>  <b>6AV6613-0AA00-0AM0</b>  <b>6AV2103-0DA00-0AM0</b></p> <p><b>6AV2103-0HA00-0AM0</b>  <b>6AV2103-0XA00-0AM0</b></p>

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

More information is available on the Internet at:  
<http://www.siemens.com/wincc-unified-system>


## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) Runtime

#### Overview

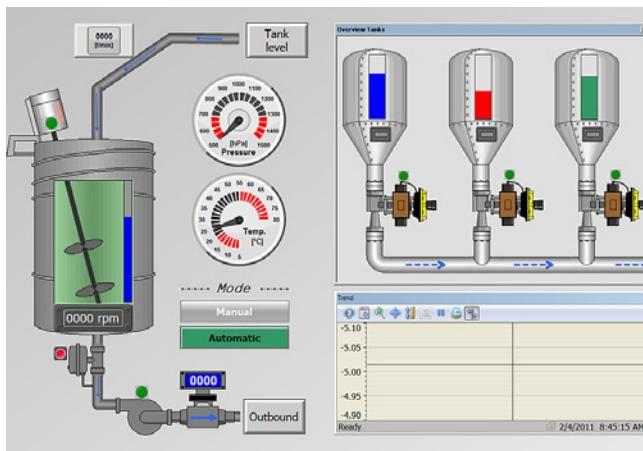

#### SIMATIC WinCC Runtime Advanced visualization software

- PC-based operator control and monitoring solution for single-user systems directly at the machine
- Basic package for visualization, reporting and logging, user administration, can be expanded flexibly with VB scripts
- Basic package expandable by means of option packages
- Can be integrated into automation solutions based on TCP/IP networks
- Expanded service concepts with remote operation, diagnostics and administration over the intranet and Internet in combination with email communication

<http://www.siemens.com/wincc-advanced>

#### SIMATIC WinCC Runtime Professional visualization software

• PC-based operator control and monitoring system for visualization and operator control of processes, production flows, machines and plants in all sectors – from the simple single-user station through to distributed multi-user systems and cross-location solutions with web clients. WinCC Runtime Professional is the information hub for corporation-wide vertical integration.

- Industry-standard functions for signaling and acknowledging events, archiving of messages and measured values, logging of all process and configuration data, user administration, can be expanded flexibly with VB and C scripts
- Basic package expandable by means of option packages
- Also included are APIs for the Runtime to utilize the open programming interfaces

Additional information is available on the Internet at:

<http://www.siemens.com/wincc-professional>

SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Advanced

## Overview

PC-based operator control and monitoring system for single-user systems directly at the machine.

SIMATIC WinCC Runtime Advanced is configured with the SIMATIC WinCC Advanced or SIMATIC WinCC Professional configuration software.

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC Runtime Advanced V17</b>		
<b>Basic software</b>		
Data storage medium		
• 128 PowerTags	<b>6AV2104-0BA07-0AA0</b>	<b>6AV2104-3BB07-0AE0</b>
• 512 PowerTags	<b>6AV2104-0DA07-0AA0</b>	<b>6AV2104-3DD07-0AE0</b>
• 2 048 PowerTags	<b>6AV2104-0FA07-0AA0</b>	<b>6AV2104-3FF07-0AE0</b>
• 4 096 PowerTags	<b>6AV2104-0HA07-0AA0</b>	<b>6AV2104-3HH07-0AE0</b>
• 8 192 PowerTags	<b>6AV2104-0KA07-0AA0</b>	<b>6AV2105-3KK07-0AE0</b>
• 16 384 PowerTags	<b>6AV2104-0LA07-0AA0</b>	
<u>as download<sup>1)</sup></u>		
Email address required for delivery		
• 128 PowerTags	<b>6AV2104-0BA07-0AH0</b>	<b>6AV2104-3BB07-0AK0</b>
• 512 PowerTags	<b>6AV2104-0DA07-0AH0</b>	<b>6AV2104-3DD07-0AK0</b>
• 2 048 PowerTags	<b>6AV2104-0FA07-0AH0</b>	<b>6AV2104-3FF07-0AK0</b>
• 4 096 PowerTags	<b>6AV2104-0HA07-0AH0</b>	<b>6AV2104-3HH07-0AK0</b>
• 8 192 PowerTags	<b>6AV2104-0KA07-0AH0</b>	<b>6AV2105-3KK07-0AK0</b>
• 16 384 PowerTags	<b>6AV2104-0LA07-0AH0</b>	
<b>PowerPacks (version-independent)</b>		
<b>SIMATIC WinCC Runtime Advanced</b>		
Data storage medium		
• 128 PowerTags to 512 PowerTags	<b>6AV2104-2BD00-0BD0</b>	<b>6AV2104-4BB07-0AE0</b>
• 512 PowerTags to 2 048 PowerTags	<b>6AV2104-2DF00-0BD0</b>	<b>6AV2104-4DD07-0AE0</b>
• 2 048 PowerTags to 4 096 PowerTags	<b>6AV2104-2FH00-0BD0</b>	<b>6AV2104-4FF07-0AE0</b>
• 4 096 PowerTags to 8 192 PowerTags	<b>6AV2104-2HK00-0BD0</b>	<b>6AV2104-4HH07-0AE0</b>
• 8 192 PowerTags to 16 384 PowerTags	<b>6AV2104-2KL00-0BD0</b>	<b>6AV2104-4KK07-0AE0</b>
<u>as download<sup>1)</sup></u>		
Email address required for delivery		
• 128 PowerTags to 512 PowerTags	<b>6AV2104-2BD00-0BJ0</b>	<b>6AV2104-4BB07-0AK0</b>
• 512 PowerTags to 2 048 PowerTags	<b>6AV2104-2DF00-0BJ0</b>	<b>6AV2104-4DD07-0AK0</b>
• 2 048 PowerTags to 4 096 PowerTags	<b>6AV2104-2FH00-0BJ0</b>	<b>6AV2104-4FF07-0AK0</b>
• 4 096 PowerTags to 8 192 PowerTags	<b>6AV2104-2HK00-0BJ0</b>	<b>6AV2104-4HH07-0AK0</b>
• 8 192 PowerTags to 16 384 PowerTags	<b>6AV2104-2KL00-0BJ0</b>	<b>6AV2104-4KK07-0AK0</b>

**HMI software**

TIA Portal

SIMATIC WinCC (TIA Portal)

**SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Advanced**

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC Runtime Advanced V16</b>		
<b>Basic software</b>		
<u>Data storage medium</u>		
• 128 PowerTags	<b>6AV2104-0BA06-0AA0</b>	<b>6AV2104-3BB06-0AE0</b>
• 512 PowerTags	<b>6AV2104-0DA06-0AA0</b>	<b>6AV2104-3DD06-0AE0</b>
• 2 048 PowerTags	<b>6AV2104-0FA06-0AA0</b>	<b>6AV2104-3FF06-0AE0</b>
• 4 096 PowerTags	<b>6AV2104-0HA06-0AA0</b>	<b>6AV2104-3HH06-0AE0</b>
• 8 192 PowerTags	<b>6AV2104-0KA06-0AA0</b>	<b>6AV2105-3KK06-0AE0</b>
• 16 384 PowerTags	<b>6AV2104-0LA06-0AA0</b>	
<u>as download<sup>1)</sup></u>		
Email address required for delivery		
• 128 PowerTags	<b>6AV2104-0BA06-0AH0</b>	<b>6AV2104-3BB06-0AK0</b>
• 512 PowerTags	<b>6AV2104-0DA06-0AH0</b>	<b>6AV2104-3DD06-0AK0</b>
• 2 048 PowerTags	<b>6AV2104-0FA06-0AH0</b>	<b>6AV2104-3FF06-0AK0</b>
• 4 096 PowerTags	<b>6AV2104-0HA06-0AH0</b>	<b>6AV2104-3HH06-0AK0</b>
• 8 192 PowerTags	<b>6AV2104-0KA06-0AH0</b>	<b>6AV2105-3KK06-0AK0</b>
• 16 384 PowerTags	<b>6AV2104-0LA06-0AH0</b>	
<b>PowerPacks</b>		
<b>SIMATIC WinCC Runtime Advanced V16</b>		
<u>Data storage medium</u>		
• 128 PowerTags to 512 PowerTags	<b>6AV2104-2BD06-0BD0</b>	<b>6AV2104-4BB06-0AE0</b>
• 512 PowerTags to 2 048 PowerTags	<b>6AV2104-2DF06-0BD0</b>	<b>6AV2104-4DD06-0AE0</b>
• 2 048 PowerTags to 4 096 PowerTags	<b>6AV2104-2FH06-0BD0</b>	<b>6AV2104-4FF06-0AE0</b>
• 4 096 PowerTags to 8 192 PowerTags	<b>6AV2104-2HK06-0BD0</b>	<b>6AV2104-4HH06-0AE0</b>
• 8 192 PowerTags to 16 384 PowerTags	<b>6AV2104-2KL06-0BD0</b>	<b>6AV2104-4KK06-0AE0</b>
<u>as download<sup>1)</sup></u>		
Email address required for delivery		
• 128 PowerTags to 512 PowerTags	<b>6AV2104-2BD06-0BJ0</b>	<b>6AV2104-4BB06-0AK0</b>
• 512 PowerTags to 2 048 PowerTags	<b>6AV2104-2DF06-0BJ0</b>	<b>6AV2104-4DD06-0AK0</b>
• 2 048 PowerTags to 4 096 PowerTags	<b>6AV2104-2FH06-0BJ0</b>	<b>6AV2104-4FF06-0AK0</b>
• 4 096 PowerTags to 8 192 PowerTags	<b>6AV2104-2HK06-0BJ0</b>	<b>6AV2104-4HH06-0AK0</b>
• 8 192 PowerTags to 16 384 PowerTags	<b>6AV2104-2KL06-0BJ0</b>	<b>6AV2104-4KK06-0AK0</b>

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

Ordering data	Article No.	Technical specifications																																																
<b>SIMATIC WinCC flexible Panel Options to SIMATIC WinCC (TIA Portal) Panel Options</b> <ul style="list-style-type: none"> <li>• WinCC flexible /Audit for SIMATIC Panel on SIMATIC WinCC Audit for SIMATIC Comfort/ Mobile Panels</li> <li>• WinCC flexible /Sm@rtAccess for SIMATIC Panel on SIMATIC WinCC Sm@rtServer for SIMATIC Panels</li> <li>• WinCC flexible /Sm@rtService for SIMATIC Panel on SIMATIC WinCC Sm@rtServer for SIMATIC Panels</li> <li>• WinCC flexible/ProAgent for Panels on SIMATIC ProDiag for Comfort/Mobile Panels</li> <li>• Datenträger</li> <li>• as Download<sup>3)</sup> Single License, Software and License Key Download. Email address required for delivery</li> </ul>	<b>6AV2107-4XP00-0BF0</b> <b>6AV2107-4XP00-0BK0</b>	<p>The following tables of system limitations provide assistance in estimating whether a specific project is still within the system limitations for WinCC Runtime Advanced. The stated maximum values are not additive. We cannot guarantee proper functioning of configurations that make full use of all system limits on the HMI devices.</p> <p>In addition to the limitations specified, allowances must be made for restrictions in configuration memory resources.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"><b>SIMATIC WinCC Runtime Advanced</b></th> </tr> </thead> <tbody> <tr> <td><b>Tags</b></td><td></td></tr> <tr> <td>Number of tags in the project</td><td>24 576</td></tr> <tr> <td>Number of PowerTags</td><td>128–16 384</td></tr> <tr> <td>Number of elements per array</td><td>1 600</td></tr> <tr> <td>Number of local tags</td><td>8 192</td></tr> <tr> <td><b>Alarms</b></td><td></td></tr> <tr> <td>Number of alarm classes</td><td>32</td></tr> <tr> <td>Number of discrete alarms</td><td>6 000</td></tr> <tr> <td>Number of analog alarms</td><td>500</td></tr> <tr> <td>Length of an alarm in characters</td><td>80</td></tr> <tr> <td>Number of process values per alarm</td><td>8</td></tr> <tr> <td>Size of the alarm buffer</td><td>2 048</td></tr> <tr> <td>Number of queued alarm events</td><td>500</td></tr> <tr> <td><b>Screens</b></td><td></td></tr> <tr> <td>Number of screens</td><td>750</td></tr> <tr> <td>Number of fields per screen</td><td>600</td></tr> <tr> <td>Number of tags per screen</td><td>400</td></tr> <tr> <td>Number of complex objects per screen<sup>1)</sup></td><td>40</td></tr> <tr> <td><b>Recipes</b></td><td></td></tr> <tr> <td>Number of recipes</td><td>1 000</td></tr> <tr> <td>Number of elements per recipe<sup>2)</sup></td><td>2 000</td></tr> <tr> <td>User data length in KB per data record</td><td>512</td></tr> <tr> <td>Number of data records per recipe</td><td>5 000</td></tr> </tbody> </table>	<b>SIMATIC WinCC Runtime Advanced</b>		<b>Tags</b>		Number of tags in the project	24 576	Number of PowerTags	128–16 384	Number of elements per array	1 600	Number of local tags	8 192	<b>Alarms</b>		Number of alarm classes	32	Number of discrete alarms	6 000	Number of analog alarms	500	Length of an alarm in characters	80	Number of process values per alarm	8	Size of the alarm buffer	2 048	Number of queued alarm events	500	<b>Screens</b>		Number of screens	750	Number of fields per screen	600	Number of tags per screen	400	Number of complex objects per screen <sup>1)</sup>	40	<b>Recipes</b>		Number of recipes	1 000	Number of elements per recipe <sup>2)</sup>	2 000	User data length in KB per data record	512	Number of data records per recipe	5 000
<b>SIMATIC WinCC Runtime Advanced</b>																																																		
<b>Tags</b>																																																		
Number of tags in the project	24 576																																																	
Number of PowerTags	128–16 384																																																	
Number of elements per array	1 600																																																	
Number of local tags	8 192																																																	
<b>Alarms</b>																																																		
Number of alarm classes	32																																																	
Number of discrete alarms	6 000																																																	
Number of analog alarms	500																																																	
Length of an alarm in characters	80																																																	
Number of process values per alarm	8																																																	
Size of the alarm buffer	2 048																																																	
Number of queued alarm events	500																																																	
<b>Screens</b>																																																		
Number of screens	750																																																	
Number of fields per screen	600																																																	
Number of tags per screen	400																																																	
Number of complex objects per screen <sup>1)</sup>	40																																																	
<b>Recipes</b>																																																		
Number of recipes	1 000																																																	
Number of elements per recipe <sup>2)</sup>	2 000																																																	
User data length in KB per data record	512																																																	
Number of data records per recipe	5 000																																																	

- 1) Runtime licenses for WinCC Runtime Advanced options must be purchased separately for each target system
- 2) Each including 1 upgrade license to the WinCC Runtime Advanced options
- 3) Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

<sup>1)</sup> Complex objects are: Bars, sliders, symbol library, clock, and all objects from the Controls area.

<sup>2)</sup> When using arrays, each array element represents a recipe element

**HMI software**

TIA Portal

SIMATIC WinCC (TIA Portal)

**SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Advanced****Technical specifications**

<b>SIMATIC WinCC Runtime Advanced</b>	
<b>Logs</b>	
Number of logs	100
Number of entries per log (including all log segments) <sup>3)</sup>	500 000
Number of log segments	400
Cyclical trigger for tag logging	1 s
Number of tags that can be logged per log	24 576
<b>Trends</b>	
Number of trends	800
<b>Text lists and graphics lists</b>	
Number of graphic lists	500
Number of text lists	500
Number of entries per text or graphic list	3 500
Number of graphic objects	24 576
Number of text elements	40 000
<b>Scripts</b>	
Number of scripts	200
<b>Communication</b>	
Number of connections	8
Number of connections based on "SIMATIC HMI HTTP"	16
Maximum number of connected Sm@rtClients (including a service client)	4 <sup>4)</sup>
<b>Help system</b>	
Number of characters in a help text	500
<b>Languages</b>	
Number of runtime languages	32
<b>Scheduler</b>	
Time-triggered tasks <sup>5)</sup>	48
<b>User administration</b>	
Number of user groups	50
Number of user rights	32
Number of users	100

**More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-advanced>

**SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Professional**
**Overview**

PC-based operator control and monitoring system for visualization and operator control of processes, production flows, machines and plants in all sectors – from the simple single-user station through to distributed multi-user systems and cross-location solutions with web clients.

SIMATIC WinCC Runtime Professional is the information hub for corporation-wide vertical integration. SIMATIC WinCC Runtime Professional is configured with the SIMATIC WinCC Professional configuration software.

**Ordering data**
**Article No.**
**SIMATIC WinCC Runtime Professional V17**
**Basic software**

- 128 PowerTags
  - 512 PowerTags
  - 2 048 PowerTags
  - 4 096 PowerTags
  - 8 192 PowerTags
  - 65 536 PowerTags
  - 102 400 PowerTags
  - 153 600 PowerTags
  - 262 144 PowerTags
  - Client for Runtime Professional
- Incl. 500 archive tags each

as download<sup>1)</sup>  
Email address required for delivery.

- 128 PowerTags
  - 512 PowerTags
  - 2 048 PowerTags
  - 4 096 PowerTags
  - 8 192 PowerTags
  - 65 536 PowerTags
  - 102 400 PowerTags
  - 153 600 PowerTags
  - 262 144 PowerTags
  - Client for Runtime Professional
- Incl. 500 archive tags each

- 6AV2105-0BA07-0AA0**  
**6AV2105-0DA07-0AA0**  
**6AV2105-0FA07-0AA0**  
**6AV2105-0HA07-0AA0**  
**6AV2105-0KA07-0AA0**  
**6AV2105-0MA07-0AA0**  
**6AV2105-0PA07-0AA0**  
**6AV2105-0RA07-0AA0**  
**6AV2105-0TA07-0AA0**  
**6AV2107-0DB07-0AA0**

- 6AV2105-0BA07-0AH0**  
**6AV2105-0DA07-0AH0**  
**6AV2105-0FA07-0AH0**  
**6AV2105-0HA07-0AH0**  
**6AV2105-0KA07-0AH0**  
**6AV2105-0MA07-0AH0**  
**6AV2105-0PA07-0AH0**  
**6AV2105-0RA07-0AH0**  
**6AV2105-0TA07-0AH0**  
**6AV2107-0DB07-0AH0**

**SIMATIC WinCC Runtime Professional ASIA V17**

- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags
- 8 192 PowerTags
- 65 536 PowerTags
- 102 400 PowerTags
- 153 600 PowerTags
- 262 144 PowerTags
- Client for Runtime Professional

Incl. 500 archive tags each

- 6AV2105-0BA17-0AA0**  
**6AV2105-0DA17-0AA0**  
**6AV2105-0FA17-0AA0**  
**6AV2105-0HA17-0AA0**  
**6AV2105-0KA17-0AA0**  
**6AV2105-0MA17-0AA0**  
**6AV2105-0PA17-0AA0**  
**6AV2105-0RA17-0AA0**  
**6AV2105-0TA17-0AA0**  
**6AV2107-0DB17-0AH0**

**3**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**HMI software**

TIA Portal

SIMATIC WinCC (TIA Portal)

**SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Professional**

Ordering data	Article No.	Article No.
<b>PowerPacks (version-independent)</b>		
<b>SIMATIC WinCC Runtime Professional and SIMATIC WinCC Runtime Professional ASIA</b>		
<ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 4 096 PowerTags</li> <li>• 4 096 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul> <u>as download<sup>1)</sup></u> Email address required for delivery.	<b>6AV2105-2BD00-0BD0</b> <b>6AV2105-2DF00-0BD0</b> <b>6AV2105-2FH00-0BD0</b> <b>6AV2105-2HK00-0BD0</b> <b>6AV2105-2KM00-0BD0</b> <b>6AV2105-2MP00-0BD0</b> <b>6AV2105-2PR00-0BD0</b> <b>6AV2105-2RT00-0BD0</b>	<b>Upgrades</b> <b>SIMATIC WinCC Runtime Professional V11..16 and SIMATIC WinCC Runtime Professional ASIA V11..16 to V17</b> <ul style="list-style-type: none"> <li>• SIMATIC WinCC Runtime Professional 128 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 512 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 2 048 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 4 096 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 8 192 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 64k to 256k PowerTags</li> <li>• Client for Runtime Professional as download<sup>1)</sup> Email address required for delivery.</li> </ul> <b>6AV2105-3BB07-0AE0</b> <b>6AV2105-3DD07-0AE0</b> <b>6AV2105-3FF07-0AE0</b> <b>6AV2105-3HH07-0AE0</b> <b>6AV2105-3KK07-0AE0</b> <b>6AV2105-3MM07-0AE0</b> <b>6AV2107-3DB07-0AE0</b> <b>6AV2105-3BB07-0AK0</b> <b>6AV2105-3DD07-0AK0</b> <b>6AV2105-3FF07-0AK0</b> <b>6AV2105-3HH07-0AK0</b> <b>6AV2105-3KK07-0AK0</b> <b>6AV2105-3MM07-0AK0</b> <b>6AV2107-3DB07-0AK0</b>
<ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 4 096 PowerTags</li> <li>• 4 096 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul> <u>as download<sup>1)</sup></u> Email address required for delivery.	<b>6AV2105-2BD00-0BJ0</b> <b>6AV2105-2DF00-0BJ0</b> <b>6AV2105-2FH00-0BJ0</b> <b>6AV2105-2HK00-0BJ0</b> <b>6AV2105-2KM00-0BJ0</b> <b>6AV2105-2MP00-0BJ0</b> <b>6AV2105-2PR00-0BJ0</b> <b>6AV2105-2RT00-0BJ0</b>	<b>WinCC V7.3 .. V7.5 to SIMATIC WinCC RT Professional V17</b> <ul style="list-style-type: none"> <li>• SIMATIC WinCC Runtime Professional 128 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 512 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 2 048 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 8 192 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 64k to 256k PowerTags</li> <li>• Client for Runtime Professional as download<sup>1)</sup> Email address required for delivery.</li> </ul> <b>6AV2105-4BB07-0AE0</b> <b>6AV2105-4DD07-0AE0</b> <b>6AV2105-4FF07-0AE0</b> <b>6AV2105-4KK07-0AE0</b> <b>6AV2105-4MM07-0AE0</b> <b>6AV2107-4DB07-0AE0</b> <b>6AV2105-4BB07-0AK0</b> <b>6AV2105-4DD07-0AK0</b> <b>6AV2105-4FF07-0AK0</b> <b>6AV2105-4KK07-0AK0</b> <b>6AV2105-4MM07-0AK0</b> <b>6AV2107-4DB07-0AK0</b>

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC Runtime Professional V16</b>		
<b>Basic software</b>		
<ul style="list-style-type: none"> <li>• 128 PowerTags</li> <li>• 512 PowerTags</li> <li>• 2 048 PowerTags</li> <li>• 4 096 PowerTags</li> <li>• 8 192 PowerTags</li> <li>• 65 536 PowerTags</li> <li>• 102 400 PowerTags</li> <li>• 153 600 PowerTags</li> <li>• 262 144 PowerTags</li> <li>• Client for Runtime Professional Incl. 500 archive tags each</li> </ul> <p>Incl. 500 archive tags each as download<sup>1)</sup> Email address required for delivery.</p>	<p><b>6AV2105-0BA06-0AA0</b> <b>6AV2105-0DA06-0AA0</b> <b>6AV2105-0FA06-0AA0</b> <b>6AV2105-0HA06-0AA0</b> <b>6AV2105-0KA06-0AA0</b> <b>6AV2105-0MA06-0AA0</b> <b>6AV2105-0PA06-0AA0</b> <b>6AV2105-0RA06-0AA0</b> <b>6AV2105-0TA06-0AA0</b> <b>6AV2107-0DB06-0AA0</b></p> <p><b>6AV2105-0BA06-0AH0</b> <b>6AV2105-0DA06-0AH0</b> <b>6AV2105-0FA06-0AH0</b> <b>6AV2105-0HA06-0AH0</b> <b>6AV2105-0KA06-0AH0</b> <b>6AV2105-0MA06-0AH0</b> <b>6AV2105-0PA06-0AH0</b> <b>6AV2105-0RA06-0AH0</b> <b>6AV2105-0TA06-0AH0</b> <b>6AV2107-0DB06-0AH0</b></p>	<p><b>PowerPacks</b></p> <p><b>SIMATIC WinCC Runtime Professional V16 and SIMATIC WinCC Runtime Professional ASIA V16</b></p> <ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 4 096 PowerTags</li> <li>• 4 096 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul> <p>As download<sup>1)</sup> Email address required for delivery.</p> <ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 4 096 PowerTags</li> <li>• 4 096 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul>
<b>SIMATIC WinCC Runtime Professional ASIA V16</b>		
	<p><b>6AV2105-0BA16-0AA0</b> <b>6AV2105-0DA16-0AA0</b> <b>6AV2105-0FA16-0AA0</b> <b>6AV2105-0HA16-0AA0</b> <b>6AV2105-0KA16-0AA0</b> <b>6AV2105-0MA16-0AA0</b> <b>6AV2105-0PA16-0AA0</b> <b>6AV2105-0RA16-0AA0</b> <b>6AV2105-0TA16-0AA0</b> <b>6AV2107-0DB16-0AH0</b></p>	

**HMI software**

TIA Portal

SIMATIC WinCC (TIA Portal)

**SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Professional**

Ordering data	Article No.	Article No.
<i>Upgrades V11..15.1 to WinCC V16</i>		
<b>SIMATIC WinCC Runtime Professional V11..15.1 and SIMATIC WinCC Runtime Professional ASIA V11..V15.1 to V16</b>		
<ul style="list-style-type: none"> <li>• SIMATIC WinCC Runtime Professional 128 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 512 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 2 048 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 4 096 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 8 192 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 64k to 256k PowerTags</li> <li>• Client for Runtime Professional</li> </ul>	<b>6AV2105-3BB06-0AE0</b>	<b>6AV2105-4BB06-0AE0</b>
	<b>6AV2105-3DD06-0AE0</b>	<b>6AV2105-4DD06-0AE0</b>
	<b>6AV2105-3FF06-0AE0</b>	<b>6AV2105-4FF06-0AE0</b>
	<b>6AV2105-3HH06-0AE0</b>	<b>6AV2105-4KK06-0AE0</b>
	<b>6AV2105-3KK06-0AE0</b>	<b>6AV2105-4MM06-0AE0</b>
	<b>6AV2105-3MM06-0AE0</b>	<b>6AV2107-4DB06-0AE0</b>
	<b>6AV2107-3DB06-0AE0</b>	
<i>As download<sup>1)</sup></i>		
Email address required for delivery.		
<ul style="list-style-type: none"> <li>• SIMATIC WinCC Runtime Professional 128 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 512 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 2 048 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 4 096 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 8 192 PowerTags</li> <li>• SIMATIC WinCC Runtime Professional 64k to 256k PowerTags</li> <li>• Client for Runtime Professional</li> </ul>	<b>6AV2105-3BB06-0AK0</b>	<b>6AV2105-4BB06-0AK0</b>
	<b>6AV2105-3DD06-0AK0</b>	<b>6AV2105-4DD06-0AK0</b>
	<b>6AV2105-3FF06-0AK0</b>	<b>6AV2105-4FF06-0AK0</b>
	<b>6AV2105-3HH06-0AK0</b>	<b>6AV2105-4KK06-0AK0</b>
	<b>6AV2105-3KK06-0AK0</b>	<b>6AV2105-4MM06-0AK0</b>
	<b>6AV2105-3MM06-0AK0</b>	<b>6AV2107-4DB06-0AK0</b>
	<b>6AV2107-3DB06-0AK0</b>	

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Professional**
**Technical specifications**

The following tables of system limits provide assistance in estimating whether a specific project is still within the system limitations for WinCC Runtime Professional. The stated maximum values are not additive.

We cannot guarantee proper functioning of configurations that make full use of all system limits on the HMI devices. In addition to the limitations specified, allowances must be made for restrictions in configuration memory resources.

<b>SIMATIC WinCC Runtime Professional</b>	
<b>Alarms</b>	
Configurable alarms per server/single user	150,000
PowerTags per alarm line	10
User text blocks per alarm line	10
Message classes	256
Alarm types	16
Alarm priorities	17 (0...16)
<b>Alarms in Runtime</b>	
Alarms per alarm log	Unlimited <sup>1)</sup>
Alarms per short-term log list	1,000
Alarms per long-term log list	1,000 <sup>2)</sup>
Alarms per alarm display	5,000 <sup>3)</sup>
<b>Screens</b>	
Objects per screen <sup>4)</sup>	Unlimited <sup>5)</sup>
Levels per screen	32
Screens per project	Unlimited <sup>5)</sup>
Instances of fixed faceplates in a process screen	31 instances of the same picture type
Screen size in pixels	10 000 x 10 000
Nesting levels of screen objects	20
<b>Recipes</b>	
Number of recipes	Unlimited <sup>5)</sup>
Number of recipe elements	500 <sup>6)</sup>
Number of recipe data records	10,000 <sup>6)</sup>
Number of views	Unlimited <sup>5)</sup>
<b>Logs</b>	
Trend views per screen	25
Trends per trend view	80
Tables per screen	25
Columns per table	12
Values per table	30,000
Logs per single-user station/server	100
Log tags per single-user station/server <sup>7)</sup>	80,000

<b>SIMATIC WinCC Runtime Professional</b>	
<b>Trends</b>	
Trend views per image	25
Trends per trend view	80
<b>User administration</b>	
Number of user groups	128
Number of user rights	999
Number of users	128
<b>Configurations – Quantity structure in a multi-user system</b>	
WinCC Clients in a system	32 <sup>8) 9)</sup>
Web clients in a system	150 <sup>10)</sup>

<sup>1)</sup> Limited by system resources.

<sup>2)</sup> On single-user station or server or on client per server if "LongTimeArchiveConsistency" is set to "No". On single-user station, server, or client if "LongTimeArchiveConsistency" is set to "Yes".

<sup>3)</sup> On single-user station or server or on client per server.

<sup>4)</sup> The number and complexity of the objects affect the performance.

<sup>5)</sup> Limited by system resources.

<sup>6)</sup> The sum of the number of recipe elements and number of data records must not exceed a value of 1,000,000

<sup>7)</sup> Dependent on the Logging PowerPack used for the log tags. 500 log tags are contained in the basis version.

<sup>8)</sup> If the server is also used as an operator station, the number of clients for this server is reduced to four.

<sup>9)</sup> Mixed configuration: 32 clients + 3 web clients

<sup>10)</sup> Mixed configuration: 50 web clients + 1 WinCC Client

More information is available on the Internet at:

<http://www.siemens.com/wincc-professional>

## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Communication

#### Overview

##### **Communication – SIMATIC WinCC Runtime Advanced**

WinCC Advanced is an open visualization system and offers the option of connecting the most diverse control systems.

##### Number of connectable controllers

WinCC Advanced permits the parallel coupling of up to 8 controllers.  
Connection to third-party controllers.

The following "Coupling overview" table includes lists of third-party protocols and controllers which are directly supported by WinCC Advanced. Generally it is also possible to connect third-party controllers via OPC (OLE for Process Control).

Current notes and information about OPC servers from many different suppliers can be found at:  
<http://www.opcfoundation.org/>

WinCC Advanced supports the standards:

- OPC Data Access 2.05a
- OPC UA Data Access 1.01
- OPC XML Data Access 1.00 (client via DCOM/XML gateway)

#### Coupling overview for WinCC Runtime Advanced

Protocol	Description	PC interface
<b>SIMATIC HMI</b>		
<b>Ethernet TCP/IP (HTTP communication)</b>	HTTP communication for data exchange between SIMATIC HMI (client + server) <sup>1)</sup>	CP 1612 A2
<b>SIMATIC S7</b>		
<b>Ethernet TCP/IP (S7 communication)</b>	Channel for communication via Ethernet TCP/IP with max. 8 x SIMATIC S7 controllers: S7-1200, S7-1500, S7-300, S7-400, S7-200 with CP 243-1	CP 1612 A2 CP 1613 A2 CP 1623
<b>MPI, PROFIBUS (S7 communication)</b>	Channel for communication via MPI, PROFIBUS with max. 8 x SIMATIC S7 controllers: S7-1200 with CM 1243-5 (DP master), S7-1500, S7-300, S7-400, S7-200 (passive S7-200 only)	CP 5612 CP 5622 CP 5711 CP 5613 A3 CP 5623
<b>PPI (PPI protocol)</b>	Channel for communication via PPI with 1 x SIMATIC S7-200 (network operation, e.g. parallel PG possible)	CP 5612 CP 5622 CP 5711 CP 5613 A3 CP 5623
<b>Software interface (S7 communication)</b>	Channel for communication via software interface with WinAC	
<b>SINUMERIK<sup>2)</sup></b>		
<b>Ethernet TCP/IP (S7 communication)</b>	Channel for communication via Ethernet TCP/IP with SINUMERIK 840D sl	CP 1612 A2 CP 1613 A2 CP 1623
<b>MPI (S7 communication)</b>	Channel for communication via MPI with SINUMERIK 840D sl	CP 5612 CP 5622 CP 5711 CP 5613 A3 CP 5623

<sup>1)</sup> HTTP and OPC communication can be used in combination with the other couplings; regarding SIMATIC Panels that support HTTP or OPC communication, see the overview under "System interfaces (WinCC V11)".

<sup>2)</sup> "SINUMERIK Operate WinCC RT Advanced" license required; for further information, see NC 60 Catalog.

SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Communication

## Overview

Protocol	Description	PC interface
<b>Third-party controllers (WinCC V11.0 and higher)<sup>3)</sup></b>		
<b>Allen Bradley Ethernet IP</b>	Channel for communication with max. 4 x Allen Bradley controllers via Ethernet TCP/IP with Allen Bradley Ethernet IP protocol The ControlLogix / CompactLogix, SLC500 / MicroLogix and PLC5 controllers are supported	CP 1612 A2
<b>Allen Bradley DF1</b>	Channel for communication with Allen Bradley controllers via DF1 protocol The controllers SLC500 / MicroLogix and PLC5 are supported <sup>3)</sup>	COM1/COM2
<b>Mitsubishi MC TCP/IP</b>	Channel for communication with max. 4 x Mitsubishi controllers via Ethernet TCP/IP with Mitsubishi MC TCP/IP protocol The FX3, Q, and iQ/QnUD controller series are supported	CP 1612 A2
<b>Mitsubishi FX</b>	Channel for communication with Mitsubishi controllers via FX protocol The FX1N, FX2N controllers are supported	COM1/COM2
<b>Modbus TCP/IP</b>	Channel for communication with max. 4 x Modicon controllers via Ethernet TCP/IP using the Modbus TCP/IP protocol The Quantum, Momentum, Premium, TSX Micro, Compact and M340 controllers are supported	CP 1612 A2
<b>Modbus RTU</b>	Channel for communication with Modicon controllers via the Modbus RTU protocol The Quantum, Momentum, and Compact controllers are supported	COM1/COM2
<b>Omron Link / Multi Link</b>	Channel for communication with Omron controllers via the Link/Multi protocol The CP1x, CJ1x, CJ2H, CS1x, and CP2MC controllers are supported	COM1/COM2
<b>Cross-vendor</b>		
<b>OPC client<sup>1)4)</sup> for OPC DA, OPC UA DA, XML DA</b>	Channel for OPC communication, WinCC can acquire data from OPC server applications	CP 1612 A2
<b>OPC server for OPC DA</b>	Server applications for OPC communication; WinCC provides process data to OPC clients	CP 1612 A2

1) HTTP and OPC communication can be used in combination with the other couplings; regarding SIMATIC Panels that support HTTP or OPC communication, see the overview under "System interfaces (WinCC V11)".

2) "SINUMERIK Operate WinCC RT Advanced" license required; for further information, see NC 60 Catalog.

3) For detailed information regarding supported controllers, see "System interfaces (WinCC V11)"

4) Application note: Parallel use of the OPC client channel allows, for example, connection to an SNMP OPC server for visualization of the data present there. The SNMP OPC server enables monitoring of any network components (e.g. switches) that support the SNMP protocol. Further information can be found under SIMATIC NET communications systems/SNMP OPC server.

## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Communication

#### Overview

##### **Communication – SIMATIC WinCC Runtime Professional**

WinCC Professional is an open process visualization system and offers the option of connecting the most diverse control systems.

##### Released communication software

Only communication software with the listed (or higher) product versions should be used. Corresponding SIMATIC NET upgrades are available for the upgrading of older versions.

##### Number of connectable controllers

With CP 1613 A2/CP 1623, a maximum of 64 S7 controllers can be connected via Industrial Ethernet; with CP 5612/CP 5622 a maximum of 8 and with CP 5613 A3 a maximum of 44 S7 controllers via PROFIBUS. With approx. 10 or more controllers, the use of Industrial Ethernet is recommended.

##### Client-server communication

Communication between the clients and the server is implemented using the TCP/IP protocol. The construction of a separate PC-LAN is recommended. For small projects with correspondingly small message frame advent, a SIMATIC NET Industrial Ethernet can be used for both process communication (WinCC/server ↔ PLC) and for PC-PC communication (WinCC/client ↔ WinCC/server)

##### Connection to third-party controllers

The following "Coupling overview" table includes lists of third-party protocols and controllers which are directly supported by WinCC Professional. Generally it is also possible to connect third-party controllers via OPC (OLE for Process Control).

Current notes and information about OPC servers from many different suppliers can be found at:

<http://www.opcfoundation.org/>

WinCC Professional supports the standards:

- OPC Data Access 2.05a
- OPC Data Access 3.00
- OPC UA Data Access 1.01
- OPC XML Data Access 1.00
- OPC HDA 1.20
- OPC A&E 1.10

3

#### **Coupling overview for WinCC Runtime Professional**


Protocol	Description	PC interface
<b>SIMATIC HMI</b>		
<b>SIMATIC S7</b>	Protocol Suite with channel units for communication with SIMATIC S7 via <ul style="list-style-type: none"> <li>• Ethernet TCP/IP (S7 communication) to S7-1200, S7-1500, S7-300, S7-400</li> <li>• MPI, PROFIBUS (S7 communication) to S7-1200 with CM 1243-5 (DP master), S7-1500, S7-300, S7-400</li> <li>• Software interface (S7 communication) to Win AC</li> </ul>	CP 5612 CP 5622 CP 5711 CP 5613 A3 CP 5623
<b>Non-Siemens controllers (WinCC V11.0 and higher)</b>		
<b>Allen Bradley Ethernet IP</b>	Channel for communication with Allen Bradley controllers via Ethernet TCP/IP with Ethernet IP protocol The ControlLogix / CompactLogix, SLC500 / MicroLogix, and PLC5 controllers are supported	CP 1612 A2
<b>Mitsubishi MC TCP/IP</b>	Channel for communication with Mitsubishi controllers via Ethernet TCP/IP with Mitsubishi MC TCP/IP protocol The FX3, Q, and iQ/QnUD controller series are supported	CP 1612 A2
<b>Modbus TCP/IP</b>	Channel for communication with Modicon controllers via Ethernet TCP/IP using the Modbus TCP/IP protocol The Quantum, Momentum, Premium, TSX Micro, Compact and M340 controllers are supported	CP 1612 A2
<b>Cross-vendor</b>		
<b>OPC client<sup>1)</sup> for OPC DA, OPC XML DA</b>	Channel for OPC communication, WinCC can acquire data from OPC server applications	CP 1612 A2
<b>OPC server for OPC DA, OPC UA DA, OPC XML DA, OPC A&amp;E, OPC HDA</b>	Server applications for OPC communication; WinCC provides process data to OPC clients	CP 1612 A2

<sup>1)</sup> Application note: Parallel use of the OPC client channel allows, for example, connection to an SNMP OPC server for visualization of the data present there. The SNMP OPC server enables monitoring of any network components (e.g. switches) that support the SNMP protocol. Further information can be found under SIMATIC NET communications systems/SNMP OPC server.


SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Communication

## Overview

### Communications examples

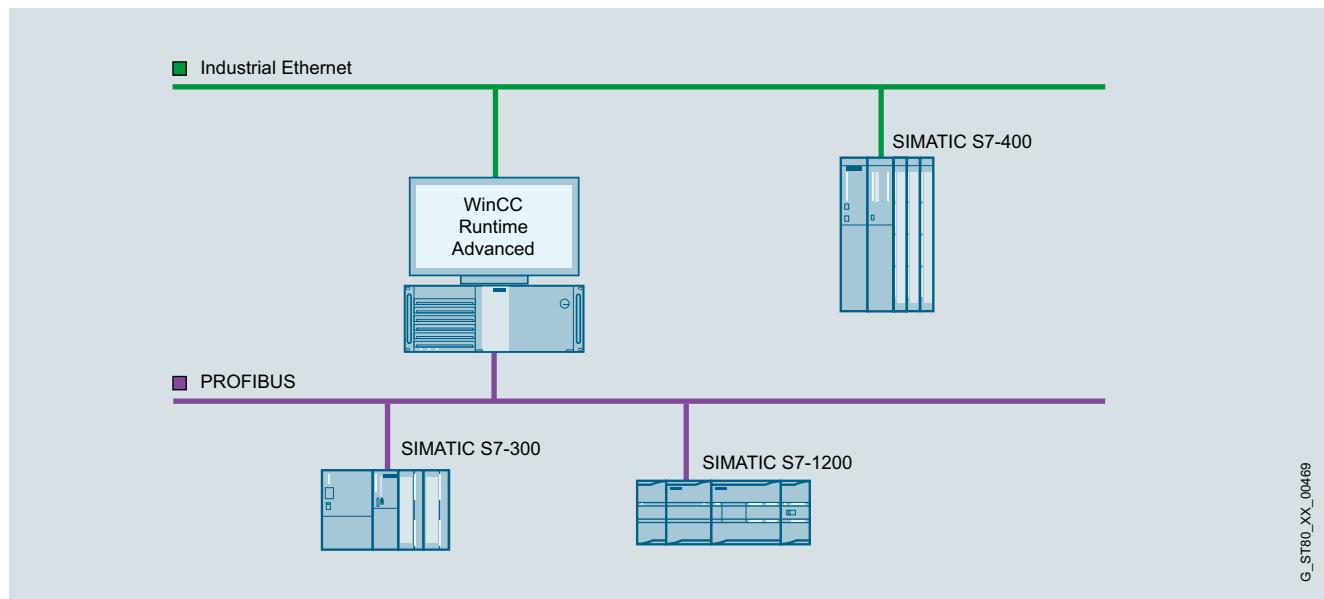

WinCC Runtime Advanced single-user system

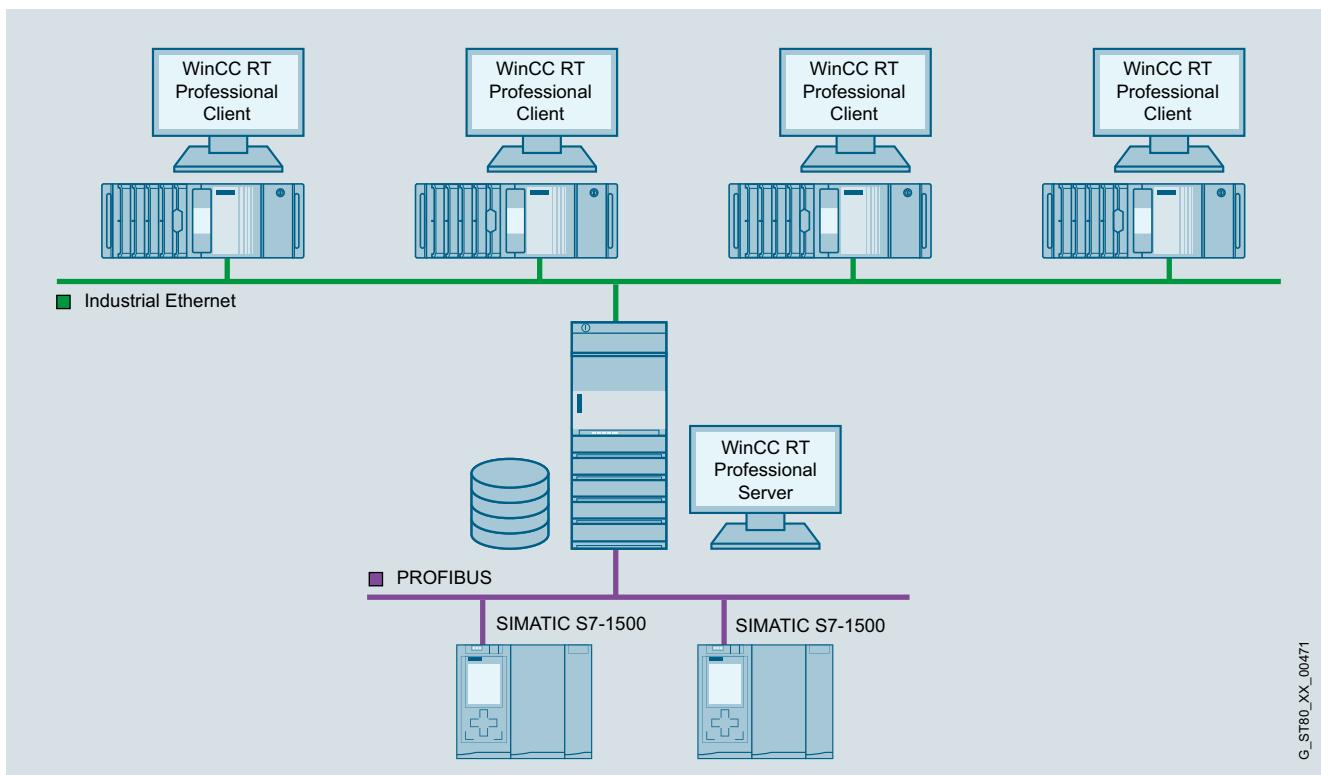

WinCC Runtime Professional multi-user system with operable server


## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Communication

#### Overview

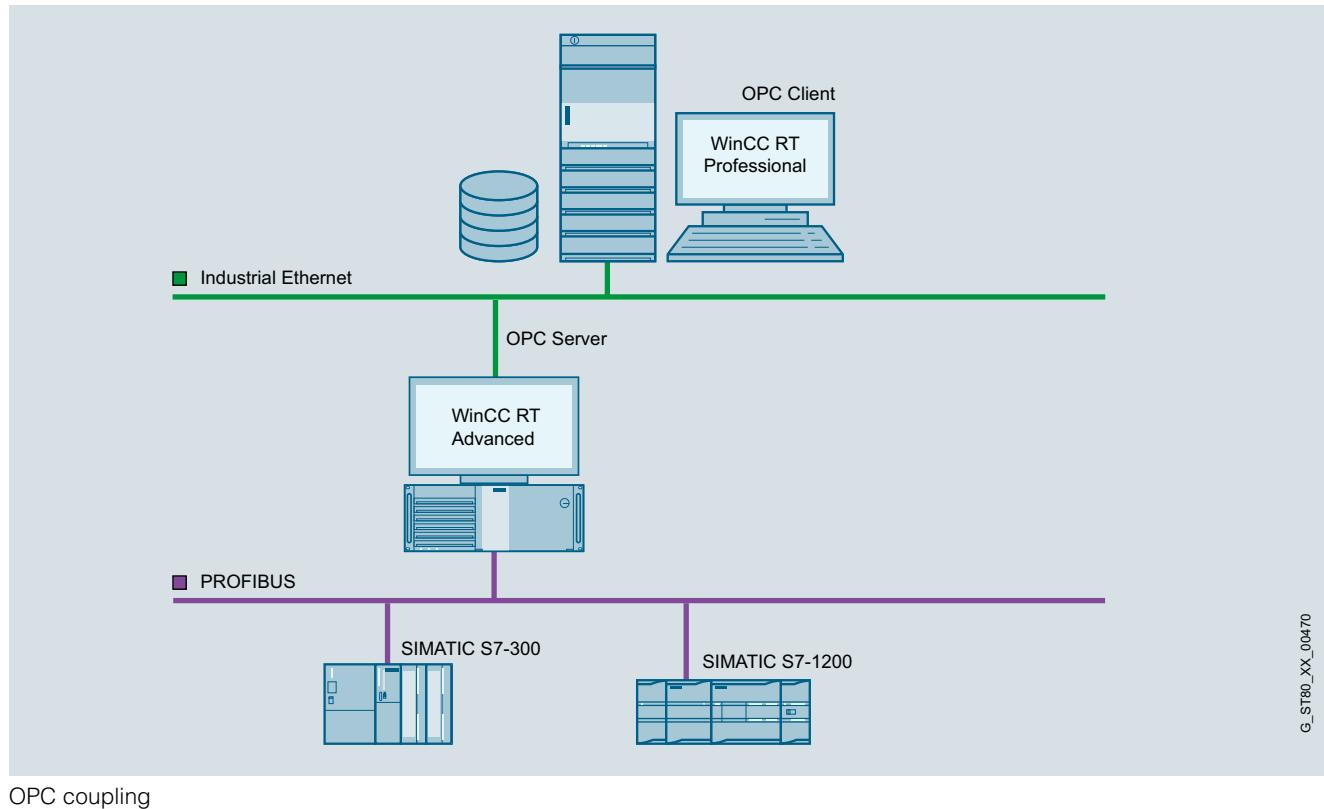

SIMATIC WinCC (TIA Portal) Runtime > WinCC Runtime Communication

Ordering data	Article No.	Article No.
<p><i>Communication via Industrial Ethernet TCP/IP</i></p> <p><b>CP 1612 A2</b> PCI card (32-bit) for connecting a programming device or PC to Industrial Ethernet (10/100/1000 Mbps) with RJ45 connection via SOFTNET-S7 and SOFTNET PG.  Software requirement: WinCC Runtime Advanced: No further installation is required (SOFTNET-S7) WinCC Runtime Professional: SOFTNET-S7 Lean (maximum of 8 connections) or SOFTNET-S7 (maximum of 64 connections) must be installed (SOFTNET-S7 Lean is included in the scope of delivery of WinCC Runtime Professional)</p>	6GK1161-2AA01	<p><i>Communication via PROFIBUS</i></p> <p><b>CP 5612</b> PCI card (32-bit) for connecting a PG/PC to PROFIBUS (communication software included in the WinCC basic package)</p> <p><b>CP 5622</b> PCI Express X1 card (32-bit) for connection of PG/PC to PROFIBUS (communication software included in WinCC basic package)</p> <p><b>CP 5711</b> USB adapter (USB V2.0) for connecting a PG/notebook to PROFIBUS or MPI (communication software included in WinCC Basic package)</p> <p><b>CP 5613 A3</b> PCI Card (32-bit) for connecting a PC to PROFIBUS (communication software must be ordered separately)</p> <p><b>CP 5623</b> PCI Express X1 card (32-bit) for connection of PG/PC to Industrial Ethernet (communication software must be ordered separately)</p>
<p><b>SIMATIC NET SOFTNET-IE S7 V15</b> Software for S7 and S5-compatible communication, incl. OPC server, PG/OP communication and NCM PC, up to 64 connections, single license for 1 installation, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A  <ul style="list-style-type: none"> <li>• Single license for 1 installation</li> <li>• Upgrade package for SIMATIC NET from Edition 2006</li> </ul> </p>	6GK1704-1CW15-0AA0 6GK1704-1CW00-3AE0	
<p><b>SOFTNET-IE S7 Extended V15</b> Software for S7-, S5-compatible communication, OPC; PG/OP communication, proj. SW up to 255 connections (S7) or 512 connections (S7-1200/S7-1500); single license for 1 installation</p>	6GK1704-1BW15-0AA0	
<p><b>SIMATIC NET SOFTNET-IE S7 LEAN V15</b> (included in the scope of delivery of WinCC Runtime Professional) Software for S7-compatible and S5-compatible communication incl. OPC server, PG/OP communication and NCM PC, up to 8 connections, single license for one installation of runtime software, software and electronic manual on CD-ROM, license key on USB flash drive; Class A  <ul style="list-style-type: none"> <li>• Single license for 1 installation</li> <li>• Upgrade package for SIMATIC NET from Edition 2006</li> </ul> </p>	6GK1704-1LW15-0AA0 6GK1704-1LW00-3AE0	
<p><b>SIMATIC NET HARDNET-IE S7 V15</b> Software for S7, open communication; OPC, PG/OP communication, project software; up to 120 connections; single license for one installation of runtime software, software and electronic manual on DVD; license key on USB flash drive; Class A  <ul style="list-style-type: none"> <li>• Single license for 1 installation</li> <li>• Upgrade package for SIMATIC NET from Edition 2006</li> </ul> </p>	6GK1716-1CB15-0AA0 6GK1716-1CB00-3AE0	
<p><b>CP 1623</b> PCI Express X1 card (32-bit) for connection of PG/PC to Industrial Ethernet (communication software must be ordered separately)</p>	6GK1162-3AA00	

## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) options

#### Overview

##### **Options for SIMATIC Panels, SIMATIC WinCC Runtime Advanced and SIMATIC WinCC Runtime Professional**

###### SIMATIC Logon

- Creates user administration on a central computer to which one or more WinCC stations can be connected over Ethernet.
- With each user logon/logoff on one of the connected stations, SIMATIC Logon checks whether a user password has been created and that the required authorizations exist.
- SIMATIC Logon supports the user in combination with the Audit option in meeting requirements in accordance with FDA 21 CFR Part 11 and EU178.

##### **Options for SIMATIC WinCC Runtime Advanced and SIMATIC WinCC Runtime Professional**

###### SIMATIC WinCC Logging

- Logging of messages and process values
- Online evaluation of process value logs and alarm logs
- Evaluation of process value and alarm logs using standard MS tools such as Excel

###### SIMATIC WinCC Recipes

- Generation and management of data records for machine or production data
- Display or entry of data records via a configurable screen object or via process pictures distributed within the project
- Transmission of data records from or to the PLC
- Import/export of data records for further processing with other tools (e.g. MS Excel)

##### **Options for SIMATIC Panels and SIMATIC WinCC Runtime Advanced**

###### SIMATIC WinCC Audit

- Recording of operator actions in an audit trail
- Electronic signature for important user actions relevant to production
- Audit supports users in meeting special quality requirements, e.g.
  - Production plants requiring validation according to FDA 21 CFR Part 11 (Food Drug Administration legislation)
  - In respect of traceability according to EU 175/2002 (EU directive)

###### SIMATIC WinCC Sm@rtServer

- Flexible solution for location-independent access to HMI systems
- Remote maintenance of machines and plants via the Internet/intranet
- Reduced downtimes for machines and plants due to direct remote access
- Flexible solution for location-independent access to machines and plants

##### **Options for SIMATIC WinCC Runtime Professional**

###### SIMATIC WinCC DataMonitor

- Display and evaluation of current process states and historical data on office PCs with standard tools.
- Information can be individually compiled online during runtime via the Internet/intranet.

###### WinCC IndustrialDataBridge for WinCC Runtime Professional (V13 SP1 and higher)

Using the SIMATIC WinCC IndustrialDataBridge, communication links between different data sources and data targets can be created by means of simple configuration/parameter assignment. The WinCC IndustrialDataBridge can either be integrated into WinCC or used as a stand-alone application (not in conjunction with WinCC).

###### SIMATIC Information Server 2014 SP3

The SIMATIC Information Server 2014 SP3 is an open, web-based reporting system for interactive areas. Reports can be used in Internet Explorer, for Excel, Word or PowerPoint, as well as for Adobe Reader (pdf). The SIMATIC Information Server has access to archived process values and messages, and can be used either directly in conjunction with WinCC / WinCC RT Professional / PCS7 OS as well as with SIMATIC Process Historian 2014.

For more detailed information on the SIMATIC Information Server and article numbers, see SCADA System SIMATIC WinCC.

### SIMATIC WinCC (TIA Portal) options

#### Overview

##### SIMATIC Process Historian 2014

The SIMATIC Process Historian 2014 is a powerful, long-term archive server solution that stores the WinCC process values and messages in a central database. The system offers full scalability for performance and scope. It records and stores data from one or more WinCC, WinCC RT Professional and PCS 7 projects. The number of connected single stations, servers, or redundant server pairs is unrestricted.

SIMATIC Process Historian is designed for use throughout your plant, and is positioned below the corporate management level (ERP, MES).

For more detailed information on the SIMATIC Process Historian and article numbers, see SCADA System SIMATIC WinCC.

##### SIMATIC WinCC Redundancy

For assembling a high-performance, fail-safe, client-server system. One WinCC/Redundancy package is required for each redundant pair of servers.

##### SIMATIC WinCC Server and SIMATIC WinCC Client

For assembling a high-performance client-server system

#### **Overview of the individual options**

Options	WinCC RT Advanced	WinCC RT Professional	SIMATIC Panels
<b>SIMATIC Logon</b>	•	•	
<b>WinCC Logging</b>	•	•	• 1)
<b>WinCC Recipes</b>	•	•	• 1)
<b>WinCC Audit</b>	•	-	•
<b>WinCC Sm@rtServer</b>	• 1)	-	• 1)
<b>WinCC DataMonitor</b>	-	•	-
<b>WinCC IndustrialDataBridge</b>	-	•	-
<b>SIMATIC Information Server</b>	-	•	-
<b>SIMATIC Process Historian</b>	-	•	-
<b>WinCC Redundancy</b>	-	•	-
<b>WinCC Server/WinCC Client</b>	-	•	-
<b>WinCC WebNavigator</b>	-	•	-
<b>WinCC WebUX</b>	-	•	-

• possible


1) integrated in basic system

<http://www.siemens.com/wincc-tia-portal-options>

**HMI software**

TIA Portal

SIMATIC WinCC (TIA Portal)

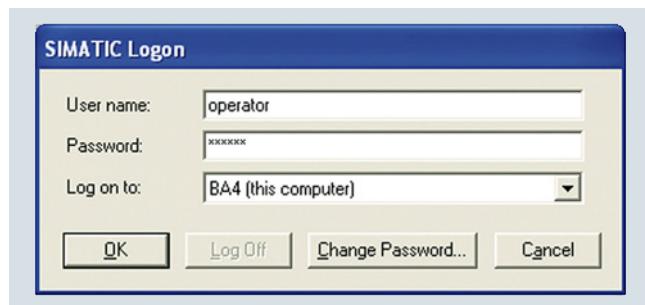**SIMATIC WinCC (TIA Portal) options > SIMATIC Logon****Overview**

- Option for connecting SIMATIC Panels and PCs with SIMATIC WinCC Runtime Advanced as well as WinCC Runtime Professional to a central user administration.
- Creates user administration on a central computer to which one or more panels or WinCC stations can be connected over Ethernet.
- With each logging-on/off of a user on one of the connected stations, SIMATIC Logon checks whether a user password has been created and that the required privileges exist.

***SIMATIC Logon for Panels and WinCC Runtime Advanced***

- All users of the SIMATIC Panels or WinCC Runtime Advanced stations can be managed plant-wide from a central location
- Supports the user in combination with the Audit option in meeting requirements in accordance with FDA 21 CFR Part 11 and EU178.
- Licensing:  
SIMATIC Logon (basic license) and SIMATIC Logon Remote Access (3-pack license) for the connection of 3 panels or WinCC Runtime Advanced stations to a central user administration. Additional stations can be connected by using further SIMATIC Logon Remote Access licenses (3-pack/10-pack).

***SIMATIC Logon for WinCC Runtime Professional***

- All users of WinCC Runtime Professional can be managed plant-wide from a central location.
- The central user management with SL utilizes Windows mechanisms and must be installed on all participating WinCC Runtime Professional stations.
- Licensing  
SIMATIC Logon (basic license) is included in the basic package of WinCC Runtime Professional

**Ordering data****Article No.**

<b>SIMATIC Logon V1.6</b> Basic license <sup>1)</sup> For Panels or WinCC Runtime Advanced stations, the corresponding number of additional SIMATIC Logon Remote Access licenses is required. No SIMATIC Logon Remote Access licenses are required for WinCC Runtime Professional	<b>6ES7658-7BX61-0YA0</b>
<b>SIMATIC Logon upgrade to V1.6</b>	<b>6ES7658-7BX61-0YE0</b>
<b>SIMATIC Logon Remote Access (3 clients)</b> Remote Access for 3 clients; single license for 3 SIMATIC Logon Remote Access clients; the number of licensed clients is determined from the sum of the installed SIMATIC Logon Remote Access licenses.	<b>6ES7658-7BA00-2YB0</b>
<b>SIMATIC Logon Remote Access (10 clients)</b> Remote Access for 10 clients; single license for 10 SIMATIC Logon Remote Access clients; the number of licensed clients is determined from the sum of the installed SIMATIC Logon Remote Access licenses.	<b>6ES7658-7BB00-2YB0</b>

<sup>1)</sup> SIMATIC Logon V1.5 included in scope of supply of WinCC Runtime Professional.

**More information**

More information is available at:

<http://www.siemens.com/simatic-logon>

**Overview**

- Option for SIMATIC WinCC Runtime Advanced as well as SIMATIC Panels for recording operations in an audit trail, and electronic signature
- The audit trail is furnished with a security mechanism that displays subsequent manipulations.
- A user-friendly configuration function, which is included as standard in WinCC, is used to define the following:
  - Which operator actions should be recorded in the audit trail during runtime
  - Which important operator actions during runtime require electronic signature/comments
- Available for the following SIMATIC HMI systems:
  - Comfort Panels
  - Mobile Panels
  - TP/OP 277
  - MP 277
  - MP 377
  - WinCC Runtime Advanced
- Licensing:
  - A license for SIMATIC WinCC Logging and SIMATIC WinCC Audit is required for every operator station (panel or PC).

**Ordering data****Article No.****SIMATIC WinCC Audit for SIMATIC Comfort/Mobile Panels**

- Single license, license key only on USB flash drive
- As download<sup>1)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0RP00-0BB0****6AV2107-0RP00-0BH0****SIMATIC WinCC Audit for Runtime Advanced<sup>2)</sup>**

- Single license, license key only on USB flash drive
- As download<sup>1)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0RA00-0BB0****6AV2107-0RA00-0BH0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

<sup>2)</sup> The following license is also required: SIMATIC WinCC Logging for Runtime Advanced

**Technical specifications**

<b>WinCC Audit</b>	
Storage location for Audit Trail when used on the Panel	Plug-in Flash memory card or via Ethernet in the higher-level PC
Storage location for Audit Trail when using WinCC Runtime Advanced	Local hard disk or via Ethernet in the higher-level PC
<b>Execution platform</b>	
SIMATIC Panels	Mobile Panel 277, TP/OP 277
SIMATIC Multi Panels	MP 277, MP 377
SIMATIC Comfort Panels	all
PC systems	SIMATIC WinCC Runtime Advanced

**More information**

More information is available at:

<http://www.siemens.com/wincc-audit-tia-portal>


## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) options > WinCC DataMonitor

#### Overview

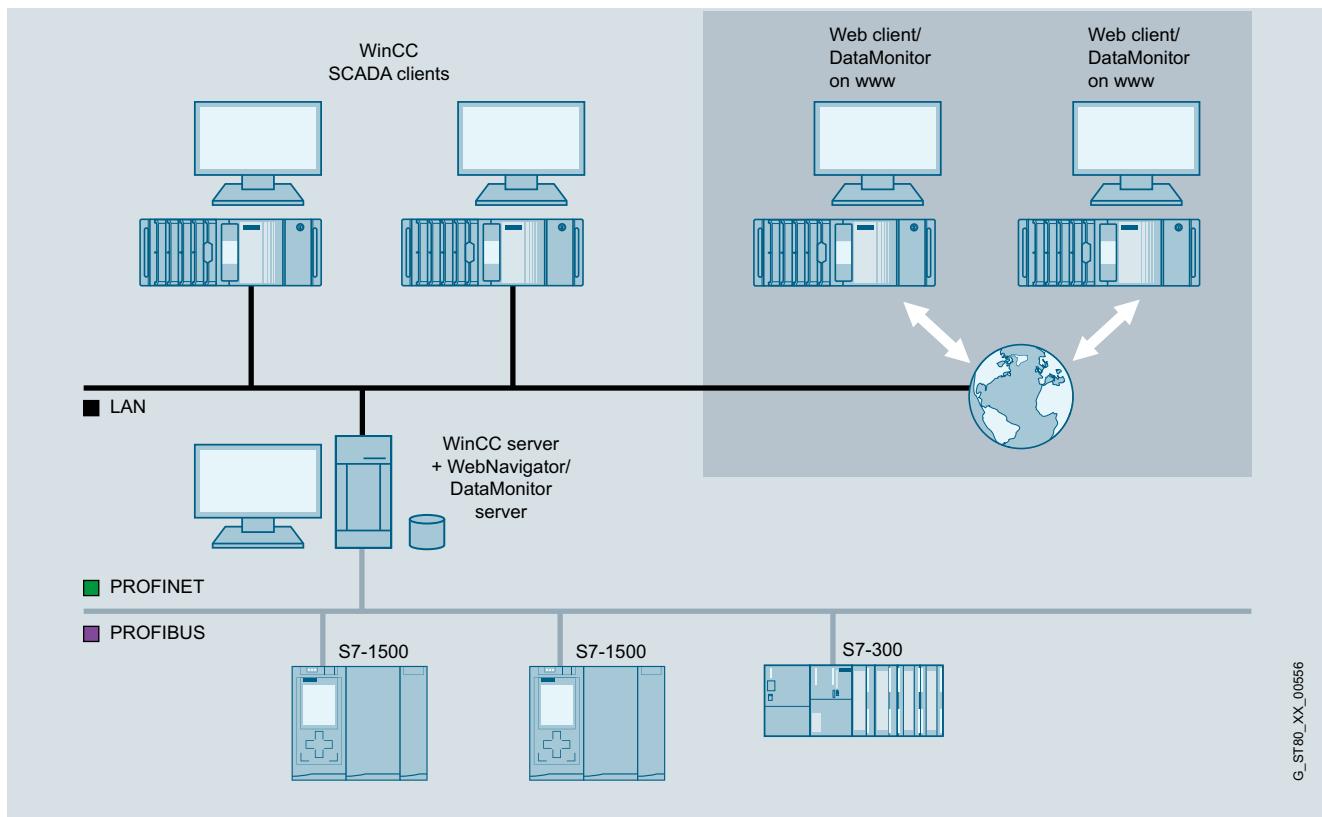

G\_ST80\_XX\_00556

WinCC DataMonitor

- The WinCC DataMonitor is used for display and evaluation of current process states and historical data on office PCs using standard tools such as Microsoft Internet Explorer or Microsoft Excel. The DataMonitor Client is supported by a web server with current and historical process data and alarms. All staff ranging from machine operators to corporate managers can use the DataMonitor to obtain information. In combination with WinCC V7 and with the aid of the multichannel architecture, access can be made to several lower-level WinCC stations.
- DataMonitor is a suite of Internet-capable tools:
  - Process Screens**: Tool exclusively for monitoring and navigating via WinCC or WinCC Runtime Professional screens using the WinCC Web Viewer (WinCCViewer RT) in the "view only" mode.
  - Excel Workbooks**: Logging tool that integrates WinCC or WinCC Runtime Professional Archive and online values into Microsoft Excel and supports online analysis.
  - Published Reports**: Event- or time-driven execution of Excel or PDF reports for the output of process data and analysis results.
  - WebCenter**: Individual configuration of Internet pages and compilation of information within a portal.
- DataMonitor does not require manual client installation because it loads the required components from the DataMonitor server
- There is no installation required on the client for the WebCenter, Trends and Alarms functions.

#### Licenses

- A (server-based) license is required for the WinCC DataMonitor. This is a graduated license based on the number of simultaneous web client access operations and can be incremented at any time using additive web client licenses (countable licenses).
- The DataMonitor Client software can be installed as many times as required without the need for a license.

Additional information is available on the Software Update Service, license types, online software delivery and handling your software licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

Ordering data	Article No.	More information
<b>SIMATIC WinCC DataMonitor as from Runtime Professional V14 and WinCC as from V7.4<sup>2)</sup></b>		Additional information is available on the Internet at: <a href="http://www.siemens.com/wincc-datamonitor">http://www.siemens.com/wincc-datamonitor</a>
Standard scope of supply		
<ul style="list-style-type: none"> <li>• 1 client license (countable)</li> <li>• 3 client licenses (countable)</li> <li>• 10 client licenses (countable)</li> <li>• 30 client licenses (countable)</li> </ul>	<b>6AV6362-3AB00-0BB0</b> <b>6AV6362-3AD00-0BB0</b> <b>6AV6362-3AF00-0BB0</b> <b>6AV6362-3AJ00-0BB0</b>	
As download <sup>1)</sup>		
<ul style="list-style-type: none"> <li>• 1 client license (countable)</li> <li>• 3 client licenses (countable)</li> <li>• 10 client licenses (countable)</li> <li>• 30 client licenses (countable)</li> </ul>	<b>6AV6362-3AB00-0AH0</b> <b>6AV6362-3AD00-0AH0</b> <b>6AV6362-3AF00-0AH0</b> <b>6AV6362-3AJ00-0AH0</b>	

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

<sup>2)</sup> As from WinCC V14 the licenses are cumulative (countable), i.e. one 10 client license and one 30 client license permit access by 40 clients.

A license is not required for the engineering system for configuring the runtime option.


# HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

## SIMATIC WinCC (TIA Portal) options > WinCC Logging

### Overview

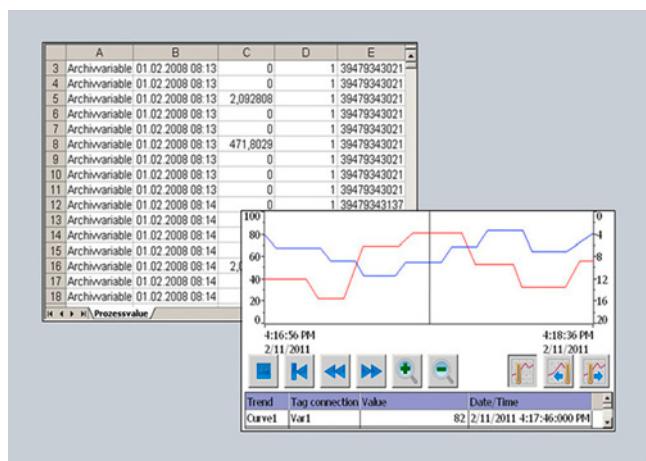

- Option for SIMATIC WinCC Runtime Advanced and WinCC Runtime Professional for logging process values and alarms
- Logging of process values and alarms supports the acquisition and processing of process data from an industrial plant or machine. Evaluation of the logged process data provides information about the operating states of the plant or machine
- Licensing:
  - SIMATIC Panels / Multi Panels / Comfort Panels: No license is required.
  - WinCC Runtime Advanced: One license is required per operator station
  - WinCC Runtime Professional: 500 Logging Tags are already included in the basic package. The number of Logging Tags can be increased by means of additional licenses

### Ordering data

### Article No.

#### SIMATIC WinCC Logging for Runtime Advanced<sup>1)</sup>

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0GA00-0BB0**

**6AV2107-0GA00-0BH0**

#### SIMATIC WinCC Recipes + Logging for Runtime Advanced<sup>1)</sup>

- Single license per option, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0HA00-0BB0**

**6AV2107-0HA00-0BH0**

#### SIMATIC WinCC Logging for Runtime Professional 1500 logging tags

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0GB00-0BB0**

**6AV2107-0GB00-0BH0**

#### SIMATIC WinCC Logging for Runtime Professional 5 000 logging tags

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0GD00-0BB0**

**6AV2107-0GD00-0BH0**

#### WinCC Logging for Runtime Professional Powerpack 1 500 -> 5 000 logging tags

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-2GD00-0BD0**

**6AV2107-2GD00-0BJ0**

#### WinCC Logging Upgrade for SIMATIC WinCC Archives V7.0 (10 licenses)

- Single license per option, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-4GX00-0BF0**

<sup>1)</sup> One license is required for each operator station. A license is not required for the engineering system for configuring the runtime option.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**Technical specifications**

<b>WinCC Logging for Runtime Advanced</b>	
The values specified are maximum values	
Number of logs	100
Archivable data	Process values, alarms
Cyclical trigger for archiving process values (variables)	1 s
Max. number of entries per log (incl. sequence log)	500,000 <sup>1)</sup>
Log types	Circular logs, sequence logs (max. 400 per log)
Data storage format	CSV (Comma Separated Variable), RDB (Runtime Data Base), Microsoft SQL database (database not included in scope of delivery)

<sup>1)</sup> Dependent on memory medium used.

**More information**

Additional information is available on the Internet at:  
<http://www.siemens.com/wincc-logging-tia-portal>

3

<b>WinCC Logging for Runtime Professional</b>	
The values specified are maximum values	
Number of logs per single-user station/server	100
Archivable data	Process values, alarms
Measured values per second, max.	Server/single-user station: 5 000 per sec.
Log tags per single-user station/server	80,000 <sup>2)</sup>
Log types	Circular log with and without long-term logging
Data storage format	Microsoft SQL 2008 database

<sup>2)</sup> Dependent on the Logging PowerPack used for the log tags. 500 log tags are contained in the basis version.


# HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

## SIMATIC WinCC (TIA Portal) options > WinCC Recipes

### Overview

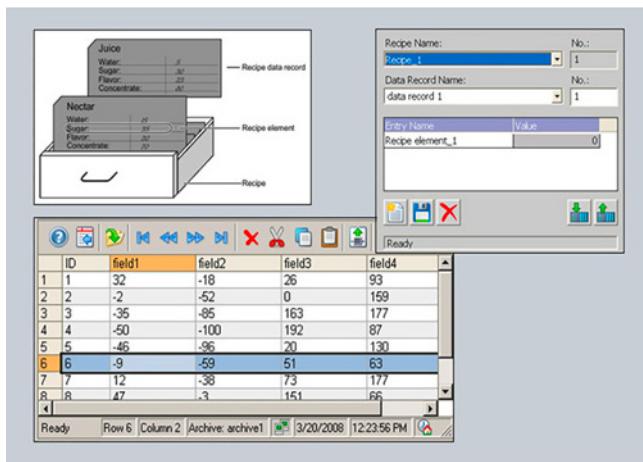

- Option for SIMATIC WinCC Runtime Advanced and WinCC Runtime Professional for managing data records in recipes that contain related machine or production data
- The data in a data set can be transferred, for example, from the control unit to the PLC to switch production to a different product variant
- Licensing:
  - SIMATIC Panels / Multi Panels / Comfort Panels: No license is required.
  - WinCC Runtime Advanced: One license is required per operator station
  - WinCC Runtime Professional: A license is only required on the server (or single-user system).

### Ordering data

#### Article No.

##### **SIMATIC WinCC Recipes for Runtime Advanced<sup>1)</sup>**

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0JA00-0BB0**

**6AV2107-0JA00-0BH0**

##### **SIMATIC WinCC Recipes + Logging for Runtime Advanced<sup>1)</sup>**

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0HA00-0BB0**

**6AV2107-0HA00-0BH0**

##### **SIMATIC WinCC Recipes for Runtime Professional<sup>1)</sup>**

- Single license, license key only on USB flash drive
- As download<sup>2)</sup>  
Single license, license key download only  
Email address required for delivery

**6AV2107-0JB00-0BB0**

**6AV2107-0JB00-0BH0**

<sup>1)</sup> One license is required for each operator console. A license is not required for the engineering system for configuring the runtime option.

<sup>2)</sup> Current information and availability regarding the new delivery form can be found at: <http://www.siemens.com/tia-online-software-delivery>

### Technical specifications

#### **WinCC Recipes for Runtime Advanced**

The values specified are maximum values

Number of recipes 1 000

Number of elements per recipe<sup>1)</sup> 2 000

User data length in KB per data record 256

Number of data records per recipe 5 000

<sup>1)</sup> When using arrays, each array element represents a recipe element

#### **WinCC Recipes for Runtime Professional**

The values specified are maximum values

Number of recipes 1 000<sup>2)</sup>

Number of elements per recipe<sup>1)</sup> 500<sup>3)</sup>

User data length in KB per data record 3 000<sup>3)</sup>

Number of data records per recipe 3 000<sup>2)</sup>

<sup>2)</sup> Limited by system resources.

<sup>3)</sup> The product of the number of recipe elements and the number of data records must not exceed a value of 320 000.

### More information

More information is available at:

<http://www.siemens.com/wincc-recipes-tia-portal>

**SIMATIC WinCC (TIA Portal) options > WinCC Redundancy**

### Overview

Option for SIMATIC WinCC (TIA Portal), supporting the parallel operation of two interfaced WinCC single-user systems or process data servers for mutual monitoring

If one of the two server PCs or one of the two WinCC stations fails, the second one will take over control of the entire system. Once the failed server or station is restored to operation, the contents of all the message and process value archives are copied to it.

One WinCC Redundancy package is required for each redundant pair of servers.

### Ordering data

### Article No.

**SIMATIC WinCC Redundancy for Runtime Professional**

- Single license for 2 installations, license key on USB flash drive, software and documentation on DVD
- As download<sup>1)</sup>  
Single license for 2 installations, license key download only  
Email address required for delivery

**6AV2107-0FB00-0BB0**

**6AV2107-0FB00-0BH0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

A license is not required for the engineering system for configuring the runtime option.

### More information

More information is available at:

<http://www.siemens.com/wincc-redundancy-tia-portal>


## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) options > WinCC Server / WinCC Client

#### Overview

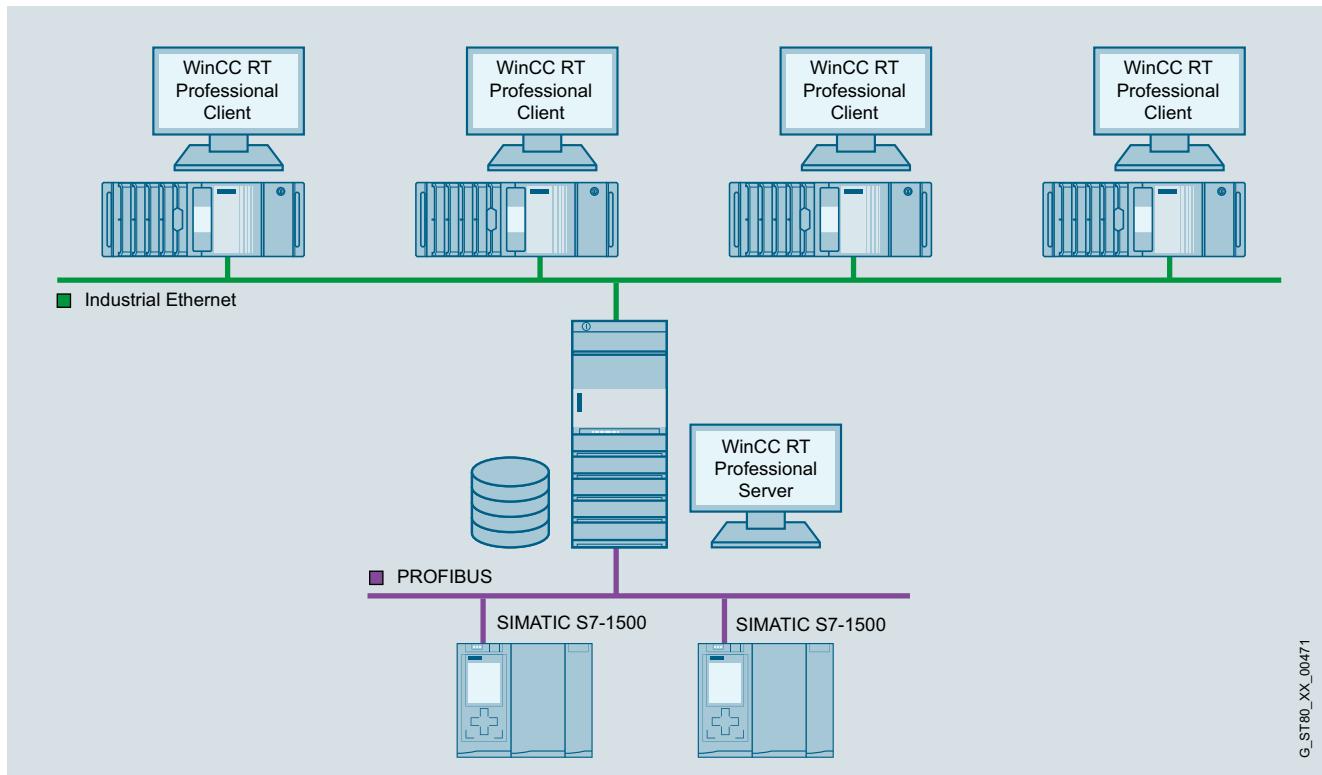

G\_ST80\_XX\_00471

- Option for SIMATIC WinCC Runtime Professional, which permits the configuration of a powerful client/server system
- One of the following operating systems must be available to install the option on the server: Windows Server 2003 R2 SP2, Windows Server 2008 SP2 or Windows XP Professional. When using Windows XP Professional, a maximum of 3 clients can be connected.
- A number of coordinated operator monitoring and control stations can be operated in a single group with networked automation systems.
- Client/server solution: One server supplies up to 32 connected clients with process and archive data, alarms, screens and reports.
  - Requirement: Network connection (TCP/IP) between the server PC and the connected clients.
- Licensing:
  - A WinCC Runtime Professional license on the server with the appropriate number of PowerTags and the "WinCC Server for RT Professional" license.
  - The "WinCC Client for RT Professional" license on the clients.

SIMATIC WinCC (TIA Portal) options > WinCC Server / WinCC Client

Ordering data	Article No.	More information
<b>SIMATIC WinCC Server for Runtime Professional</b> <ul style="list-style-type: none"> <li>Single license, license key only on USB flash drive</li> </ul> <u>As download<sup>1)</sup></u> <ul style="list-style-type: none"> <li>Single license, license key download only, email address required for delivery</li> </ul>	<b>6AV2107-0EB00-0BB0</b>  <b>6AV2107-0EB00-0BH0</b>	More information is available at: <a href="http://www.siemens.com/wincc-server-tia-portal">http://www.siemens.com/wincc-server-tia-portal</a>
<b>SIMATIC WinCC Client for Runtime Professional</b>		
<b>V17</b> <ul style="list-style-type: none"> <li>Single license, license key on USB flash drive, software and documentation on DVD</li> <li>Single license, software and license key download. Email address required for delivery</li> </ul>	<b>6AV2107-0DB07-0AA0</b>  <b>6AV2107-0DB07-0AH0</b>	
<b>SIMATIC WinCC Client for Runtime Professional ASIA V17</b> Single license, license key on USB flash drive, software and documentation on DVD	<b>6AV2107-0DB17-0AA0</b>	
<b>V16</b> <ul style="list-style-type: none"> <li>Single license, license key on USB flash drive, software and documentation on DVD</li> </ul> <u>As download<sup>1)</sup></u> <ul style="list-style-type: none"> <li>Single license, software and license key download. Email address required for delivery</li> </ul>	<b>6AV2107-0DB06-0AA0</b>  <b>6AV2107-0DB06-0AH0</b>	
<b>SIMATIC WinCC Client for Runtime Professional ASIA V16</b> Single license, license key on USB flash drive, software and documentation on DVD	<b>6AV2107-0DB16-0AA0</b>	

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

A license is not required for the engineering system for configuring the runtime option.


## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) options > WinCC Sm@rtServer

#### Overview

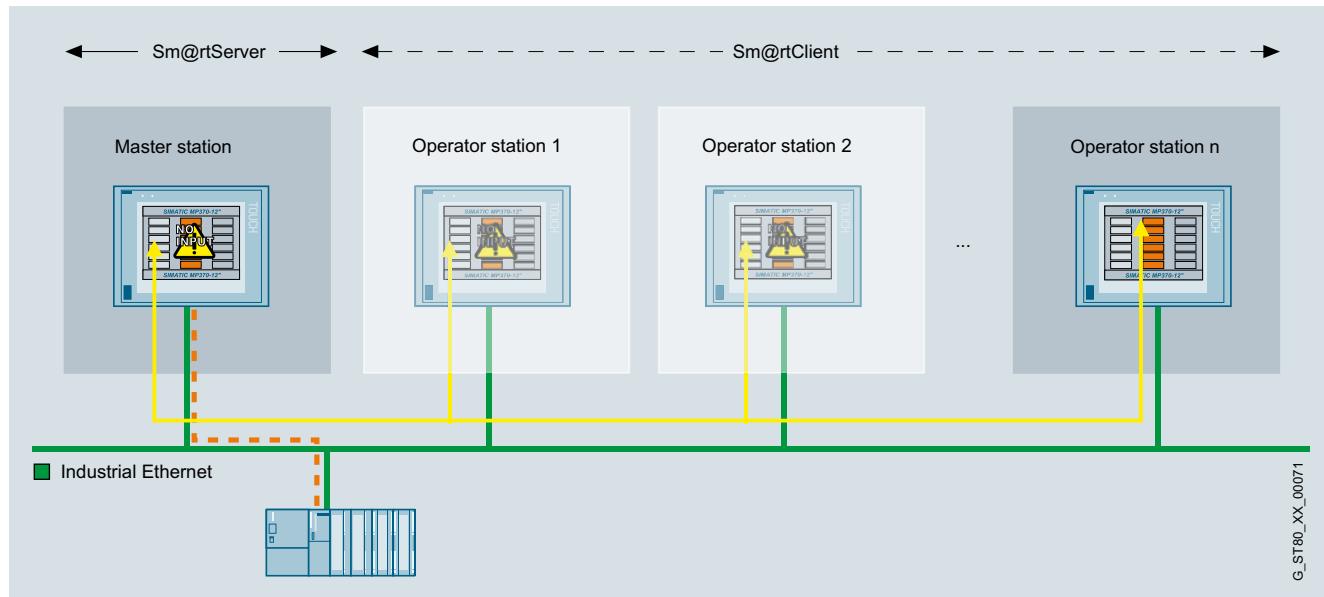

- Option for SIMATIC WinCC Runtime Advanced plus SIMATIC Panels for communication between various SIMATIC HMI systems.
- Available for the following SIMATIC HMI systems:
  - Basic Panels 2<sup>nd</sup> Generation (with Ethernet interface)
  - Comfort Panels
  - Mobile Panel 2<sup>nd</sup> Generation, Mobile Panel 277, Mobile Panel 177 PN
  - TP 177B PN/DP, OP 177B PN/DP
  - TP 277, OP 277
  - MP 177, MP 277, MP 377
  - WinCC Runtime Advanced
- A SIMATIC HMI system can be used to control or monitor another system remotely; entry level for client/server configurations for distributed operator stations or for solutions with head end or control room
- Local operation, visualization and data processing are as possible as plant-wide access to information. Integrated information flows ensure an overview of the status of all processes.
- Licensing:
 

The "SIMATIC WinCC Sm@rtServer for Panel" or "SIMATIC WinCC Sm@rtServer for Basic Panel" or "SIMATIC WinCC Sm@rtServer for Runtime Advanced" license must be installed on the server operator panel.

A separate license is no longer required for Comfort / Mobile Panels Version V14 or higher and for Runtime Advanced Version V14 SP1 or higher.

A license is not required for the engineering system for configuring the runtime option.

#### Note:

When accessing the operator stations via the Sm@rtServer option, suitable protective measures (including IT security such as network segmentation) should be taken in order to ensure safe operation of the system.

Additional information on the topic of industrial security is available on the Internet at:

<http://www.siemens.com/industrialsecurity>

SIMATIC WinCC (TIA Portal) options > WinCC Sm@rtServer

Ordering data	Article No.	Technical specifications
<b>WinCC Sm@rtServer for SIMATIC Basic Panels<sup>1)</sup></b> <ul style="list-style-type: none"> <li>• Single license License key only on USB flash drive</li> <li>• As download<sup>2)</sup> Single license, license key download only Email address required for delivery</li> </ul>	<b>6AV2107-0CR00-0BB0</b>  <b>6AV2107-0CR00-0BH0</b>	<b>WinCC Sm@rtServer</b> The values specified are maximum values
<b>WinCC Sm@rtServer for SIMATIC Panels<sup>1) 3)</sup></b> <ul style="list-style-type: none"> <li>• Single license License key only on USB flash drive</li> <li>• As download<sup>2)</sup> Single license, license key download only Email address required for delivery</li> </ul>	<b>6AV2107-0CP00-0BB0</b>  <b>6AV2107-0CP00-0BH0</b>	<b>Execution platform</b> SIMATIC Basic Panels 2nd Generation SIMATIC Comfort Panels SIMATIC Panels SIMATIC Multi Panels PC systems <b>Number of Sm@rtClients that can simultaneously connect to a Sm@rtServer</b>
<b>WinCC Sm@rtServer for Runtime Advanced<sup>1) 4)</sup></b> <ul style="list-style-type: none"> <li>• Single license License key only on USB flash drive</li> <li>• As download<sup>2)</sup> Single license, license key download only Email address required for delivery</li> </ul>	<b>6AV2107-0CA00-0BB0</b>  <b>6AV2107-0CA00-0BH0</b>	SIMATIC Basic Panels 2nd Generation Comfort Panel, Mobile Panel 2nd Generation as Sm@rtServer Mobile Panel 177 PN, TP/OP 177B PN/DP, MP 177 as Sm@rtServer Mobile Panel 277, TP/OP 277, MP 277 as Sm@rtServer MP 377 as Sm@rtServer WinCC Runtime Advanced as Sm@rtServer
		1 client 2 clients for 4" devices 3 clients for 7", 9", 12" and 15" devices 2 clients for 19" devices 1 client for 22" devices 2 clients 3 clients for 6" devices 2 clients for 8" and 10" devices 3 clients for 12" devices 2 clients for 15" devices 1 client for 19" devices 5 clients

<sup>1)</sup> The license must be installed on the Sm@rtServer HMI device. A license is not required for the engineering system for configuring the runtime option.

<sup>2)</sup> Current information and availability regarding the new delivery form can be found at: <http://www.siemens.com/tia-online-software-delivery>

<sup>3)</sup> The license is no longer required for version V14 or higher

<sup>4)</sup> The license is no longer required for version V14 SP1 or higher

### More information

More information is available at:

<http://www.siemens.com/wincc-smartserver-tia-portal>



## HMI software

TIA Portal

SIMATIC WinCC (TIA Portal)

### SIMATIC WinCC (TIA Portal) options > WinCC WebNavigator

#### Overview

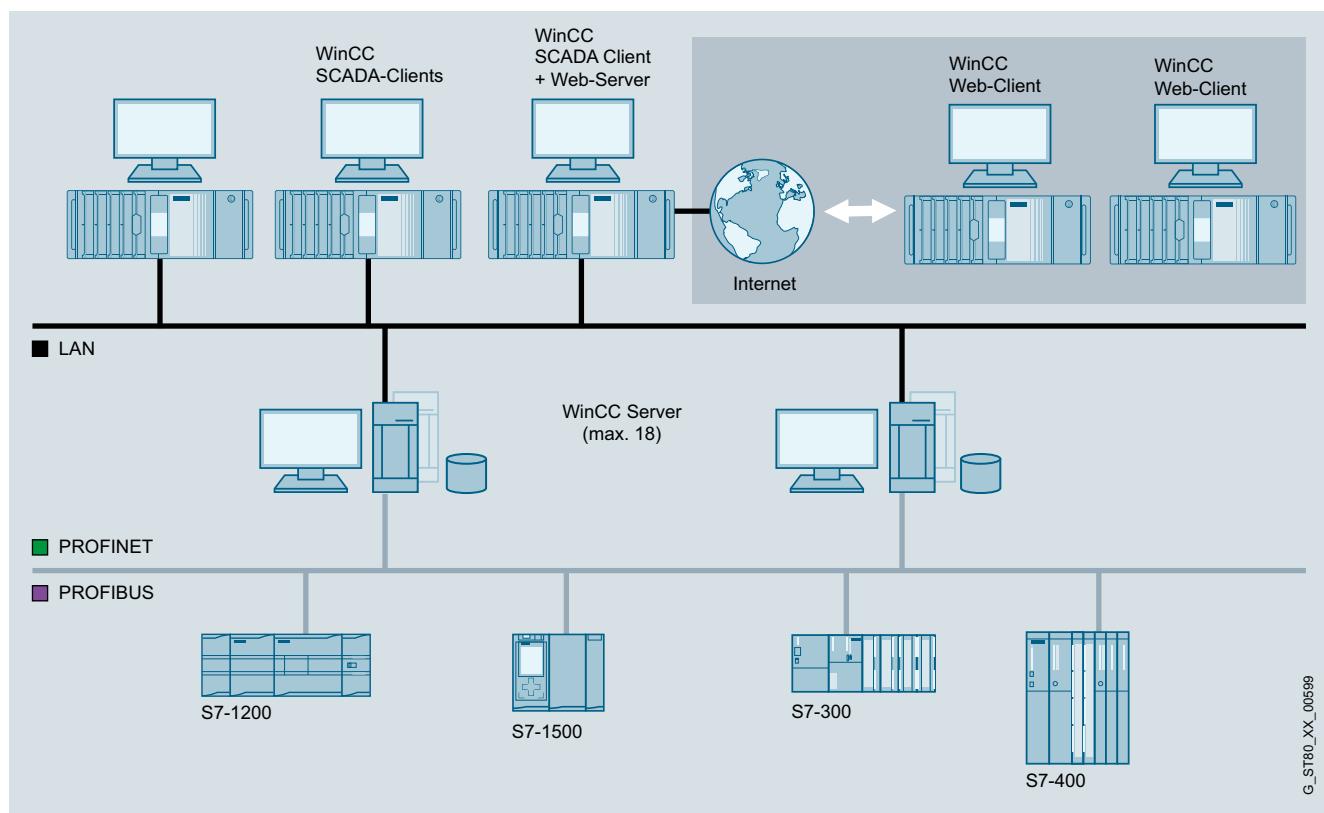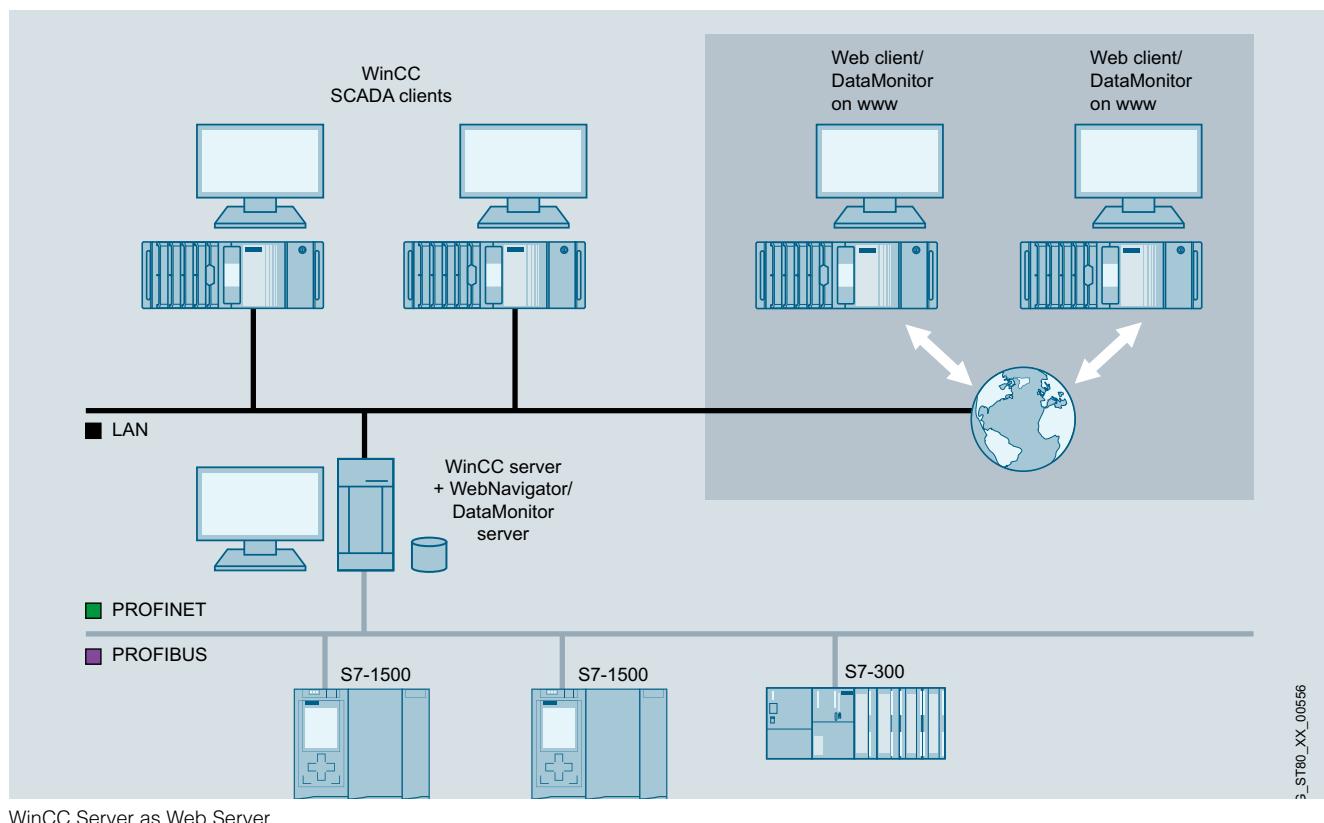

**Overview****WinCC WebNavigator**

- Option for SIMATIC WinCC or WinCC Runtime Professional for operating and monitoring plants over the Internet, company Intranet or LAN.
- Configuration from:  
- A web server with SIMATIC WinCC as single-user or server version and a web client that permits operator control and monitoring of a current WinCC project using the Internet Explorer. In combination with WinCC V7, the WebNavigator Server can be operated on a MultiClient

Licenses

- A (server-based) license is required for the WebNavigator. This is a graduated license based on the number of simultaneous web client access operations and can be incremented at any time using additive web client licenses (countable licenses).
- The WebNavigator client software can be installed as many times as required without the need for a license.
- A (client-based) license is required for the WebNavigator diagnostics. This provides access to all web servers with a WebNavigator Server or WebNavigator Diagnostic Server license.
- The WinCC/WebUX and WinCC/WebNavigator licenses can be combined, if necessary.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

Note:

When accessing the operator stations via the WinCC WebNavigator option, suitable protective measures (including IT security such as network segmentation) should be taken in order to ensure safe operation of the system.

You will find more information on the topic of Industrial Security on the Internet at:

<http://www.siemens.com/industrialsecurity>

**Ordering data****Article No.****SIMATIC WinCC WebNavigator as from Runtime Professional V14 and WinCC as from V7.4<sup>2)</sup>**

Single license, license key on USB flash drive

- 1 client license (countable)
- 3 client licenses (countable)
- 10 client licenses (countable)
- 30 client licenses (countable)
- 100 client licenses (countable)

As download<sup>1)</sup>

Single license, license key download. Email address mandatory

- 1 client license (countable)
- 3 client licenses (countable)
- 10 client licenses (countable)
- 30 client licenses (countable)
- 100 client licenses (countable)

**6AV6362-1AB00-0BB0**  
**6AV6362-1AD00-0BB0**  
**6AV6362-1AF00-0BB0**  
**6AV6362-1AJ00-0BB0**  
**6AV6362-1AM00-0BB0**

**6AV6362-1AB00-0AH0**  
**6AV6362-1AD00-0AH0**  
**6AV6362-1AF00-0AH0**  
**6AV6362-1AJ00-0AH0**  
**6AV6362-1AM00-0AH0**

**SIMATIC WinCC WebNavigator Diagnostics Client**

For WinCC V14 Runtime Professional and WinCC as from V7.4

- Standard scope of supply
- As download

**6AV6362-1BA00-0BB0**  
**6AV6362-1BA00-0AH0**

**WinCC WebNavigator Load Balancing**

For WinCC V7.4 only

- Load Balancing
- Load Balancing Step Up

As download

RT-SW, single license, license key download. Email address mandatory

- Load Balancing
- Load Balancing Step Up

**6AV6362-1FA00-0BB0**  
**6AV6362-1GA00-0BB0**

**6AV6362-1FA00-0AH0**  
**6AV6362-1GA00-0AH0**

<sup>1)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

<sup>2)</sup> As from WinCC V14 the licenses are cumulative (countable), i.e. one 10 client license and one 30 client license permit access by 40 clients.

A license is not required for the engineering system for configuring the runtime option.

**More information**

You can find more information at:

<http://www.siemens.com/wincc-webnavigator>

# HMI Software

TIA Portal

TIA Portal Options

## SIMATIC Visualisation Architect

### Overview

#### **SIMATIC Visualisation Architect**

##### Challenge:

- To standardize the user interfaces of the visualizations throughout the plant
- Significant reduction of the engineering costs for generating the visualizations
- To make the in-house work standard usable

##### Solution:

- Automatic generation and creation of the visualizations, based on the program code of the PLC and corresponding visualization objects within the framework of system-wide library concepts.

##### **Licensing**

- The software can be installed on multiple computers. The number of existing licenses determines the number of computers on which the software can be used simultaneously (floating license).
- An upgrade to the subsequent version is offered for users of previous versions.
- A rental license is available for temporary use
- A trial license is available for testing purposes
- It is possible to conclude Software Update Service (SUS) contracts

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

3

### Ordering data

### Article No.

#### **SIMATIC Visualisation Architect V17**

##### as package

- SIMATIC Visualization Architect V17
- SIMATIC Visualization Architect V17 Rental
- SIMATIC Visualization Architect V17 Trial  
Download in Customer Support Portal

##### as download<sup>1)</sup>

- SIMATIC Visualization Architect V17
- SIMATIC Visualization Architect V17 Rental

**6AV2107-0PX07-0AA5**

**6AV2107-0PX07-0AA6**

**6AV2107-0PX07-0AA7**

**6AV2107-0PX07-0AH5**

**6AV2107-0PX07-0AH6**

#### **Upgrade**

#### **SIMATIC Visualization Architect**

Engineering software  
in the TIA Portal; software and  
documentation on CD,  
License key on USB flash drive  
Class A;  
6 languages: en, de, fr, es, it, zh

#### **V17**

- as package
- as download<sup>1)</sup>  
Email address required for  
delivery

**6AV2107-3PX07-0AA5**

**6AV2107-3PX07-0AH5**

#### **V15/V15.1 -> V16**

- as package
- as download<sup>1)</sup>  
Email address required for  
delivery

**6AV2107-3PX06-0AA5**

**6AV2107-3PX06-0AH5**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

### More info

For up-to-date information and availability, see:

<http://www.siemens.com/sivarc>

### Technical specifications

#### **SIMATIC Visualization Architect**

Operating system requirements

In accordance with the requirements  
of the TIA Portal components:  

- SIMATIC STEP 7 (TIA Portal)
- SIMATIC WinCC Unified,  
Professional, Advanced, Comfort,  
Basic

Unterstützte STEP 7 Version

SIMATIC STEP 7 V17

Unterstützte WinCC Versionen

SIMATIC WinCC V17 Unified,  
Professional, Advanced, Comfort,  
Basic

## Overview

The TIA Portal option ProDiag makes it possible to monitor a machine or plant and to intervene in the event of a fault. The monitoring messages which can be generated for the various faults provide specific information on the monitoring mode, location and cause of the fault. Information on troubleshooting can be provided in addition. Plant operators can then not only recognize faults, they can also identify any potential danger in advance and take appropriate countermeasures.

### Licensing

- The runtime license for controllers includes 250 supervisions or an unlimited number of supervisions per CPU. From FW 2.0 onwards, the software can run on S7-1500/ET 200SP CPUs regardless of the TIA Portal version.
- For the visualization of the messages, the controls are licensed according to the HMI runtime platforms.

You can find more information on the Software Update Service, license types, online software delivery and handling your software licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

## Technical specifications

### Can be used for

SIMATIC ProDiag S7-1500	For all S7-1500 CPUs and ET 200SP CPUs with FW V2.0 and higher
-------------------------	--

## Ordering data

## Article No.

<b>SIMATIC ProDiag S7-1500 for 250 monitoring functions</b> For SIMATIC S7-1500 CPUs and ET 200SP CPUs with FW 2.0 and higher. Independent of the TIA Portal version. <ul style="list-style-type: none"><li>• Package with data storage medium</li><li>• Download incl. license key <sup>1)</sup> E-mail address required for delivery</li></ul>	<b>6ES7823-0AA00-1AA0</b> <b>6ES7823-0AE00-1AA0</b>
<b>SIMATIC ProDiag S7-1500 for all planned monitoring tasks on a CPU</b> For SIMATIC S7-1500 CPUs and ET 200SP CPUs with FW 2.0 and higher. Independent of the TIA Portal version. <ul style="list-style-type: none"><li>• Package with data storage medium</li><li>• Download incl. license key <sup>1)</sup> E-mail address required for delivery</li></ul>	<b>6ES7823-0AA00-1DA0</b> <b>6ES7823-0AE00-1DA0</b>
<b>SIMATIC ProDiag for SIMATIC Comfort / Mobile Panels</b> Controls for SIMATIC WinCC as of V14 <ul style="list-style-type: none"><li>• Package with data storage medium</li><li>• Download incl. license key <sup>1)</sup> E-mail address required for delivery</li></ul>	<b>6AV2107-0UP00-0BB0</b> <b>6AV2107-0UP00-0BH0</b>
<b>SIMATIC ProDiag for WinCC Runtime Advanced</b> Controls for SIMATIC WinCC as of V14 <ul style="list-style-type: none"><li>• Package with data storage medium</li><li>• Download incl. license key <sup>1)</sup> E-mail address required for delivery</li></ul>	<b>6AV2107-0UA00-0BB0</b> <b>6AV2107-0UA00-0BH0</b>
<b>SIMATIC ProDiag for WinCC Runtime Professional</b> Controls for SIMATIC WinCC as of V14. <ul style="list-style-type: none"><li>• Package with data storage medium</li><li>• Download incl. license key <sup>1)</sup> E-mail address required for delivery</li></ul>	<b>6AV2107-0UB00-0BB0</b> <b>6AV2107-0UB00-0BH0</b>

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

## More info

### TIA Portal Highlights

<http://www.siemens.com/tiaprofile>

### Software download

For up-to-date information and download availability, see:

<http://www.siemens.com/tia-online-software-delivery>

## HMI software

### SIMATIC WinCC V7

#### SIMATIC WinCC V7 SCADA system

##### Overview



#### **SIMATIC WinCC V7 SCADA system**

The scalable and open SCADA system for maximum plant transparency and productivity

- Efficiency:  
As a key to greater productivity, SIMATIC WinCC combines efficient engineering with high-performance archiving and maximum data security. With integrated diagnostics functions and flexible production analysis, you shorten the time-to-market and also reduce your plant standstill times. SIMATIC WinCC is the basis for efficient operations management and intelligent production analyses, so it offers a secure basis for deciding on optimization measures, and thus more productivity at lower cost.
- Scalability:  
With SIMATIC WinCC, it is possible to implement plants in all industrial sectors and technologies, and easily expand or modernize them by means of options or add-ons, in functional terms or sector-specifically. You can benefit from the redundancy concepts for enhanced availability, or decide on centralized archiving and analysis of plant information. SIMATIC WinCC offers stationary and mobile solutions to cover increasing demands.

- Innovation:

With innovative technology, you have all the important information in view at all times.

In this way, SIMATIC WinCC simplifies intuitive operation and monitoring of the production plant – even remotely. Stay informed with mobile SCADA solutions anywhere and at any time – including with existing tablet and smartphone hardware.

The use of multi-touch gestures in the industrial environment opens the door to modern operator concepts.

- Openness:

Since international standards and system-internal script and programming interfaces are supported, special requests can also be easily implemented.

SIMATIC WinCC backs cross-manufacturer communication for integrating existing hardware, as well as for simple integration into the IT world. WinCC specialists are available worldwide as qualified solution providers. These certified and centrally audited partners are ready to implement your individual SCADA project even in diversified client-server architectures with redundancy, or in applications with energy data management systems.

SIMATIC WinCC is designed to be independent of any specific technology or industrial sector, modular in structure, and easy to expand. It is used worldwide in single-user applications in mechanical engineering, as well as in complex multi-user solutions with redundant servers or Web-based client access. References from many industries prove the versatility and performance capability.

<http://www.siemens.com/wincc-v7>

## Overview



- PC-based operator control and monitoring system for visualizing and operating processes, production flows, machines and plants in all sectors – from the simple single-user station through to distributed multi-user systems with redundant servers and cross-location solutions with web clients. WinCC is the information hub for corporation-wide vertical integration.
- The basic system configuration (WinCC Basic Software) includes industry-standard functions for signaling and acknowledging events, archiving of messages and measured values, logging of all process and configuration data, user administration and visualization.
- The WinCC Basic Software forms the core of a wide range of different applications. Based on the open programming interfaces, a wide range of WinCC options (from Siemens Industry Automation) and WinCC Add-ons have been developed (by Siemens-internal and external partners).
- WinCC can be operated with every PC that meets the given HW requirements. The SIMATIC IPC product range is available in particular for the industrial use of WinCC systems. SIMATIC IPCs impress with their powerful PC technology, are designed for round-the-clock operation, and can be operated in both office areas and harsh industrial environments.

Current versions:

### **SIMATIC WinCC V7.5 SP2**

Runs on:

- Windows 10 Professional, Enterprise (64-bit)
- Windows 10 Enterprise LTSB (64-bit)
- Windows 2012 Server R2 (64-bit)
- Windows 2016 Server (64-bit)

For WebNavigator Clients and DataMonitor Clients, also:

- Windows 7 SP1 Professional, Enterprise, Ultimate (32-/64-bit)
- Windows 8.1 Professional, Enterprise (32-/64-bit)

Please check the Siemens Online Support compatibility list for details:

<https://support.industry.siemens.com/kompatool/pages/main/index.jsf>

### **SIMATIC WinCC V7.4 SP1**

Runs on:

- Windows 7 Professional, Enterprise, Ultimate (32-/64-bit)
- Windows 8.1 Professional, Enterprise (32-/64-bit)
- Windows 10 Professional, Enterprise, 2015 LTSB, 2016 LTSB (64-bit)
- Windows 2008 Server R2 SP1 (64-bit)
- Windows 2012 Server R2 (64-bit)
- Windows 2016 Server (64-bit)
- Includes Microsoft SQL Server 2014 SP1 (32-bit)

Use in virtual environments – for more information see:

<http://support.automation.siemens.com/WW/view/en/49370459>

### **SIMATIC SCADA and SIMATIC IPCs**

Perfect interaction for optimum productivity.

- Price advantage as "Package" comprising hardware and software
- System-tested solutions reduce testing overhead
- Simple ordering and synchronized logistics

Only if ordered together with the SIMATIC IPC.

# HMI software

## SIMATIC WinCC V7

### SIMATIC WinCC V7 basic software

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC system software</b>		
<b>V7.5 SP2</b>		
<b>Runtime Packages on DVD</b>		
Incl. 512 archive tags each; language/script versions: en, de, fr, it, es; with license for		
<ul style="list-style-type: none"> <li>• WinCC RT Client</li> <li>• 128 PowerTags (RT 128)</li> <li>• 512 PowerTags (RT 512)</li> <li>• 2 048 PowerTags (RT 2 048)</li> <li>• 8 192 PowerTags (RT 8 192)</li> <li>• 65 536 PowerTags (RT 65 536)</li> <li>• 102 400 PowerTags (RT 102 400)</li> <li>• 153 600 PowerTags (RT 153 600)</li> <li>• 262 144 PowerTags (RT 262 144)</li> </ul>	<b>6AV6381-2CA07-5AX0</b> <b>6AV6381-2BC07-5AX0</b> <b>6AV6381-2BD07-5AX0</b> <b>6AV6381-2BE07-5AX0</b> <b>6AV6381-2BH07-5AX0</b> <b>6AV6381-2BF07-5AX0</b> <b>6AV6381-2BJ07-5AX0</b> <b>6AV6381-2BK07-5AX0</b> <b>6AV6381-2BL07-5AX0</b>  <u>as download</u> <ul style="list-style-type: none"> <li>• WinCC RT Client</li> <li>• 128 PowerTags (RT 128)</li> <li>• 512 PowerTags (RT 512)</li> <li>• 2 048 PowerTags (RT 2 048)</li> <li>• 8 192 PowerTags (RT 8 192)</li> <li>• 65 536 PowerTags (RT 65 536)</li> <li>• 102 400 PowerTags (RT 102 400)</li> <li>• 153 600 PowerTags (RT 153 600)</li> <li>• 262 144 PowerTags (RT 262 144)</li> </ul>	<b>6AV6381-2CA07-5AV0</b> <b>6AV6381-2BC07-5AV0</b> <b>6AV6381-2BD07-5AV0</b> <b>6AV6381-2BE07-5AV0</b> <b>6AV6381-2BH07-5AV0</b> <b>6AV6381-2BF07-5AV0</b> <b>6AV6381-2BJ07-5AV0</b> <b>6AV6381-2BK07-5AV0</b> <b>6AV6381-2BL07-5AV0</b>  <b>Complete packages on DVD</b> Language versions: en, zh-CN, zh-TW, ko, ja; with license for
<ul style="list-style-type: none"> <li>• WinCC RC Client</li> <li>• 128 PowerTags (RC 128)</li> <li>• 512 PowerTags (RC 512)</li> <li>• 2 048 PowerTags (RC 2 048)</li> <li>• 8 192 PowerTags (RC 8 192)</li> <li>• 65 536 PowerTags (RC 65 536)</li> <li>• 102 400 PowerTags (RC 102 400)</li> <li>• 153 600 PowerTags (RC 153 600)</li> <li>• 262 144 PowerTags (RC 262 144)</li> </ul>	<b>6AV6381-2CA07-5AH0</b> <b>6AV6381-2BC07-5AH0</b> <b>6AV6381-2BD07-5AH0</b> <b>6AV6381-2BE07-5AH0</b> <b>6AV6381-2BH07-5AH0</b> <b>6AV6381-2BF07-5AH0</b> <b>6AV6381-2BJ07-5AH0</b> <b>6AV6381-2BK07-5AH0</b> <b>6AV6381-2BL07-5AH0</b>  <u>as download</u> <ul style="list-style-type: none"> <li>• WinCC RC Client</li> <li>• 128 PowerTags (RC 128)</li> <li>• 512 PowerTags (RC 512)</li> <li>• 2 048 PowerTags (RC 2 048)</li> <li>• 8 192 PowerTags (RC 8 192)</li> <li>• 65 536 PowerTags (RC 65 536)</li> <li>• 102 400 PowerTags (RC 102 400)</li> <li>• 153 600 PowerTags (RC 153 600)</li> <li>• 262 144 PowerTags (RC 262 144)</li> </ul>	Language versions: en, zh-CN, zh-TW, ko, ja; with license for
<b>Complete packages on DVD</b>		
Language versions: en, de, fr, it, es; with license for		
<ul style="list-style-type: none"> <li>• WinCC RC Client</li> <li>• 128 PowerTags (RC 128)</li> <li>• 512 PowerTags (RC 512)</li> <li>• 2 048 PowerTags (RC 2 048)</li> <li>• 8 192 PowerTags (RC 8 192)</li> <li>• 65 536 PowerTags (RC 65 536)</li> <li>• 102 400 PowerTags (RC 102 400)</li> <li>• 153 600 PowerTags (RC 153 600)</li> <li>• 262 144 PowerTags (RC 262 144)</li> </ul>	<b>6AV6381-2CB07-5AX0</b> <b>6AV6381-2BM07-5AX0</b> <b>6AV6381-2BN07-5AX0</b> <b>6AV6381-2BP07-5AX0</b> <b>6AV6381-2BS07-5AX0</b> <b>6AV6381-2BQ07-5AX0</b> <b>6AV6381-2BT07-5AX0</b> <b>6AV6381-2BU07-5AX0</b> <b>6AV6381-2BV07-5AX0</b>  <b>V7.5 SP2 PowerPacks</b> <b>For upgrading from:</b>	
<b>Runtime Packages</b>		
<ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul>	<b>6AV6371-2BD07-5AX0</b> <b>6AV6371-2BG07-5AX0</b> <b>6AV6371-2BM07-5AX0</b> <b>6AV6371-2BN07-5AX0</b> <b>6AV6371-2BP07-5AX0</b> <b>6AV6371-2BQ07-5AX0</b> <b>6AV6371-2BR07-5AX0</b>  <u>as download</u> <ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul>	
<b>Complete packages</b>		
<ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul>	<b>6AV6371-2BD17-5AX0</b> <b>6AV6371-2BG17-5AX0</b> <b>6AV6371-2BM17-5AX0</b> <b>6AV6371-2BN17-5AX0</b> <b>6AV6371-2BP17-5AX0</b> <b>6AV6371-2BQ17-5AX0</b> <b>6AV6371-2BR17-5AX0</b>  <u>as download</u> <ul style="list-style-type: none"> <li>• 128 to 512 PowerTags</li> <li>• 512 to 2 048 PowerTags</li> <li>• 2 048 to 8 192 PowerTags</li> <li>• 8 192 to 65 536 PowerTags</li> <li>• 65 536 to 102 400 PowerTags</li> <li>• 102 400 to 153 600 PowerTags</li> <li>• 153 600 to 262 144 PowerTags</li> </ul>	

Ordering data	Article No.	Article No.
<b>V7.5 SP2 archives</b>		
<ul style="list-style-type: none"> <li>• 1 500 archive tags (countable)</li> <li>• 5 000 archive tags (countable)</li> <li>• 10 000 archive tags (countable)</li> <li>• 30 000 archive tags (countable)</li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• 1 500 archive tags (countable)</li> <li>• 5 000 archive tags (countable)</li> <li>• 10 000 archive tags (countable)</li> <li>• 30 000 archive tags (countable)</li> </ul>	<b>6AV6371-1DQ17-5AX0</b> <b>6AV6371-1DQ17-5BX0</b> <b>6AV6371-1DQ17-5CX0</b> <b>6AV6371-1DQ17-5EX0</b>  <b>6AV6371-1HQ17-5AX0</b> <b>6AV6371-1HQ17-5BX0</b> <b>6AV6371-1HQ17-5CX0</b> <b>6AV6371-1HQ17-5EX0</b>	<b>For upgrading the Client RT version</b>
		<ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.5 SP2</li> <li>• From V7.4 to V7.5 SP2</li> <li>• From V7.2/7.3 ASIA to V7.5 SP2 ASIA</li> <li>• From V7.4 ASIA to V7.5 SP2 ASIA</li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.5 SP2</li> <li>• From V7.4 to V7.5 SP2</li> </ul>
<b>SIMATIC WinCC software packages</b>		<b>6AV6381-2CA07-5AX3</b> <b>6AV6381-2CA07-5AX4</b> <b>6AV6381-2CA07-5AV3</b> <b>6AV6381-2CA07-5AV4</b>
<b>SIMATIC WinCC V7.5 SP2 Runtime</b>	<b>6AV6382-2AA07-5AX0</b> <b>6AV6382-2CA07-5AX0</b> <b>6AV6382-2DA07-5AX0</b> <b>6AV6382-2EA07-5AX0</b> <b>6AV6382-2HA07-5AX0</b> <b>6AV6382-2FA07-5AX0</b>	<b>For upgrading the Client RC version</b>
<ul style="list-style-type: none"> <li>• WinCC RT Client</li> <li>• 128 PowerTags</li> <li>• 512 PowerTags</li> <li>• 2 048 PowerTags</li> <li>• 8 192 PowerTags</li> <li>• 65 536 PowerTags</li> </ul>		<ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.4 SP2</li> <li>• From V7.4 to V7.5 SP2</li> <li>• From V7.2/7.3 ASIA to V7.5 SP2 ASIA</li> <li>• From V7.4 ASIA to V7.5 SP2 ASIA</li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.4 SP2</li> <li>• From V7.4 to V7.5 SP2</li> </ul>
<b>SIMATIC WinCC V7.5 SP2 Runtime ASIA</b>	<b>6AV6382-2AA07-5AV0</b> <b>6AV6382-2CA07-5AV0</b> <b>6AV6382-2DA07-5AV0</b> <b>6AV6382-2EA07-5AV0</b> <b>6AV6382-2HA07-5AV0</b> <b>6AV6382-2FA07-5AV0</b>	<b>6AV6381-2CB07-5AX3</b> <b>6AV6381-2CB07-5AX4</b> <b>6AV6381-2CB07-5AV3</b> <b>6AV6381-2CB07-5AV4</b>
<ul style="list-style-type: none"> <li>• WinCC RT Client</li> <li>• 128 PowerTags</li> <li>• 512 PowerTags</li> <li>• 2 048 PowerTags</li> <li>• 8 192 PowerTags</li> <li>• 65 536 PowerTags</li> </ul>		<b>SIMATIC WinCC Software Update Service (SUS)<sup>3) 4) 5)</sup></b>
<b>SIMATIC WinCC Upgrades/Software Update Service</b>		<b>SIMATIC WinCC V7 Update</b>
<b>SIMATIC WinCC V7.5 SP2 Upgrade<sup>1)</sup></b>		Software Update Service for WinCC basic software and options:
<b>For upgrading the RT version</b>		<ul style="list-style-type: none"> <li>• 1 license</li> <li>• 3 licenses</li> <li>• 10 licenses</li> </ul>
<ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.5 SP2</li> <li>• From V7.4 to V7.5 SP2</li> <li>• From V7.2/7.3 ASIA to V7.5 SP2 ASIA<sup>2)</sup></li> <li>• From V7.4 ASIA to V7.5 SP2 ASIA<sup>2)</sup></li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.5 SP2</li> <li>• From V7.4 to V7.5 SP2</li> </ul>	<b>6AV6381-2AA07-5AX3</b> <b>6AV6381-2AA07-5AX4</b> <b>6AV6381-2AA07-5AV3</b>  <b>6AV6381-2AA07-5AV4</b>  <b>6AV6381-2AA07-5AK3</b> <b>6AV6381-2AA07-5AK4</b>	<b>6AV6381-1AA00-0AX5</b> <b>6AV6381-1AA00-0BX5</b> <b>6AV6381-1AA00-0CX5</b>  <b>6AV6381-1KA00-0AX5</b> <b>6AV6381-1KA00-0BX5</b> <b>6AV6381-1KA00-0CX5</b>
<b>For upgrading the RC version</b>		
<ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.5 SP2</li> <li>• From V7.4 to V7.5 SP2</li> <li>• From V7.2/7.3 ASIA to V7.5 SP2 ASIA<sup>2)</sup></li> <li>• From V7.4 ASIA to V7.5 SP2 ASIA<sup>2)</sup></li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• From V7.2/7.3 to V7.5 SP2</li> <li>• From V7.4 to V7.5 SP2</li> </ul>	<b>6AV6381-2AB07-5AX3</b> <b>6AV6381-2AB07-5AX4</b> <b>6AV6381-2AB07-5AV3</b>  <b>6AV6381-2AB07-5AV4</b>  <b>6AV6381-2AB07-5AK3</b> <b>6AV6381-2AB07-5AK4</b>	

<sup>1)</sup> According to licensing provisions, 1 upgrade package must be ordered for each WinCC station

<sup>2)</sup> Upgrading from V7.X RT/RC ASIA to V7.5 ASIA is carried out using the "respective non-Asia Package"

<sup>3)</sup> The Software Update Service is valid for 1 year. The contract is automatically extended by 1 more year unless canceled 3 months prior to expiration. According to licensing provisions, 1 Software Update Service must be ordered for each WinCC station.

<sup>4)</sup> Requires the current software version

<sup>5)</sup> SUS is available as download

# HMI software

## SIMATIC WinCC V7

### SIMATIC WinCC V7 basic software

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC system software</b>		
<b>V7.4 SP1</b>		
<b>Runtime Packages on DVD</b>		
Incl. 512 archive tags each; language/script versions: en, de, fr, it, es; with license for		
• WinCC RT Client	<b>6AV6381-2CA07-4AX0</b>	<b>6AV6381-2CA07-4AV0</b>
• 128 PowerTags (RT 128)	<b>6AV6381-2BC07-4AX0</b>	<b>6AV6381-2BC07-4AV0</b>
• 512 PowerTags (RT 512)	<b>6AV6381-2BD07-4AX0</b>	<b>6AV6381-2BD07-4AV0</b>
• 2 048 PowerTags (RT 2 048)	<b>6AV6381-2BE07-4AX0</b>	<b>6AV6381-2BE07-4AV0</b>
• 8 192 PowerTags (RT 8 192)	<b>6AV6381-2BH07-4AX0</b>	<b>6AV6381-2BH07-4AV0</b>
• 65 536 PowerTags (RT 65 536)	<b>6AV6381-2BF07-4AX0</b>	<b>6AV6381-2BF07-4AV0</b>
• 102 400 PowerTags (RT 102 400)	<b>6AV6381-2BJ07-4AX0</b>	<b>6AV6381-2BJ07-4AV0</b>
• 153 600 PowerTags (RT 153 600)	<b>6AV6381-2BK07-4AX0</b>	<b>6AV6381-2BK07-4AV0</b>
• 262 144 PowerTags (RT 262 144)	<b>6AV6381-2BL07-4AX0</b>	<b>6AV6381-2BL07-4AV0</b>
<u>as download</u>		
• WinCC RT Client	<b>6AV6381-2CA07-4AH0</b>	
• 128 PowerTags (RT 128)	<b>6AV6381-2BC07-4AH0</b>	
• 512 PowerTags (RT 512)	<b>6AV6381-2BD07-4AH0</b>	
• 2 048 PowerTags (RT 2 048)	<b>6AV6381-2BE07-4AH0</b>	
• 8 192 PowerTags (RT 8 192)	<b>6AV6381-2BH07-4AH0</b>	
• 65 536 PowerTags (RT 65 536)	<b>6AV6381-2BF07-4AH0</b>	
• 102 400 PowerTags (RT 102 400)	<b>6AV6381-2BJ07-4AH0</b>	
• 153 600 PowerTags (RT 153 600)	<b>6AV6381-2BK07-4AH0</b>	
• 262 144 PowerTags (RT 262 144)	<b>6AV6381-2BL07-4AH0</b>	
<b>Complete packages on DVD</b>		
Language versions: en, zh-CN, zh-TW, ko, ja; with license for		
en, de, fr, it, es; with license for		
• WinCC RC Client	<b>6AV6381-2CB07-4AX0</b>	<b>6AV6381-2CB07-4AV0</b>
• 128 PowerTags (RC 128)	<b>6AV6381-2BM07-4AX0</b>	<b>6AV6381-2BM07-4AV0</b>
• 512 PowerTags (RC 512)	<b>6AV6381-2BN07-4AX0</b>	<b>6AV6381-2BN07-4AV0</b>
• 2 048 PowerTags (RC 2 048)	<b>6AV6381-2BP07-4AX0</b>	<b>6AV6381-2BP07-4AV0</b>
• 8 192 PowerTags (RC 8 192)	<b>6AV6381-2BS07-4AX0</b>	<b>6AV6381-2BS07-4AV0</b>
• 65 536 PowerTags (RC 65 536)	<b>6AV6381-2BQ07-4AX0</b>	<b>6AV6381-2BQ07-4AV0</b>
• 102 400 PowerTags (RC 102 400)	<b>6AV6381-2BT07-4AX0</b>	<b>6AV6381-2BT07-4AV0</b>
• 153 600 PowerTags (RC 153 600)	<b>6AV6381-2BU07-4AX0</b>	<b>6AV6381-2BU07-4AV0</b>
• 262 144 PowerTags (RC 262 144)	<b>6AV6381-2BV07-4AX0</b>	<b>6AV6381-2BV07-4AV0</b>
<u>as download</u>		
• WinCC RC Client	<b>6AV6381-2CB07-4AH0</b>	
• 128 PowerTags (RC 128)	<b>6AV6381-2BM07-4AH0</b>	
• 512 PowerTags (RC 512)	<b>6AV6381-2BN07-4AH0</b>	
• 2 048 PowerTags (RC 2 048)	<b>6AV6381-2BP07-4AH0</b>	
• 8 192 PowerTags (RC 8 192)	<b>6AV6381-2BS07-4AH0</b>	
• 65 536 PowerTags (RC 65 536)	<b>6AV6381-2BQ07-4AH0</b>	
• 102 400 PowerTags (RC 102 400)	<b>6AV6381-2BT07-4AH0</b>	
• 153 600 PowerTags (RC 153 600)	<b>6AV6381-2BU07-4AH0</b>	
• 262 144 PowerTags (RC 262 144)	<b>6AV6381-2BV07-4AH0</b>	
<b>V7.4 SP1 PowerPacks</b>		
<b>For upgrading from:</b>		
<b>Runtime Packages</b>		
• 128 to 512 PowerTags	<b>6AV6371-2BD07-4AX0</b>	
• 512 to 2 048 PowerTags	<b>6AV6371-2BG07-4AX0</b>	
• 2 048 to 8 192 PowerTags	<b>6AV6371-2BM07-4AX0</b>	
• 8 192 to 65 536 PowerTags	<b>6AV6371-2BN07-4AX0</b>	
• 65 536 to 102 400 PowerTags	<b>6AV6371-2BP07-4AX0</b>	
• 102 400 to 153 600 PowerTags	<b>6AV6371-2BQ07-4AX0</b>	
• 153 600 to 262 144 PowerTags	<b>6AV6371-2BR07-4AX0</b>	
<u>as download</u>		
• 128 to 512 PowerTags	<b>6AV6371-2BD07-4AJ0</b>	
• 512 to 2 048 PowerTags	<b>6AV6371-2BG07-4AJ0</b>	
• 2 048 to 8 192 PowerTags	<b>6AV6371-2BM07-4AJ0</b>	
• 8 192 to 65 536 PowerTags	<b>6AV6371-2BN07-4AJ0</b>	
• 65 536 to 102 400 PowerTags	<b>6AV6371-2BP07-4AJ0</b>	
• 102 400 to 153 600 PowerTags	<b>6AV6371-2BQ07-4AJ0</b>	
• 153 600 to 262 144 PowerTags	<b>6AV6371-2BR07-4AJ0</b>	
<b>Complete packages</b>		
• 128 to 512 PowerTags	<b>6AV6371-2BD17-4AX0</b>	
• 512 to 2 048 PowerTags	<b>6AV6371-2BG17-4AX0</b>	
• 2 048 to 8 192 PowerTags	<b>6AV6371-2BM17-4AX0</b>	
• 8 192 to 65 536 PowerTags	<b>6AV6371-2BN17-4AX0</b>	
• 65 536 to 102 400 PowerTags	<b>6AV6371-2BP17-4AX0</b>	
• 102 400 to 153 600 PowerTags	<b>6AV6371-2BQ17-4AX0</b>	
• 153 600 to 262 144 PowerTags	<b>6AV6371-2BR17-4AX0</b>	
<u>as download</u>		
• 128 to 512 PowerTags	<b>6AV6371-2BD17-4AJ0</b>	
• 512 to 2 048 PowerTags	<b>6AV6371-2BG17-4AJ0</b>	
• 2 048 to 8 192 PowerTags	<b>6AV6371-2BM17-4AJ0</b>	
• 8 192 to 65 536 PowerTags	<b>6AV6371-2BN17-4AJ0</b>	
• 65 536 to 102 400 PowerTags	<b>6AV6371-2BP17-4AJ0</b>	
• 102 400 to 153 600 PowerTags	<b>6AV6371-2BQ17-4AJ0</b>	
• 153 600 to 262 144 PowerTags	<b>6AV6371-2BR17-4AJ0</b>	

Ordering data	Article No.	Article No.
<b>V7.4 SP1 archives</b>	6AV6371-1DQ17-4AX0	<b>SIMATIC WinCC V7.5 SP2 Communication via Industrial Ethernet/PROFIBUS</b>
<ul style="list-style-type: none"> <li>• 1 500 archive tags (countable)</li> <li>• 5 000 archive tags (countable)</li> <li>• 10 000 archive tags (countable)</li> <li>• 30 000 archive tags (countable)</li> </ul> <p>as download</p> <ul style="list-style-type: none"> <li>• 1 500 archive tags (countable)</li> <li>• 5 000 archive tags (countable)</li> <li>• 10 000 archive tags (countable)</li> <li>• 30 000 archive tags (countable)</li> </ul>	<b>6AV6371-1DQ17-4BX0</b> <b>6AV6371-1DQ17-4CX0</b> <b>6AV6371-1DQ17-4EX0</b>  <b>6AV6371-1HQ17-4AX0</b> <b>6AV6371-1HQ17-4BX0</b> <b>6AV6371-1HQ17-4CX0</b> <b>6AV6371-1HQ17-4EX0</b>	<b>6GK1161-2AA01</b>
<b>SIMATIC WinCC Upgrades/ Software Update Service</b>		
<b>SIMATIC WinCC V7.4 SP1 Upgrade<sup>1)</sup></b>		
<b>For upgrading the RT version</b>		
<ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> <li>• From V7.X ASIA to V7.4 SP1 ASIA<sup>2)</sup></li> </ul> <p>as download</p> <ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> </ul>	<b>6AV6381-2AA07-4AX3</b> <b>6AV6381-2AA07-4AV3</b>  <b>6AV6381-2AA07-4AK3</b>	<b>CP 1612 A2</b> PCI card (32-bit) for connection of a PG/PC to Industrial Ethernet (10/100/1 000 Mbps) with RJ45 connection via SOFTNET S7 and SOFTNET PG.
<b>For upgrading the RC version</b>		
<ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> <li>• From V7.X ASIA to V7.4 SP1 ASIA<sup>2)</sup></li> </ul> <p>as download</p> <ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> </ul>	<b>6AV6381-2AB07-4AX3</b> <b>6AV6381-2AB07-4AV3</b>  <b>6AV6381-2AB07-4AK3</b>	<b>SOFTNET-IE S7 Version 15</b> Software for S7- and S5-compatible communication incl. OPC Server, PG/OP communication and NCM PC; up to 64 connections; Single License for one installation of runtime software, software and electronic manual on CD-ROM; license key on USB flash drive, Class A.
<b>For upgrading the Client RT version</b>		
<ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> <li>• From V7.X ASIA to V7.4 SP1 ASIA</li> </ul> <p>as download</p> <ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> </ul>	<b>6AV6381-2CA07-4AX3</b> <b>6AV6381-2CA07-4AV3</b>  <b>6AV6381-2CA07-4AK3</b>	<b>SOFTNET-IE S7 Lean Version 15 (license included in scope of supply of WinCC V7.4 SP1)</b> Software for S7 and S5-compatible communication including OPC Server, PG/OP communication and NCM PC; up to 8 connections; Single License for one installation of runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A.
<b>For upgrading the Client RC version</b>		
<ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> <li>• From V7.X ASIA to V7.4 SP1 ASIA</li> </ul> <p>as download</p> <ul style="list-style-type: none"> <li>• From V7.X to V7.4 SP1</li> </ul>	<b>6AV6381-2CB07-4AX3</b> <b>6AV6381-2CB07-4AK3</b>  <b>6AV6381-2CB07-4AV3</b>	<b>SOFTNET-IE S7 Lean Version 15 (license included in scope of supply of WinCC V7.4 SP1)</b> Software for S7 and S5-compatible communication including OPC Server, PG/OP communication and NCM PC; up to 8 connections; Single License for one installation of runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A.
<b>SIMATIC WinCC Software Update Service (SUS)<sup>3) 4) 5)</sup></b>		
<b>SIMATIC WinCC V7 Update</b>		
Software Update Service for WinCC basic software and options:		
<ul style="list-style-type: none"> <li>• 1 license</li> <li>• 3 licenses</li> <li>• 10 licenses</li> </ul> <p>as download</p> <ul style="list-style-type: none"> <li>• 1 license</li> <li>• 3 licenses</li> <li>• 10 licenses</li> </ul>	<b>6AV6381-1AA00-0AX5</b> <b>6AV6381-1AA00-0BX5</b> <b>6AV6381-1AA00-0CX5</b>  <b>6AV6381-1KA00-0AX5</b> <b>6AV6381-1KA00-0BX5</b> <b>6AV6381-1KA00-0CX5</b>	<b>CP 1623</b> PCI Express X1 card (32-bit) for connection of PG/PC to Industrial Ethernet (communications software must be ordered separately)

<sup>1)</sup> According to licensing provisions, 1 upgrade package must be ordered for each WinCC station

<sup>2)</sup> Upgrading from V7.X RT/RC ASIA is carried out using the "respective non-ASIA Package"

<sup>3)</sup> The Software Update Service is valid for 1 year. The contract is automatically extended by 1 more year unless canceled 3 months prior to expiration. According to licensing provisions, 1 Software Update Service must be ordered for each WinCC station.

<sup>4)</sup> Requires the current software version

<sup>5)</sup> SUS is available as download

# HMI software

## SIMATIC WinCC V7

### SIMATIC WinCC V7 basic software

Ordering data	Article No.	Article No.
<b>Communication via PROFIBUS</b>		
<b>CP 5612</b> PCI card (32-bit) for connecting a PG/PC to PROFIBUS (communications software included in WinCC Basic Package)	<b>6GK1561-2AA00</b>	<b>SIMATIC WinCC V7.4 SP1 Communication via Industrial Ethernet/PROFIBUS</b> <b>CP 1612 A2</b> PCI card (32-bit) for connection of a PG/PC to Industrial Ethernet (10/100/1 000 Mbps) with RJ45 connection via SOFTNET S7 and SOFTNET PG. Windows 8.1 and Windows 2012 Server are not supported.
<b>CP 5622</b> PCI Express X1 card (32-bit) for connecting a PG/PC to PROFIBUS (communications software included in WinCC Basic Package)	<b>6GK1562-2AA00</b>	<b>6GK1161-2AA01</b>
<b>CP 5711</b> USB adapter for connecting a PG/PC to PROFIBUS or MPI (communications software included in WinCC Basic Package)	<b>6GK1571-1AA00</b>	
<b>CP 5613 A3</b> PCI card (32-bit) for connecting a PC to PROFIBUS (communications software must be ordered separately)	<b>6GK1561-3AA02</b>	<b>SOFTNET-IE S7 Version 14 SP1</b> SOFTNET-IE S7 V14 software for S7, S5-comp. communication, OPC; PG/OP communication, configuration software, up to 64 conn.; floating license; runtime software, software and electr. manual; on DVD; license key on USB flash drive; Class A; 2 languages (en, de); for 32/64-bit: Windows 7 SP1 Prof./Ultimate, 64-bit: Windows 8.1Pro; Windows 10 Server 2008 R2 SP1, 2012 R2CP 1612 (no Win 8.1, Win 10 Server 2012, R2) <ul style="list-style-type: none"> <li>• Single License for 1 installation</li> <li>• Upgrade package for SIMATIC NET Edition 2006 or higher</li> <li>• Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005</li> </ul>
<b>CP 5614 A3</b> PCI card (32-bit) for connecting a PC to PROFIBUS (communications software must be ordered separately)	<b>6GK1561-4AA02</b>	<b>6GK1704-1CW14-0AA0</b> <b>6GK1704-1CW00-3AE0</b> <b>6GK1704-1CW00-3AE1</b>
CP 5623 PCI Express X1 card (32-bit) for connection of PG/PC to Industrial Ethernet (communications software must be ordered separately)	<b>6GK1562-3AA00</b>	<b>SOFTNET-IE S7 Lean Version 14 SP1</b> <b>(license included in scope of supply of WinCC V7.4 SP1)</b> SIMATIC NET SOFTNET-IE S7 LEAN V14; SW f. S7, S5-comp. comm., OPC PG/OP comm., config. SW, up to 8 conn. floating license; Runtime Software, SW and electr. manual on DVD; license key on USB flash drive; Class A; 2 languages (en, de); for 32/64-bit: Win 7 SP1 Prof/Ult, 64-bit: Win 8.1 PRO; Windows 10 Server 2008 R2 SP1, 2012 R2; CP 1612 (no Win 8.1, Win 10, Server 2012, R2) <ul style="list-style-type: none"> <li>• Single License for 1 installation</li> <li>• Upgrade package for SIMATIC NET Edition 2006 or higher</li> <li>• Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005</li> </ul>
<b>HARDNET PB S7</b> Software for S7 communication incl. PG/OP communication, FDL, OPC Server, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A for CP 5613 A3, CP 5614 A3, CP 5623 English/German <ul style="list-style-type: none"> <li>• Single License for 1 installation</li> <li>• Upgrade package for SIMATIC NET Edition 2006 or higher</li> <li>• Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005</li> </ul>	<b>6GK1713-5CB15-0AA0</b> <b>6GK1713-5CB00-3AE0</b>  <b>6GK1713-5CB00-3AE1</b>	<b>6GK1704-1LW14-0AA0</b> <b>6GK1704-1LW00-3AE0</b> <b>6GK1704-1LW00-3AE1</b>
<b>HARDNET PB DP</b> Software for DP protocol incl. PG/OP communication, FDL, DP OPC Server, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A, for CP 5613 A3, CP 5614 A3, CP 5623; English/German <ul style="list-style-type: none"> <li>• Single License for 1 installation</li> <li>• Upgrade package for SIMATIC NET Edition 2006 or higher</li> <li>• Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005</li> </ul>	<b>6GK1713-5DB15-0AA0</b> <b>6GK1713-5DB00-3AE0</b>  <b>6GK1713-5DB00-3AE1</b>	<b>CP 1623</b> PCI Express X1 card (32-bit) for connection of PG/PC to Industrial Ethernet (communications software must be ordered separately)  <b>CP 1628</b> PCI Express X1 card (32-bit) for connecting a PG/PC to Industrial Ethernet (communications software must be ordered separately)
		<b>6GK1162-3AA00</b>  <b>6GK1162-8AA00</b>
		<b>HARDNET IE S7 V13 SP2</b> Software for S7-compatible and S5-compatible communication incl. OPC Server, PG/OP communication and NCM PC, Single License for one installation of runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A for CP 1613 A2, CP 1623, CP 1628; English/German <ul style="list-style-type: none"> <li>• Single License for 1 installation</li> <li>• Upgrade package for SIMATIC NET Edition 2006 or higher</li> <li>• Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005</li> </ul>
		<b>6GK1716-1CB13-0AA0</b> <b>6GK1716-1CB00-3AE0</b> <b>6GK1716-1CB00-3AE1</b>

Ordering data	Article No.	Article No.
<i>Communication via PROFIBUS</i>		
<b>CP 5612</b> PCI card (32-bit) for connecting a PG/PC to PROFIBUS (communications software included in WinCC Basic Package)	<b>6GK1561-2AA00</b>	<b>HARDNET PB S7 V8.2 SP1</b> Software for S7 communication incl. PG/OP communication, FDL, OPC Server, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A for CP 5613 A3, CP 5614 A3, CP 5623 English/German • Single License for 1 installation • Upgrade package for SIMATIC NET Edition 2006 or higher • Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005
<b>CP 5622</b> PCI Express X1 card (32-bit) for connecting a PG/PC to PROFIBUS (communications software included in WinCC Basic Package)	<b>6GK1562-2AA00</b>	<b>6GK1713-5CB08-2AA0</b> <b>6GK1713-5CB00-3AE0</b>
<b>CP 5711</b> USB adapter for connecting a PG/PC to PROFIBUS or MPI (communications software included in WinCC Basic Package)	<b>6GK1571-1AA00</b>	<b>6GK1713-5CB00-3AE1</b>
<b>CP 5613 A3</b> PCI card (32-bit) for connecting a PC to PROFIBUS (communications software must be ordered separately)	<b>6GK1561-3AA02</b>	<b>HARDNET PB S7 V13 SP2</b> Software for S7 communication incl. PG/OP communication, FDL, OPC Server, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A for CP 5613 A3, CP 5614 A3, CP 5623 English/German • Single License for 1 installation • Upgrade package for SIMATIC NET Edition 2006 or higher • Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005
<b>CP 5614 A3</b> PCI card (32-bit) for connecting a PC to PROFIBUS (communications software must be ordered separately)	<b>6GK1561-4AA02</b>	<b>6GK1713-5CB13-0AA0</b> <b>6GK1713-5CB00-3AE0</b>
<b>CP 5623</b> PCI Express X1 card (32-bit) for connection of PG/PC to Industrial Ethernet (communications software must be ordered separately)	<b>6GK1562-3AA00</b>	<b>6GK1713-5CB00-3AE1</b>
		<b>HARDNET PB DP V13 SP2</b> Software for DP protocol incl. PG/OP communication, FDL, DP OPC Server, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A, for CP 5613 A3, CP 5614 A3, CP 5623; English/German • Single License for 1 installation • Upgrade package for SIMATIC NET Edition 2006 or higher • Upgrade package for SIMATIC NET V6.0, V6.1, V6.2 and Edition 2005
		<b>6GK1713-5DB13-0AA0</b> <b>6GK1713-5DB00-3AE0</b>  <b>6GK1713-5DB00-3AE1</b>
		<b>FMS 5613 V7.1 SP6 (Edition 2008 + SP6)</b>
		Software for FMS protocol incl. PG/OP communication, FDL, OPC Server, runtime software, software and electronic manual on CD-ROM, license key on USB flash drive, Class A, for CP 5613 A2, CP 5614 A2, CP 5623; English/German
		• Single License for 1 installation • Upgrade package for SIMATIC NET Edition 2006 or higher
		<b>6GK1713-5FB71-3AA0</b> <b>6GK1713-5FB00-3AE0</b>

# HMI software

## SIMATIC WinCC V7

### SIMATIC WinCC V7 basic software

#### Technical specifications

Type	SIMATIC WinCC V7.5 SP1	
PC hardware requirements		
<b>Processor type</b>		
• Minimum	Single-user station/server: Dual-core; 2.5 GHz	
• Recommended	Client: Dual-core; 2.5 GHz Single-user station/server: Multi-core; 3.5 GHz Client: Multi-core; 3 GHz <sup>2)</sup>	
<b>Work memory RAM</b>		
• Minimum	Windows 10 (64-bit) • Single-user station/server: 4 GB • Client: 2 GB	
• Recommended	Windows Server 2012 R2 / Windows Server 2016 / Windows Server 2019 Server: 4 GB Windows 10 (64-bit) • Single-user station/server: 4 GB • Client: 4 GB	
	Windows Server 2012 R2 / Windows Server 2016 / Windows Server 2019 Server: 8 GB	
<b>Graphics resolution</b>		
• Minimum	800 x 600	
• Recommended	1 920 x 1 080	
<b>Hard disk</b>		
• Minimum	Single-user station/server: 80 GB	
	Client: 20 GB	
• Recommended	WebClient/DataMonitor Client: 5 GB Single-user station/server: 160 GB Client: 40 GB	
	WebClient/DataMonitor Client: 10 GB	
<b>DVD-ROM/USB interface</b>	For software installation and license transfer	
Type	SIMATIC WinCC V7.5 SP1	
<b>Functionality/quantity structure</b>		
Number of messages	150 000	
• Message text (number of characters)	10 x 256	
• Message archive	System-limited <sup>1)</sup>	
• Process values per message	10	
• Constant load of messages, max.	Server/single-user station: 10/s	
• Message burst, max.	Server/single-user station: 2 000/10 s every 5 min	
Archive		
• Archive data points	Max. 80 000 per server <sup>2)</sup>	
• Archive types	Short-term archive with and without long-term archiving	
• Data storage format	Microsoft SQL Server 2016 SP2	
• Measured values per second	Server/single-user station: up to 30 000/s <sup>4)</sup>	
User archive		
• Total archives	No limit	
• Fields per user archive	500 (maximum number of 1 000 000 fields)	
• Data records per user archive	10 000	
• User archive views	No limit	
Graphics system		
• Number of screens	System-limited <sup>1)</sup>	
• Number of objects per screen	System-limited <sup>1)</sup>	
• Number of controllable fields per screen	System-limited <sup>1)</sup>	
PowerTags	256 K <sup>3)</sup>	
Trends		
• Trend views per picture	25	
• Trends per trend view	80	
User administration		
• User groups	128	
• Number of users	128	
• Authorization groups	999	
Configuration languages	5 European (en, de, fr, it, es), 4 Asian (zh-CN, zh-TW, ko, ja)	
Protocols		
• Message sequence reports (simultaneously)	1 per server/single-user station	
• Message archive reports (simultaneously)	3	
• User reports	System-limited <sup>1)</sup>	
• Report lines per group	66	
• Tags per report	300 <sup>5)</sup>	
Multi-user system		
• Server	18	
• Uni Client (without its own project)	Max. 64	
• Multi-Client (with its own project)	Max. 50	

<sup>1)</sup> Dependent on available storage space<sup>2)</sup> Dependent on number of licensed archive tags (ArchiveTags)<sup>3)</sup> Dependent on the number of licensed PowerTags<sup>4)</sup> Dependent on system performance, especially of hard disk (SSD/RAID recommended)<sup>5)</sup> Number of variables per report depends on process communication performance

**More information*****WinCC language versions***

SIMATIC WinCC is also offered in simplified Chinese, traditional Chinese, Korean and Japanese especially for Asian markets. These WinCC versions are intended for machine manufacturers, plant constructors and exporters who supply the regions of China, Taiwan, Korea and Japan.

WinCC ASIA includes all familiar WinCC functions and offers in addition the configuration user interface in the respective national language and English. The online help is available in simplified Chinese, traditional Chinese, Korean, Japanese and English. A Chinese, Korean, Japanese or multilingual Windows operating system is required for operation.

The runtime licenses are language-neutral. The English handling program (Automation License Manager – ALM) is executable under the Chinese, Korean and Japanese Windows versions.

In order to use the Asian languages in WinCC, an Asia hardware dongle is required.

More information is available on the Internet at:

<http://www.siemens.com/wincc-v7>

***IPC packages***

There are attractive packages available with SIMATIC Rack PCs (IPC347, IPC547, IPC647, IPC847), SIMATIC Box PCs (IPC227, IPC427, IPC627, IPC827) and SIMATIC Panel PCs (IPC277, IPC477, IPC677) for a completely matched software and hardware package. These IPCs can be configured in different ways for use as single station, server or client.

<http://www.siemens.com/scada-ipc>

**Downloads:**

In most cases, the products can also be obtained as software downloads.

You can find more information on the Software Update Service, license forms, Online Software Delivery and handling your SW licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

# HMI software

## SIMATIC WinCC V7

### SIMATIC WinCC V7 options

#### Overview



The universal WinCC basic software is the basis for modular expansions. These functional expansions can be obtained in the form of WinCC options and as WinCC Premium add-ons.

WinCC options are created by WinCC Development and are Siemens Industry Automation products. You can obtain support from our Advisory Services and via the central hotline.

#### Options for scalable plant configurations

- WinCC/Server  
For configuring a powerful client/server system
- WinCC/Redundancy  
For increasing system availability through redundancy
- WinCC Web Navigator  
For operator control and monitoring of plants via the Internet, in-house intranet or LAN
- WinCC WebUX  
For operator control and monitoring of plants, independent of platforms and browsers, via the Internet, in-house intranet or LAN
- SIMATIC Process Historian  
Central, scalable long-term archive for the whole plant
- SIMATIC TeleControl  
For connecting outlying stations (remote terminal units = RTUs) via telecontrol protocols in a WinCC SCADA system

#### Options for greater efficiency in operations management

- WinCC /User Archives  
For managing data records in user archives
- WinCC/DataMonitor  
For displaying and evaluating current process states and historical data on office PCs with standard tools
- WinCC/Performance Monitor  
For analysis and optimization of production on the basis of individual performance indicators
- WinCC/SES (Sequence Execution System)  
Scalable step sequence control for sequence-based processes
- WinCC/Audit
  - Change management
  - Generation of audit trails for engineering and runtime
- WinCC/Calendar Scheduler  
Calendar-based planning of events
- WinCC/ChangeControl
  - Change and version management
  - Generation of audit trails for engineering
- WinCC/Event Notifier  
For sending of notifications triggered by specific events in the WinCC message system
- SIMATIC Information Server  
Web-based, integrated reporting from production to management, based on archived data

#### Options for openness and individual system expansions

- WinCC/Connectivity Pack  
Access to WinCC logs via OPC HDA, OPC A&E, OPC XML Server, OPC UA Server/Client and WinCC OLE DB /OLE DB
- WinCC/Connectivity Station  
Gateway to WinCC server data via OPC HDA, OPC A&E, OPC XML server, OPC UA Server/Client, and WinCC OLE DB /OLE DB from independent computers
- WinCC IndustrialDataBridge  
Configurable connection to databases and IT systems
- WinCC/ODK (Open Development Kit)  
For the use of open programming interfaces and the generation of customer-specific WinCC ActiveX objects

#### More information

##### **SIMATIC WinCC Options**

<http://www.siemens.com/simatic-wincc-options>

**Overview*****SIMATIC TeleControl***

SIMATIC TeleControl for WinCC supports connection to outlying stations (Remote Terminal Units = RTUs) via telecontrol protocols.

- SIMATIC TeleControl V7.4 has been released for use with WinCC V7.4.
- For compatibility with WinCC 7.4 SP1, use TeleControl V7.4 update 1
- SIMATIC TeleControl V7.4 supports the combination with WinCC as a Windows service

Licenses

- SIMATIC TeleControl for WinCC consists of an engineering and a runtime component
- The engineering software is supplied with a floating license. The floating license allows installation of the software on any number of computers. This means one user per license can use the software independently of the computer used or a specific workstation.
- The runtime software is supplied as a single license for one server and allows a specific number of stations to be connected depending on the license.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

**Ordering data****Article No.*****SIMATIC TeleControl for WinCC*****6DL5000-7AA47-0XA5*****SIMATIC TeleControl 7.4 for WinCC Basic Engineering***

Software package with SIMATIC Telecontrol for WinCC 7.4 engineering software, floating license for 1 user; runs with Windows 7 Ultimate and Enterprise 32/64-bit, Windows 10 LTSB 2015 (64-bit), Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, electronic documentation on CD/DVD, two languages (English, German)

**Type of delivery:**

License key memory stick, certificate of license including terms and conditions, SIMATIC WinCC Data Medium Package V7.4 and CD "WinCC TeleControl Option V7.4"

***SIMATIC TeleControl V7.4 for WinCC Server Runtime***

Software package with SIMATIC Telecontrol for WinCC 7.4 engineering software, single license for 1 user; runs with Windows 7 Ultimate and Enterprise 32/64-bit, Windows 10 LTSB 2015 (64-bit), Windows Server 2008 R2 Standard 64-bit or Windows Server 2012 R2 Standard 64-bit, electronic documentation on CD/DVD, two languages (English, German)

**Type of delivery:**

License key memory stick, certificate of license including terms and conditions, SIMATIC WinCC Data Medium Package V7.4 and CD "WinCC TeleControl Option V7.4"

**• 6 stations****• 12 stations****• 256 stations****• unlimited****6DL5002-7AA47-0XA0****6DL5002-7AB47-0XA0****6DL5002-7AE47-0XA0****6DL5002-7AF47-0XA0**

## HMI software

SIMATIC WinCC V7

SIMATIC WinCC V7 options

### SIMATIC TeleControl

Ordering data	Article No.	More information
<u>Upgrades</u>	6DL5002-7AA47-0XE0	For an overview of the complete performance range on the Internet, visit: 
<b>SIMATIC TeleControl for WinCC, upgrade V7.0 to V7.4</b>		Service & Support:
Upgrade package; single license for 1 installation, E-SW and documentation on DVD; license key on USB flash drive, Class A; two languages (English, German). Executable under Windows 7 Ult/Server 2008 R2/Server 2012 R2		International:
<u>Driver software for telecontrol protocols</u>	6DL5101-8AX00-0XB0	<a href="https://support.industry.siemens.com/cs/?lc=en-DE">https://support.industry.siemens.com/cs/?lc=en-DE</a>
<b>TeleControl SINAUT driver</b>		Technical Support (Hotline):
Runtime license for a WinCC stand-alone system or WinCC Server, single license for 1 installation. Requirement: SIMATIC TeleControl 7.4 software for WinCC Server Runtime (6, 12, 256 stations)		International:
<u>Type of delivery:</u>		<a href="https://support.industry.siemens.com/My/ww/en/requests">https://support.industry.siemens.com/My/ww/en/requests</a>
License key memory stick, certificate of license including terms and conditions		More information on telecontrol (RTUs):
<b>TeleControl DNP3 driver</b>	6DL5101-8EX00-0XB0	International:
Runtime license for a WinCC stand-alone system or WinCC Server, single license for 1 installation. Requirement: SIMATIC TeleControl 7.4 software for WinCC Server Runtime (6, 12, 256 stations)		<a href="http://www.siemens.com/telecontrol">http://www.siemens.com/telecontrol</a>
<u>Type of delivery:</u>		
License key memory stick, certificate of license including terms and conditions		
<b>TeleControl IEC 870-5-101/-104 driver</b>	6DL5101-8CX00-0XB0	
Runtime license for one WinCC Single Station or one WinCC Server, single license for 1 installation Requirement: SIMATIC TeleControl 7.4 software for WinCC Server Runtime (6, 12, 256 stations)		
<u>Type of delivery:</u>		
License key memory stick, certificate of license including terms and conditions		

## Overview

### WinCC/Audit & WinCC/ChangeControl

- **WinCC/ChangeControl** is used to **trace engineering changes** in a tamper-proof long-term audit trail database, called the audit trail for short. All engineering changes are automatically recorded in the audit trail. This provides a traceable record of every change that has been made, as well as enabling the causes to be deduced and the system downtimes to be minimized.
- To begin tracing at defined project statuses, a project version definition is provided that contains all data and files of a WinCC project version. The project version definition naturally provides the ability to reactivate earlier project versions. Document management is also provided, which manages and archives intermediate statuses for system graphics, reports or user files and stores change information of the user. The audit viewer with helpful filter functions enables the audit trail to be quickly and easily evaluated, exported or even printed out.
- **WinCC/Audit** includes the full functionality of **WinCC/ChangeControl** and is also used for **tracing all operations**. All operations are automatically recorded in the audit trail at RT.
- The WinCC/Audit or WinCC/ChangeControl options and SIMATIC Logon support users in the validation of their plants and meet the requirements according to FDA CFR 21 Part 11.

### Licenses

WinCC Audit complete licenses include the runtime and configuration licenses (RC).

Licensing applies to one engineering station (configuration) and one operating station (runtime) for which an audit trail is to be generated.

An RC license also always includes a runtime (RT) license. Only one RT license is required for each additional operating station with audit trail.

## Ordering data

### Article No.

#### WinCC/ChangeControl

##### For the configuration of the Audit Trail incl. RT

- WinCC V7.5 SP2
  - WinCC V7.4 SP1
- as download
- WinCC V7.5 SP2
  - WinCC V7.4 SP1

**6AV6371-1DV27-5AX0  
6AV6371-1DV27-4AX0**

#### WinCC/Audit

##### WinCC/Audit RC

##### For the configuration of the Audit Trail incl. RT

- WinCC V7.5 SP2
  - WinCC V7.4 SP1
- as download

**6AV6371-1DV17-5AX0  
6AV6371-1DV17-4AX0**

#### WinCC/Audit RT

##### Creation of Audit Trails in RT

- WinCC V7.5 SP2
  - WinCC V7.4 SP1
- as download

**6AV6371-1DV07-5AX0  
6AV6371-1DV07-4AX0**

#### Upgrades

##### V7.4 to V7.5 SP2

- For WinCC/Audit RT
  - For WinCC/Audit RC or WinCC/ChangeControl
- as download

**6AV6371-1DV07-5BX4  
6AV6371-1DV17-5BX4**

##### V7.2/V7.3 to V7.5 SP2

- For WinCC/Audit RT
  - For WinCC/Audit RC or WinCC/ChangeControl
- as download

**6AV6371-1DV07-5BX3  
6AV6371-1DV17-5BX3**

##### V7.x to V7.4 SP1

- For WinCC/Audit RT
  - For WinCC/Audit RC or WinCC/ChangeControl
- as download

**6AV6371-1DV07-4BX3  
6AV6371-1DV17-4BX3**

### More information

More information is available at:

<http://www.siemens.com/customized-automation>

Information on the declarations of conformity for SIMATIC WinCC can be found at:

<https://new.siemens.com/global/en/markets/pharma-industry/good-manufacturing-practice.html>

## HMI software

SIMATIC WinCC V7

SIMATIC WinCC V7 options

### WinCC/Calendar Scheduler

#### Overview

##### **WinCC/Calendar Scheduler**

- Option for SIMATIC WinCC for managing events in a calendar.
- Setting WinCC variables or starting global scripts at defined times.

#### Licenses

- WinCC/Calendar Scheduler comprises engineering and runtime software, with licensing either on the WinCC server or single-user system
- A common "Upgrade for WinCC Calendar options" software package is used to upgrade to a new version.

#### Ordering data

#### Article No.

##### **WinCC/Calendar Scheduler**

- WinCC V7.5 SP2
- WinCC V7.4 <sup>1)</sup>

##### as download

- WinCC V7.5 SP2
- WinCC V7.4 <sup>1)</sup>

**6AV6372-1DC07-5AX0**

**6AV6372-1DC07-4AX0**

##### **Upgrade**

- V7.4 -> V7.5 SP2
- V7.2/7.3 -> V7.5 SP1
- V7.x -> V7.4 <sup>1)</sup>

##### as download

- V7.4 -> V7.5 SP2
- V7.2/7.3 -> V7.5 SP2
- V7.x->V7.4 <sup>1)</sup>

**6AV6372-1DC07-5AX4**

**6AV6372-1DC07-5AX3**

**6AV6372-1DC07-4AX3**

**6AV6372-1KC07-5AX4**

**6AV6372-1KC07-5AX3**

**6AV6372-1KC07-4AX3**

<sup>1)</sup> Also compatible with WinCC V7.4 SP1, except Windows Server 2016.

#### More information

You can find more information at:

<http://www.siemens.com/wincc-calendar-options>

**WinCC/Connectivity Pack & WinCC Connectivity Station**

## Overview

### WinCC/Connectivity Pack & WinCC Connectivity Station

Cross-manufacturer communication in the automation sector has always been of primary importance for WinCC. This is even more true for the release of preprocessed production data for higher-level information systems (e.g. MES = Management Execution System, ERP = Enterprise Resource Planning or Office packages = MS Excel, MS Access, etc.).

WinCC features integrated OPC Data Access and OPC XML DA servers for access to all online values in the system and makes open interfaces available for access to historical WinCC data.

- The Connectivity Pack includes OPC XML DA 1.00, OPC HDA 1.20 (Historical Data Access), OPC A&E 1.10 (Alarm & Events) as well as a WinCC OLE DB interface, which also gives remote computers without installed WinCC access to WinCC archive and alarm data.
- The function of the OPC servers (XML DA, HDA and A&E) and the OPC UA servers (DA, HDA, AC) is assured by the WinCC/Connectivity Pack. In order to access data in the database via WinCC OLE DB/OLE DB, you will also need a license for the WinCC/Connectivity Pack.

### Licensing

- A Connectivity Pack license is required for each WinCC system to be accessed.
- When using the Connectivity Station it is not necessary to install additional Connectivity Pack licenses on the WinCC systems being accessed.
- In order to use the OPC interfaces of the Connectivity Station on a computer without the WinCC installation, you need the "WinCC Connectivity Station" license.
- For sole use of the OPC interfaces of a WinCC installation, only the Connectivity Pack license is required.

The following table shows the rules:

	<b>New: WinCC-independent installation at Connectivity Station</b>	<b>Conventional installation: OPC with WinCC</b>
<b>OPC DA</b>	"WinCC Connectivity Station" license	No license required
<b>OPC HDA</b>	"WinCC Connectivity Station" license	"WinCC Connectivity Pack" license
<b>OPC A&amp;E</b>	"WinCC Connectivity Station" license	"WinCC Connectivity Pack" license
<b>OPC UA DA</b>		"WinCC OPC UA HDA / AC Connectivity Pack" license

The Connectivity Station is planned over NCM PC Manager or SIMATIC Manager. In versions 7.0 and higher, the Connectivity Station does not run as a service.

Additional information is available on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here: <http://www.siemens.com/simatic-licenses>

## Ordering data

### Article No.

#### *WinCC/Connectivity Pack & WinCC Connectivity Station*

#### **V7.5 SP2 for WinCC V7.5 SP2**

##### **Basic Packages**

- WinCC/Connectivity Pack V7.5 SP2<sup>1)</sup>
  - WinCC/Connectivity Station V7.5 SP2<sup>1)</sup>
- as download
- WinCC/Connectivity Pack V7.5 SP2
  - WinCC/Connectivity Station V7.5 SP2

**6AV6371-1DR07-5AX0**

**6AV6371-1DR17-5AX0**

**6AV6371-1HR07-5AX0**

**6AV6371-1HR17-5AX0**

#### **V7.4 SP1 for WinCC V7.4 SP1**

##### **Basic Packages**

- WinCC/Connectivity Pack V7.4 SP1<sup>1)</sup>
  - WinCC/Connectivity Station V7.4 SP1<sup>1)</sup>
- as download

**6AV6371-1DR07-4AX0**

**6AV6371-1DR17-4AX0**

**6AV6371-1HR07-4AX0**

**6AV6371-1HR17-4AX0**

<sup>1)</sup> Upgrades are included in the WinCC Basic Software upgrades

## More information

You can find more information at:

<http://www.siemens.com/wincc-connectivity-pack>

## HMI software

SIMATIC WinCC V7

SIMATIC WinCC V7 options

### WinCC/Event Notifier

#### Overview

##### **WinCC/Event Notifier**

- Option for SIMATIC WinCC for notifying selected persons by email in specified time slots
- Notification depends on events occurring in the WinCC Message System
- Escalation levels, i.e. Group 2 is only notified when nobody "on site" or from Group 1 has reacted within a specified time
- Final notification of all persons previously notified in connection with the specific event about the reaction that has taken place

#### Licenses

- WinCC/Event Notifier comprises engineering and runtime software, with licensing either on the WinCC server or single-user system
- A common "Upgrade for WinCC Event Notifier options" software package is used to upgrade to a new version

#### Ordering data

#### Article No.

##### **WinCC/Event Notifier**

- For WinCC 7.5 SP2
- For WinCC V7.4<sup>1)</sup>

**6AV6372-1DD07-5AX0**  
**6AV6372-1DD07-4AX0**

##### as download

- For WinCC V7.5 SP2
- For WinCC V7.4<sup>1)</sup>

**6AV6372-1HD07-5AX0**  
**6AV6372-1HD07-4AX0**

##### **Upgrade**

- From V7.4 -> 7.5 SP2
- From V7.4 -> 7.5 SP2

**6AV6372-1DC07-5AX4**  
**6AV6372-1KC07-5AX4**

<sup>1)</sup> Also compatible with WinCC V7.4 SP1, except Windows Server 2016.

#### More information

You can find more information at:

<http://www.siemens.com/wincc-calendar-options>

**Overview****WinCC/ODK (Open Development Kit)**

- WinCC option for utilization of the exposed programming interfaces that can be used to access data and functions of the WinCC configuration and WinCC runtime system
- The interfaces are designed as "C-Application Programming Interface" (C-API)
- As of WinCC version 7.2, the Open Development Kit includes the previous WinCC/IndustrialX option

Licenses

The scope of supply of WinCC/ODK includes many examples and comprehensive documentation.

You can find more information on the Software Update Service, license types, online software delivery and handling your licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

**Ordering data****Article No.****SIMATIC WinCC/ODK**

Open Development Kit, Option for SIMATIC WinCC

- V7.4<sup>1)</sup>
- V7.3 SE

as download

- V7.4<sup>1)</sup>
- V7.3 SE

**6AV6371-1CC07-4AX0**  
**6AV6371-1CC07-3AX0**

**6AV6371-1GC07-4AX0**  
**6AV6371-1GC07-3AX0**

<sup>1)</sup> Also compatible with WinCC V7.4 SP1

**More information**

You can find more information at:

<http://www.siemens.com/wincc-odk>

## HMI software

SIMATIC WinCC V7

SIMATIC WinCC V7 options

### WinCC/PerformanceMonitor

#### Overview

##### **WinCC/PerformanceMonitor – Analysis and optimization of production on the basis of individual performance indicators**

The WinCC/PerformanceMonitor facilitates flexible calculation and powerful analysis of plant-specific key performance indicators (KPIs). The indicators provide the basis for deriving optimization potential, thus enabling productivity enhancement.

They relate to individual machine groups, plant sections or production lines. The elements to be monitored are designated as equipment. Indicators are calculated based on operands which are derived from already configured WinCC tags.

By combining them with associated values, more accurate production correlations can be highlighted, such as quality/supplier dependencies. The calculation formulas used are quick and simple to create in WinCC.

Analysis of the indicators and their operands can be carried out in the WinCC system at any time. Indicators, along with their associated values if required, can be clearly displayed in bar graphs, allowing easy comparison. In addition, the input values of each performance indicator can be shown via an integrated analysis function (drill-down). The Gantt chart illustrates the chronological sequence of the operands. The table display lists the archived values, allowing subsequent correction if required. Performance indicators calculated online, either cyclically or triggered by a tag, can be written to WinCC tags for further processing in WinCC, and display in WinCC images, for example.

The PerformanceMonitor can be combined with the Web Navigator for distribution on the Internet, and with the Information Server for reporting purposes. Integration into WinCC ensures fast configuration and complete transparency across all machine and plant data as a basis for optimizing plant productivity.

- The WinCC/PerformanceMonitor can be installed on a WinCC stand-alone system, WinCC server or WinCC client project (WinCC RT Client license), and consists of an engineering client as well as a runtime user interface.
- The WinCC/PerformanceMonitor provides ActiveX control elements for embedding in WinCC images.
  - PerformanceControl: Bar graphs for displaying performance indicators in relation to context values, showing the operands for cause analysis in each case.
  - Gantt chart: Chronological sequence of time-based operands
  - TableControl: Tabular listing of operands with post correction option.
- With the help of the integrated configuration environment, operands are calculated (based on tags) which can be used to calculate key statistics at the set evaluation time.
- For analysis via intranet or Internet, the controls of the WinCC/PerformanceMonitor are available when using the WinCC/WebNavigator.
- The SIMATIC Information Server can be used for generating plant-specific, web-based reports (predefined and expandable).

#### Licensing

- The basic package comprises a configuration environment, runtime controls (bars, Gantt, tables) and a license for archiving 30 values.
- The logged values (operands, context) form the basis of the analysis. If more values are to be archived, the number of (additive) archive values can be increased in steps of 30, 100, 300 or 1 000 (countable tags).

You can find more information on the Software Update Service, license types, online software delivery and handling your licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

Ordering data	Article No.	More information
<u><a href="#">WinCC/PerformanceMonitor</a></u> <b>WinCC/PerformanceMonitor Basic Package</b> including 30 PerformanceMonitor archive tags <ul style="list-style-type: none"> <li>• WinCC/PerformanceMonitor V7.5 SP2</li> <li>• WinCC/PerformanceMonitor V7.4 SP1</li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• WinCC/PerformanceMonitor V7.5 SP2</li> <li>• WinCC/PerformanceMonitor V7.4 SP1 for WinCC V7.4 SP1</li> </ul>	<b>6AV6372-2DG07-5AA0</b> <b>6AV6372-2DG07-4AA0</b> <b>6AV6372-2HG07-5AA0</b> <b>6AV6372-2HG07-4AA0</b>	You can find more information at: <a href="http://www.siemens.com/winc-performancemonitor">http://www.siemens.com/winc-performancemonitor</a>
<b>Option for WinCC/PerformanceMonitor V7.4 SP1 and V7.5 SP2 Basic Package</b> <ul style="list-style-type: none"> <li>• 30 additive PerformanceMonitor archive tags</li> <li>• 100 additive PerformanceMonitor archive tags</li> <li>• 300 additive PerformanceMonitor archive tags</li> <li>• 1 000 additive PerformanceMonitor archive tags</li> </ul> <u>as download</u> <ul style="list-style-type: none"> <li>• 30 additive PerformanceMonitor archive tags</li> <li>• 100 additive PerformanceMonitor archive tags</li> <li>• 300 additive PerformanceMonitor archive tags</li> <li>• 1 000 additive PerformanceMonitor archive tags</li> </ul>	<b>6AV6372-2CG20-0BA0</b> <b>6AV6372-2CG20-0CA0</b> <b>6AV6372-2CG20-0DA0</b> <b>6AV6372-2CG20-0EA0</b> <b>6AV6372-2JG20-0BA0</b> <b>6AV6372-2JG20-0CA0</b> <b>6AV6372-2JG20-0DA0</b> <b>6AV6372-2JG20-0EA0</b>	
<u><a href="#">WinCC/PerformanceMonitor Upgrade</a></u> <b>V7.4 to V7.5 SP2</b> <ul style="list-style-type: none"> <li>• Standard software</li> <li>• As download</li> </ul> <b>V7.2/7.3 to V7.5 SP2</b> <ul style="list-style-type: none"> <li>• Standard software</li> <li>• As download</li> </ul> <b>V7.x to V7.4 SP1</b> <ul style="list-style-type: none"> <li>• Standard software</li> <li>• As download</li> </ul>	<b>6AV6372-2DG07-5AX4</b> <b>6AV6372-2KG07-5AX4</b> <b>6AV6372-2DG07-5AX3</b> <b>6AV6372-2KG07-5AX3</b> <b>6AV6372-2DG07-4AX3</b> <b>6AV6372-2KG07-4AX3</b>	

## HMI software

SIMATIC WinCC V7

SIMATIC WinCC V7 options

### WinCC/Redundancy

#### Overview

##### **WinCC/Redundancy**

- Option for SIMATIC WinCC, supporting the parallel operation of two interfaced WinCC single-user systems or process data servers for mutual monitoring
- If one of the two server PCs or one of the two WinCC stations fails, the second one will take over control of the entire system. Once the failed server or station is restored to operation, the process value archives are copied to the restored partner.

#### Licenses

The WinCC/Redundancy option includes licenses for both redundant servers. A Redundancy license is required on each of the two servers in addition to other necessary licenses.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

#### Ordering data

#### Article No.

##### **SIMATIC WinCC/Redundancy V7.5 SP2**

- Runtime Software,  
Single License for 2 installations
- As download,  
Runtime Software,  
Single License for 2 installations

**6AV6371-1CF07-5AX0**

**6AV6371-1HF07-5AX0**

##### **SIMATIC WinCC/Redundancy V7.4 SP1**

- Runtime Software,  
Single License for 2 installations
- As download,  
Runtime Software,  
Single License for 2 installations


**6AV6371-1CF07-4AX0**

**6AV6371-1HF07-4AX0**

#### More information

You can find more information at:

<http://www.siemens.com/wincc-redundancy>

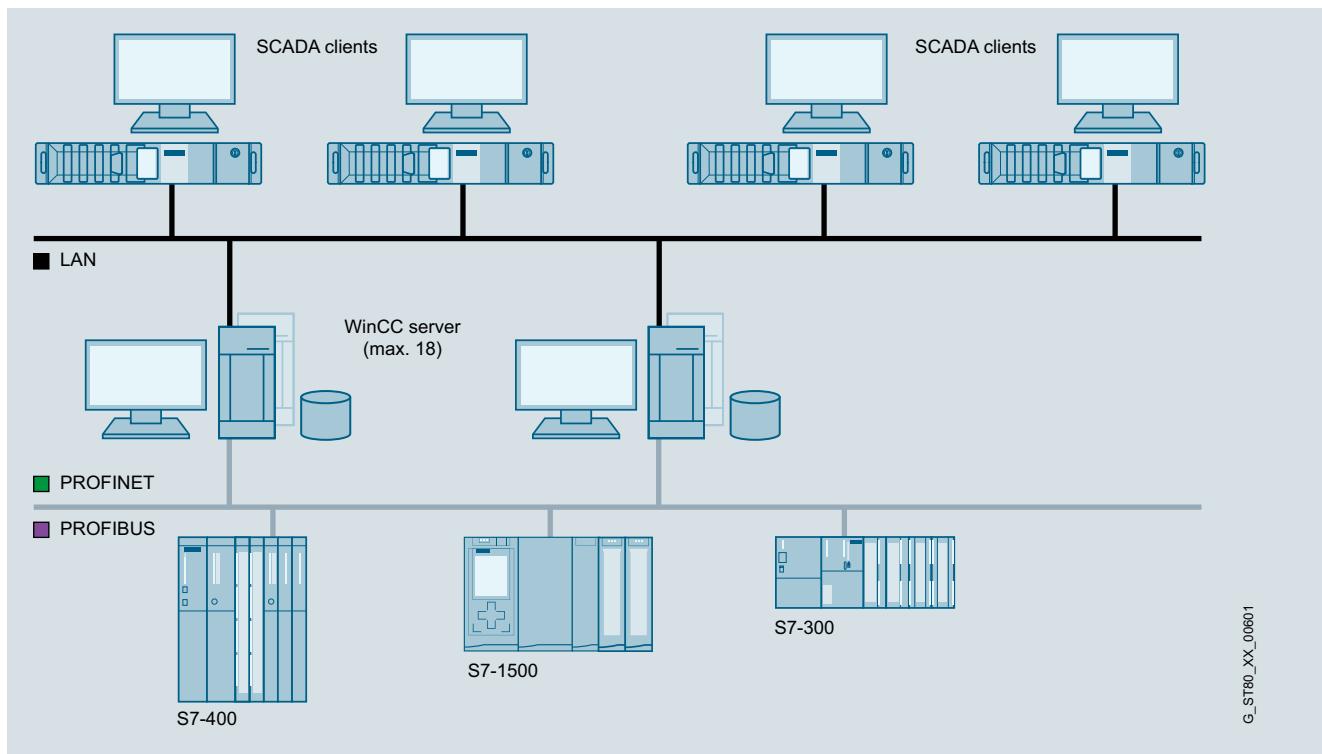**Overview****SIMATIC WinCC/Server**

- Option for SIMATIC WinCC, which permits the configuration of a powerful client/server system.
- A maximum of 3 clients can be connected to non-server operating systems.
- A number of coordinated HMI stations can be operated in a single group with networked automation systems
- Client/server solution:
  - Client without its own project ("UNI-Client"):
 One (redundant) server can supply up to 64 clients with process and archive data, messages, images and reports. The clients act as display and operating stations for the project on the server.
  - Client with its own project ("MULTI-Client"):
 One client can simultaneously access up to 18 (redundant) servers. These servers make the data and images available. This data can be collectively processed and displayed in the client project in order, for example, to implement a system overview across several servers. In this case, one server can supply data to as many as 50 clients.
- Requirement: Network connection (TCP/IP) between the server PC and the connected clients

**Licenses**

The following licenses are required for configuring a multi-user system:

- WinCC Server license on the server in addition to a WinCC RT license (a server license is required for each server)
- One WinCC RT Client license on each client.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

**Ordering data****Article No.****SIMATIC WinCC/Server V7.5 SP2**

- |   |                    |
|---|--------------------|
| • Runtime Software,<br>Single License                 | 6AV6371-1CA07-5AX0 |
| • As download,<br>Runtime Software,<br>Single License | 6AV6371-1HA07-5AX0 |

**SIMATIC WinCC/Server V7.4 SP1**

- |   |                    |
|---|--------------------|
| • Runtime Software,<br>Single License                 | 6AV6371-1CA07-4AX0 |
| • As download,<br>Runtime Software,<br>Single License | 6AV6371-1HA07-4AX0 |

**More information**

You can find more information at:

<http://www.siemens.com/wincc-server>


## HMI software

SIMATIC WinCC V7

SIMATIC WinCC V7 options

### WinCC/SES (Sequence Execution System)

#### Overview

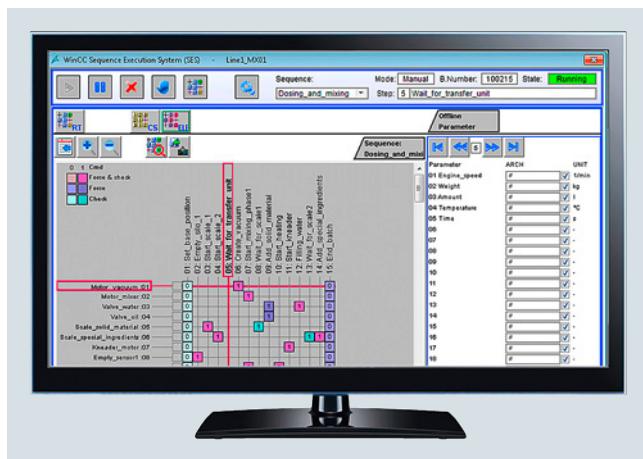

#### WinCC/SES

The WinCC/SES (Sequence Execution System) is designed for the sequential control of recipe and sequence-based processes in production. WinCC/SES is especially suitable for production plants in which dosing, mixing and material transport are important process actions.

Sequence controls can be structured with a high degree of flexibility, with the production steps being defined in a clear configuration interface and freely combined to form individual process sequences. In addition both the step sequences and the parameters can be modified online during production runs.

WinCC/SES helps the user to fine tune their production processes by allowing them to easily combine automatic sequences with manual interventions. This means that operators can react quickly and intervene in the running process, for example when quality of the raw materials fluctuates or if a different sequence among the production steps becomes necessary to facilitate more versatile production paths.

WinCC/SES also offers a high level of system availability and rapid response times since the program sequence takes place directly on the automation controller instead of on the PC.

#### Licenses

In addition to the basic SIMATIC WinCC V7.4 software, WinCC/SES V7.4 also requires STEP 7 version 5.5 SP4 to be installed.

The basic pack allows the sequential control of two plant sections. Extension Units can be used to increase the number of plant sections by 5 in each case (countable licenses).

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here: <http://www.siemens.com/simatic-licenses>

#### Ordering data

#### Article No.

##### **SIMATIC WinCC/SES Sequence Execution System**

Software option package for the sequential control of recipe and sequence-based processes in production, functional enhancement for SIMATIC WinCC; electronic documentation in English, German

##### **V7.5 SP2<sup>1)2)</sup>**

- Basic Package (incl. 2 units)  
For configuration of the Sequence Execution System
- Extension 5 units (countable)  
For increasing the number of units<sup>2)</sup>

##### As download

- Basic Package (incl. 2 units)
- Extension 5 units (countable)

##### **Upgrades**

- Basic Package Upgrade from 7.4 to 7.5 SP2<sup>1)</sup>
- Extension 5 units Upgrade from 7.4 to 7.5 SP2<sup>1)</sup>
- Basic Package Upgrade from 7.2/3 to 7.5 SP2<sup>1)</sup>
- Extension 5 units Upgrade from 7.2/3 to 7.5 SP2<sup>1)</sup>

##### As download

- Basic Package Upgrade from 7.4 to 7.5 SP2<sup>1)</sup>
- Extension 5 units Upgrade from 7.4 to 7.5 SP2<sup>1)</sup>
- Basic Package Upgrade from 7.2/3 to 7.5 SP2<sup>1)</sup>
- Extension 5 units Upgrade from 7.2/3 to 7.5 SP2<sup>1)</sup>

##### **V7.4<sup>1)2)</sup>**

- Basic Package (incl. 2 units)  
For configuration of the Sequence Execution System
- Extension 5 units  
For increasing the number of units<sup>2)</sup>

##### As download

- Basic Package (incl. 2 units)
- Extension 5 units

##### **Upgrades**

- Basic Package Upgrade 7.4<sup>1)</sup>
- Extension 5 units Upgrade 7.4<sup>1)</sup>

##### As download

- Basic Package Upgrade 7.4<sup>1)</sup>
- Extension 5 units Upgrade 7.4<sup>1)</sup>

**6AV6372-2DJ07-5AA0**

**6AV6372-2BJ07-5BA0**

**6AV6372-2HJ07-5AA0**

**6AV6372-2JJ07-5BA0**

**6AV6372-2DJ17-5AA1**

**6AV6372-2BJ17-5BA1**

**6AV6372-2DJ17-5AA0**

**6AV6372-2BJ17-5BA0**

**6AV6372-2HJ17-5AA1**

**6AV6372-2JJ17-5BA1**

**6AV6372-2HJ17-5AA0**

**6AV6372-2JJ17-5BA0**

**6AV6372-2DJ07-4AA0**

**6AV6372-2BJ07-4BA0**

**6AV6372-2HJ07-4AA0**

**6AV6372-2JJ07-4BA0**

<sup>1)</sup> Also compatible with WinCC V7.4 SP1

<sup>2)</sup> Additionally requires STEP 7 V5.5. Based on SIMATIC S7-300 from S7-315 or higher, redundancy, WebNavigator is not supported.

#### More information

You can find more information at:

<http://www.siemens.com/wincc-ses>

**Overview****WinCC/User Archives**

- Option for SIMATIC WinCC for managing data sets in user archives that contain related data.
- WinCC and its automation partners (e.g. a SIMATIC S7 controller) write these data sets and exchange them if required.

The WinCC/User Archives option can also be used in the context of the WinCC/WebNavigator (see also WinCC/WebNavigator option).

**Licenses**

A license is only required for the server (or single-user system).

You can find more information on the Software Update Service, license types, online software delivery and handling your licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

**Ordering data****Article No.****SIMATIC WinCC/User Archives**

- Option for SIMATIC WinCC V7.5 SP2, Runtime Software, Single License
- Option for SIMATIC WinCC V7.4 SP1, Runtime Software, Single License

**As download**

- Option for SIMATIC WinCC V7.5 SP2, Runtime Software, Single License
- Option for SIMATIC WinCC V7.4 SP1, Runtime Software, Single License

**6AV6371-1CB07-5AX0****6AV6371-1CB07-4AX0****6AV6371-1HB07-5AX0****6AV6371-1HB07-4AX0****More information**

You can find more information at:

<http://www.siemens.com/wincc-user-archives>

## HMI software

### SIMATIC WinCC flexible

#### Introduction

##### Overview

###### **SIMATIC WinCC flexible ES engineering software**

- Family of configuration systems with WinCC flexible/Compact/Standard/Advanced for SIMATIC operator panels, the HMI part of SIMATIC C7 as well as for the WinCC flexible Runtime PC-based visualization software
- Runs on Windows 7 Professional, Ultimate, Enterprise / Windows 10 Professional, Enterprise
- Can be expanded by the option "WinCC flexible/ChangeControl" for version management and change logging

###### **SIMATIC WinCC flexible Runtime visualization software**

- Modular PC-based HMI solution for single-user systems directly at the machine (further development of ProTool/Pro RT)
- Runs on Windows 7 Professional, Ultimate, Enterprise / Windows 10 Professional, Enterprise
- Basic package for visualization, reporting and logging; can be expanded by implementing option packages
- Flexible expansion possible with VB scripts and customized ActiveX controls created with OPP (Open Platform Program)
- Can be integrated into automation solutions based on TCP/IP networks
- Expanded service concepts with remote operation, diagnostics and administration over the intranet and Internet in combination with email communication

**Overview****SIMATIC WinCC flexible ES**

- Uniform family of engineering tools for configuring SIMATIC HMI operator panels, the operator controls of SIMATIC C7 units, SINUMERIK Panel PCs as well as the PC-based visualization software WinCC flexible Runtime.
- Runs on Windows 7 Professional, Ultimate, Enterprise / Windows 10 Professional, Enterprise
- Current version:
  - SIMATIC WinCC flexible 2008 SP5 Micro
  - SIMATIC WinCC flexible 2008 SP5 Compact
  - SIMATIC WinCC flexible 2008 SP5 Standard
  - SIMATIC WinCC flexible 2008 SP5 Advanced

**Ordering data****Article No.****WinCC flexible 2008 Compact incl. SP5**

- Software and documentation on DVD, floating license, license key on USB stick
- as download<sup>3)</sup>, software and license key download, floating license, e-mail address required for delivery

**6AV6611-0AA51-3CA5****6AV6611-0AA51-3CH5****WinCC flexible 2008 Standard incl. SP5**

- Software and documentation on DVD, floating license, license key on USB stick
- as download<sup>3)</sup>, software and license key download, floating license, e-mail address required for delivery

**6AV6612-0AA51-3CA5****6AV6612-0AA51-3CH5****WinCC flexible 2008 Advanced incl. SP5**

- Software and documentation on DVD, floating license, license key on USB stick
- as download<sup>3)</sup>, software and license key download, floating license, e-mail address required for delivery

**6AV6613-0AA51-3CA5****6AV6613-0AA51-3CH5****WinCC flexible /ChangeControl for WinCC flexible 2008 Compact/Standard/Advanced<sup>1) 2)</sup>**

- Floating license, option, license key only
- as download<sup>3)</sup>, only license key download, floating license, e-mail address required for delivery

**6AV6613-6AA01-3AB5****6AV6613-6AA01-3AH5****Powerpacks****SIMATIC WinCC flexible Power Packs**

Floating license, license key only on USB stick

- WinCC flexible 2008 Standard to 2008 Advanced
- WinCC flexible 2008 Compact to 2008 Advanced
- WinCC flexible 2008 Compact to 2008 Standard as download<sup>3)</sup>, floating license, license key download only, e-mail address required for delivery
- WinCC flexible 2008 Standard to 2008 Advanced
- WinCC flexible 2008 Compact to 2008 Advanced
- WinCC flexible 2008 Compact to 2008 Standard

**6AV6613-2CD01-3AD5****6AV6613-2BD01-3AD5****6AV6612-2BC01-3AD5****6AV6613-2CD01-3AJ5****6AV6613-2BD01-3AJ5****6AV6612-2BC01-3AJ5**

# HMI software

## SIMATIC WinCC flexible

### SIMATIC WinCC flexible ES

Ordering data	Article No.	Technical specifications
<b>Updates</b>		
<b>WinCC flexible 2008 Compact/ Standard/Advanced Update 2008, 2008 SP1, SP2, SP3 -&gt; SP5</b>	<b>6AV6613-0AA51-3CU8</b>	<b>System requirements (minimum requirements)</b>
<b>Upgrades</b>		<b>WinCC flexible Engineering Software</b>
<b>SIMATIC WinCC flexible 2004/2005/2007 to SIMATIC WinCC flexible 2008 incl. SP5</b>		<b>Operating system</b>
<ul style="list-style-type: none"> <li>• Upgrade to WinCC flexible 2008 Compact, incl. ChangeControl option <sup>1)</sup></li> <li>• Upgrade to WinCC flexible 2008 Standard, incl. ChangeControl option <sup>1)</sup></li> <li>• Upgrade to WinCC flexible 2008 Advanced, incl. ChangeControl option <sup>1)</sup> as download <sup>3)</sup>, Email address required for delivery</li> <li>• Upgrade to WinCC flexible 2008 Compact, incl. ChangeControl option <sup>1)</sup></li> <li>• Upgrade to WinCC flexible 2008 Standard, incl. ChangeControl option <sup>1)</sup></li> <li>• Upgrade to WinCC flexible 2008 Advanced, incl. ChangeControl option <sup>1)</sup></li> </ul>	<b>6AV6611-0AA51-3CE5</b>	<ul style="list-style-type: none"> <li>• Windows 7 Professional SP1, Ultimate/Enterprise SP1 (32-bit and 64-bit)</li> <li>• Windows 10 Professional, Enterprise, LTSB Enterprise (64-bit)</li> </ul>
	<b>6AV6612-0AA51-3CE5</b>	<b>Processor</b>
	<b>6AV6613-0AA51-3CE5</b>	<b>Resolution</b>
	<b>6AV6611-0AA51-3CK5</b>	<b>Main memory (RAM)</b>
	<b>6AV6612-0AA51-3CK5</b>	<b>Hard disk (free memory space) <sup>1)</sup></b>
	<b>6AV6613-0AA51-3CK5</b>	<b>DVD drive</b>

<sup>1)</sup> A separate license for WinCC flexible /ChangeControl must be purchased for each engineering station

<sup>2)</sup> The ChangeControl option has not been released for integrated operation with STEP 7

<sup>3)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

- 1) In addition to WinCC flexible, Windows also requires free hard drive space; e.g. space should be reserved for the swap file. The following formula has proven itself in the past: The size of the swap file = 3 x the size of available RAM. For more information, refer to your Windows documentation
- 2) When installing one language. An additional 200 MB are required for each further language. In the case of different partitions for system and configuration: System partition approx. 700 MB, project partition approx. 1.3 GB.
- 3) When installing one language. An additional 80 MB are required for each further language. In the case of different partitions for system and configuration: System partition approx. 600 MB, project partition approx. 600 MB.

### More information

More information is available on the Internet at:

<http://www.siemens.com/wincc-flexible>

#### Note:

Do you require a specific modification or extension to the products described here? You will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible under "Customized Products".

**Overview**

PC-based visualization software for single-user systems directly at the machine.

- Runs on Windows 7 Professional, Ultimate, Enterprise and Windows 10 Professional, Enterprise
- Current version: SIMATIC WinCC flexible 2008 SP5 Runtime

SIMATIC WinCC flexible Runtime is configured with the SIMATIC WinCC flexible Advanced configuration software.

**Ordering data****Article No.**
**SIMATIC WinCC flexible 2008 Runtime**

for PC systems; software and documentation on DVD, including software of the options for PC systems<sup>1)</sup>:

- Single license,  
license key on USB stick for:
- 128 PowerTags (RT 128)
  - 512 PowerTags (RT 512)
  - 2 048 PowerTags (RT 2 048)
  - 4 096 PowerTags (RT 4 096)

as download<sup>2)</sup>  
Single license, software and license key download,  
e-mail address required for delivery.

- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags

**6AV6613-1BA51-3CA0**  
**6AV6613-1DA51-3CA0**  
**6AV6613-1FA51-3CA0**  
**6AV6613-1GA51-3CA0**

**6AV6613-1BA51-3CH0**  
**6AV6613-1DA51-3CH0**  
**6AV6613-1FA51-3CH0**  
**6AV6613-1GA51-3CH0**

**PowerPacks**
**SIMATIC WinCC flexible 2008 Runtime**

Single license, license key only on USB stick for PowerTags from

- 128 to 512 PowerTags
- 128 to 2 048 PowerTags
- 128 to 4 096 PowerTags
- 512 to 2 048 PowerTags
- 512 to 4 096 PowerTags
- 2 048 to 4 096 PowerTags

as download<sup>2)</sup>  
Single license,  
license key download only,  
e-mail address required for delivery.

- 128 to 512 PowerTags
- 128 to 2 048 PowerTags
- 128 to 4 096 PowerTags
- 512 to 2 048 PowerTags
- 512 to 4 096 PowerTags
- 2 048 to 4 096 PowerTags

**6AV6613-4BD01-3AD0**  
**6AV6613-4BF01-3AD0**  
**6AV6613-4BG01-3AD0**  
**6AV6613-4DF01-3AD0**  
**6AV6613-4DG01-3AD0**  
**6AV6613-4FG01-3AD0**

**6AV6613-4BD01-3AJ0**  
**6AV6613-4BF01-3AJ0**  
**6AV6613-4BG01-3AJ0**  
**6AV6613-4DF01-3AJ0**  
**6AV6613-4DG01-3AJ0**  
**6AV6613-4FG01-3AJ0**

**Updates**
**SIMATIC WinCC flexible 2008 Runtime Update 2008, 2008 SP1, SP2, SP3 -> SP5**

**6AV6613-1XA51-3CU8**

<sup>1)</sup> Runtime licenses for WinCC flexible Runtime options must be purchased separately for each target system.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

## HMI software

### SIMATIC WinCC flexible

#### SIMATIC WinCC flexible RT

Ordering data	Article No.	Article No.
<b>Upgrades</b> <b>SIMATIC WinCC flexible 2004/2005/2007 Runtime to SIMATIC WinCC flexible 2008 Runtime</b>  Upgrade to SIMATIC WinCC flexible Runtime 2008 PowerTags including Runtime options for: WinCC flexible /Archives; WinCC flexible /Recipes; WinCC flexible /Audit; WinCC flexible /Sm@rtAccess; WinCC flexible /OPC-Server; WinCC flexible /ProAgent <ul style="list-style-type: none"> <li>• Software and documentation on DVD, single license, license key on USB stick</li> <li>• as download<sup>2)</sup>, software and license key download, single license, e-mail address required for delivery</li> </ul>	<b>6AV6613-1XA51-3CE0</b>  <b>6AV6613-1XA51-3CK0</b>	<b>Communication via Industrial Ethernet</b> <b>SIMATIC NET HARDNET-IE S7 V12</b> Software for S7 communication and open communication; OPC, PG/OP communication, configuring software; up to 120 connections; Single License for 1 installation of runtime software, software and electronic manual on DVD <ul style="list-style-type: none"> <li>• Single license for 1 installation</li> <li>• Software Update Service for one year, with automatic extension; requirement: current software version</li> <li>• Upgrade S7-1613 from V6.4 to S7-1613 V8.0 SP1</li> <li>• Upgrade S7-1613 from V6.0, V6.1, V6.2 or V6.3 to S7-1613 V8.0 SP1</li> </ul>
<b>Upgrade of the SIMATIC WinCC flexible Panel options:</b>  WinCC flexible /Audit for SIMATIC Panel; WinCC flexible /Sm@rtAccess for SIMATIC Panel; WinCC flexible /Sm@rtService for SIMATIC Panel; WinCC flexible /OPC-Server for SIMATIC Multi Panel; WinCC flexible /ProAgent for SIMATIC Multi Panel <ul style="list-style-type: none"> <li>• only license key on USB stick, single license</li> <li>• as download<sup>2)</sup>, only license key download, single license, e-mail address required for delivery</li> </ul>	<b>6AV6618-7XX01-3AF0</b>  <b>6AV6618-7XX01-3AK0</b>	<b>Communication via PROFIBUS</b> <b>CP 5613 A3</b> PCI card (32-bit) for connecting a PC to PROFIBUS (communications software must be ordered separately) <b>CP 5614 A3</b> PCI card (32-bit) for connecting a PC to PROFIBUS (communications software must be ordered separately) <b>SIMATIC NET PB S7-5613 V8.0 SP1</b> Software for S7 communication, incl. PG and FDL protocol, OPC server and NCM PC; Runtime software, software and electronic manual on USB flash drive, license key on diskette, Class A, for 32-bit Windows 7 Professional/Ultimate for up to 4 CP 5613 A2, CP5614 A2, CP 5603 / CP 5623 / CP 5624; <ul style="list-style-type: none"> <li>• Software Update Service for one year, with automatic extension; requirement: current software version</li> <li>• Upgrade S7-5613 from V6.4 to S7-5613 V8.0 SP1</li> <li>• Upgrade S7-5613 from V6.0, V6.1, V6.2 or V6.3 to S7-5613 V8.0 SP1</li> </ul>
<sup>1)</sup> Runtime licenses for WinCC flexible Runtime options must be purchased separately for each target system. <sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <a href="http://www.siemens.com/tia-online-software-delivery">http://www.siemens.com/tia-online-software-delivery</a>		<b>6GK1561-3AA02</b>  <b>6GK1561-4AA02</b>  <b>6GK1713-5CB00-3AL0</b>  <b>6GK1713-5CB00-3AE0</b>  <b>6GK1713-5CB00-3AE1</b>  <b>6GK1561-2AA00</b>  <b>6GK1562-2AA00</b>  <b>6GK1571-1AA00</b>  <b>6ES7901-0BF00-0AA0</b>

**Technical specifications**

Type	SIMATIC WinCC flexible Runtime
	The specifications are maximum values
<b>Displays</b>	
• Fields per screen	500
• Variables per screen	400
• Static text	400
• Graphics objects	30,000
• Complex objects per display (e.g. bars)	2,000
• Trends	40
• Graphics lists <sup>1)</sup>	800
• Text lists <sup>1)</sup>	500
• Number of entries in symbol tables	500
<b>Variables</b>	3,500
<b>Variables</b>	4,096 <sup>3)</sup>
<b>Messages bit-triggered / analog</b>	4,000 / 500
• Message text (number of characters)	80
• Number of process values per message	8
• Size of message buffer	1,024
• Pending message events	500
<b>Archives <sup>4)</sup></b>	100
• Archivable data	Process data, messages
• Max. number of entries per archive (incl. all archive segments)	500,000
• Archive types	Short-term archive, sequence archive (max. 400 per archive)
• Data storage format	CSV (Comma Separated Variable), RDB (Runtime Data Base), interface to MS SQL database
<b>Recipes<sup>4)</sup></b>	1,000
• Elements per recipe	2,000 <sup>3)</sup>
• Data records per recipe	5,000 <sup>2)</sup>
<b>Password protection</b>	
• User rights	32
• Number of user groups	50
<b>Visual Basic scripts</b>	200
<b>Online languages, max.</b>	16
<b>Communication</b>	
SIMATIC S7 MPI interface/ PROFIBUS DP interface	
• Number of connectable stations, max.	Depending on the scope of the configuration (communication) from the point of view of WinCC flexible Runtime, as many as 8 connections are possible
SIMATIC S7 PPI interface	
• Number of connectable stations, max.	1 from viewpoint of WinCC flexible Runtime
SIMATIC S5 PROFIBUS DP interface	
• Number of connectable stations, max.	1 from viewpoint of WinCC flexible Runtime
Multi-protocol operation	Yes, OPC Client or SIMATIC HMI HTTP protocol are additive, i.e. can be used in conjunction with other PLC links

**More information**

More information is available on the Internet at:

<http://www.siemens.com/wincc-flexible>

**Note:**

Do you need a specific modification or option for the products described here? You will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible under "Customized Products".

<sup>1)</sup> Together only 500 text and graphics lists

<sup>2)</sup> Dependent on memory medium used

<sup>3)</sup> Dependent on number of licensed PowerTags

<sup>4)</sup> Option for SIMATIC WinCC flexible Runtime. For further information, refer to "WinCC flexible options".

## HMI software

SIMATIC WinCC flexible

### SIMATIC WinCC flexible options

#### Overview

##### **Option for SIMATIC WinCC flexible Engineering**

##### **SIMATIC WinCC flexible /ChangeControl**

WinCC flexible /ChangeControl enables consistent backup of configuration data. The history of changes can be verified down to the last detail for applications requiring interruption-free proof for the complete life cycle of a product.

##### **Options for SIMATIC Panels/Multi Panels and SIMATIC WinCC flexible Runtime**

##### **SIMATIC WinCC flexible /Archives**

Archiving of alarms and process values

##### **SIMATIC WinCC flexible /Recipes**

Generation and management of data records for machine or production data

##### **SIMATIC WinCC flexible /Audit**

Recording of operator actions in an Audit Trail

- Audit supports users in meeting special quality requirements, e.g.
  - Production plant requiring validation according to 21 CFR Part 11 (Food Drug Administration legislation)
  - In respect of traceability according to EU 175/2002 (EU directive)

##### **SIMATIC Logon for WinCC flexible**

Option for connecting PCs with SIMATIC WinCC flexible Runtime and SIMATIC Panels to central user administration.

##### **SIMATIC WinCC flexible /Sm@rtAccess**

- Flexible solution for access to HMI systems and process data from any location
- Communication between different SIMATIC HMI systems

##### **SIMATIC WinCC flexible /Sm@rtService**

- Remote maintenance and servicing of machines and plants via Internet/intranet
- Flexible solution for remote access to machines and plant

##### **SIMATIC WinCC flexible /OPC server**

- Incorporation of automation components from different manufacturers into a single automation concept
- Communication for data exchange between HMI systems and/or higher-level control system

##### **SIMATIC WinCC flexible /ProAgent**

- Precise and rapid process fault diagnostics in plant and machines for SIMATIC S7 and SIMATIC HMI
- Standardized diagnostics concept for various SIMATIC components
- No further configuration overhead for diagnostics functionality

**WinCC flexible /ChangeControl****Overview****WinCC flexible /ChangeControl**

- Options for the versioning of configuration data and for tracing configuration changes (e.g. as verification in regulated sectors)
- For the engineering tool SIMATIC WinCC flexible Compact/Standard/Advanced
- One license is required for each configuration computer

**Ordering data****Article No.**

**WinCC flexible /ChangeControl  
for WinCC flexible 2008  
Compact/Standard/Advanced<sup>1)</sup>**

Floating license,  
license key only on USB stick  
as download<sup>2)</sup>

**6AV6613-6AA01-3AB5**

**WinCC flexible /ChangeControl  
for WinCC flexible 2008  
Compact/Standard/Advanced<sup>1)</sup>**

Floating license,  
only license key download;  
Email address required for delivery

**6AV6613-6AA01-3AH5**

<sup>1)</sup> The ChangeControl option has not been released for integrated operation with STEP 7.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

**More information**Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

## HMI software

SIMATIC WinCC flexible

SIMATIC WinCC flexible options

### WinCC flexible /Archives

#### Overview

##### WinCC flexible /Archives

- Option for SIMATIC WinCC flexible Runtime for archiving process values and messages
- Archiving of process values and messages supports the acquisition and processing of process data from an industrial plant or machine. Evaluation of the archived process data provides information about the operating states of the plant or machine
- One license is required per operator station  
(no license is required for SIMATIC Panels/Multi Panels)

#### Ordering data

#### Article No.

<b>WinCC flexible /Archives for WinCC flexible 2008 Runtime<sup>1)</sup></b> Single license, license key only on USB stick	<b>6AV6618-7ED01-3AB0</b>
<b>WinCC flexible /Archives+Recipes for WinCC flexible 2008 Runtime<sup>1)</sup></b> Single license for each option, license key only on USB stick as download <sup>2)</sup>	<b>6AV6618-7GD01-3AB0</b>
<b>WinCC flexible /Archives for WinCC flexible 2008 Runtime<sup>1)</sup></b> Single license, license key download only Email address required for delivery	<b>6AV6618-7ED01-3AH0</b>
<b>WinCC flexible /Archives+Recipes for WinCC flexible 2008 Runtime<sup>1)</sup></b> Single license for each option, license key download only Email address required for delivery	<b>6AV6618-7GD01-3AH0</b>

<sup>1)</sup> One license is required for each operator station. A license is not required for the engineering system for configuring the Runtime option.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### Technical specifications

Type	WinCC flexible /Archives
	The specifications are maximum values
<b>Execution platform</b>	SIMATIC WinCC flexible Runtime
<b>Archives</b>	<p>100</p> <p>Process values, messages</p> <p>1 s</p> <p>500,000<sup>1)</sup></p> <p>• Circulating archive</p> <p>• Sequence archive (max. 400 per archive)</p> <p>CSV (Comma Separated Variable), RDB (Runtime Data Base) and interface to Microsoft SQL database (database not included in scope of delivery)</p>
• Archivable data	
• Cyclical trigger for archiving process values (variables)	
• Max. number of entries per archive (incl. sequence archive)	
• Archive types	
• Data storage format	

<sup>1)</sup> Dependent on memory medium used

#### More information

##### Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

**Overview****WinCC flexible /Recipes**

- Option for SIMATIC WinCC flexible Runtime for managing data records in recipes that contain related machine or production data
- The data in a data set can be transferred, for example, from the control unit to the PLC to switch production to a different product variant
- One license is required per operator station (no license is required for SIMATIC Panels/Multi Panels)

**Technical specifications**

Type	WinCC flexible /Recipes
	The specifications are maximum values
<b>Execution platform</b>	SIMATIC WinCC flexible Runtime
<b>Recipes</b>	1000 2000 <sup>1)</sup> 5000 <sup>2)</sup> 8000 KB <sup>2)</sup>
• Entries per recipe	
• Data records per recipe	
• User data length in bytes per data record	

<sup>1)</sup> Dependent on number of licensed PowerTags

<sup>2)</sup> Dependent on memory medium used

**Ordering data****Article No.**

<b>WinCC flexible /Recipes for WinCC flexible 2008 Runtime <sup>1)</sup></b> Single license, license key only on USB stick	<b>6AV6618-7FD01-3AB0</b>
<b>WinCC flexible /Archives+ Recipes for WinCC flexible 2008 Runtime <sup>1)</sup></b> Single license per option, license key only on USB stick	<b>6AV6618-7GD01-3AB0</b>
<b>as download <sup>2)</sup></b>	
<b>WinCC flexible /Recipes for WinCC flexible 2008 Runtime <sup>1)</sup></b> Single license, license key download only email address required for delivery	<b>6AV6618-7FD01-3AH0</b>
<b>WinCC flexible /Archives+ Recipes for WinCC flexible 2008 Runtime <sup>1)</sup></b> Single license for each option, license key download only email address required for delivery	<b>6AV6618-7GD01-3AH0</b>

3

**More information****Note**

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

<sup>1)</sup> One license is required for each operator station. A license is not required for the engineering system for configuring the Runtime option.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/ia-online-software-delivery>

## HMI software

SIMATIC WinCC flexible

SIMATIC WinCC flexible options

### WinCC flexible /Audit

#### Overview

##### WinCC flexible /Audit

- Option for SIMATIC WinCC flexible Runtime as well as SIMATIC Panels for recording operations in an audit trail, and electronic signature
- The audit trail features a safety mechanism that indicates subsequent manipulation.
- An easy-to-use configuration option included as standard in WinCC flexible enables you to set:
  - The operator actions to be recorded in the audit trail during runtime
  - The important operator actions requiring electronic signature/comments during runtime
- The audit option combined with the WinCC flexible ES ChangeControl option supports the user with plant validation
- Available for the following SIMATIC HMI systems: TP/OP 270, TP/OP 277, MP 270B, MP 277, MP 370, MP 377, WinCC flexible Runtime
- A license is required for every operator station (panel or PC)

#### Technical specifications

WinCC flexible /Audit	
Archive for Audit Trail use on the Panel	<ul style="list-style-type: none"> <li>• Plug-in flash memory card on the panel</li> <li>• In the higher-level PC (memory medium) connected to the panel via Ethernet</li> </ul>
Archive for Audit Trail use of WinCC flexible Runtime	On the PC (storage medium)
Execution platform	
SIMATIC Panels	Mobile Panel 277, TP/OP 270, TP/OP 277
SIMATIC Multi Panels	MP 270B, MP 277, MP 370, MP 377
PCs	SIMATIC WinCC flexible Runtime

#### More information

##### Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

#### Ordering data

#### Article No.

<b>WinCC flexible /Audit for SIMATIC Panels<sup>1)</sup></b> Single license, license key only on USB stick	<b>6AV6618-7HB01-3AB0</b>
<b>WinCC flexible /Audit for WinCC flexible Runtime 2008<sup>1)</sup></b> Single license, license key only on USB stick	<b>6AV6618-7HD01-3AB0</b>
<b>as download<sup>2)</sup></b>	
<b>WinCC flexible /Audit for SIMATIC Panels<sup>1)</sup></b> Single license, license key download only E-mail address required for the delivery	<b>6AV6618-7HB01-3AH0</b>
<b>WinCC flexible /Audit for WinCC flexible Runtime 2008<sup>1)</sup></b> Single license, license key download only E-mail address required for the delivery	<b>6AV6618-7HD01-3AH0</b>

<sup>1)</sup> One license is required for each operator console. A license is not required for the engineering system for configuring the runtime option.

<sup>2)</sup> Current information and availability regarding the new delivery package can be found at: <http://www.siemens.com/tia-online-software-delivery>

**SIMATIC Logon for WinCC flexible****Overview****SIMATIC Logon**

- Option for connecting PCs with SIMATIC WinCC flexible Runtime and SIMATIC Panels to central user administration SIMATIC Logon.
- Creates user administration on a central computer to which one or more WinCC flexible stations can be connected over Ethernet.
- SIMATIC Logon for WinCC flexible supports the user in combination with the /Audit and /ChangeControl options in meeting requirements in accordance with FDA 21 CFR Part 11 and EU178.

**Ordering data****Article No.****SIMATIC Logon V1.5**

Basic license;  
for panels or  
WinCC flexible Runtime stations,  
the corresponding number of  
additional SIMATIC Logon Remote  
Access licenses is required.

**6ES7658-7BX51-0YA0****SIMATIC Logon Upgrade to V1.5****6ES7658-7BX51-0YE0****SIMATIC Logon Remote Access  
for WinCC flexible (3 clients)**

Remote access for  
3 WinCC flexible 2008 clients;  
single license for  
3 remote access clients;  
type of delivery:  
CD, license key disk, Certificate of  
License, Terms and Conditions  
The number of licensed clients is  
determined based on the amount of  
installed SIMATIC Logon remote  
access licenses.

**6ES7658-7BA00-2YB0****SIMATIC Logon Remote Access  
for WinCC flexible (10 clients)**

Remote access for  
10 WinCC flexible 2008 clients;  
single license for  
10 remote access clients;  
type of delivery:  
CD, license key disk, Certificate of  
License, Terms and Conditions  
The number of licensed clients is  
determined based on the amount of  
installed SIMATIC Logon remote  
access licenses.

**6ES7658-7BB00-2YB0****Technical specifications**

<b>SIMATIC Logon for WinCC flexible</b>	
<b>Execution platform</b>	
SIMATIC Panels	Mobile Panel 177 PN; Mobile Panel 277, TP/OP 177B PN/DP, TP/OP 277
SIMATIC Multi Panels	MP 177, MP 277, MP 377
PCs	WinCC flexible Runtime

**More information****Note**

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

## HMI software

SIMATIC WinCC flexible

SIMATIC WinCC flexible options

### WinCC flexible /Sm@rtAccess

#### Overview

- Option for SIMATIC WinCC flexible Runtime plus SIMATIC Panels for communication between various SIMATIC HMI systems.
- Available for the following SIMATIC HMI systems:
  - Mobile Panel 177 PN, Mobile Panel 277
  - TP 177B PN/DP, OP 177B PN/DP
  - TP 270, TP 277, OP 270, OP 277
  - MP 177, MP 270B, MP 277, MP 370, MP 377
  - WinCC flexible Runtime
- Communication between HMI systems is established on the basis of Ethernet networks, or via the intranet/Internet:
  - Read and write access to tags;
  - One SIMATIC HMI system can be remotely controlled or monitored from another one;
- Licensing:
 The license "WinCC flexible /Sm@rtAccess for Panel" or "WinCC flexible /Sm@rtAccess for WinCC flexible Runtime" must be installed on both the server and client HMI device.

#### Note:

If the operator stations are accessed using the Sm@rtAccess option, suitable protective measures (including IT security such as network segmentation) should be taken in order to ensure safe operation of the system.

More information is available on the topic of Industrial Security on the Internet at:

<http://www.siemens.com/industrialsecurity>

#### Ordering data

#### Article No.

##### WinCC flexible /Sm@rtAccess for SIMATIC Panel<sup>1)</sup>

Single license,  
license key only on USB stick

**6AV6618-7AB01-3AB0**

##### WinCC flexible /Sm@rtAccess for WinCC flexible 2008 Runtime<sup>1)</sup>

Single license,  
license key only on USB stick  
as download<sup>2)</sup>

**6AV6618-7AD01-3AB0**

##### WinCC flexible /Sm@rtAccess for SIMATIC Panel<sup>1)</sup>

Single license,  
license key download only  
E-mail address required for the delivery

**6AV6618-7AB01-3AH0**

##### WinCC flexible /Sm@rtAccess for WinCC flexible 2008 Runtime<sup>1)</sup>

Single license,  
license key download only  
E-mail address required for the delivery

**6AV6618-7AD01-3AH0**

<sup>1)</sup> The license must be installed on the server and on the client HMI device. Server applications are the options Sm@rtServer, HTTP server and SOAP server. Client applications are the screen object Sm@rtClient display, and the utilization of the communication driver HTTP protocol. A license is not required for the engineering system for configuring the Runtime option.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### Technical specifications

Type	WinCC flexible /Sm@rtAccess
	The specifications are maximum values
<b>Execution platform</b>	
• SIMATIC Panels	Mobile Panel 177 PN, Mobile Panel 277, TP/OP 177B PN/DP, TP/OP 270, TP/OP 277
• SIMATIC Multi Panels	MP 177, MP 270B, MP 277, MP 370, MP 377
• PCs	WinCC flexible Runtime
<b>Sm@rtAccess</b>	
<b>Sm@rtClient concept</b>	
Number of connections for one client	
• Mobile Panel 177 PN, TP/OP 177 B PN/DP, MP 177 as HTTP server	4
• Mobile Panel 277, TP/OP 270, TP/OP 277, MP 270B, MP 277, MP 370, MP 377 as HTTP server	8
• for WinCC flexible Runtime	16
<b>Sm@rtAccess</b>	
<b>Sm@rtClient concept</b>	
Number of Sm@rtClients that can connect to a Sm@rtServer at the same time <sup>1)</sup> <sup>2)</sup>	
• Mobile Panel 177 PN, TP/OP 177B PN/DP, MP 177 as Sm@rtServer	2 clients
• Mobile Panel 277, TP/OP 270, TP/OP 277, MP 270B, MP 277 as Sm@rtServer	3 clients for 6" devices 2 clients for 8" and 10" devices
• MP 370, MP 377 as Sm@rtServer	3 clients for 12" devices 2 clients for 15" devices 1 client for 19" devices 5 clients
Number of Sm@rtClient displays per screen	
• for Panels/Multi Panels	1
• for WinCC flexible Runtime	2

<sup>1)</sup> Including 1 Service Client

<sup>2)</sup> The Sm@rtServer and the WinCC flexible/Pro Agent option cannot be used simultaneously on OP/TP/MP 270/370. Parallel operation of the runtime options ProAgent, Sm@rtAccess and Sm@rtService is possible in the context of the MP 277 8" and 10" devices, Mobile Panel 277 as well as the MP 377. Limitation: a maximum of 2 clients can be connected simultaneously to a Sm@rtServer.

#### More information

##### Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

## Overview

- Option for SIMATIC WinCC flexible Runtime and SIMATIC Panels for remote maintenance and servicing of machines/plants via the Internet/intranet
- Available for the following SIMATIC HMI systems:
  - Mobile Panel 177 PN, Mobile Panel 277
  - TP 177B PN/DP, OP 177B PN/DP
  - TP 270, TP 277, OP 270, OP 277
  - MP 177, MP 270B, MP 277, MP 370, MP 377
  - WinCC flexible Runtime
- Licensing  
 The "WinCC flexible /Sm@rtService for Panel" license or "WinCC flexible /Sm@rtService for WinCC flexible Runtime" license must be installed on the operator panels that use one of the following options/functions: Sm@rtServer, HTML pages (mini-Web server), e-mail.

### Note:

If the operator stations are accessed using the Sm@rtService option, suitable protective measures (including IT security such as network segmentation) should be taken in order to ensure safe operation of the system.

You will find more information on the topic of Industrial Security on the Internet at:

<http://www.siemens.com/industrialsecurity>

## Technical specifications

Type	WinCC flexible /Sm@rtService
<b>Execution platform</b>	
• SIMATIC Panels	Mobile Panel 177 PN, Mobile Panel 277, TP 177B PN/DP, OP 177B PN/DP, TP/OP 270, TP/OP 277
• SIMATIC Multi Panels	MP 177, MP 270B, MP 277, MP 370, MP 377
• PCs	SIMATIC WinCC flexible Runtime
<b>Sm@rtService<sup>1)</sup></b>	
Remote access via	Internet Explorer V6.0 SP1 and higher
HTML pages	HTML V1.1 (no support for ActiveX, Java, ASP)
• for Panels/Multi Panels	HTML V1.1
• for WinCC flexible Runtime	HTML V1.1
Sending emails	• via SMTP server  • Subject, message texts with 250 characters of text per email; date/time of message, message no.

<sup>1)</sup> The Sm@rtServer and the WinCC flexible/ProAgent option cannot be used simultaneously on OP/TP/MP 270/370. Parallel operation of the runtime options ProAgent, Sm@rtAccess and Sm@rtService is possible in the context of the MP 277 8" and 10" devices, Mobile Panel 277 as well as the MP 377. Limitation: a maximum of 2 clients can be connected with a Sm@rtServer.

3

## Ordering data

### Article No.

<b>WinCC flexible /Sm@rtService for SIMATIC Panels<sup>1)</sup></b> Single license, license key only on USB stick	<b>6AV6618-7BB01-3AB0</b>
<b>WinCC flexible /Sm@rtService for WinCC flexible Runtime 2008<sup>1)</sup></b> Single license, license key only on USB stick as download <sup>2)</sup>	<b>6AV6618-7BD01-3AB0</b>
<b>WinCC flexible /Sm@rtService for SIMATIC Panels<sup>1)</sup></b> Single license, license key download only E-mail address required for the delivery	<b>6AV6618-7BB01-3AH0</b>
<b>WinCC flexible /Sm@rtService for WinCC flexible Runtime 2008<sup>1)</sup></b> Single license, license key download only E-mail address required for the delivery	<b>6AV6618-7BD01-3AH0</b>

## More information

### Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

<sup>1)</sup> The "WinCC flexible /Sm@rtService for Panel" license or "WinCC flexible /Sm@rtService for WinCC flexible Runtime" license must be installed on the operator panels that use one of the following options: Sm@rtServer, HTML pages, e-mail. The remote service PC and engineering system do not require a license for configuration of the Runtime option.

<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

## HMI software

SIMATIC WinCC flexible

SIMATIC WinCC flexible options

### WinCC flexible /OPC-Server

#### Overview

- Option for SIMATIC WinCC flexible Runtime as well as Multi Panels for communication with applications from different manufacturers (e.g. MES, ERP, or applications in the office sector)
- Available for the following SIMATIC HMI systems:
  - Mobile Panel 277, MP 270B, MP 277, MP 370, MP 377 (use of OPC on XML basis)
  - WinCC flexible Runtime (use of OPC based on DCOM)
- One license is required for each operator station.

#### Ordering data

#### Article No.

<b>WinCC flexible /OPC-Server for SIMATIC Multi Panels<sup>1)</sup></b> Single license, license key only on USB stick	<b>6AV6618-7CC01-3AB0</b>
<b>WinCC flexible /OPC-Server for WinCC flexible Runtime 2008<sup>1)</sup></b> Single license, license key only on USB stick as download <sup>2)</sup>	<b>6AV6618-7CD01-3AB0</b>
<b>WinCC flexible /OPC-Server for SIMATIC Multi Panels<sup>1)</sup></b> Single license, license key download only E-mail address required for the delivery	<b>6AV6618-7CC01-3AH0</b>
<b>WinCC flexible /OPC-Server for WinCC flexible Runtime 2008<sup>1)</sup></b> Single license, license key download only E-mail address required for the delivery	<b>6AV6618-7CD01-3AH0</b>

<sup>1)</sup> One license is required for each operator station. A license is not required for the engineering system for configuring the Runtime option.

<sup>2)</sup> Current information and availability regarding the new delivery package can be found at: <http://www.siemens.com/tia-online-software-delivery>

#### Technical specifications

Type	WinCC flexible /OPC-Server
	The specifications are maximum values
<b>Execution platform</b>	<ul style="list-style-type: none"> <li>• SIMATIC Panels</li> <li>• SIMATIC Multi Panels</li> <li>• PCs</li> </ul>
<b>OPC-Server</b>	<ul style="list-style-type: none"> <li>• XML server for Multi Panels</li> <li>• DCOM server for WinCC flexible Runtime</li> <li>• Number of connections that an OPC server can accommodate</li> </ul>

<sup>1)</sup> Data access via XML has a functional scope that is similar to OPC Data Access. A software adapter is required that must be installed on the OPC client PC to enable DCOM-based OPC clients to access the OPC XML server without any modification. The software adapter is supplied with WinCC flexible Engineering and Runtime.

#### More information

##### Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

**Overview**

- Targeted and rapid process diagnostics in plants and machines for SIMATIC S7 and SIMATIC HMI
- Standardized diagnostics concept for various SIMATIC components
- No further configuration overhead for diagnostics functionality
- Freed up PLC capacity with regard to memory and program execution time

Note:

For more information, see "Process Diagnostics Software SIMATIC ProAgent".

**More information**Note

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about the Open Platform Program for the creation of user-specific functions and controls for WinCC flexible.

**Ordering data****Article No.****WinCC flexible /ProAgent**

- WinCC flexible /ProAgent for SIMATIC Panels<sup>1)</sup> executable on Mobile Panel 277, TP/OP/MP 270/277 and MP 370/377, single license, only license key on USB stick
- WinCC flexible /ProAgent for WinCC flexible Runtime 2008<sup>1)</sup> single license, only license key on USB stick as download<sup>2)</sup>
- WinCC flexible /ProAgent for SIMATIC Panels<sup>1)</sup> executable on Mobile Panel 277, TP/OP/MP 270/277 and MP 370/377, single license, only license key download email address required for delivery
- WinCC flexible /ProAgent for WinCC flexible Runtime 2008<sup>1)</sup> single license, only license key download email address required for delivery

**6AV6618-7DB01-3AB0****6AV6618-7DD01-3AB0****6AV6618-7DB01-3AH0****6AV6618-7DD01-3AH0**

<sup>1)</sup> One license is required for each operator station. A license is not required for the engineering system for configuring the Runtime option.


<sup>2)</sup> Current information and availability regarding the new type of delivery can be found at: <http://www.siemens.com/tia-online-software-delivery>

## HMI software


SIMATIC ProAgent process diagnostics software

### SIMATIC WinCC/ProAgent

#### Overview

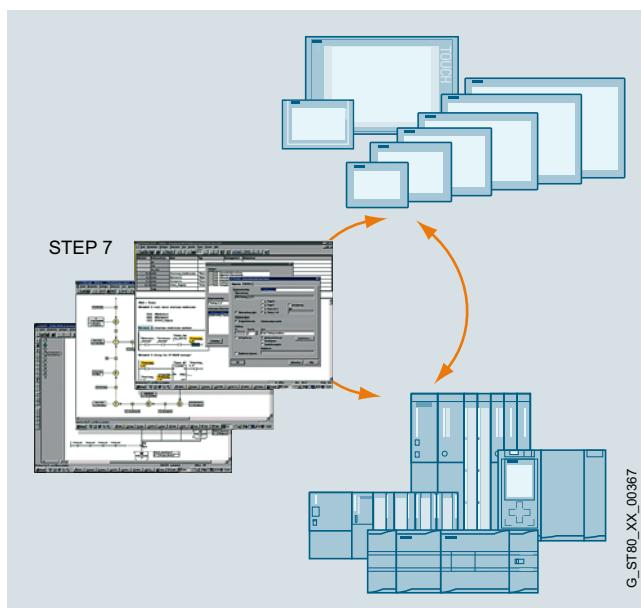

Process fault diagnostics with ProAgent for WinCC flexible /ProAgent and with the STEP 7 engineering tools

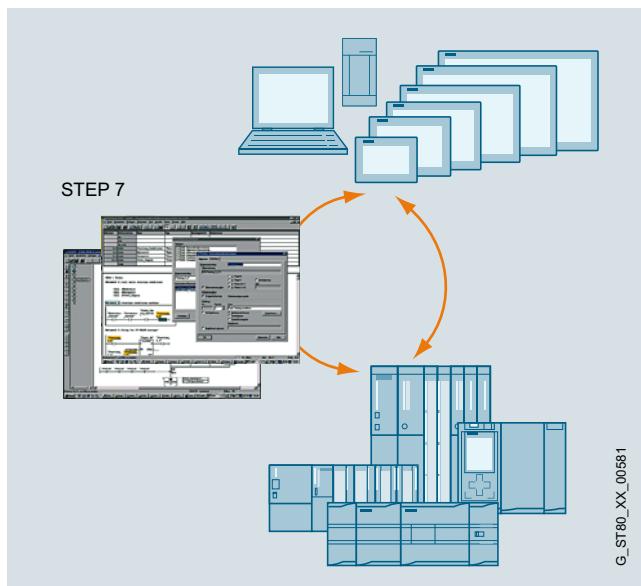

- Process fault diagnostics software for quick and precise diagnosis of faults/errors in plants and machines for SIMATIC S7 and SIMATIC HMI
- Standardized diagnostics concept for various SIMATIC components: optimum interaction of STEP 7 engineering tools and SIMATIC HMI
- Standardized user interface

#### Licensing

Runtime software, one license is required for each piece of target hardware.

Additional information is available on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

#### Ordering data

#### Article No.

##### **SIMATIC WinCC/ProAgent**

Software option package for process diagnosis based on S7 GRAPH V5 and higher and S7 PDIAG V5 and higher; functional enhancement for SIMATIC WinCC; electronic documentation in English, French and German; functions and standard screens for use on a PC (resolution 1024 x 768 pixels) and Panel PC 577/677/877 15" (resolution 1024 x 768 pixels) in English, French and German, runtime license (single license) WinCC version:

- V7.5<sup>1)</sup>
- V7.4<sup>1)</sup>

##### As download

- V7.5<sup>1)</sup>
- V7.4<sup>1)</sup>

##### Upgrade

- V7.4 to V7.5<sup>1)</sup>
- V7.2/3 to V7.5<sup>1)</sup>
- V7.x to V7.4<sup>1)</sup>

##### As download

- V7.4 to V7.5<sup>1)</sup>
- V7.2/3 to V7.5<sup>1)</sup>
- V7.x to V7.4<sup>1)</sup>

##### **SIMATIC WinCC flexible/ProAgent**

Software option package for process diagnostics based on S7 PDIAG V5.1 and higher, S7 GRAPH V5.2 + SP3 and higher; S7 HiGRAPH V5.3 and higher. Functional enhancement for SIMATIC WinCC flexible; electronic documentation in English, French, German, Italian, and Spanish

##### **• WinCC flexible/ProAgent for SIMATIC Panels**

Runtime license (single license) executable on TP/OP/MP 270/277, Mobile Panel 277, and MP 370/377

##### **• WinCC flexible /ProAgent for WinCC flexible Runtime**

Runtime license (single license)

**6AV6371-1DG07-5AX0  
6AV6371-1DG07-4AX0**

**6AV6371-1HG07-5AX0  
6AV6371-1HG07-4AX0**

**6AV6371-1DG07-5AX4  
6AV6371-1DG07-5AX3  
6AV6371-1DG07-4AX3**

**6AV6371-1KG07-5AX4  
6AV6371-1KG07-5AX3  
6AV6371-1KG07-4AX3**

**6AV6618-7DB01-3AB0**

**6AV6618-7DD01-3AB0**

<sup>1)</sup> Not multi-station-capable

### Overview



SIMATIC Notifier

### SIMATIC Notifier: Detect. React. Benefit.

SIMATIC Notifier is used to provide targeted notifications to employees on their smart devices. The web-based setup is performed on the Notifier server in advance for each individual device.

The SIMATIC Notifier Client app receives the notifications. S7, S7 Classic or OPC UA communication is required for integration into a system/machine.

#### Licenses:

- SIMATIC Notifier Server
- SIMATIC Notifier Client License (unlimited expansion options, depending on the number of linked smart devices)

### Ordering data

### Article No.

#### SIMATIC Notifier Server 1.0 for Win7 or Win10 (64-bit)

SIMATIC Notifier Server license key, download + SIMATIC Notifier Server software, download.  
Including a SIMATIC Notifier Client license.  
Email address required for delivery.

**6AV2170-0AA10-0AA0**

#### SIMATIC Notifier Client license

Freely expandable Client license, download.  
Email address required for delivery.

**6AV2170-0AA20-0AA0**

### Technical specifications

	<b>SIMATIC Notifier</b>
<b>Machine integration</b>	S7 Classic, S7+, OPC UA
<b>Max. number of controllers/machines</b>	30x S7 or 30x OPC UA or 30x mixed configurations <sup>1)</sup>
<b>Max. number of variables per second per machine</b>	50 <sup>1)</sup>
<b>Max. number of variables per second per Notifier Server</b>	1500 <sup>1)</sup>
<b>Max. number of connected smart devices per Notifier Server</b>	50 <sup>1)</sup>
<b>Minimum requirements for smartwatch OS</b>	Android Wear 2
<b>Minimum requirements for a Windows PC</b>	Windows 7 or 10 (64-bit), 4 GB RAM; Internet Explorer or Google Chrome
<b>Availability</b>	In countries as per OSD country list (Online Software Delivery)

<sup>1)</sup> Depending on the performance of the Windows PC used

### More information

More information is available at:

<http://www.siemens.com/simatic-notifier>

# HMI software

## SIMATIC WinCC OA

### Introduction

#### Overview

##### **SIMATIC WinCC OA**

The SCADA system SIMATIC WinCC Open Architecture addresses applications with a high demand for customer-specific adaptations, large and/or complex applications, as well as projects that demand special system requirements and functions.

SIMATIC WinCC OA stands for:

- Object orientation supports efficient engineering and flexible plant expansion
- Up to 2 048 servers for distributed systems
- Scalable – from small, single-user systems to networked, redundant high-end systems with more than 10 million PowerTags
- Can be used on any platform, and is available for Windows, Linux, iOS and Android
- Hot-standby redundancy and disaster recovery system assure maximum fail-safety and availability
- Platform for customized solutions
- Extensive driver and interfacing options:  
S7, S7 PLUS, OPC, OPC UA, Modbus, Rockwell EtherNet/IP, IEC 61850, IEC 60870-5-101/104, DNP3, XML, TCP/IP

Apart from the software, SIMATIC WinCC OA also offers a large spectrum of services and preconfigured additional functionalities, such as:

- Single server: products required for operation of a single-user system
- Server: Server Basic Package and expansions with PowerTags (I/Os)
- User interfaces: all available user interface licenses and engineering licenses for one server
- Driver: a wide range of additional connection options for one server
- Add-ons: functional expansions within a WinCC OA Server and additional functions based on the server
- IPC Packages: special offers for SIMATIC WinCC OA Servers, purchased together with a SIEMENS PC platform
- Development Packages: special offers for development environments and expansions
- Solution Frameworks: pre-defined projects with pre-implemented functions such as extended maintenance applications, tree views of a plant or simulation options with SIMATIC WinCC OA
- Trade goods: commodities for SIMATIC WinCC OA

#### SIMATIC WinCC OA IOT Suite

The product spectrum of SIMATIC WinCC OA is extended towards IoT with the SIMATIC WinCC OA IOT Suite. This is based on the standard product SIMATIC WinCC OA and comprises two components:

- IOT Box and IOT OPA

#### SIMATIC WinCC OA Services

SIMATIC WinCC OA offers a multitude of support such as consulting, solution portfolio or special implementations (e.g. driver extensions or creation of new ones), as well as hotline support. A large number of training courses is also offered for the multitude of WinCC OA possibilities. This offer is rounded out with travel expense flat rates to ensure the deployment of our employees on site.

#### **End User License Agreement**

The current End User License Agreement (EULA) can be found under: <http://www.etm.at/download/EULA.pdf>

#### Product warranty

During the 12-month warranty period, faults will be corrected at ETM's discretion either by a workaround, a patch or a new WinCC OA version. For resolved defects, the warranty is extended by max. 3 months for the corrected area in WinCC OA (starting from the availability of the patch correcting the fault). An upgrade to the latest WinCC OA version is not part of the product warranty!

#### **Definitions:**

- "Update" means a modification or expansion of the current software release, including additional functionalities
- "Upgrade" means replacing the current software version with the next higher version.

## Overview



### **SIMATIC WinCC Open Architecture**

SIMATIC WinCC Open Architecture is a SCADA system for visualizing and operating processes, production flows, machines and plants in all industrial sectors.

SIMATIC WinCC OA is built consistently on object-oriented structures. Due to this consistent and well-considered use of object-oriented structures, from process images to the database, the engineering costs improve for SIMATIC WinCC OA customers.

Distributed systems enable the connection of up to 2 048 autonomous SIMATIC WinCC Open Architecture systems via a single network. Each subsystem can be configured either as single-user or multi-user system, each of which may be redundant or non-redundant.

**Current version:** *SIMATIC WinCC Open Architecture V3.18*

New in Version 3.18:

- Dashboard
  - Web-based
  - Online configurations
  - Individually adapted widgets
- Archiving
  - PostgreSQL
  - MS SQL Server (later as version)
  - Parallel archiving
- Connectivity
  - SINUMERIK powerline
  - OMRON FINS
  - OPC UA improvements
- Other
  - Docker Support
  - New icon theme
  - Connectors & Auto-Routing

### Supported platforms:

- Windows 2019 Server
- Windows 2019 Server LTSC
- Windows 10 CB Version 20H2
- Windows 10 LTSC 2019
- Red Hat Enterprise Linux 8.2
- Oracle Linux
- SIEMENS Industrial OS 2.x
- Docker – Debian 10
- VMware ESXi 7
- vSphere HA Cluster

You can find the supported platforms for older versions in the of the WinCC OA Portal.

Note:

Native 64-bit support.

**3**

### **Software services**

Four types of software services are available. They are ordered for each WinCC OA software component.

Software service	Short description	Available service periods	Renewable
<b>POS</b>	Patch Only Service	1 year	Yes
<b>SUS</b>	Software Update Service	1 year	Yes
<b>SMS</b>	Software Maintenance Service	1 year	Yes
<b>UPG</b>	one Upgrade	n/a	No

# HMI software

## SIMATIC WinCC OA

### SIMATIC WinCC OA Software and Software Services

#### Technical specifications

Type	SIMATIC WinCC Open Architecture V3.18	Type	SIMATIC WinCC Open Architecture V3.18
<b>Operating system</b>	<ul style="list-style-type: none"> <li>Windows 10 CB Version 20H2 (64-bit)</li> <li>Windows 10 LTSC 2019 (64-bit)</li> <li>Windows 2019 Server (64-bit)</li> <li>Windows 2019 Server LTSC (64-bit)</li> <li>RedHat Enterprise</li> <li>Linux 8.2</li> <li>SIEMENS Industrial OS 2.2</li> <li>Docker - Debian 10</li> <li>VMware ESXi 7 (supports all systems mentioned above)</li> <li>vSphere HA Cluster <ul style="list-style-type: none"> <li>- ITC V3</li> </ul> </li> </ul>	<b>PC hardware requirements</b> <sup>1)</sup>	
<b>Mobile operating system</b>	<ul style="list-style-type: none"> <li>Android 6 and higher</li> <li>iOS 13 and higher</li> </ul>	<b>Processor type</b>	Intel Pentium or equivalent
<b>Supported browsers</b>	<ul style="list-style-type: none"> <li>Firefox: 78.5.0 ESR (64-bit)</li> <li>Chrome: Version 83.0 (64-bit)</li> <li>Microsoft EDGE (Chromium) 83.0 (64-bit)</li> </ul>	Minimum	Intel Pentium IV 1.6 GHz (or better) <sup>2)3)</sup>
<b>Supported databases</b>	<ul style="list-style-type: none"> <li>Oracle Client version: 19c</li> <li>Oracle Server version: 19c</li> <li>InfluxDBv1.8.3+</li> <li>PostgreSQL V13</li> </ul>	Recommended	<ul style="list-style-type: none"> <li>Client: Intel Pentium IV/Core2/i3, 2 GHz<sup>2)3)</sup></li> <li>Server: Intel Core i3 CPU Dual, 3 GHz<sup>2)</sup></li> <li>Server large system<sup>4)</sup>: Intel(R) Core(TM) i5/i7 CPU Dual / Quad, 3 GHz<sup>2)3)</sup></li> </ul>
		<b>Work memory RAM</b>	
		Minimum	2 GB <sup>2)</sup>
		Recommended	<ul style="list-style-type: none"> <li>Client: 2 GB<sup>2)3)</sup></li> <li>Server: 8 GB<sup>2)3)</sup></li> <li>Server large system: 16 GB<sup>2)</sup></li> </ul>
		<b>Hard disk (available memory for installation)</b>	
		Minimum	HD with 800 MB available <sup>2)</sup>
		Recommended	Server large system with local logging: SCSI LVD Controller, WIDE SCSI / LVD HDD or comparable storage system with at least 500 MB of available space <sup>2)</sup>
		<b>Screen and graphics card (TrueColor)</b>	
		Minimum	1024 x 768 <sup>2)</sup>
		Recommended	1280 x 1024 <sup>2)</sup>
		<b>Mouse and keyboard</b>	Mouse, keyboard
		<b>DVD drive</b>	Possible for software installation, also via web installation or USB flash drive
		<b>Local power user rights</b>	<ul style="list-style-type: none"> <li>For installation</li> <li>For operation</li> </ul>

<sup>1)</sup> For actual use in plants, the hardware requirements are largely dependent on the project size and the dynamic response of the process variables. Use the most rugged, high-quality hardware possible with corresponding functionalities such as redundant power supply units or RAID hard disks. WinCC OA supports dual and multi-processor mode and benefits significantly from the fact that each WinCC OA Manager can be assigned to one processor core as a system process. At the same time, however, it is important that the individual cores offer the highest possible performance (high clocking), since load-critical core processes such as the event manager run on exactly one core (for this reason, multi-core machines with many low-clocked cores are unsuitable for WinCC OA). As for RAM, CPU and HDD, the usual rule applies: more is better.

<sup>2)</sup> System requirements generally only refer to the latest WinCC OA Version under the supported versions of the Windows and Linux operating systems.

<sup>3)</sup> A precondition for the minimum requirement is that the operating system used does not have any greater requirements itself.

<sup>4)</sup> With a large system it is essential that the system permits not only the highest data point numbers but also a high dynamic response.

WinCC OA is ideally suited for use in very large distributed systems. The optimum design of such systems demands corresponding system knowledge of WinCC OA. Due to the event-oriented processing, individual design parameters can be increased or reduced as necessary in actual applications.

## Technical specifications

Type	SIMATIC WinCC Open Architecture
<b>Functionality/quantity structure</b>	
Number of messages	150 000 <sup>2)</sup>
Message text (number of characters)	System-limited <sup>1)</sup>
Message archive	System-limited <sup>1)</sup>
Process values per message	1 process value + up to 32 alarm associated values per message
Constant load of messages, max.	500/s <sup>2)</sup>
Message burst, max.	15 000/10 s every 5 min <sup>2)</sup>
<b>Archives</b>	
Archive data points	Max. 250 000 per server <sup>2)</sup>
Archive types	< 20 parallel archives, different retention period for each archive
Data storage format	Oracle or file system
Measured values per second, max.	Server/single-user station: 7 000/s <sup>2) 3)</sup>
<b>User archive</b>	
Archive	System-limited <sup>1)</sup>
Type	SIMATIC WinCC Open Architecture
Table size	System-limited by ORACLE database
<b>Graphics system</b>	
Number of screens	System-limited <sup>1)</sup>
Number of objects per screen	System-limited <sup>1)</sup>
Number of controllable fields per screen	System-limited <sup>1)</sup>
Process tags	< 750 000 per server <sup>2)</sup>
<b>User administration</b>	
User accounts	< 4096
Configuration languages	3 (en, de, ru)
Runtime languages	40 (of which 8 Asian)
<b>Multi-user system</b>	
Server	< 2 048 <sup>2) 4)</sup>
Number of clients	< 244 per server <sup>2) 5)</sup>

<sup>1)</sup> Dependent on the available storage space

<sup>2)</sup> Dependent on the system configuration and the system load (due to the event-oriented architecture, the system load is essentially determined by the change rates of the values to be processed)

<sup>3)</sup> By means of high-performance hardware configuration (one archiving cluster and approx. 120 distributed systems that archive parallel values in the cluster): 200 000 archived value changes per second

<sup>4)</sup> Physical limit: <2 048, in practice systems have already been implemented with up to 550 distributed systems

<sup>5)</sup> Physical limit: < 244 clients per server, recommended: Max. 100 clients per server

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Service

## WinCC OA Single Station

### Overview

A WinCC OA Single Station or Single Operator Station is a compact WinCC OA Server configuration which, in contrast to a regular WinCC OA Server license, cannot be extended by additional PowerTags or add-ons. Includes alarm messaging, extended trend, historical recording and SSL encryption.

### Design

#### PowerTags

The WinCC OA Single Station contains a maximum of 500 PowerTags with the **Bit** and **Integer** data point types. In contrast to Server Basic licenses, however, Single Station licenses **cannot** be extended with additional PowerTag Packages.

#### UIs

The Single Station license includes a Desktop UI license and a license for one WinCC OA OPERATOR Device.

More information on this can be found in the <User Interfaces> section.

#### Drivers

A Single Station license contains technical licenses for S7 and S7 Plus (8 connections) drivers, as well as one OPC and one OPC UA Client each. More information on drivers can be found in the <Drivers> section.

#### Add-ons

Single Stations include an OPC Server and a WinCC OA Web Server. More information on options can be found in the <Add-ons> section.

### WinCC OA Para Single Station

The single station can additionally be extended by a development and parameter assignment license.

The WinCC OA PARA Single Station license contains a graphical editor including symbol catalogs, a script development environment and a test framework.

An existing WinCC OA Single Station license is required for the purchase. When the PARA Single Station license is procured, the UI contained in the Single Station package can be used either for parameterization or for operator control and display functions, but not for both at the same time.

This special PARA license can only be ordered in conjunction with the Single Station package.

### Ordering data

### Article No.

*SIMATIC WinCC Open Architecture*

V3.18

#### WinCC OA - Single Station V3.18

License for single operator station with max. 500 PowerTags (bit, integer)

- Single Station
- Single Station UPG
- Single Station SUS
- Single Station SMS
- Single Station POS

**6AV6355-1AA31-8AA0**  
**6AV6355-1CA31-8AA0**  
**6AV6355-1DA00-0AA0**  
**6AV6355-1FA00-0AA0**  
**6AV6355-1GA00-0AA0**

*WinCC OA - Para Single Station V3.18*

Development and parameter assignment license for WinCC OA - Single Station

- Para Single Station
- Para Single Station UPG
- Para Single Station SUS
- Para Single Station SMS
- Para Single Station POS

**6AV6355-1AA31-8AA1**  
**6AV6355-1CA31-8AA1**  
**6AV6355-1DA00-0AA1**  
**6AV6355-1FA00-0AA1**  
**6AV6355-1GA00-0AA1**

V3.17

#### WinCC OA - Single Station V3.17

License for single operator station with max. 500 PowerTags (bit, integer)

- Single Station
- Single Station UPG
- Single Station SUS
- Single Station SMS
- Single Station POS

**6AV6355-1AA31-7AA0**  
**6AV6355-1CA31-7AA0**  
**6AV6355-1DA31-7AA0**  
**6AV6355-1FA31-7AA0**  
**6AV6355-1GA31-7AA0**

*WinCC OA - Para Single Station V3.17*

Development and parameter assignment license for WinCC OA - Single Station

- Para Single Station
- Para Single Station UPG
- Para Single Station SUS
- Para Single Station SMS
- Para Single Station POS

**6AV6355-1AA31-7AA1**  
**6AV6355-1CA31-7AA1**  
**6AV6355-1DA31-7AA1**  
**6AV6355-1FA31-7AA1**  
**6AV6355-1GA31-7AA1**

## Overview

### WinCC OA Server

A WinCC OA Server consists of a WinCC OA Server Basic license, the corresponding number of WinCC OA PowerTag licenses and additional options.

The WinCC OA Server Basic license contains:

- Alarm messaging
- Extended trend
- Historical recordings (NDB and NGA)
- S7 and S7 Plus (8 connections) drivers
- SSL encryption
- OPC Client
- OPC Server
- OPC UA Client
- 1 WinCC OA Web Server
- 1 WinCC OA OPERATOR (1 Device)

Other required options can be licensed in addition, unless the packages involved are not extendable.

The Server Basic License does **not** include an external data connection (PowerTags). These must be purchased for proper operation.

In contrast to previous versions, the new structure of the server licensing allows the distribution of PowerTag Packages.

This possibility enables additive ordering of several PowerTag packages on one server or separate ordering and moving of PowerTag packages to different servers by the customer.

PowerTags can also be gradually expanded using "PowerPacks".

### Design

**The WinCC OA Server Basic license** includes alarm messaging, extended trend, historical recording and SSL encryption.

Additional services are available as follows:

- UIs  
The WinCC OA Server Basic license includes **one** WinCC OA OPERATOR license; beyond this, no UIs are included and must be ordered separately. More information on this can be found in the <User Interfaces> section.
- Drivers  
A Server Basic license contains technical licenses for S7 and S7 Plus (8 connections) drivers, as well as one OPC and one OPC UA Client each. More information on drivers can be found in the <Drivers> section.
- Add-ons  
WinCC OA Server Basic includes a web server.

Options required in addition can also be licensed, if the basic license allows it.

More information on options can be found under <Add-ons>.

### PowerTag packages (PowerTags)

PowerTag packages are extensions of WinCC OA servers by a defined number of PowerTags.

In the context of WinCC OA, a PowerTag is a data point element (DPE), the content of which is exchanged either via drivers (e.g. S7 Driver communicates with a PLC), with other WinCC OA Servers (distributed systems) or with other software systems. Internal data point elements, i.e. DPEs without communication to the outside, are not counted for the licensing.

For a redundant server configuration, both WinCC OA Server licenses must be extended to the same number of PowerTags. A PowerTag extension can only be ordered within the same WinCC OA version. The packages on a server are counted cumulatively and can be extended at a later point in time.

A single PowerTag Package **cannot** be split between several servers due to the license.

### PowerPacks

PowerPacks are another possibility to increase the PowerTags of a WinCC OA Server. Purchasing a PowerPack, however, only increases the system to the next higher number of PowerTags.

In this way, systems that are too small can be extended quickly and economically.

Example: A server with a 10k PowerTag Package was purchased, but it turns out that 25k is needed.

The customer can then purchase a 10k/15k PowerPack and a 15k/25k PowerPack in addition.

For a redundant server configuration, both WinCC OA Server licenses must be extended to the same number of PowerTags. Therefore, both servers need the same PowerPack extensions.

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Server**

Ordering data	Article No.	Article No.
V3.18	<b>WinCC OA - Server Basic V3.18</b> License for WinCC OA Server without external data connection and UIs. <ul style="list-style-type: none"> <li>• Server Basic</li> <li>• Server Basic UPG</li> <li>• Server Basic SUS</li> <li>• Server Basic SMS</li> <li>• Server Basic POS</li> </ul> <b>WinCC OA - PowerTags V3.18</b> Extension of a WinCC OA Server license by a fixed number of PowerTags. <ul style="list-style-type: none"> <li>• 1k PowerTags</li> <li>• 1k PowerTags UPG</li> <li>• 1k PowerTags SUS</li> <li>• 1k PowerTags SMS</li> <li>• 1k PowerTags POS</li> <li>• 3k PowerTags</li> <li>• 3k PowerTags UPG</li> <li>• 3k PowerTags SUS</li> <li>• 3k PowerTags SMS</li> <li>• 3k PowerTags POS</li> <li>• 5k PowerTags</li> <li>• 5k PowerTags UPG</li> <li>• 5k PowerTags SUS</li> <li>• 5k PowerTags SMS</li> <li>• 5k PowerTags POS</li> <li>• 10k PowerTags</li> <li>• 10k PowerTags UPG</li> <li>• 10k PowerTags SUS</li> <li>• 10k PowerTags SMS</li> <li>• 10k PowerTags POS</li> <li>• 15k PowerTags</li> <li>• 15k PowerTags UPG</li> <li>• 15k PowerTags SUS</li> <li>• 15k PowerTags SMS</li> <li>• 15k PowerTags POS</li> <li>• 25k PowerTags</li> <li>• 25k PowerTags UPG</li> <li>• 25k PowerTags SUS</li> <li>• 25k PowerTags SMS</li> <li>• 25k PowerTags POS</li> </ul>	<b>WinCC OA - PowerTags V3.18</b> <ul style="list-style-type: none"> <li>• 50k PowerTags</li> <li>• 50k PowerTags UPG</li> <li>• 50k PowerTags SUS</li> <li>• 50k PowerTags SMS</li> <li>• 50k PowerTags POS</li> <li>• 75k PowerTags</li> <li>• 75k PowerTags UPG</li> <li>• 75k PowerTags SUS</li> <li>• 75k PowerTags SMS</li> <li>• 75k PowerTags POS</li> <li>• 100k PowerTags</li> <li>• 100k PowerTags UPG</li> <li>• 100k PowerTags SUS</li> <li>• 100k PowerTags SMS</li> <li>• 100k PowerTags POS</li> <li>• 150k PowerTags</li> <li>• 150k PowerTags UPG</li> <li>• 150k PowerTags SUS</li> <li>• 150k PowerTags SMS</li> <li>• 150k PowerTags POS</li> <li>• 200k PowerTags</li> <li>• 200k PowerTags UPG</li> <li>• 200k PowerTags SUS</li> <li>• 200k PowerTags SMS</li> <li>• 200k PowerTags POS</li> <li>• 250k PowerTags</li> <li>• 250k PowerTags UPG</li> <li>• 250k PowerTags SUS</li> <li>• 250k PowerTags SMS</li> <li>• 250k PowerTags POS</li> <li>• Unlimited PowerTags</li> <li>• Unlimited PowerTags UPG</li> <li>• Unlimited PowerTags SUS</li> <li>• Unlimited PowerTags SMS</li> <li>• Unlimited PowerTags POS</li> </ul>
		<b>6AV6355-1AA31-8BB6</b> <b>6AV6355-1CA31-8BB6</b> <b>6AV6355-1DA00-0BB6</b> <b>6AV6355-1FA00-0BB6</b> <b>6AV6355-1GA00-0BB6</b> <b>6AV6355-1AA31-8BB7</b> <b>6AV6355-1CA31-8BB7</b> <b>6AV6355-1DA00-0BB7</b> <b>6AV6355-1FA00-0BB7</b> <b>6AV6355-1GA00-0BB7</b> <b>6AV6355-1AA31-8BB8</b> <b>6AV6355-1CA31-8BB8</b> <b>6AV6355-1DA00-0BB8</b> <b>6AV6355-1FA00-0BB8</b> <b>6AV6355-1GA00-0BB8</b> <b>6AV6355-1AA31-8BC0</b> <b>6AV6355-1CA31-8BC0</b> <b>6AV6355-1DA00-0BC0</b> <b>6AV6355-1FA00-0BC0</b> <b>6AV6355-1GA00-0BC0</b> <b>6AV6355-1AA31-8BC1</b> <b>6AV6355-1CA31-8BC1</b> <b>6AV6355-1DA00-0BC1</b> <b>6AV6355-1FA00-0BC1</b> <b>6AV6355-1GA00-0BC1</b> <b>6AV6355-1AA31-8BC2</b> <b>6AV6355-1CA31-8BC2</b> <b>6AV6355-1DA00-0BC2</b> <b>6AV6355-1FA00-0BC2</b> <b>6AV6355-1GA00-0BC2</b> <b>6AV6355-1AA31-8BC3</b> <b>6AV6355-1CA31-8BC3</b> <b>6AV6355-1DA00-0BC3</b> <b>6AV6355-1FA00-0BC3</b> <b>6AV6355-1GA00-0BC3</b>

Ordering data	Article No.	Article No.
<b>WinCC OA - PowerPacks V3.18</b>	<p>Extension for step-by-step increase of PowerTags</p> <ul style="list-style-type: none"> <li>• 1k/3k PowerPack</li> <li>• 1k/3k PowerPack UPG</li> <li>• 1k/3k PowerPack SUS</li> <li>• 1k/3k PowerPack SMS</li> <li>• 1k/3k PowerPack POS</li> <li>• 3k/5k PowerPack</li> <li>• 3k/5k PowerPack UPG</li> <li>• 3k/5k PowerPack SUS</li> <li>• 3k/5k PowerPack SMS</li> <li>• 3k/5k PowerPack POS</li> <li>• 5k/10k PowerPack</li> <li>• 5k/10k PowerPack UPG</li> <li>• 5k/10k PowerPack SUS</li> <li>• 5k/10k PowerPack SMS</li> <li>• 5k/10k PowerPack POS</li> <li>• 10k/15k PowerPack</li> <li>• 10k/15k PowerPack UPG</li> <li>• 10k/15k PowerPack SUS</li> <li>• 10k/15k PowerPack SMS</li> <li>• 10k/15k PowerPack POS</li> <li>• 15k/25k PowerPack</li> <li>• 15k/25k PowerPack UPG</li> <li>• 15k/25k PowerPack SUS</li> <li>• 15k/25k PowerPack SMS</li> <li>• 15k/25k PowerPack POS</li> <li>• 25k/50k PowerPack</li> <li>• 25k/50k PowerPack UPG</li> <li>• 25k/50k PowerPack SUS</li> <li>• 50k/75k PowerPack SMS</li> <li>• 15k/25k PowerPack POS</li> <li>• 50k/75k PowerPack</li> <li>• 50k/75k PowerPack UPG</li> <li>• 50k/75k PowerPack SUS</li> <li>• 50k/75k PowerPack SMS</li> <li>• 50k/75k PowerPack POS</li> <li>• 75k/100k PowerPack</li> <li>• 75k/100k PowerPack UPG</li> <li>• 75k/100k PowerPack SUS</li> <li>• 75k/100k PowerPack SMS</li> <li>• 75k/100k PowerPack POS</li> <li>• 100k/150k PowerPack</li> <li>• 100k/150k PowerPack UPG</li> <li>• 100k/150k PowerPack SUS</li> <li>• 100k/150k PowerPack SMS</li> <li>• 100k/150k PowerPack POS</li> <li>• 150k/200k PowerPack</li> <li>• 150k/200k PowerPack UPG</li> <li>• 150k/200k PowerPack SUS</li> <li>• 150k/200k PowerPack SMS</li> <li>• 150k/200k PowerPack POS</li> <li>• 200k/250k PowerPack</li> <li>• 200k/250k PowerPack UPG</li> <li>• 200k/250k PowerPack SUS</li> <li>• 200k/250k PowerPack SMS</li> <li>• 250k/Unlimited PowerPack</li> <li>• 250k/Unlimited PowerPack UPG</li> <li>• 250k/Unlimited PowerPack SUS</li> <li>• 250k/Unlimited PowerPack SMS</li> <li>• 250k/Unlimited PowerPack POS</li> </ul>	<p><b>V3.17</b></p> <p><b>WinCC OA - Server Basic V3.17</b></p> <p>License for WinCC OA Server without external data connection and UIs.</p> <ul style="list-style-type: none"> <li>• Server Basic</li> <li>• Server Basic UPG</li> <li>• Server Basic SUS</li> <li>• Server Basic SMS</li> <li>• Server Basic POS</li> </ul> <p><b>WinCC OA - PowerTags V3.17</b></p> <p>Extension of a WinCC OA Server license by a fixed number of PowerTags.</p> <ul style="list-style-type: none"> <li>• 1k PowerTags</li> <li>• 1k PowerTags UPG</li> <li>• 1k PowerTags SUS</li> <li>• 1k PowerTags SMS</li> <li>• 1k PowerTags POS</li> <li>• 3k PowerTags</li> <li>• 3k PowerTags UPG</li> <li>• 3k PowerTags SUS</li> <li>• 3k PowerTags SMS</li> <li>• 3k PowerTags POS</li> <li>• 5k PowerTags</li> <li>• 5k PowerTags UPG</li> <li>• 5k PowerTags SUS</li> <li>• 5k PowerTags SMS</li> <li>• 5k PowerTags POS</li> <li>• 10k PowerTags</li> <li>• 10k PowerTags UPG</li> <li>• 10k PowerTags SUS</li> <li>• 10k PowerTags SMS</li> <li>• 10k PowerTags POS</li> <li>• 15k PowerTags</li> <li>• 15k PowerTags UPG</li> <li>• 15k PowerTags SUS</li> <li>• 15k PowerTags SMS</li> <li>• 15k PowerTags POS</li> <li>• 25k PowerTags</li> <li>• 25k PowerTags UPG</li> <li>• 25k PowerTags SUS</li> <li>• 25k PowerTags SMS</li> <li>• 25k PowerTags POS</li> <li>• 50k PowerTags</li> <li>• 50k PowerTags UPG</li> <li>• 50k PowerTags SUS</li> <li>• 50k PowerTags SMS</li> <li>• 50k PowerTags POS</li> <li>• 75k PowerTags</li> <li>• 75k PowerTags UPG</li> <li>• 75k PowerTags SUS</li> <li>• 75k PowerTags SMS</li> <li>• 75k PowerTags POS</li> <li>• 100k PowerTags</li> <li>• 100k PowerTags UPG</li> <li>• 100k PowerTags SUS</li> <li>• 100k PowerTags SMS</li> <li>• 100k PowerTags POS</li> <li>• 150k PowerTags</li> <li>• 150k PowerTags UPG</li> <li>• 150k PowerTags SUS</li> <li>• 150k PowerTags SMS</li> <li>• 150k PowerTags POS</li> <li>• 200k PowerTags</li> <li>• 200k PowerTags UPG</li> <li>• 200k PowerTags SUS</li> <li>• 200k PowerTags SMS</li> <li>• 200k PowerTags POS</li> <li>• 250k PowerTags</li> <li>• 250k PowerTags UPG</li> <li>• 250k PowerTags SUS</li> <li>• 250k PowerTags SMS</li> <li>• 250k PowerTags POS</li> </ul>

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Server**

Ordering data	Article No.	Article No.
<b>WinCC OA - PowerTags V3.17</b>	<ul style="list-style-type: none"> <li>• 200k PowerTags</li> <li>• 200k PowerTags UPG</li> <li>• 200k PowerTags SUS</li> <li>• 200k PowerTags SMS</li> <li>• 200k PowerTags POS</li> <li>• 250k PowerTags</li> <li>• 250k PowerTags UPG</li> <li>• 250k PowerTags SUS</li> <li>• 250k PowerTags SMS</li> <li>• 250k PowerTags POS</li> <li>• Unlimited PowerTags</li> <li>• Unlimited PowerTags UPG</li> <li>• Unlimited PowerTags SUS</li> <li>• Unlimited PowerTags SMS</li> <li>• Unlimited PowerTags POS</li> </ul>	<b>WinCC OA - PowerPacks V3.17</b> <ul style="list-style-type: none"> <li><b>6AV6355-1AA31-7BC1</b></li> <li><b>6AV6355-1CA31-7BC1</b></li> <li><b>6AV6355-1DA31-7BC1</b></li> <li><b>6AV6355-1FA31-7BC1</b></li> <li><b>6AV6355-1GA31-7BC1</b></li> <li><b>6AV6355-1AA31-7BC2</b></li> <li><b>6AV6355-1CA31-7BC2</b></li> <li><b>6AV6355-1DA31-7BC2</b></li> <li><b>6AV6355-1FA31-7BC2</b></li> <li><b>6AV6355-1GA31-7BC2</b></li> <li><b>6AV6355-1AA31-7BC3</b></li> <li><b>6AV6355-1CA31-7BC3</b></li> <li><b>6AV6355-1DA31-7BC3</b></li> <li><b>6AV6355-1FA31-7BC3</b></li> <li><b>6AV6355-1GA31-7BC3</b></li> </ul>
<b>WinCC OA - PowerPacks V3.17</b>	<p>Extension for step-by-step increase of PowerTags</p> <ul style="list-style-type: none"> <li>• 1k/3k PowerPack</li> <li>• 1k/3k PowerPack UPG</li> <li>• 1k/3k PowerPack SUS</li> <li>• 1k/3k PowerPack SMS</li> <li>• 1k/3k PowerPack POS</li> <li>• 3k/5k PowerPack</li> <li>• 3k/5k PowerPack UPG</li> <li>• 3k/5k PowerPack SUS</li> <li>• 3k/5k PowerPack SMS</li> <li>• 3k/5k PowerPack POS</li> <li>• 5k/10k PowerPack</li> <li>• 5k/10k PowerPack UPG</li> <li>• 5k/10k PowerPack SUS</li> <li>• 5k/10k PowerPack SMS</li> <li>• 5k/10k PowerPack POS</li> <li>• 10k/15k PowerPack</li> <li>• 10k/15k PowerPack UPG</li> <li>• 10k/15k PowerPack SUS</li> <li>• 10k/15k PowerPack SMS</li> <li>• 10k/15k PowerPack POS</li> <li>• 15k/25k PowerPack</li> <li>• 15k/25k PowerPack UPG</li> <li>• 15k/25k PowerPack SUS</li> <li>• 15k/25k PowerPack SMS</li> <li>• 15k/25k PowerPack POS</li> <li>• 25k/50k PowerPack</li> <li>• 25k/50k PowerPack UPG</li> <li>• 25k/50k PowerPack SUS</li> <li>• 25k/50k PowerPack SMS</li> <li>• 25k/50k PowerPack POS</li> <li>• 50k/75k PowerPack</li> <li>• 50k/75k PowerPack UPG</li> <li>• 50k/75k PowerPack SUS</li> <li>• 50k/75k PowerPack SMS</li> <li>• 50k/75k PowerPack POS</li> <li>• 75k/100k PowerPack</li> <li>• 75k/100k PowerPack UPG</li> <li>• 75k/100k PowerPack SUS</li> <li>• 75k/100k PowerPack SMS</li> <li>• 75k/100k PowerPack POS</li> <li>• 100k/150k PowerPack</li> <li>• 100k/150k PowerPack UPG</li> <li>• 100k/150k PowerPack SUS</li> <li>• 100k/150k PowerPack SMS</li> <li>• 100k/150k PowerPack POS</li> </ul>	<b>WinCC OA - PowerPacks V3.17</b> <ul style="list-style-type: none"> <li><b>6AV6355-1AA31-7BE1</b></li> <li><b>6AV6355-1CA31-7BE1</b></li> <li><b>6AV6355-1DA31-7BE1</b></li> <li><b>6AV6355-1FA31-7BE1</b></li> <li><b>6AV6355-1GA31-7BE1</b></li> <li><b>6AV6355-1AA31-7BE2</b></li> <li><b>6AV6355-1CA31-7BE2</b></li> <li><b>6AV6355-1DA31-7BE2</b></li> <li><b>6AV6355-1FA31-7BE2</b></li> <li><b>6AV6355-1GA31-7BE2</b></li> <li><b>6AV6355-1AA31-7BE3</b></li> <li><b>6AV6355-1CA31-7BE3</b></li> <li><b>6AV6355-1DA31-7BE3</b></li> <li><b>6AV6355-1FA31-7BE3</b></li> <li><b>6AV6355-1GA31-7BE3</b></li> </ul>

## Overview

### WinCC OA User Interfaces

User interfaces (UIs) form the interface between software and user.

WinCC Open Architecture offers a variety of such interfaces: On the one hand for creating panel files, logic operations, libraries and much more in the form of a graphical editor (GED), for data point configurations and value management on the other hand (PARA).

The internal, general module (Vision) offers a simple possibility for user interfaces at operator stations (operator stations, workstation stations). The user interface serves to display values, issue commands or track alarms in the alarm list. Trends and reports are also usually part of the UI. From a programming viewpoint, the user interaction in WinCC OA is completely isolated from the background processing – it is merely a view of the data of the current process image or the history.

UIs on a server are counted cumulatively and can be extended at a later point in time by purchasing additional UI licenses.

UI packages cannot be split between several servers due to license restrictions.

### Design

#### Desktop UI

Operator station license for extending an existing WinCC OA Server license. Simultaneous connections from active desktop UIs are counted. Packages are counted cumulatively.

#### Dashboard (V3.18)

Licenses for extending an existing WinCC OA Server license by a web-based dashboard display. Simultaneous connections from active dashboards are counted. Packages are counted cumulatively. Available in standard or REDU version, as well as Mobile Dashboard version optimized for mobile devices.

#### UltraLightClient User eXperience (ULC UX)

Licenses for UltraLightClient User eXperience web clients to extend an existing WinCC OA Server license. Simultaneous connections from active ULC UX clients are counted. Supports a subset of the Desktop UI functionality. Packages are counted cumulatively. Available in standard or REDU version.

#### Mobile UI

License for WinCC OA Mobile App for iOS or Android, to extend an existing WinCC OA Server license. The supported Android and iOS versions can be found in the respective App Store. Simultaneous connections from active mobile apps are counted. Packages are counted cumulatively. Available in standard or REDU version.

#### Operator APP (only for WinCC OA versions < V3.18 available!)

License for connecting an Operator app (for iOS) to a WinCC OA Server. SSL secured connection. Measured values and alarms can be queried, commands and acknowledgments can be sent. Configuration is performed in WinCC OA via a wizard. Each device must be assigned a license on the server. The Operator app can be obtained free of charge from the App Store.

#### Para

Development and parameter assignment license for WinCC OA Server with graphical editor (incl. symbol catalogs), script development environment and test framework. Requires WinCC OA Server Basic license. The parameterization package does not occupy an existing UI license in the server configuration. Parameterization during runtime is possible.

Available in standard, REDU or remote version.

#### REDU

Desktop UI, ULC UX, Mobile UI, Dashboards and Para have a REDU option in addition to the standard version. When creating a redundant system, the REDU option (x2) must be obtained for the desired UIs. More detailed information can be found under "Redundancy" in the "Add-ons" section.

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA User Interfaces**

Ordering data	Article No.	Article No.
V3.18	<b>WinCC OA – Desktop UI V3.18</b> Operator station licenses for extending a WinCC OA Server. <ul style="list-style-type: none"> <li>• 1 Desktop UI <b>6AV6355-1AA31-8CA0</b></li> <li>• 1 Desktop UI UPG <b>6AV6355-1CA31-8CA0</b></li> <li>• 1 Desktop UI SUS <b>6AV6355-1DA00-0CA0</b></li> <li>• 1 Desktop UI SMS <b>6AV6355-1FA00-0CA0</b></li> <li>• 1 Desktop UI POS <b>6AV6355-1GA00-0CA0</b></li> <li>• 10 Desktop UI <b>6AV6355-1AA31-8CA1</b></li> <li>• 10 Desktop UI UPG <b>6AV6355-1CA31-8CA1</b></li> <li>• 10 Desktop UI SUS <b>6AV6355-1DA00-0CA1</b></li> <li>• 10 Desktop UI SMS <b>6AV6355-1FA00-0CA1</b></li> <li>• 10 Desktop UI POS <b>6AV6355-1GA00-0CA1</b></li> <li>• 25 Desktop UI <b>6AV6355-1AA31-8CA2</b></li> <li>• 25 Desktop UI UPG <b>6AV6355-1CA31-8CA2</b></li> <li>• 25 Desktop UI SUS <b>6AV6355-1DA00-0CA2</b></li> <li>• 25 Desktop UI SMS <b>6AV6355-1FA00-0CA2</b></li> <li>• 25 Desktop UI POS <b>6AV6355-1GA00-0CA2</b></li> <li>• 50 Desktop UI <b>6AV6355-1AA31-8CA3</b></li> <li>• 50 Desktop UI UPG <b>6AV6355-1CA31-8CA3</b></li> <li>• 50 Desktop UI SUS <b>6AV6355-1DA00-0CA3</b></li> <li>• 50 Desktop UI SMS <b>6AV6355-1FA00-0CA3</b></li> <li>• 50 Desktop UI POS <b>6AV6355-1GA00-0CA3</b></li> <li>• 100 Desktop UI <b>6AV6355-1AA31-8CA4</b></li> <li>• 100 Desktop UI UPG <b>6AV6355-1CA31-8CA4</b></li> <li>• 100 Desktop UI SUS <b>6AV6355-1DA00-0CA4</b></li> <li>• 100 Desktop UI SMS <b>6AV6355-1FA00-0CA4</b></li> <li>• 100 Desktop UI POS <b>6AV6355-1GA00-0CA4</b></li> </ul>	<b>WinCC OA – Desktop UI REDU V3.18</b> Operator station licenses for extending a WinCC OA REDU Server. <ul style="list-style-type: none"> <li>• 1 Desktop UI REDU <b>6AV6355-1AA31-8CB0</b></li> <li>• 1 Desktop UI REDU UPG <b>6AV6355-1CA31-8CB0</b></li> <li>• 1 Desktop UI REDU SUS <b>6AV6355-1DA00-0CB0</b></li> <li>• 1 Desktop UI REDU SMS <b>6AV6355-1FA00-0CB0</b></li> <li>• 1 Desktop UI REDU POS <b>6AV6355-1GA00-0CB0</b></li> <li>• 10 Desktop UI REDU <b>6AV6355-1AA31-8CB1</b></li> <li>• 10 Desktop UI REDU UPG <b>6AV6355-1CA31-8CB1</b></li> <li>• 10 Desktop UI REDU SUS <b>6AV6355-1DA00-0CB1</b></li> <li>• 10 Desktop UI REDU SMS <b>6AV6355-1FA00-0CB1</b></li> <li>• 10 Desktop UI REDU POS <b>6AV6355-1GA00-0CB1</b></li> <li>• 25 Desktop UI REDU <b>6AV6355-1AA31-8CB2</b></li> <li>• 25 Desktop UI REDU UPG <b>6AV6355-1CA31-8CB2</b></li> <li>• 25 Desktop UI REDU SUS <b>6AV6355-1DA00-0CB2</b></li> <li>• 25 Desktop UI REDU SMS <b>6AV6355-1FA00-0CB2</b></li> <li>• 25 Desktop UI REDU POS <b>6AV6355-1GA00-0CB2</b></li> <li>• 50 Desktop UI REDU <b>6AV6355-1AA31-8CB3</b></li> <li>• 50 Desktop UI REDU UPG <b>6AV6355-1CA31-8CB3</b></li> <li>• 50 Desktop UI REDU SUS <b>6AV6355-1DA00-0CB3</b></li> <li>• 50 Desktop UI REDU SMS <b>6AV6355-1FA00-0CB3</b></li> <li>• 50 Desktop UI REDU POS <b>6AV6355-1GA00-0CB3</b></li> <li>• 100 Desktop UI REDU <b>6AV6355-1AA31-8CB4</b></li> <li>• 100 Desktop UI REDU UPG <b>6AV6355-1CA31-8CB4</b></li> <li>• 100 Desktop UI REDU SUS <b>6AV6355-1DA00-0CB4</b></li> <li>• 100 Desktop UI REDU SMS <b>6AV6355-1FA00-0CB4</b></li> <li>• 100 Desktop UI REDU POS <b>6AV6355-1GA00-0CB4</b></li> </ul>

Ordering data	Article No.	Article No.
<b>WinCC OA – ULC UX V3.18</b>  Licenses for UltraLightClient User eXperience web clients. <ul style="list-style-type: none"><li>• 1 ULC UX</li><li>• 1 ULC UX UPG</li><li>• 1 ULC UX SUS</li><li>• 1 ULC UX SMS</li><li>• 1 ULC UX POS</li><li>• 10 ULC UX</li><li>• 10 ULC UX UPG</li><li>• 10 ULC UX SUS</li><li>• 10 ULC UX SMS</li><li>• 10 ULC UX POS</li><li>• 25 ULC UX</li><li>• 25 ULC UX UPG</li><li>• 25 ULC UX SUS</li><li>• 25 ULC UX SMS</li><li>• 25 ULC UX POS</li><li>• 50 ULC UX</li><li>• 50 ULC UX UPG</li><li>• 50 ULC UX SUS</li><li>• 50 ULC UX SMS</li><li>• 50 ULC UX POS</li><li>• 100 ULC UX</li><li>• 100 ULC UX UPG</li><li>• 100 ULC UX SUS</li><li>• 100 ULC UX SMS</li><li>• 100 ULC UX POS</li></ul>	<b>6AV6355-1AA31-8CC0</b> <b>6AV6355-1CA31-8CC0</b> <b>6AV6355-1DA00-0CC0</b> <b>6AV6355-1FA00-0CC0</b> <b>6AV6355-1GA00-0CC0</b> <b>6AV6355-1AA31-8CC1</b> <b>6AV6355-1CA31-8CC1</b> <b>6AV6355-1DA00-0CC1</b> <b>6AV6355-1FA00-0CC1</b> <b>6AV6355-1GA00-0CC1</b> <b>6AV6355-1AA31-8CC2</b> <b>6AV6355-1CA31-8CC2</b> <b>6AV6355-1DA00-0CC2</b> <b>6AV6355-1FA00-0CC2</b> <b>6AV6355-1GA00-0CC2</b> <b>6AV6355-1AA31-8CC3</b> <b>6AV6355-1CA31-8CC3</b> <b>6AV6355-1DA00-0CC3</b> <b>6AV6355-1FA00-0CC3</b> <b>6AV6355-1GA00-0CC3</b> <b>6AV6355-1AA31-8CC4</b> <b>6AV6355-1CA31-8CC4</b> <b>6AV6355-1DA00-0CC4</b> <b>6AV6355-1FA00-0CC4</b> <b>6AV6355-1GA00-0CC4</b>	<b>6AV6355-1AA31-8CE0</b> <b>6AV6355-1CA31-8CE0</b> <b>6AV6355-1DA00-0CE0</b> <b>6AV6355-1FA00-0CE0</b> <b>6AV6355-1GA00-0CE0</b> <b>6AV6355-1AA31-8CE1</b> <b>6AV6355-1CA31-8CE1</b> <b>6AV6355-1DA00-0CE1</b> <b>6AV6355-1FA00-0CE1</b> <b>6AV6355-1GA00-0CE1</b> <b>6AV6355-1AA31-8CE2</b> <b>6AV6355-1CA31-8CE2</b> <b>6AV6355-1DA00-0CE2</b> <b>6AV6355-1FA00-0CE2</b> <b>6AV6355-1GA00-0CE2</b> <b>6AV6355-1AA31-8CE3</b> <b>6AV6355-1CA31-8CE3</b> <b>6AV6355-1DA00-0CE3</b> <b>6AV6355-1FA00-0CE3</b> <b>6AV6355-1GA00-0CE3</b> <b>6AV6355-1AA31-8CE4</b> <b>6AV6355-1CA31-8CE4</b> <b>6AV6355-1DA00-0CE4</b> <b>6AV6355-1FA00-0CE4</b> <b>6AV6355-1GA00-0CE4</b>
<b>WinCC OA - ULC UX REDU V3.18</b>  Licenses for UltraLightClient User eXperience web clients for REDU Server. <ul style="list-style-type: none"><li>• 1 ULC UX REDU</li><li>• 1 ULC UX REDU UPG</li><li>• 1 ULC UX REDU SUS</li><li>• 1 ULC UX REDU SMS</li><li>• 1 ULC UX REDU POS</li><li>• 10 ULC UX REDU</li><li>• 10 ULC UX REDU UPG</li><li>• 10 ULC UX REDU SUS</li><li>• 10 ULC UX REDU SMS</li><li>• 10 ULC UX REDU POS</li><li>• 25 ULC UX REDU</li><li>• 25 ULC UX REDU UPG</li><li>• 25 ULC UX REDU SUS</li><li>• 25 ULC UX REDU SMS</li><li>• 25 ULC UX REDU POS</li><li>• 50 ULC UX REDU</li><li>• 50 ULC UX REDU UPG</li><li>• 50 ULC UX REDU SUS</li><li>• 50 ULC UX REDU SMS</li><li>• 50 ULC UX REDU POS</li><li>• 100 ULC UX REDU</li><li>• 100 ULC UX REDU UPG</li><li>• 100 ULC UX REDU SUS</li><li>• 100 ULC UX REDU SMS</li><li>• 100 ULC UX REDU POS</li></ul>	<b>6AV6355-1AA31-8CD0</b> <b>6AV6355-1CA31-8CD0</b> <b>6AV6355-1DA00-0CD0</b> <b>6AV6355-1FA00-0CD0</b> <b>6AV6355-1GA00-0CD0</b> <b>6AV6355-1AA31-8CD1</b> <b>6AV6355-1CA31-8CD1</b> <b>6AV6355-1DA00-0CD1</b> <b>6AV6355-1FA00-0CD1</b> <b>6AV6355-1GA00-0CD1</b> <b>6AV6355-1AA31-8CD2</b> <b>6AV6355-1CA31-8CD2</b> <b>6AV6355-1DA00-0CD2</b> <b>6AV6355-1FA00-0CD2</b> <b>6AV6355-1GA00-0CD2</b> <b>6AV6355-1AA31-8CD3</b> <b>6AV6355-1CA31-8CD3</b> <b>6AV6355-1DA00-0CD3</b> <b>6AV6355-1FA00-0CD3</b> <b>6AV6355-1GA00-0CD3</b> <b>6AV6355-1AA31-8CD4</b> <b>6AV6355-1CA31-8CD4</b> <b>6AV6355-1DA00-0CD4</b> <b>6AV6355-1FA00-0CD4</b> <b>6AV6355-1GA00-0CD4</b>	<b>6AV6355-1AA31-8CF0</b> <b>6AV6355-1CA31-8CF0</b> <b>6AV6355-1DA00-0CF0</b> <b>6AV6355-1FA00-0CF0</b> <b>6AV6355-1GA00-0CF0</b> <b>6AV6355-1AA31-8CF1</b> <b>6AV6355-1CA31-8CF1</b> <b>6AV6355-1DA00-0CF1</b> <b>6AV6355-1FA00-0CF1</b> <b>6AV6355-1GA00-0CF1</b> <b>6AV6355-1AA31-8CF2</b> <b>6AV6355-1CA31-8CF2</b> <b>6AV6355-1DA00-0CF2</b> <b>6AV6355-1FA00-0CF2</b> <b>6AV6355-1GA00-0CF2</b> <b>6AV6355-1AA31-8CF3</b> <b>6AV6355-1CA31-8CF3</b> <b>6AV6355-1DA00-0CF3</b> <b>6AV6355-1FA00-0CF3</b> <b>6AV6355-1GA00-0CF3</b> <b>6AV6355-1AA31-8CF4</b> <b>6AV6355-1CA31-8CF4</b> <b>6AV6355-1DA00-0CF4</b> <b>6AV6355-1FA00-0CF4</b> <b>6AV6355-1GA00-0CF4</b>

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA User Interfaces

Ordering data	Article No.	Article No.
<b>WinCC OA - Para Standard V3.18</b>  Development and parameter assignment license for WinCC OA Server. <ul style="list-style-type: none"><li>• Para Standard</li><li>• Para Standard UPG</li><li>• Para Standard SUS</li><li>• Para Standard SMS</li><li>• Para Standard POS</li></ul>	<b>6AV6355-1AA31-8CH0</b> <b>6AV6355-1CA31-8CH0</b> <b>6AV6355-1DA00-0CH0</b> <b>6AV6355-1FA00-0CH0</b> <b>6AV6355-1GA00-0CH0</b>	<b>WinCC OA – Mobile Dashboard REDU V3.18</b>  Licenses for web-based dashboard display on redundant server, optimized for mobile devices: <ul style="list-style-type: none"><li>• 1 Mobile Dashboard REDU</li><li>• 1 Mobile Dashboard REDU UPG</li><li>• 1 Mobile Dashboard REDU SUS</li><li>• 1 Mobile Dashboard REDU SMS</li><li>• 1 Mobile Dashboard REDU POS</li><li>• 10 Mobile Dashboards REDU</li><li>• 10 Mobile Dashboards REDU UPG</li><li>• 10 Mobile Dashboards REDU SUS</li><li>• 10 Mobile Dashboards REDU SMS</li><li>• 10 Mobile Dashboards REDU POS</li><li>• 25 Mobile Dashboards REDU</li><li>• 25 Mobile Dashboards REDU UPG</li><li>• 25 Mobile Dashboards REDU SUS</li><li>• 25 Mobile Dashboards REDU SMS</li><li>• 25 Mobile Dashboards REDU POS</li><li>• 50 Mobile Dashboards REDU</li><li>• 50 Mobile Dashboards REDU UPG</li><li>• 50 Mobile Dashboards REDU SUS</li><li>• 50 Mobile Dashboards REDU SMS</li><li>• 50 Mobile Dashboards REDU POS</li><li>• 100 Mobile Dashboards REDU</li><li>• 100 Mobile Dashboards REDU UPG</li><li>• 100 Mobile Dashboards REDU SUS</li><li>• 100 Mobile Dashboards REDU SMS</li><li>• 100 Mobile Dashboards REDU POS</li></ul>
<b>WinCC OA - Para Standard REDU V3.18</b>  Development and parameter assignment license for WinCC OA REDU Server. <ul style="list-style-type: none"><li>• Para Standard REDU</li><li>• Para Standard REDU UPG</li><li>• Para Standard REDU SUS</li><li>• Para Standard REDU SMS</li><li>• Para Standard REDU POS</li></ul>	<b>6AV6355-1AA31-8CH1</b> <b>6AV6355-1CA31-8CH1</b> <b>6AV6355-1DA00-0CH1</b> <b>6AV6355-1FA00-0CH1</b> <b>6AV6355-1GA00-0CH1</b>	<b>6AV6355-1AA31-8CK0</b> <b>6AV6355-1CA31-8CK0</b> <b>6AV6355-1DA00-0CK0</b> <b>6AV6355-1FA00-0CK0</b> <b>6AV6355-1GA00-0CK0</b> <b>6AV6355-1AA31-8CK1</b> <b>6AV6355-1CA31-8CK1</b> <b>6AV6355-1DA00-0CK1</b> <b>6AV6355-1FA00-0CK1</b> <b>6AV6355-1GA00-0CK1</b> <b>6AV6355-1AA31-8CK2</b> <b>6AV6355-1CA31-8CK2</b> <b>6AV6355-1DA00-0CK2</b> <b>6AV6355-1FA00-0CK2</b>
<b>WinCC OA - Para Remote V3.18</b>  Remote development and parameter assignment license for WinCC OA Server. <ul style="list-style-type: none"><li>• Para Remote</li><li>• Para Remote UPG</li><li>• Para Remote SUS</li><li>• Para Remote SMS</li><li>• Para Remote POS</li></ul>	<b>6AV6355-1AA31-8CH2</b> <b>6AV6355-1CA31-8CH2</b> <b>6AV6355-1DA00-0CH2</b> <b>6AV6355-1FA00-0CH2</b> <b>6AV6355-1GA00-0CH2</b>	<b>6AV6355-1AA31-8CK3</b> <b>6AV6355-1CA31-8CK3</b> <b>6AV6355-1DA00-0CK3</b> <b>6AV6355-1FA00-0CK3</b> <b>6AV6355-1GA00-0CK3</b> <b>6AV6355-1AA31-8CK4</b> <b>6AV6355-1CA31-8CK4</b> <b>6AV6355-1DA00-0CK4</b> <b>6AV6355-1FA00-0CK4</b> <b>6AV6355-1GA00-0CK4</b>
<b>WinCC OA – Mobile Dashboard V3.18</b>  Licenses for native HTML5 dashboard display optimized for mobile devices. <ul style="list-style-type: none"><li>• 1 Mobile Dashboard</li><li>• 1 Mobile Dashboard UPG</li><li>• 1 Mobile Dashboard SUS</li><li>• 1 Mobile Dashboard SMS</li><li>• 1 Mobile Dashboard POS</li><li>• 10 Mobile Dashboards</li><li>• 10 Mobile Dashboards UPG</li><li>• 10 Mobile Dashboards SUS</li><li>• 10 Mobile Dashboards SMS</li><li>• 10 Mobile Dashboards POS</li><li>• 25 Mobile Dashboards</li><li>• 25 Mobile Dashboards UPG</li><li>• 25 Mobile Dashboards SUS</li><li>• 25 Mobile Dashboards SMS</li><li>• 25 Mobile Dashboards POS</li><li>• 50 Mobile Dashboards</li><li>• 50 Mobile Dashboards UPG</li><li>• 50 Mobile Dashboards SUS</li><li>• 50 Mobile Dashboards SMS</li><li>• 50 Mobile Dashboards POS</li><li>• 100 Mobile Dashboards</li><li>• 100 Mobile Dashboards UPG</li><li>• 100 Mobile Dashboards SUS</li><li>• 100 Mobile Dashboards SMS</li><li>• 100 Mobile Dashboards POS</li></ul>	<b>6AV6355-1AA31-8CJ0</b> <b>6AV6355-1CA31-8CJ0</b> <b>6AV6355-1DA00-0CJ0</b> <b>6AV6355-1FA00-0CJ0</b> <b>6AV6355-1GA00-0CJ0</b> <b>6AV6355-1AA31-8CJ1</b> <b>6AV6355-1CA31-8CJ1</b> <b>6AV6355-1DA00-0CJ1</b> <b>6AV6355-1FA00-0CJ1</b> <b>6AV6355-1GA00-0CJ1</b> <b>6AV6355-1AA31-8CJ2</b> <b>6AV6355-1CA31-8CJ2</b> <b>6AV6355-1DA00-0CJ2</b> <b>6AV6355-1FA00-0CJ2</b> <b>6AV6355-1GA00-0CJ2</b> <b>6AV6355-1AA31-8CJ3</b> <b>6AV6355-1CA31-8CJ3</b> <b>6AV6355-1DA00-0CJ3</b> <b>6AV6355-1FA00-0CJ3</b> <b>6AV6355-1GA00-0CJ3</b> <b>6AV6355-1AA31-8CJ4</b> <b>6AV6355-1CA31-8CJ4</b> <b>6AV6355-1DA00-0CJ4</b> <b>6AV6355-1FA00-0CJ4</b> <b>6AV6355-1GA00-0CJ4</b>	

Ordering data	Article No.	Article No.
<b>WinCC OA – Dashboard V3.18</b> Licenses for web-based dashboard display		<b>WinCC OA – Dashboard REDU V3.18</b> Licenses for web-based dashboard display on redundant server:

- 1 Dashboard **6AV6355-1AA31-8CL0**
- 1 Dashboard UPG **6AV6355-1CA31-8CL0**
- 1 Dashboard SUS **6AV6355-1DA00-0CL0**
- 1 Dashboard SMS **6AV6355-1FA00-0CL0**
- 1 Dashboard POS **6AV6355-1GA00-0CL0**
- 10 Dashboards **6AV6355-1AA31-8CL1**
- 10 Dashboards UPG **6AV6355-1CA31-8CL1**
- 10 Dashboards SUS **6AV6355-1DA00-0CL1**
- 10 Dashboards SMS **6AV6355-1FA00-0CL1**
- 10 Dashboards POS **6AV6355-1GA00-0CL1**
- 25 Dashboards **6AV6355-1AA31-8CL2**
- 25 Dashboards UPG **6AV6355-1CA31-8CL2**
- 25 Dashboards SUS **6AV6355-1DA00-0CL2**
- 25 Dashboards SMS **6AV6355-1FA00-0CL2**
- 25 Dashboards POS **6AV6355-1GA00-0CL2**
- 50 Dashboards **6AV6355-1AA31-8CL3**
- 50 Dashboards UPG **6AV6355-1CA31-8CL3**
- 50 Dashboards SUS **6AV6355-1DA00-0CL3**
- 50 Dashboards SMS **6AV6355-1FA00-0CL3**
- 50 Dashboards POS **6AV6355-1GA00-0CL3**
- 100 Dashboards **6AV6355-1AA31-8CL4**
- 100 Dashboards UPG **6AV6355-1CA31-8CL4**
- 100 Dashboards SUS **6AV6355-1DA00-0CL4**
- 100 Dashboards SMS **6AV6355-1FA00-0CL4**
- 100 Dashboards POS **6AV6355-1GA00-0CL4**

- 1 Dashboard REDU **6AV6355-1AA31-8CM0**
- 1 Dashboard REDU UPG **6AV6355-1CA31-8CM0**
- 1 Dashboard REDU SUS **6AV6355-1DA00-0CM0**
- 1 Dashboard REDU SMS **6AV6355-1FA00-0CM0**
- 1 Dashboard REDU POS **6AV6355-1GA00-0CM0**
- 10 Dashboards REDU **6AV6355-1AA31-8CM1**
- 10 Dashboards REDU UPG **6AV6355-1CA31-8CM1**
- 10 Dashboards REDU SUS **6AV6355-1DA00-0CM1**
- 10 Dashboards REDU SMS **6AV6355-1FA00-0CM1**
- 10 Dashboards REDU POS **6AV6355-1GA00-0CM1**
- 25 Dashboards REDU **6AV6355-1AA31-8CM2**
- 25 Dashboards REDU UPG **6AV6355-1CA31-8CM2**
- 25 Dashboards REDU SUS **6AV6355-1DA00-0CM2**
- 25 Dashboards REDU SMS **6AV6355-1FA00-0CM2**
- 25 Dashboards REDU POS **6AV6355-1GA00-0CM2**
- 50 Dashboards REDU **6AV6355-1AA31-8CM3**
- 50 Dashboards REDU UPG **6AV6355-1CA31-8CM3**
- 50 Dashboards REDU SUS **6AV6355-1DA00-0CM3**
- 50 Dashboards REDU SMS **6AV6355-1FA00-0CM3**
- 50 Dashboards REDU POS **6AV6355-1GA00-0CM3**
- 100 Dashboards REDU **6AV6355-1AA31-8CM4**
- 100 Dashboards REDU UPG **6AV6355-1CA31-8CM4**
- 100 Dashboards REDU SUS **6AV6355-1DA00-0CM4**
- 100 Dashboards REDU SMS **6AV6355-1FA00-0CM4**
- 100 Dashboards REDU POS **6AV6355-1GA00-0CM4**

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA User Interfaces

Ordering data	Article No.	Article No.
<p><b>V3.17</b></p> <p><b>WinCC OA – Desktop UI V3.17</b> Operator station licenses for extending a WinCC OA Server.</p> <ul style="list-style-type: none"> <li>• 1 Desktop UI</li> <li>• 1 Desktop UI UPG</li> <li>• 1 Desktop UI SUS</li> <li>• 1 Desktop UI SMS</li> <li>• 1 Desktop UI POS</li> <li>• 10 Desktop UI</li> <li>• 10 Desktop UI UPG</li> <li>• 10 Desktop UI SUS</li> <li>• 10 Desktop UI SMS</li> <li>• 10 Desktop UI POS</li> <li>• 25 Desktop UI</li> <li>• 25 Desktop UI UPG</li> <li>• 25 Desktop UI SUS</li> <li>• 25 Desktop UI SMS</li> <li>• 25 Desktop UI POS</li> <li>• 50 Desktop UI</li> <li>• 50 Desktop UI UPG</li> <li>• 50 Desktop UI SUS</li> <li>• 50 Desktop UI SMS</li> <li>• 50 Desktop UI POS</li> <li>• 100 Desktop UI</li> <li>• 100 Desktop UI UPG</li> <li>• 100 Desktop UI SUS</li> <li>• 100 Desktop UI SMS</li> <li>• 100 Desktop UI POS</li> </ul> <p><b>WinCC OA – Desktop UI REDU V3.17</b> Operator station licenses for extending a WinCC OA REDU Server.</p> <ul style="list-style-type: none"> <li>• 1 Desktop UI REDU</li> <li>• 1 Desktop UI REDU UPG</li> <li>• 1 Desktop UI REDU SUS</li> <li>• 1 Desktop UI REDU SMS</li> <li>• 1 Desktop UI REDU POS</li> <li>• 10 Desktop UI REDU</li> <li>• 10 Desktop UI REDU UPG</li> <li>• 10 Desktop UI REDU SUS</li> <li>• 10 Desktop UI REDU SMS</li> <li>• 10 Desktop UI REDU POS</li> <li>• 25 Desktop UI REDU</li> <li>• 25 Desktop UI REDU UPG</li> <li>• 25 Desktop UI REDU SUS</li> <li>• 25 Desktop UI REDU SMS</li> <li>• 25 Desktop UI REDU POS</li> <li>• 50 Desktop UI REDU</li> <li>• 50 Desktop UI REDU UPG</li> <li>• 50 Desktop UI REDU SUS</li> <li>• 50 Desktop UI REDU SMS</li> <li>• 50 Desktop UI REDU POS</li> <li>• 100 Desktop UI REDU</li> <li>• 100 Desktop UI REDU UPG</li> <li>• 100 Desktop UI REDU SUS</li> <li>• 100 Desktop UI REDU SMS</li> <li>• 100 Desktop UI REDU POS</li> </ul>	<p><b>WinCC OA – ULC UX V3.17</b> Licenses for UltraLightClient User eXperience web clients.</p> <ul style="list-style-type: none"> <li>• 1 ULC UX</li> <li>• 1 ULC UX UPG</li> <li>• 1 ULC UX SUS</li> <li>• 1 ULC UX SMS</li> <li>• 1 ULC UX POS</li> <li>• 10 ULC UX</li> <li>• 10 ULC UX UPG</li> <li>• 10 ULC UX SUS</li> <li>• 10 ULC UX SMS</li> <li>• 10 ULC UX POS</li> <li>• 25 ULC UX</li> <li>• 25 ULC UX UPG</li> <li>• 25 ULC UX SUS</li> <li>• 25 ULC UX SMS</li> <li>• 25 ULC UX POS</li> <li>• 50 ULC UX</li> <li>• 50 ULC UX UPG</li> <li>• 50 ULC UX SUS</li> <li>• 50 ULC UX SMS</li> <li>• 50 ULC UX POS</li> <li>• 100 ULC UX</li> <li>• 100 ULC UX UPG</li> <li>• 100 ULC UX SUS</li> <li>• 100 ULC UX SMS</li> <li>• 100 ULC UX POS</li> </ul> <p><b>WinCC OA – ULC UX REDU V3.17</b> Licenses for UltraLightClient User eXperience web clients for REDU Server.</p> <ul style="list-style-type: none"> <li>• 1 ULC UX REDU</li> <li>• 1 ULC UX REDU UPG</li> <li>• 1 ULC UX REDU SUS</li> <li>• 1 ULC UX REDU SMS</li> <li>• 1 ULC UX REDU POS</li> <li>• 10 ULC UX REDU</li> <li>• 10 ULC UX REDU UPG</li> <li>• 10 ULC UX REDU SUS</li> <li>• 10 ULC UX REDU SMS</li> <li>• 10 ULC UX REDU POS</li> <li>• 25 ULC UX REDU</li> <li>• 25 ULC UX REDU UPG</li> <li>• 25 ULC UX REDU SUS</li> <li>• 25 ULC UX REDU SMS</li> <li>• 25 ULC UX REDU POS</li> <li>• 50 ULC UX REDU</li> <li>• 50 ULC UX REDU UPG</li> <li>• 50 ULC UX REDU SUS</li> <li>• 50 ULC UX REDU SMS</li> <li>• 50 ULC UX REDU POS</li> <li>• 100 ULC UX REDU</li> <li>• 100 ULC UX REDU UPG</li> <li>• 100 ULC UX REDU SUS</li> <li>• 100 ULC UX REDU SMS</li> <li>• 100 ULC UX REDU POS</li> </ul>	<p><b>6AV6355-1AA31-7CC0</b> <b>6AV6355-1CA31-7CC0</b> <b>6AV6355-1DA31-7CC0</b> <b>6AV6355-1FA31-7CC0</b> <b>6AV6355-1AA31-7CC1</b> <b>6AV6355-1CA31-7CC1</b> <b>6AV6355-1DA31-7CC1</b> <b>6AV6355-1FA31-7CC1</b> <b>6AV6355-1AA31-7CC2</b> <b>6AV6355-1CA31-7CC2</b> <b>6AV6355-1DA31-7CC2</b> <b>6AV6355-1FA31-7CC2</b> <b>6AV6355-1AA31-7CC3</b> <b>6AV6355-1CA31-7CC3</b> <b>6AV6355-1DA31-7CC3</b> <b>6AV6355-1FA31-7CC3</b> <b>6AV6355-1AA31-7CC4</b> <b>6AV6355-1CA31-7CC4</b> <b>6AV6355-1DA31-7CC4</b> <b>6AV6355-1FA31-7CC4</b> <b>6AV6355-1AA31-7CC4</b></p> <p><b>6AV6355-1AA31-7CD0</b> <b>6AV6355-1CA31-7CD0</b> <b>6AV6355-1DA31-7CD0</b> <b>6AV6355-1FA31-7CD0</b> <b>6AV6355-1AA31-7CD1</b> <b>6AV6355-1CA31-7CD1</b> <b>6AV6355-1DA31-7CD1</b> <b>6AV6355-1FA31-7CD1</b> <b>6AV6355-1AA31-7CD2</b> <b>6AV6355-1CA31-7CD2</b> <b>6AV6355-1DA31-7CD2</b> <b>6AV6355-1FA31-7CD2</b> <b>6AV6355-1AA31-7CD3</b> <b>6AV6355-1CA31-7CD3</b> <b>6AV6355-1DA31-7CD3</b> <b>6AV6355-1FA31-7CD3</b> <b>6AV6355-1AA31-7CD4</b> <b>6AV6355-1CA31-7CD4</b> <b>6AV6355-1DA31-7CD4</b> <b>6AV6355-1FA31-7CD4</b></p>

Ordering data	Article No.	Article No.
<b>WinCC OA - Mobile V3.17</b>  Licenses for WinCC OA Mobile App for iOS or Android. <ul style="list-style-type: none"><li>• 1 Mobile</li><li>• 1 Mobile UPG</li><li>• 1 Mobile SUS</li><li>• 1 Mobile SMS</li><li>• 1 Mobile POS</li><li>• 10 Mobiles</li><li>• 10 Mobiles UPG</li><li>• 10 Mobiles SUS</li><li>• 10 Mobiles SMS</li><li>• 10 Mobiles POS</li><li>• 25 Mobiles</li><li>• 25 Mobiles UPG</li><li>• 25 Mobiles SUS</li><li>• 25 Mobiles SMS</li><li>• 25 Mobiles POS</li><li>• 50 Mobiles</li><li>• 50 Mobiles UPG</li><li>• 50 Mobiles SUS</li><li>• 50 Mobiles SMS</li><li>• 50 Mobiles POS</li><li>• 100 Mobiles</li><li>• 100 Mobiles UPG</li><li>• 100 Mobiles SUS</li><li>• 100 Mobiles SMS</li><li>• 100 Mobiles POS</li></ul>	<b>6AV6355-1AA31-7CE0</b> <b>6AV6355-1CA31-7CE0</b> <b>6AV6355-1DA31-7CE0</b> <b>6AV6355-1FA31-7CE0</b> <b>6AV6355-1GA31-7CE0</b> <b>6AV6355-1AA31-7CE1</b> <b>6AV6355-1CA31-7CE1</b> <b>6AV6355-1DA31-7CE1</b> <b>6AV6355-1FA31-7CE1</b> <b>6AV6355-1GA31-7CE1</b> <b>6AV6355-1AA31-7CE2</b> <b>6AV6355-1CA31-7CE2</b> <b>6AV6355-1DA31-7CE2</b> <b>6AV6355-1FA31-7CE2</b> <b>6AV6355-1GA31-7CE2</b> <b>6AV6355-1AA31-7CE3</b> <b>6AV6355-1CA31-7CE3</b> <b>6AV6355-1DA31-7CE3</b> <b>6AV6355-1FA31-7CE3</b> <b>6AV6355-1GA31-7CE3</b> <b>6AV6355-1AA31-7CE4</b> <b>6AV6355-1CA31-7CE4</b> <b>6AV6355-1DA31-7CE4</b> <b>6AV6355-1FA31-7CE4</b> <b>6AV6355-1GA31-7CE4</b>	<b>6AV6355-1AA31-7CG0</b> <b>6AV6355-1CA31-7CG0</b> <b>6AV6355-1DA31-7CG0</b> <b>6AV6355-1FA31-7CG0</b> <b>6AV6355-1GA31-7CG0</b> <b>6AV6355-1AA31-7CG1</b> <b>6AV6355-1CA31-7CG1</b> <b>6AV6355-1DA31-7CG1</b> <b>6AV6355-1FA31-7CG1</b> <b>6AV6355-1GA31-7CG1</b> <b>6AV6355-1AA31-7CG2</b> <b>6AV6355-1CA31-7CG2</b> <b>6AV6355-1DA31-7CG2</b> <b>6AV6355-1FA31-7CG2</b> <b>6AV6355-1GA31-7CG2</b> <b>6AV6355-1AA31-7CG3</b> <b>6AV6355-1CA31-7CG3</b> <b>6AV6355-1DA31-7CG3</b> <b>6AV6355-1FA31-7CG3</b> <b>6AV6355-1GA31-7CG3</b> <b>6AV6355-1AA31-7CG4</b> <b>6AV6355-1CA31-7CG4</b> <b>6AV6355-1DA31-7CG4</b> <b>6AV6355-1FA31-7CG4</b> <b>6AV6355-1GA31-7CG4</b>
<b>WinCC OA - Mobile REDU V3.17</b>  Licenses for WinCC OA Mobile App for iOS or Android for REDU Server. <ul style="list-style-type: none"><li>• 1 Mobile REDU</li><li>• 1 Mobile REDU UPG</li><li>• 1 Mobile REDU SUS</li><li>• 1 Mobile REDU SMS</li><li>• 1 Mobile REDU POS</li><li>• 10 Mobiles REDU</li><li>• 10 Mobiles REDU UPG</li><li>• 10 Mobiles REDU SUS</li><li>• 10 Mobiles REDU SMS</li><li>• 10 Mobiles REDU POS</li><li>• 25 Mobiles REDU</li><li>• 25 Mobiles REDU UPG</li><li>• 25 Mobiles REDU SUS</li><li>• 25 Mobiles REDU SMS</li><li>• 25 Mobiles REDU POS</li><li>• 50 Mobiles REDU</li><li>• 50 Mobiles REDU UPG</li><li>• 50 Mobiles REDU SUS</li><li>• 50 Mobiles REDU SMS</li><li>• 50 Mobiles REDU POS</li><li>• 100 Mobiles REDU</li><li>• 100 Mobiles REDU UPG</li><li>• 100 Mobiles REDU SUS</li><li>• 100 Mobiles REDU SMS</li><li>• 100 Mobiles REDU POS</li></ul>	<b>6AV6355-1AA31-7CF0</b> <b>6AV6355-1CA31-7CF0</b> <b>6AV6355-1DA31-7CF0</b> <b>6AV6355-1FA31-7CF0</b> <b>6AV6355-1GA31-7CF0</b> <b>6AV6355-1AA31-7CF1</b> <b>6AV6355-1CA31-7CF1</b> <b>6AV6355-1DA31-7CF1</b> <b>6AV6355-1FA31-7CF1</b> <b>6AV6355-1GA31-7CF1</b> <b>6AV6355-1AA31-7CF2</b> <b>6AV6355-1CA31-7CF2</b> <b>6AV6355-1DA31-7CF2</b> <b>6AV6355-1FA31-7CF2</b> <b>6AV6355-1GA31-7CF2</b> <b>6AV6355-1AA31-7CF3</b> <b>6AV6355-1CA31-7CF3</b> <b>6AV6355-1DA31-7CF3</b> <b>6AV6355-1FA31-7CF3</b> <b>6AV6355-1GA31-7CF3</b> <b>6AV6355-1AA31-7CF4</b> <b>6AV6355-1CA31-7CF4</b> <b>6AV6355-1DA31-7CF4</b> <b>6AV6355-1FA31-7CF4</b> <b>6AV6355-1GA31-7CF4</b>	<b>6AV6355-1AA31-7CH0</b> <b>6AV6355-1CA31-7CH0</b> <b>6AV6355-1DA31-7CH0</b> <b>6AV6355-1FA31-7CH0</b> <b>6AV6355-1GA31-7CH0</b>
		<b>WinCC OA - Para Standard V3.17</b>  Development and parameter assignment license for WinCC OA Server. <ul style="list-style-type: none"><li>• Para Standard</li><li>• Para Standard UPG</li><li>• Para Standard SUS</li><li>• Para Standard SMS</li><li>• Para Standard POS</li></ul>
		<b>6AV6355-1AA31-7CH1</b> <b>6AV6355-1CA31-7CH1</b> <b>6AV6355-1DA31-7CH1</b> <b>6AV6355-1FA31-7CH1</b> <b>6AV6355-1GA31-7CH1</b>
		<b>WinCC OA - Para Standard REDU V3.17</b>  Development and parameter assignment license for WinCC OA REDU Server. <ul style="list-style-type: none"><li>• Para Standard REDU</li><li>• Para Standard REDU UPG</li><li>• Para Standard REDU SUS</li><li>• Para Standard REDU SMS</li><li>• Para Standard REDU POS</li></ul>
		<b>6AV6355-1AA31-7CH2</b> <b>6AV6355-1CA31-7CH2</b> <b>6AV6355-1DA31-7CH2</b> <b>6AV6355-1FA31-7CH2</b> <b>6AV6355-1GA31-7CH2</b>
		<b>WinCC OA - Para Remote V3.17</b>  Remote development and parameter assignment license for WinCC OA Server. <ul style="list-style-type: none"><li>• Para Remote</li><li>• Para Remote UPG</li><li>• Para Remote SUS</li><li>• Para Remote SMS</li><li>• Para Remote POS</li></ul>
		<b>6AV6355-1AA31-7CH3</b> <b>6AV6355-1CA31-7CH3</b> <b>6AV6355-1DA31-7CH3</b> <b>6AV6355-1FA31-7CH3</b> <b>6AV6355-1GA31-7CH3</b>

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA Drivers

### Overview

#### WinCC OA Drivers

In WinCC OA, drivers handle communication with the control and field level.

Since numerous and very different forms of communication are possible with the PLCs or telecontrol nodes, there are several different drivers that can be selected.

The PLC used or the associated communication bus determines which WinCC OA Driver is to be used.

The driver reads current states, measured or counted values from the field and, in the other direction, directs commands and setpoints to the lower-level PLCs.

### Function

Several different drivers can run simultaneously on one server in WinCC OA. Data transmission can be event-based or polled in scan cycles.

Pre-processing of data is included:

- Scaling/conversion in both directions
- Type transformations
- Smoothing (value, time, noise reduction, etc.)
- Optimized reading:  
"Poll on use mechanisms"
- With certain drivers, different polling groups and corresponding time-shifted polling times can be desynchronized (Sync on sec) for better load distribution on the managers.

Time stamping can be obtained from the I/O. Resolution up to 1 ms for value storage.

Regular retrieval and processing of values is based on driver-specific time periods.

Protocol	Description
<b>S7</b>	Includes drivers for unlimited connection of S7-3xx and S7-4xx PLCs. S7-12xx and S7-15xx PLCs can be connected for a limited time (8, 64 or 512 connections). Connection of Open Controller, PLC-Sim, symbolic addressing, all protection levels and browsing of TIA Portal projects and online browsing of S7-1xxx PLCs.
<b>PROFINET</b>	Driver for connecting automation devices that support this fieldbus. Requires a compatible PROFINET network adapter (e.g. CP1616) and enables consistent communication from the PLC to the SCADA system without protocol break.
<b>PROFIsafe</b>	Supports the safety-related PROFIsafe protocol. Requires a compatible PROFINET network adapter (e.g. CP1616). This license also includes the operation of PROFINET.
<b>BACnet</b>	BACnet provides an integrated BACnet-compliant online/offline engineering solution for building automation technology, including object library. Designed for heating, ventilation and air-conditioning, lighting control and safety technology. The BACnet license allows the use of the BACnet driver, diagnostics and the BACnet engineering environment. Possession of a WinCC OA Para license is a prerequisite. The engineering environment consists of BACnet object library (including faceplates), BACnet browser, EDE tool and EDE file interface.  BACnet objects are intended for dedicated use with the BACnet driver. They can be expanded additively or with the help of BACnetpacks, which work in the same way as the WinCC OA PowerPacks.  5000 BACnet objects are released by default.  Project-specific releases of more than 5000 BACnet objects require the following text in the release: "Errors must be reproducibly reported within the standard limits of BACnet objects."
<b>DNP3</b>	The DNP3 (Distributed Network Protocol 3) driver is an open, rugged and modern protocol with characteristics and strengths similar to the IEC driver. The transfer of any number of frames with different data types takes place between the WinCC OA System (Master) and the remote stations (Slave).
<b>IEC 60870 101, 104</b>	IEC drivers are standardized telecontrol drivers that can process proprietary frames. IEC stands for International Electrotechnical Commission, the international standardization committee for electrical engineering. • IEC 60870-5-104 for data exchange via TCP/IP • IEC 60870-5-101 for serial connection

**Overview**

<b>IEC 61850/61400</b>	IEC 61850 and IEC 61400 clients define an architecture that covers special needs in substation automation. As a driver for medium and high voltage technology, it defines a data model and the communication services for interaction with and between the elements of a substation, such as power supply units, circuit breakers, protective devices etc. A description language and a system configuration language (SCL) have been defined for technical purposes.  Consists of the IEC 61850 driver (client – according to IEC 61850 Standard Part 7 & Part 8 Edition 2 & IEC 61400-25) and the IEC 61850/61400 browser.	<b>Cerberus</b>  Cerberus/DMS7000 is a fire, intrusion and gas alarm system from Siemens. The Cerberus driver guarantees communication to and from the central fire alarm systems and building security facilities in the event of a fire, gas or intruder alarm.  Communication is realized via C-Bus (Cer-Ban) using the serial interface RS232 (MK 7022).  This option is not available for Linux.
<b>SAIA S-Bus</b>	The SAIA S-Bus driver is a serial driver that natively supports the SAIA S-Bus for connecting SAIA PCD control devices to WinCC OA projects.	<b>EIP (Ethernet/IP)</b>  Ethernet/IP is used for communication with several PLC generations and families from Rockwell Automation / Allen Bradley. The protocol is part of the application layer and is based on the standard TCP/IP network protocol.
<b>TLS</b>	The TLS standard (Technische Lieferbedingungen für Streckenstationen – Technical Delivery Conditions for Remote Stations) defines the use and setup of traffic control systems in Austria. The WinCC OA TLS gateway is designed for communication with TLS-compliant devices.  The gateway takes over the complete communication by providing the corresponding values according to the TLS standard or by reacting to their reception. The TLS gateway obtains its parameters via configuration files that define the operating mode and TLS terminals.	<b>Omron FINS</b>  Driver for connection to Omron external control.
<b>SSI</b>	The SSI (Synchronous Serial Interface) driver is used to connect SAT telecontrol systems. The data is exchanged via the LAN (Ethernet, IEEE 802.3); the frame formats used are the SSI formats defined by SAT. The SK 1703 telecontrol components with a suitable communication card (KE/ET) are supported.	<b>OPC UA Client</b>  OPC UA Client allows access to process data and alarms from an OPC UA Server, according to the OPC Foundation standard.
<b>Modbus</b>	Modbus TCP is based on the serial Modbus protocol (as part of IEC 61158), which was adapted for TCP/IP. The Modbus TCP driver can also be used for Modbus TCP or UNICOS.	<b>OPC Client</b>  OPC (OLE for Process Control) is the use of OLE/COM technology for process control systems. The WinCC OA OPC Client (DA, HDA & A&E) allows access to process data and alarms of an OPC Server, according to the specifications of the OPC Foundation.
<b>RK512</b>	Serial driver for coupling via the RK512 protocol to the internal memory area of a SIEMENS S5 controller.	<b>MQTT</b>  MQTT (Message Queuing Telemetry Transport) is a message protocol based on TCP/IP and is intended for communication in networks with limited bandwidth. An MQTT communication network consists of at least one server (broker) and several clients. A client can either publish data or subscribe to data.  Communication is therefore based on the publish/subscribe principle.  The MQTT license allows the coupling of a WinCC OA Server with a MQTT broker for simplified data exchange with other smart devices (sensors or actuators) or for simple cloud connection (AWS, Azure, etc.).
<b>SINAUT</b>	SINAUT (Siemens Network AUTomation) is a communication protocol for automated monitoring and control of remote process stations on the basis of SIMATIC S7. Communication takes place via TCP/IP.	<b>The MQTT Broker is not included in the license!</b>
<b>SNMP</b>	SNMP (Simple Network Management Protocol) is a protocol for monitoring network elements (servers, workstations, routers, switches, hubs, etc.) and their functions. It supports SNMP V1, V2 and V3.	<b>Customer Interfaces</b>  On request, additional interfaces can be provided against specification and corresponding product planning or developed by the customer.  A corresponding interface must be taken into account and ordered for the license configuration.

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA Drivers

Ordering data	Article No.	Article No.
<b>V3.18</b>		<b>WinCC OA – BACnet objects V3.18</b>
<b>WinCC OA - Driver S7 V3.18</b> Unlimited connection of S7-3x8x and S7-4xx, Limited connection of S7-12xx and S7-15xx (options for max 64, 512)	<ul style="list-style-type: none"> <li>• Driver S7 64</li> <li>• Driver S7 64 UPG</li> <li>• Driver S7 64 SUS</li> <li>• Driver S7 64 SMS</li> <li>• Driver S7 64 POS</li> <li>• Driver S7 512</li> <li>• Driver S7 512 UPG</li> <li>• Driver S7 512 SUS</li> <li>• Driver S7 512 SMS</li> <li>• Driver S7 512 POS</li> </ul>	Dedicated PowerTags for use with the BACnet driver. <ul style="list-style-type: none"> <li>• BACnet objects 200</li> <li>• BACnet objects 200 UPG</li> <li>• BACnet objects 200 SUS</li> <li>• BACnet objects 200 SMS</li> <li>• BACnet objects 200 POS</li> <li>• BACnet objects 500</li> <li>• BACnet objects 500 UPG</li> <li>• BACnet objects 500 SUS</li> <li>• BACnet objects 500 SMS</li> <li>• BACnet objects 500 POS</li> <li>• BACnet objects 1k</li> <li>• BACnet objects 1k UPG</li> <li>• BACnet objects 1k SUS</li> <li>• BACnet objects 1k SMS</li> <li>• BACnet objects 1k POS</li> <li>• BACnet objects 3k</li> <li>• BACnet objects 3k UPG</li> <li>• BACnet objects 3k SUS</li> <li>• BACnet objects 3k SMS</li> <li>• BACnet objects 3k POS</li> <li>• BACnet objects 5k</li> <li>• BACnet objects 5k UPG</li> <li>• BACnet objects 5k SUS</li> <li>• BACnet objects 5k SMS</li> <li>• BACnet objects 5k POS</li> </ul>
<b>WinCC OA - Driver PROFINet V3.18</b> Connection of PROFINET-compatible devices. Required PROFINET network adapter	<ul style="list-style-type: none"> <li>• Driver PROFINet</li> <li>• Driver PROFINet UPG</li> <li>• Driver PROFINet SUS</li> <li>• Driver PROFINet SMS</li> <li>• Driver PROFINet POS</li> </ul>	
<b>WinCC OA - Driver PROFIsafe V3.18</b> Safety-related PROFIsafe protocol. Required PROFINET network adapter. Includes operation of PROFINET.	<ul style="list-style-type: none"> <li>• Driver PROFIsafe</li> <li>• Driver PROFIsafe UPG</li> <li>• Driver PROFIsafe SUS</li> <li>• Driver PROFIsafe SMS</li> <li>• Driver PROFIsafe POS</li> </ul>	
<b>WinCC OA - BACnet V3.18</b> Use of BACnet drivers, diagnostics, BACnet engineering environment (BACnet object library (incl. faceplates), BACnet browser, EDE tool, EDE file interface)	<ul style="list-style-type: none"> <li>• BACnet</li> <li>• BACnet UPG</li> <li>• BACnet SUS</li> <li>• BACnet SMS</li> <li>• BACnet POS</li> </ul>	<b>WinCC OA - BACnetpacks V3.18</b> For the step-by-step increase of BACnet objects <ul style="list-style-type: none"> <li>• BACnetpack 200/500</li> <li>• BACnetpack 200/500 UPG</li> <li>• BACnetpack 200/500 SUS</li> <li>• BACnetpack 200/500 SMS</li> <li>• BACnetpack 200/500 POS</li> <li>• BACnetpack 500/1k</li> <li>• BACnetpack 500/1k UPG</li> <li>• BACnetpack 500/1k SUS</li> <li>• BACnetpack 500/1k SMS</li> <li>• BACnetpack 500/1k POS</li> <li>• BACnetpack 1k/3k</li> <li>• BACnetpack 1k/3k UPG</li> <li>• BACnetpack 1k/3k SUS</li> <li>• BACnetpack 1k/3k SMS</li> <li>• BACnetpack 1k/3k POS</li> <li>• BACnetpack 3k/5k</li> <li>• BACnetpack 3k/5k UPG</li> <li>• BACnetpack 3k/5k SUS</li> <li>• BACnetpack 3k/5k SMS</li> <li>• BACnetpack 3k/5k POS</li> </ul>

Ordering data	Article No.	Article No.
<b>WinCC OA - Driver DNP3 V3.18</b> Connection of WinCC OA Server with devices via DNP3 protocol. <ul style="list-style-type: none"><li>• Driver DNP3</li><li>• Driver DNP3 UPG</li><li>• Driver DNP3 SUS</li><li>• Driver DNP3 SMS</li><li>• Driver DNP3 POS</li></ul>	<b>6AV6355-1AA31-8DB2</b> <b>6AV6355-1CA31-8DB2</b> <b>6AV6355-1DA00-0DB2</b> <b>6AV6355-1FA00-0DB2</b> <b>6AV6355-1GA00-0DB2</b>	<b>WinCC OA - Driver SSI V3.18</b> Synchronous Serial Interface, driver for Ethernet communication via satellite telecontrol components. <ul style="list-style-type: none"><li>• Driver SSI</li><li>• Driver SSI UPG</li><li>• Driver SSI SUS</li><li>• Driver SSI SMS</li><li>• Driver SSI POS</li></ul>
<b>WinCC OA - Driver IEC 101 V3.18</b> Serial driver according to IEC 60870-5-101 <ul style="list-style-type: none"><li>• Driver IEC 101</li><li>• Driver IEC 101 UPG</li><li>• Driver IEC 101 SUS</li><li>• Driver IEC 101 SMS</li><li>• Driver IEC 101 POS</li></ul>	<b>6AV6355-1AA31-8DC0</b> <b>6AV6355-1CA31-8DC0</b> <b>6AV6355-1DA00-0DC0</b> <b>6AV6355-1FA00-0DC0</b> <b>6AV6355-1GA00-0DC0</b>	<b>WinCC OA - Driver Modbus V3.18</b> Driver for the Modbus TCP standard (as part of IEC 61158) <ul style="list-style-type: none"><li>• Driver Modbus</li><li>• Driver Modbus UPG</li><li>• Driver Modbus SUS</li><li>• Driver Modbus SMS</li><li>• Driver Modbus POS</li></ul>
<b>WinCC OA - Driver IEC 104 V3.18</b> TCP/IP drivers according to IEC 60870-5-104 <ul style="list-style-type: none"><li>• Driver IEC 104</li><li>• Driver IEC 104 UPG</li><li>• Driver IEC 104 SUS</li><li>• Driver IEC 104 SMS</li><li>• Driver IEC 104 POS</li></ul>	<b>6AV6355-1AA31-8DC1</b> <b>6AV6355-1CA31-8DC1</b> <b>6AV6355-1DA00-0DC1</b> <b>6AV6355-1FA00-0DC1</b> <b>6AV6355-1GA00-0DC1</b>	<b>WinCC OA - Driver RK512 V3.18</b> Serial driver for connecting to internal memory of SIEMENS S5 via RK512 protocol <ul style="list-style-type: none"><li>• Driver RK512</li><li>• Driver RK512 UPG</li><li>• Driver RK512 SUS</li><li>• Driver RK512 SMS</li><li>• Driver RK512 POS</li></ul>
<b>WinCC OA - Driver IEC 61850/61400 V3.18</b> Medium- and high-voltage technology drivers according to IEC 61850. Consists of IEC 61850 driver and IEC 61850/61400 browser <ul style="list-style-type: none"><li>• Driver IEC 61850/61400</li><li>• Driver IEC 61850/61400 UPG</li><li>• Driver IEC 61850/61400 SUS</li><li>• Driver IEC 61850/61400 SMS</li><li>• Driver IEC 61850/61400 POS</li></ul>	<b>6AV6355-1AA31-8DC2</b> <b>6AV6355-1CA31-8DC2</b> <b>6AV6355-1DA00-0DC2</b> <b>6AV6355-1FA00-0DC2</b> <b>6AV6355-1GA00-0DC2</b>	<b>WinCC OA - Driver SINAUT V3.18</b> Siemens Network AUTomation for connection via SINAUT protocol. <ul style="list-style-type: none"><li>• Driver SINAUT</li><li>• Driver SINAUT UPG</li><li>• Driver SINAUT SUS</li><li>• Driver SINAUT SMS</li><li>• Driver SINAUT POS</li></ul>
<b>WinCC OA - Driver SAIA-S-Bus V3.18</b> Serial driver for native SAIA S-Bus support <ul style="list-style-type: none"><li>• Driver SAIA S-Bus</li><li>• Driver SAIA S-Bus UPG</li><li>• Driver SAIA S-Bus SUS</li><li>• Driver SAIA S-Bus SMS</li><li>• Driver SAIA S-Bus POS</li></ul>	<b>6AV6355-1AA31-8DC3</b> <b>6AV6355-1CA31-8DC3</b> <b>6AV6355-1DA00-0DC3</b> <b>6AV6355-1FA00-0DC3</b> <b>6AV6355-1GA00-0DC3</b>	<b>WinCC OA - Driver SNMP V3.18</b> Simple Network Management Protocol driver for network monitoring. Supports SNMP up to version V3 <ul style="list-style-type: none"><li>• Driver SNMP</li><li>• Driver SNMP UPG</li><li>• Driver SNMP SUS</li><li>• Driver SNMP SMS</li><li>• Driver SNMP POS</li></ul>
<b>WinCC OA - Driver TLS V3.18</b> TLS gateway for setting up traffic control systems in Austria. <ul style="list-style-type: none"><li>• Driver TLS</li><li>• Driver TLS UPG</li><li>• Driver TLS SUS</li><li>• Driver TLS SMS</li><li>• Driver TLS POS</li></ul>	<b>6AV6355-1AA31-8DC4</b> <b>6AV6355-1CA31-8DC4</b> <b>6AV6355-1DA00-0DC4</b> <b>6AV6355-1FA00-0DC4</b> <b>6AV6355-1GA00-0DC4</b>	<b>WinCC OA - Driver Cerberus V3.18</b> For coupling with Siemens fire alarm system DMS7000/Cerberus. <ul style="list-style-type: none"><li>• Driver Cerberus</li><li>• Driver Cerberus UPG</li><li>• Driver Cerberus SUS</li><li>• Driver Cerberus SMS</li><li>• Driver Cerberus POS</li></ul>

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Drivers**

Ordering data	Article No.	Article No.
<b>WinCC OA - Driver EIP V3.18</b>	<p>Ethernet/IP driver for the connection of external PLCs (e.g. Allen Bradley, etc.)</p> <ul style="list-style-type: none"> <li>• Driver EIP</li> <li>• Driver EIP UPG</li> <li>• Driver EIP SUS</li> <li>• Driver EIP SMS</li> <li>• Driver EIP POS</li> </ul>	<p><b>V3.17</b></p> <p><b>WinCC OA - Driver S7 V3.17</b></p> <p>Unlimited connection of S7-3xx and S7-4xx, Limited connection of S7-12xx and S7-15xx (options for max 64, 512)</p> <ul style="list-style-type: none"> <li>• Driver S7 64</li> <li>• Driver S7 64 UPG</li> <li>• Driver S7 64 SUS</li> <li>• Driver S7 64 SMS</li> <li>• Driver S7 64 POS</li> <li>• Driver S7 512</li> <li>• Driver S7 512 UPG</li> <li>• Driver S7 512 SUS</li> <li>• Driver S7 512 SMS</li> <li>• Driver S7 512 POS</li> </ul>
<b>WinCC OA - Driver Omron FINS V3.18</b>	<p>Omron FINS driver for connection to Omron PLCs</p> <ul style="list-style-type: none"> <li>• Driver Omron FINS</li> <li>• Driver Omron FINS UPG</li> <li>• Driver Omron FINS SUS</li> <li>• Driver Omron FINS SMS</li> <li>• Driver Omron FINS POS</li> </ul>	<p><b>6AV6355-1AA31-8DJ0</b></p> <p><b>6AV6355-1CA31-8DJ0</b></p> <p><b>6AV6355-1DA00-0DJ0</b></p> <p><b>6AV6355-1FA00-0DJ0</b></p> <p><b>6AV6355-1GA00-0DJ0</b></p>
<b>WinCC OA - Driver MQTT Client V3.18</b>	<p>Coupling of WinCC OA Server with an MQTT Broker (not included)</p> <ul style="list-style-type: none"> <li>• Driver MQTT Client</li> <li>• Driver MQTT Client UPG</li> <li>• Driver MQTT Client SUS</li> <li>• Driver MQTT Client SMS</li> <li>• Driver MQTT Client POS</li> </ul>	<p><b>6AV6355-1AA31-8DK2</b></p> <p><b>6AV6355-1CA31-8DK2</b></p> <p><b>6AV6355-1DA00-0DK2</b></p> <p><b>6AV6355-1FA00-0DK2</b></p> <p><b>6AV6355-1GA00-0DK2</b></p>
<b>WinCC OA - Driver PROFINet V3.17</b>	<p>Connection of PROFINET-compatible devices. Required PROFINET network adapter</p> <ul style="list-style-type: none"> <li>• Driver PROFINet</li> <li>• Driver PROFINet UPG</li> <li>• Driver PROFINet SUS</li> <li>• Driver PROFINet SMS</li> <li>• Driver PROFINet POS</li> </ul>	<p><b>6AV6355-1AA31-7DA1</b></p> <p><b>6AV6355-1CA31-7DA1</b></p> <p><b>6AV6355-1DA31-7DA1</b></p> <p><b>6AV6355-1FA31-7DA1</b></p> <p><b>6AV6355-1GA31-7DA1</b></p>
<b>WinCC OA - Driver PROFIsafe V3.17</b>	<p>Safety-related PROFIsafe protocol. Required PROFINET network adapter. Includes operation of PROFINET.</p> <ul style="list-style-type: none"> <li>• Driver PROFISafe</li> <li>• Driver PROFISafe UPG</li> <li>• Driver PROFISafe SUS</li> <li>• Driver PROFISafe SMS</li> <li>• Driver PROFISafe POS</li> </ul>	<p><b>6AV6355-1AA31-7DA4</b></p> <p><b>6AV6355-1CA31-7DA4</b></p> <p><b>6AV6355-1DA31-7DA4</b></p> <p><b>6AV6355-1FA31-7DA4</b></p> <p><b>6AV6355-1GA31-7DA4</b></p>
<b>WinCC OA - BACnet V3.17</b>	<p>Use of BACnet drivers, diagnostics, BACnet engineering environment (BACnet object library (incl. faceplates), BACnet browser, EDE tool, EDE file interface)</p>	<p><b>6AV6355-1AA31-7EB0</b></p> <p><b>6AV6355-1CA31-7EB0</b></p> <p><b>6AV6355-1DA31-7EB0</b></p> <p><b>6AV6355-1FA31-7EB0</b></p> <p><b>6AV6355-1GA31-7EB0</b></p>

Ordering data	Article No.	Article No.
<b>WinCC OA – BACnet objects V3.17</b>		
• BACnet objects 200	<b>6AV6355-1AA31-7DL1</b>	
• BACnet objects 200 UPG	<b>6AV6355-1CA31-7DL1</b>	
• BACnet objects 200 SUS	<b>6AV6355-1DA31-7DL1</b>	
• BACnet objects 200 SMS	<b>6AV6355-1FA31-7DL1</b>	
• BACnet objects 200 POS	<b>6AV6355-1GA31-7DL1</b>	
• BACnet objects 500	<b>6AV6355-1AA31-7DL2</b>	
• BACnet objects 500 UPG	<b>6AV6355-1CA31-7DL2</b>	
• BACnet objects 500 SUS	<b>6AV6355-1DA31-7DL2</b>	
• BACnet objects 500 SMS	<b>6AV6355-1FA31-7DL2</b>	
• BACnet objects 500 POS	<b>6AV6355-1GA31-7DL2</b>	
• BACnet objects 1k	<b>6AV6355-1AA31-7DL3</b>	
• BACnet objects 1k UPG	<b>6AV6355-1CA31-7DL3</b>	
• BACnet objects 1k SUS	<b>6AV6355-1DA31-7DL3</b>	
• BACnet objects 1k SMS	<b>6AV6355-1FA31-7DL3</b>	
• BACnet objects 1k POS	<b>6AV6355-1GA31-7DL3</b>	
• BACnet objects 3k	<b>6AV6355-1AA31-7DL4</b>	
• BACnet objects 3k UPG	<b>6AV6355-1CA31-7DL4</b>	
• BACnet objects 3k SUS	<b>6AV6355-1DA31-7DL4</b>	
• BACnet objects 3k SMS	<b>6AV6355-1FA31-7DL4</b>	
• BACnet objects 3k POS	<b>6AV6355-1GA31-7DL4</b>	
• BACnet objects 5k	<b>6AV6355-1AA31-7DL5</b>	
• BACnet objects 5k UPG	<b>6AV6355-1CA31-7DL5</b>	
• BACnet objects 5k SUS	<b>6AV6355-1DA31-7DL5</b>	
• BACnet objects 5k SMS	<b>6AV6355-1FA31-7DL5</b>	
• BACnet objects 5k POS	<b>6AV6355-1GA31-7DL5</b>	
<b>WinCC OA - BACnetpacks V3.17</b>		
For the step-by-step increase of BACnet objects		
• BACnetpack 200/500	<b>6AV6355-1AA31-7DM0</b>	
• BACnetpack 200/500 UPG	<b>6AV6355-1CA31-7DM0</b>	
• BACnetpack 200/500 SUS	<b>6AV6355-1DA31-7DM0</b>	
• BACnetpack 200/500 SMS	<b>6AV6355-1FA31-7DM0</b>	
• BACnetpack 200/500 POS	<b>6AV6355-1GA31-7DM0</b>	
• BACnetpack 500/1k	<b>6AV6355-1AA31-7DM1</b>	
• BACnetpack 500/1k UPG	<b>6AV6355-1CA31-7DM1</b>	
• BACnetpack 500/1k SUS	<b>6AV6355-1DA31-7DM1</b>	
• BACnetpack 500/1k SMS	<b>6AV6355-1FA31-7DM1</b>	
• BACnetpack 500/1k POS	<b>6AV6355-1GA31-7DM1</b>	
• BACnetpack 1k/3k	<b>6AV6355-1AA31-7DM2</b>	
• BACnetpack 1k/3k UPG	<b>6AV6355-1CA31-7DM2</b>	
• BACnetpack 1k/3k SUS	<b>6AV6355-1DA31-7DM2</b>	
• BACnetpack 1k/3k SMS	<b>6AV6355-1FA31-7DM2</b>	
• BACnetpack 1k/3k POS	<b>6AV6355-1GA31-7DM2</b>	
• BACnetpack 3k/5k	<b>6AV6355-1AA31-7DM3</b>	
• BACnetpack 3k/5k UPG	<b>6AV6355-1CA31-7DM3</b>	
• BACnetpack 3k/5k SUS	<b>6AV6355-1DA31-7DM3</b>	
• BACnetpack 3k/5k SMS	<b>6AV6355-1FA31-7DM3</b>	
• BACnetpack 3k/5k POS	<b>6AV6355-1GA31-7DM3</b>	
<b>WinCC OA - Driver DNP3 V3.17</b>		
Connection of WinCC OA Server with devices via DNP3 protocol. (Options for max. 100, 1 000)		
• Driver DNP3 100	<b>6AV6355-1AA31-7DB0</b>	
• Driver DNP3 100 UPG	<b>6AV6355-1CA31-7DB0</b>	
• Driver DNP3 100 SUS	<b>6AV6355-1DA31-7DB0</b>	
• Driver DNP3 100 SMS	<b>6AV6355-1FA31-7DB0</b>	
• Driver DNP3 1000	<b>6AV6355-1AA31-7DB1</b>	
• Driver DNP3 1000 UPG	<b>6AV6355-1CA31-7DB1</b>	
• Driver DNP3 1000 SUS	<b>6AV6355-1DA31-7DB1</b>	
• Driver DNP3 1000 SMS	<b>6AV6355-1FA31-7DB1</b>	
• Driver DNP3 1000 POS	<b>6AV6355-1GA31-7DB1</b>	
<b>WinCC OA - Driver IEC 101 V3.17</b>		
Serial driver according to IEC 60870-5-101		
• Driver IEC 101	<b>6AV6355-1AA31-7DC0</b>	
• Driver IEC 101 UPG	<b>6AV6355-1CA31-7DC0</b>	
• Driver IEC 101 SUS	<b>6AV6355-1DA31-7DC0</b>	
• Driver IEC 101 SMS	<b>6AV6355-1FA31-7DC0</b>	
• Driver IEC 101 POS	<b>6AV6355-1GA31-7DC0</b>	
<b>WinCC OA - Driver IEC 104 V3.17</b>		
TCP/IP drivers according to IEC 60870-5-104		
• Driver IEC 104	<b>6AV6355-1AA31-7DC1</b>	
• Driver IEC 104 UPG	<b>6AV6355-1CA31-7DC1</b>	
• Driver IEC 104 SUS	<b>6AV6355-1DA31-7DC1</b>	
• Driver IEC 104 SMS	<b>6AV6355-1FA31-7DC1</b>	
• Driver IEC 104 POS	<b>6AV6355-1GA31-7DC1</b>	
<b>WinCC OA - Driver IEC 61850/61400 V3.17</b>		
Medium- and high-voltage technology drivers according to IEC 61850.		
Consists of IEC 61850 driver and IEC 61850/61400 browser		
• Driver IEC 61850/61400	<b>6AV6355-1AA31-7DC2</b>	
• Driver IEC 61850/61400 UPG	<b>6AV6355-1CA31-7DC2</b>	
• Driver IEC 61850/61400 SUS	<b>6AV6355-1DA31-7DC2</b>	
• Driver IEC 61850/61400 SMS	<b>6AV6355-1FA31-7DC2</b>	
• Driver IEC 61850/61400 POS	<b>6AV6355-1GA31-7DC2</b>	
<b>WinCC OA - Driver SAIA-S-Bus V3.17</b>		
Serial driver for native SAIA S-Bus support		
• Driver SAIA S-Bus	<b>6AV6355-1AA31-7DC3</b>	
• Driver SAIA S-Bus UPG	<b>6AV6355-1CA31-7DC3</b>	
• Driver SAIA S-Bus SUS	<b>6AV6355-1DA31-7DC3</b>	
• Driver SAIA S-Bus SMS	<b>6AV6355-1FA31-7DC3</b>	
• Driver SAIA S-Bus POS	<b>6AV6355-1GA31-7DC3</b>	

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Drivers**

Ordering data	Article No.	Article No.
<b>WinCC OA - Driver TLS V3.17</b>	<p>TLS gateway for setting up traffic control systems in Austria.</p> <ul style="list-style-type: none"> <li>• Driver TLS</li> <li>• Driver TLS UPG</li> <li>• Driver TLS SUS</li> <li>• Driver TLS SMS</li> <li>• Driver TLS POS</li> </ul>	<b>WinCC OA - Driver SNMP V3.17</b> <p>Simple Network Management Protocol driver for network monitoring.</p> <p>Supports SNMP up to version V3</p> <ul style="list-style-type: none"> <li>• Driver SNMP</li> <li>• Driver SNMP UPG</li> <li>• Driver SNMP SUS</li> <li>• Driver SNMP SMS</li> <li>• Driver SNMP POS</li> </ul>
<b>WinCC OA - Driver SSI V3.17</b>	<p>Synchronous Serial Interface, driver for Ethernet communication via satellite telecontrol components.</p> <ul style="list-style-type: none"> <li>• Driver SSI</li> <li>• Driver SSI UPG</li> <li>• Driver SSI SUS</li> <li>• Driver SSI SMS</li> <li>• Driver SSI POS</li> </ul>	<b>WinCC OA - Driver Cerberus V3.17</b>
<b>WinCC OA - Driver Modbus V3.17</b>	<p>Driver for the Modbus TCP standard (as part of IEC 61158)</p> <ul style="list-style-type: none"> <li>• Driver Modbus</li> <li>• Driver Modbus UPG</li> <li>• Driver Modbus SUS</li> <li>• Driver Modbus SMS</li> <li>• Driver Modbus POS</li> </ul>	<p>For coupling with Siemens fire alarm system DMS7000/Cerberus.</p> <ul style="list-style-type: none"> <li>• Driver Cerberus</li> <li>• Driver Cerberus UPG</li> <li>• Driver Cerberus SUS</li> <li>• Driver Cerberus SMS</li> <li>• Driver Cerberus POS</li> </ul>
<b>WinCC OA - Driver RK512 V3.17</b>	<p>Serial driver for connecting to internal memory of SIEMENS S5 via RK512 protocol</p> <ul style="list-style-type: none"> <li>• Driver RK512</li> <li>• Driver RK512 UPG</li> <li>• Driver RK512 SUS</li> <li>• Driver RK512 SMS</li> <li>• Driver RK512 POS</li> </ul>	<b>WinCC OA - Driver EIP V3.17</b> <p>Ethernet/IP driver for the connection of external PLCs (e.g. Allen Bradley, etc.)</p> <ul style="list-style-type: none"> <li>• Driver EIP</li> <li>• Driver EIP UPG</li> <li>• Driver EIP SUS</li> <li>• Driver EIP SMS</li> <li>• Driver EIP POS</li> </ul>
<b>WinCC OA - Driver SINAUT 50 V3.17</b>	<p>Siemens Network AUTomation for connection via SINAUT protocol. (Options for max. 50, 250)</p> <ul style="list-style-type: none"> <li>• Driver SINAUT 50</li> <li>• Driver SINAUT 50 UPG</li> <li>• Driver SINAUT 50 SUS</li> <li>• Driver SINAUT 50 SMS</li> <li>• Driver SINAUT 50 POS</li> <li>• Driver SINAUT 250</li> <li>• Driver SINAUT 250 UPG</li> <li>• Driver SINAUT 250 SUS</li> <li>• Driver SINAUT 250 SMS</li> <li>• Driver SINAUT 250 POS</li> </ul>	<b>WinCC OA - Driver MQTT Client V3.17</b> <p>Coupling of WinCC OA Server with an MQTT Broker (not included)</p> <ul style="list-style-type: none"> <li>• Driver MQTT Client</li> <li>• Driver MQTT Client UPG</li> <li>• Driver MQTT Client SUS</li> <li>• Driver MQTT Client SMS</li> <li>• Driver MQTT Client POS</li> </ul>

## Overview

The WinCC Open Architecture basic software forms the core for many modular extensions.

These functional extensions are available in the form of WinCC Open Architecture Add-ons.

- RDB, DB Logger, NGA, CommCenter, Custom Component, Dist System, Redundancy, Disaster Recovery System (DRS), Secure Map, Maintenance, OPC UA Server, MindSphere, Modbus Server, OPC Server, Recipe, Report, Scheduler, Web Server
- SmartSCADA
  - SmartSCADA Toolbox
  - SmartSCADA KPI Extension
  - SmartSCADA Analytics
- Video
  - Video Light
  - Video Basic
  - Video Display
  - Video Sources

## Function

Add-on	Task
<b>RDB</b>	Relational database Add-on for connecting an Oracle database to a WinCC OA Server. Oracle licenses are not included in this license, but must be ordered separately. Requires one license per server.
<b>DB Logger</b>	Database Logger Add-on allows the export of freely selectable data from WinCC OA to an external database. The DB Logger offers parallel options for data outsourcing to allow data to be analyzed by various evaluation tools. It does not replace the RDB or the Value Archive
<b>NGA Standard</b>	The NGA Standard license allows use of the Next Generation Archiver in projects with up to 150 000 PowerTags. It contains the option to connect a freely selectable backend and can be extended by additional backend connections.
<b>NGA Premium</b>	The NGA Premium license can be used for large projects of more than 150 000 PowerTags. The connection of backends is the same as with the standard license
<b>NGA connection</b>	Enables the connection of another freely selectable backend for the Next Generation Archiver.
<b>CommCenter</b>	Modern alarm management / remote alarm messaging and communication with current standards via various media. The Communication Center creates synergies by using the various interfaces for remote alerting via the control system. Remote alarm messaging takes place via SMS and e-mail. Price per WinCC OA Server. Packaging according to the number of alarms (25, 250, 2500, unlimited). Packages are counted cumulatively and can be extended at a later point in time. Notice: These packages <b>cannot</b> be split between servers!
<b>Custom Component</b>	The Custom Component option extends a WinCC OA Server license by integrating a customer-specific manager, driver, script or graphic extension. One license is required for each customer-specific component. In redundant systems, a license in the REDU version must be purchased for each server.
<b>Dist System</b>	Permits the coupling of two or more autonomous WinCC OA Systems via a network. Each subsystem of a distributed system can be configured either as a single-user or multi-user system, each of which may be redundant or non-redundant. Up to 2048 servers can be connected. See special calculation rule for the PowerTag number of servers.

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA Add-ons

### Function

<b>Redundancy</b>	The failure safety in a redundant system is implemented by means of hot standby. Hot standby is a hardware independent solution for high availability with bumpless switchover. This is a safety concept that consists of two interconnected server systems. Both servers are constantly in operation and are subject to the same functional loading (but only one server is ever active; the second synchronizes the data with the primary unit during runtime). On the failure of one unit, an "on-the-fly changeover" takes place and the previously passive server assumes the leading role. This guarantees access to data or functions at all times.  Both servers in a redundant system require a WinCC OA Redundancy license. Use of the license options designated by REDU is also possible only in redundant systems. License options for which there is no REDU version must be purchased twice for a redundant system.	<b>Modbus Server</b>	Modbus/TCP server allows Modbus/TCP clients to query data from a WinCC OA System and display it within the Modbus data model.
<b>Disaster Recovery System (DRS)</b>	Also known as 2x2 redundancy. Enables the operation of a remote Backup Control Center, whereby the WinCC OA redundancy concept is extended by a second hot standby system. This ensures that the functionality of the system is maintained on another system, even in the event of a complete failure or shutdown during, for example, maintenance of the first hot standby system.  Use of a central Oracle database and one WinCC OA RDB option per server are prerequisites for operating a DRS. Example configurations can be viewed in the online help. Each server in this constellation requires a separate WinCC OA DRS license.	<b>OPC Server</b>	OPC Foundation-compliant (legacy) server for WinCC OA allows OPC Clients to request data. Supported profiles: DA, HDA and A&E. Supported standard: "OPC 1.20" (mandatory functions). Not available under Linux.
<b>Secure</b>	Extension of a WinCC OA Server with extended protection via Kerberos-based authentication. It allows each WinCC OA component to verify the identity of another component. WinCC OA Servers can verify the identity of the clients and clients can verify the identity of the servers. Kerberos also ensures that messages are not modified during transmission (Capture Replay attacks are prevented) and makes it possible to encrypt messages.	<b>Recipe</b>	WinCC OA recipes allow setpoints or commands for certain data point elements to be sent simultaneously. Based on "recipe types", which define the quantity of the assigned data point elements, recipes are created that send their values to the data point elements upon activation. Add-on for creating recipe types and instances, transfer of current process values as recipe, activation/download to data points, import and export (MS Excel). License required for each server.
<b>Map</b>	Add-on for displaying state-of-the-art cartographic information in WinCC OA. Both Open Street Map as well as your own map material can be displayed. One license per UI is required. The maps can be used in WinCC OA Desktop UI and Ultralight UX. Map material is not included in the license. Can also be operated offline. WinCC OA objects can be displayed within the map material.  The map license also authorizes the use of the GIS Viewer.	<b>Report</b>	Web-based reporting is implemented using the standardized Simple Object Access Protocol (SOAP) reporting interface. Third-party reporting tools can thus be used without additional workload. The BIRT templates that are also provided, as well as the predefined reporting data, further simplify the reporting. <ul style="list-style-type: none"><li>• Web-capable reporting interface (SOAP):<ul style="list-style-type: none"><li>- ECLIPSE BIRT (large number of reporting templates for ECLIPSE BIRT are also supplied)</li><li>- Crystal Reports</li><li>- SIMATIC Information Server</li><li>- Microsoft Excel</li></ul></li><li>• Online values, history</li><li>• Support of compressed data, SQL, alarms</li><li>• Diagnostic tools</li><li>• Audit Trail</li></ul>
<b>Maintenance</b>	Add-on for basic maintenance management for recording operating hours, switching cycles, message handling and notepad function. One license for each WinCC OA Server is required for the application.		Reporting Clients can be purchased in the scale 1, 2, 5 or 10. Packages are counted cumulatively and can be extended at a later point in time. Notice: These packages <b>cannot</b> be split between servers!  In redundant systems, a license in the REDU version must be purchased for each server.
<b>OPC UA Server</b>	This OPC Foundation-compliant server for WinCC OA allows OPC UA Clients to query data. Supported standard: 'OPC UA Server 1.03' (mandatory functions).	<b>Scheduler</b>	Permits the creation, parameterization and management of time programs that allow the time and event-driven triggering of specific actions. Daily, weekly and monthly programs as well as individual non-periodic events can be created, taking into account holidays, priority assignment and override functions. One license for each WinCC OA Server is required for the application.
<b>MindSphere</b>	The MindSphere Connector enables native connection of a WinCC OA Server to MindSphere. The connection is guided by a wizard and the transmission and reading of data can be freely configured via scripting. This requires the operation of a valid MindSphere Tenant.	<b>Web Server</b>	This option enables administration of different connections between WinCC OA Servers and WinCC OA ULC UX clients. Load balancing can be activated starting with a count of >1. Multilevel architectures such as access to DMZ can be realized with remote web servers.
		<b>WebSocket connection</b>	Extends a WinCC OA Server license by a WebSocket connection.
		<b>Load Balancing</b>	This option enables load balancing of different connections between WinCC OA Servers and WinCC OA ULC UX clients. One license is required for each configured web server.

## Function

### SmartSCADA

The WinCC OA feature SmartSCADA is a tool for root cause analysis and plant optimization and can be used to support decision-making.

This makes it easy to identify areas with potential for increasing efficiency and achieving increases in system performance and availability. Wizards for key performance indicators (KPI), data mining and classification as well as an interface to statistics tool "R" make it easy to functionally integrate statistics into WinCC OA projects and perform all calculations directly in the SCADA system without programming. By training statistical models, system data can be examined and the models can be used in the system at runtime.

SmartSCADA license needs to be purchased twice for redundant servers.

Add-on	Task
<b>SmartSCADAToolbox</b>	SmartSCADA Toolbox enables creation of key performance indicator definitions and key performance indicator instances in the easy-to-use formula editor or freely in CONTROL. The devices are connected by means of a context-based search in the system model or in data points. The performance indicators can be calculated manually, event-driven or cyclically. Online engineering takes place in its own wizard (no Para license included). It includes 20 KPI instances.
<b>SmartSCADA KPI Extension</b>	SmartSCADA KPI Extension for SmartSCADA Toolbox, extends the toolbox by another 100 KPI instances.
<b>SmartSCADA Analytics</b>	SmartSCADA Analytics is a time-limited license for wizard-guided data analysis of historical data and teaching of statistical models for plant classification. Numerous evaluation tools are available through the integration of the "R" statistics toolbox. No para license included. Learned models can be calculated without this license. License expires after one year.

### Video

Enables the integration of a video management system in WinCC OA. Through the combination of SCADA and video monitoring in one system, the costs for separate video interfaces and the additional expense of maintenance and operation can be saved, and the period of training for operating personnel can also be reduced.

Add-on	Task
<b>Video Light</b>	The Video Light package allows the connection of 4 cameras/sources and an external video display. This package cannot be extended.
<b>Video Basic</b>	The Video Basic Package enables the native (via ONVIF) connection of cameras/sources to a WinCC OA System. All streams, recordings and playbacks are included. Video sources are counted per IP address and must be purchased separately. Linux and virtual machines are only supported to a limited extent.
<b>Video Display</b>	Extends the Video Basic system with an external display. A Video Display license is included in the Basic Package.
<b>Video Sources</b>	Extends the Video Basic system by a defined number of sources/cameras. Includes all streaming, recording and playback functions. Video sources are counted per IP address. Video Sources can be purchased in the packages of 1, 10, 25, 50, 100, 250 or 500, packages are counted cumulatively and can be extended at a later point in time. Notice: These packages <b>cannot</b> be split between servers!  In redundant systems, a license in the REDU version must be purchased for each server.

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Add-ons**

Ordering data	Article No.	Article No.
<b>V3.18</b>		
<b>WinCC OA - RDB V3.18</b>		
For connecting the Oracle database to WinCC OA Server (Oracle licenses not included).		
<ul style="list-style-type: none"> <li>• RDB</li> <li>• RDB UPG</li> <li>• RDB SUS</li> <li>• RDB SMS</li> <li>• RDB POS</li> </ul>	<b>6AV6355-1AA31-8EA0</b> <b>6AV6355-1CA31-8EA0</b> <b>6AV6355-1DA00-0EA0</b> <b>6AV6355-1FA00-0EA0</b> <b>6AV6355-1GA00-0EA0</b>	<b>6AV6355-1AA31-8EC0</b> <b>6AV6355-1CA31-8EC0</b> <b>6AV6355-1DA00-0EC0</b> <b>6AV6355-1FA00-0EC0</b> <b>6AV6355-1GA00-0EC0</b>
<b>WinCC OA - DB Logger V3.18</b>		
Allows export of data from WinCC OA to external databases.		
<ul style="list-style-type: none"> <li>• DB Logger</li> <li>• DB Logger UPG</li> <li>• DB Logger SUS</li> <li>• DB Logger SMS</li> <li>• DB Logger POS</li> </ul>	<b>6AV6355-1AA31-8EA1</b> <b>6AV6355-1CA31-8EA1</b> <b>6AV6355-1DA00-0EA1</b> <b>6AV6355-1FA00-0EA1</b> <b>6AV6355-1GA00-0EA1</b>	<b>6AV6355-1AA31-8EC1</b> <b>6AV6355-1CA31-8EC1</b> <b>6AV6355-1DA00-0EC1</b> <b>6AV6355-1FA00-0EC1</b> <b>6AV6355-1GA00-0EC1</b>
<b>WinCC OA - NGA Standard V3.18</b>		
Enables the use of the Next Generation Archiver in projects with up to 150 000 PowerTags		
<ul style="list-style-type: none"> <li>• NGA Standard</li> <li>• NGA Standard UPG</li> <li>• NGA Standard SUS</li> <li>• NGA Standard SMS</li> <li>• NGA Standard POS</li> </ul>	<b>6AV6355-1AA31-8EA2</b> <b>6AV6355-1CA31-8EA2</b> <b>6AV6355-1DA00-0EA2</b> <b>6AV6355-1FA00-0EA2</b> <b>6AV6355-1GA00-0EA2</b>	<b>6AV6355-1AA31-8EC2</b> <b>6AV6355-1CA31-8EC2</b> <b>6AV6355-1DA00-0EC2</b> <b>6AV6355-1FA00-0EC2</b> <b>6AV6355-1GA00-0EC2</b>
<b>WinCC OA - NGA Premium V3.18</b>		
Enables the use of the Next Generation Archiver in large projects with more than 150 000 PowerTags		
<ul style="list-style-type: none"> <li>• NGA Premium</li> <li>• NGA Premium UPG</li> <li>• NGA Premium SUS</li> <li>• NGA Premium SMS</li> <li>• NGA Premium POS</li> </ul>	<b>6AV6355-1AA31-8EA3</b> <b>6AV6355-1CA31-8EA3</b> <b>6AV6355-1DA00-0EA3</b> <b>6AV6355-1FA00-0EA3</b> <b>6AV6355-1GA00-0EA3</b>	<b>6AV6355-1AA31-8EC3</b> <b>6AV6355-1CA31-8EC3</b> <b>6AV6355-1DA00-0EC3</b> <b>6AV6355-1FA00-0EC3</b> <b>6AV6355-1GA00-0EC3</b>
<b>WinCC OA - NGA backend connection V3.18</b>		
Connection of another freely selectable backend for the NGA		
<ul style="list-style-type: none"> <li>• NGA backend connection</li> <li>• NGA backend connection UPG</li> <li>• NGA backend connection SUS</li> <li>• NGA backend connection SMS</li> <li>• NGA backend connection POS</li> </ul>	<b>6AV6355-1AA31-8EA4</b> <b>6AV6355-1CA31-8EA4</b> <b>6AV6355-1DA00-0EA4</b> <b>6AV6355-1FA00-0EA4</b> <b>6AV6355-1GA00-0EA4</b>	<b>6AV6355-1AA31-8ED2</b> <b>6AV6355-1CA31-8ED2</b> <b>6AV6355-1DA00-0ED2</b> <b>6AV6355-1FA00-0ED2</b> <b>6AV6355-1GA00-0ED2</b>
<b>WinCC OA - Custom Comp V3.18</b>		
Integration of a customer-specific manager, driver, script or graphic extension.		
<ul style="list-style-type: none"> <li>• Custom Comp</li> <li>• Custom Comp UPG</li> <li>• Custom Comp SUS</li> <li>• Custom Comp SMS</li> <li>• Custom Comp POS</li> </ul>		

Ordering data	Article No.	Article No.
<b>WinCC OA - Custom Comp REDU V3.18</b>  Integration of a customer-specific manager, driver, script or graphic extension for REDU system. <ul style="list-style-type: none"><li>• Custom Comp REDU</li><li>• Custom Comp REDU UPG</li><li>• Custom Comp REDU SUS</li><li>• Custom Comp REDU SMS</li><li>• Custom Comp REDU POS</li></ul>	<b>6AV6355-1AA31-8ED3</b> <b>6AV6355-1CA31-8ED3</b> <b>6AV6355-1DA00-0ED3</b> <b>6AV6355-1FA00-0ED3</b> <b>6AV6355-1GA00-0ED3</b>	<b>WinCC OA - Secure V3.18</b> Extended protection with Kerberos. Increases IT security level by using ticket-based authentication. <ul style="list-style-type: none"><li>• Secure</li><li>• Secure UPG</li><li>• Secure SUS</li><li>• Secure SMS</li><li>• Secure POS</li></ul> <b>WinCC OA - Map V3.18</b> Display of maps in WinCC OA. Open Street Map as well as own map material are supported. <ul style="list-style-type: none"><li>• Map</li><li>• Map UPG</li><li>• Map SUS</li><li>• Map SMS</li><li>• Map POS</li></ul>
<b>WinCC OA - Dist System V3.18</b>  Extends a WinCC OA Server with the Multiserver option (up to 2 048 servers). <ul style="list-style-type: none"><li>• Dist System</li><li>• Dist System UPG</li><li>• Dist System SUS</li><li>• Dist System SMS</li><li>• Dist System POS</li></ul>	<b>6AV6355-1AA31-8EE0</b> <b>6AV6355-1CA31-8EE0</b> <b>6AV6355-1DA00-0EE0</b> <b>6AV6355-1FA00-0EE0</b> <b>6AV6355-1GA00-0EE0</b>	 <b>WinCC OA - Maintenance V3.18</b> Simple maintenance management. Operating hours, switching cycles, message handling and notepad function. <ul style="list-style-type: none"><li>• Maintenance</li><li>• Maintenance UPG</li><li>• Maintenance SUS</li><li>• Maintenance SMS</li><li>• Maintenance POS</li></ul>
<b>WinCC OA - Redundancy V3.18</b>  High availability with bumpless switchover. Both servers need a license in REDU systems. <ul style="list-style-type: none"><li>• Redundancy</li><li>• Redundancy UPG</li><li>• Redundancy SUS</li><li>• Redundancy SMS</li><li>• Redundancy POS</li></ul>	<b>6AV6355-1AA31-8EF0</b> <b>6AV6355-1CA31-8EF0</b> <b>6AV6355-1DA00-0EF0</b> <b>6AV6355-1FA00-0EF0</b> <b>6AV6355-1GA00-0EF0</b>	 <b>WinCC OA - OPC UA Server V3.18</b> OPC Foundation-compliant server for WinCC OA Server allows OPC UA Clients to query data. <ul style="list-style-type: none"><li>• OPC UA Server</li><li>• OPC UA Server UPG</li><li>• OPC UA Server SUS</li><li>• OPC UA Server SMS</li><li>• OPC UA Server POS</li></ul>
<b>WinCC OA - DRS V3.18</b>  Disaster Recovery System, remote Backup Control Center. 2 redundant systems (4 servers in total). <ul style="list-style-type: none"><li>• DRS</li><li>• DRS UPG</li><li>• DRS SUS</li><li>• DRS SMS</li><li>• DRS POS</li></ul>	<b>6AV6355-1AA31-8EF1</b> <b>6AV6355-1CA31-8EF1</b> <b>6AV6355-1DA00-0EF1</b> <b>6AV6355-1FA00-0EF1</b> <b>6AV6355-1GA00-0EF1</b>	 <b>6AV6355-1AA31-8EK0</b> <b>6AV6355-1CA31-8EK0</b> <b>6AV6355-1DA00-0EK0</b> <b>6AV6355-1FA00-0EK0</b> <b>6AV6355-1GA00-0EK0</b>

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Add-ons**

Ordering data	Article No.	Article No.	
<b>WinCC OA - MindSphere V3.18</b>	Enables connection of WinCC OA Server to MindSphere. Requires operation of a valid MindSphere Tenant.	<b>6AV6355-1AA31-8EK1</b> <b>6AV6355-1CA31-8EK1</b> <b>6AV6355-1DA00-0EK1</b> <b>6AV6355-1FA00-0EK1</b> <b>6AV6355-1GA00-0EK1</b>	<b>6AV6355-1AA31-8EM5</b> <b>6AV6355-1CA31-8EM5</b> <b>6AV6355-1DA00-0EM5</b> <b>6AV6355-1FA00-0EM5</b> <b>6AV6355-1GA00-0EM5</b>
<b>WinCC OA - Modbus Server V3.18</b>	Enables data of a WinCC OA System to be queried by Modbus/TCP clients.	<b>6AV6355-1AA31-8EK2</b> <b>6AV6355-1CA31-8EK2</b> <b>6AV6355-1DA00-0EK2</b> <b>6AV6355-1FA00-0EK2</b> <b>6AV6355-1GA00-0EK2</b>	<b>6AV6355-1AA31-8EM6</b> <b>6AV6355-1CA31-8EM6</b> <b>6AV6355-1DA00-0EM6</b> <b>6AV6355-1FA00-0EM6</b> <b>6AV6355-1GA00-0EM6</b>
<b>WinCC OA - Recipe V3.18</b>	Creation of any recipe types and instances, transfer of the current process values as recipe.	<b>6AV6355-1AA31-8EL0</b> <b>6AV6355-1CA31-8EL0</b> <b>6AV6355-1DA00-0EL0</b> <b>6AV6355-1FA00-0EL0</b> <b>6AV6355-1GA00-0EL0</b>	<b>6AV6355-1AA31-8EM7</b> <b>6AV6355-1CA31-8EM7</b> <b>6AV6355-1DA00-0EM7</b> <b>6AV6355-1FA00-0EM7</b> <b>6AV6355-1GA00-0EM7</b>
<b>WinCC OA - Report V3.18</b>	Defined number of reporting clients for evaluation of WinCC OA data using a third-party tool.	<b>6AV6355-1AA31-8EM0</b> <b>6AV6355-1CA31-8EM0</b> <b>6AV6355-1DA00-0EM0</b> <b>6AV6355-1FA00-0EM0</b> <b>6AV6355-1GA00-0EM0</b>  <b>6AV6355-1AA31-8EM1</b> <b>6AV6355-1CA31-8EM1</b> <b>6AV6355-1DA00-0EM1</b> <b>6AV6355-1FA00-0EM1</b> <b>6AV6355-1GA00-0EM1</b>  <b>6AV6355-1AA31-8EM2</b> <b>6AV6355-1CA31-8EM2</b> <b>6AV6355-1DA00-0EM2</b> <b>6AV6355-1FA00-0EM2</b> <b>6AV6355-1GA00-0EM2</b>  <b>6AV6355-1AA31-8EM3</b> <b>6AV6355-1CA31-8EM3</b> <b>6AV6355-1DA00-0EM3</b> <b>6AV6355-1FA00-0EM3</b> <b>6AV6355-1GA00-0EM3</b>	<b>6AV6355-1AA31-8EM8</b> <b>6AV6355-1CA31-8EM8</b> <b>6AV6355-1DA00-0EM8</b> <b>6AV6355-1FA00-0EM8</b> <b>6AV6355-1GA00-0EM8</b>
<b>WinCC OA - Scheduler V3.18</b>	Scheduling of daily, weekly and monthly programs, non-periodic events, priority assignment, override function.	<b>6AV6355-1AA31-8EN0</b> <b>6AV6355-1CA31-8EN0</b> <b>6AV6355-1DA00-0ENO</b> <b>6AV6355-1FA00-0ENO</b> <b>6AV6355-1GA00-0ENO</b>	

Ordering data	Article No.	Article No.
<b>WinCC OA - SmartSCADA Toolbox V3.18</b> Allows creation of key figure definitions and instances via formula editor or CONTROL. Contains 20 KPI instances. <ul style="list-style-type: none"><li>• SmartSCADA Toolbox</li><li>• SmartSCADA Toolbox UPG</li><li>• SmartSCADA Toolbox SUS</li><li>• SmartSCADA Toolbox SMS</li><li>• SmartSCADA Toolbox POS</li></ul>	<b>6AV6355-1AA31-8EP0</b> <b>6AV6355-1CA31-8EP0</b> <b>6AV6355-1DA00-0EP0</b> <b>6AV6355-1FA00-0EP0</b> <b>6AV6355-1GA00-0EP0</b>	<b>WinCC OA - Video Display V3.18</b> Extends the Video Basic system by an external display. A Video Display license is included in the Basic Package. <ul style="list-style-type: none"><li>• Video Display</li><li>• Video Display UPG</li><li>• Video Display SUS</li><li>• Video Display SMS</li><li>• Video Display POS</li></ul>
<b>WinCC OA - SmartSCADA KPI Ext. V3.18</b> Extends Toolbox by 100 KPI instances. <ul style="list-style-type: none"><li>• SmartSCADA KPI Ext.</li><li>• SmartSCADA KPI Ext. UPG</li><li>• SmartSCADA KPI Ext. SUS</li><li>• SmartSCADA KPI Ext. SMS</li><li>• SmartSCADA KPI Ext. POS</li></ul>	<b>6AV6355-1AA31-8EP1</b> <b>6AV6355-1CA31-8EP1</b> <b>6AV6355-1DA00-0EP1</b> <b>6AV6355-1FA00-0EP1</b> <b>6AV6355-1GA00-0EP1</b>	<b>WinCC OA - Video Display REDU V3.18</b> Extends Video Basic in a REDU system by an external display. A Video Display license is included in the Basic Package. <ul style="list-style-type: none"><li>• Video Display REDU</li><li>• Video Display REDU UPG</li><li>• Video Display REDU SUS</li><li>• Video Display REDU SMS</li><li>• Video Display REDU POS</li></ul>
<b>WinCC OA - SmartSCADA Analytics V3.18</b> Time-limited license (1 year) for data analysis and learning of statistical models. Contains statistical toolbox "R". <ul style="list-style-type: none"><li>• SmartSCADA Analytics</li><li>• SmartSCADA Analytics UPG</li><li>• SmartSCADA Analytics SUS</li><li>• SmartSCADA Analytics SMS</li><li>• SmartSCADA Analytics POS</li></ul>	<b>6AV6355-1AA31-8EP2</b> <b>6AV6355-1CA31-8EP2</b> <b>6AV6355-1DA00-0EP2</b> <b>6AV6355-1FA00-0EP2</b> <b>6AV6355-1GA00-0EP2</b>	<b>WinCC OA - Video Cameras V3.18</b> Extends Video Basic by a defined number of sources/cameras. <ul style="list-style-type: none"><li>• 1 Extension</li><li>• 1 Extension UPG</li><li>• 1 Extension SUS</li><li>• 1 Extension SMS</li><li>• 1 Extension POS</li><li>• 10 Extensions</li><li>• 10 Extensions UPG</li><li>• 10 Extensions SUS</li><li>• 10 Extensions SMS</li><li>• 10 Extensions POS</li><li>• 25 Extensions</li><li>• 25 Extensions UPG</li><li>• 25 Extensions SUS</li><li>• 25 Extensions SMS</li><li>• 25 Extensions POS</li><li>• 50 Extensions</li><li>• 50 Extensions UPG</li><li>• 50 Extensions SUS</li><li>• 50 Extensions SMS</li><li>• 50 Extensions POS</li><li>• 100 Extensions</li><li>• 100 Extensions UPG</li><li>• 100 Extensions SUS</li><li>• 100 Extensions SMS</li><li>• 100 Extensions POS</li><li>• 250 Extensions</li><li>• 250 Extensions UPG</li><li>• 250 Extensions SUS</li><li>• 250 Extensions SMS</li><li>• 250 Extensions POS</li><li>• 500 Extensions</li><li>• 500 Extensions UPG</li><li>• 500 Extensions SUS</li><li>• 500 Extensions SMS</li><li>• 500 Extensions POS</li></ul>
<b>WinCC OA - Video Light V3.18</b> Allows connection of 4 cameras/sources and an external video display. Cannot be extended. <ul style="list-style-type: none"><li>• Video Light</li><li>• Video Light UPG</li><li>• Video Light SUS</li><li>• Video Light SMS</li><li>• Video Light POS</li></ul>	<b>6AV6355-1AA31-8EQ0</b> <b>6AV6355-1CA31-8EQ0</b> <b>6AV6355-1DA00-0EQ0</b> <b>6AV6355-1FA00-0EQ0</b> <b>6AV6355-1GA00-0EQ0</b>	
<b>WinCC OA - Video Basic V3.18</b> Enables native connection (ONVIF) of cameras/sources to a WinCC OA System. Includes all streaming, recording and playback functions. <ul style="list-style-type: none"><li>• Video Basic</li><li>• Video Basic UPG</li><li>• Video Basic SUS</li><li>• Video Basic SMS</li><li>• Video Basic POS</li></ul>	<b>6AV6355-1AA31-8EQ1</b> <b>6AV6355-1CA31-8EQ1</b> <b>6AV6355-1DA00-0EQ1</b> <b>6AV6355-1FA00-0EQ1</b> <b>6AV6355-1GA00-0EQ1</b>	
<b>WinCC OA - Video Basic REDU V3.18</b> Enables native connection (ONVIF) of cameras/sources to a redundant WinCC OA System. Includes all streaming, recording and playback functions. <ul style="list-style-type: none"><li>• Video Basic REDU</li><li>• Video Basic REDU UPG</li><li>• Video Basic REDU SUS</li><li>• Video Basic REDU SMS</li><li>• Video Basic REDU POS</li></ul>	<b>6AV6355-1AA31-8EU0</b> <b>6AV6355-1CA31-8EU0</b> <b>6AV6355-1DA00-0EU0</b> <b>6AV6355-1FA00-0EU0</b> <b>6AV6355-1GA00-0EU0</b>	

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA Add-ons

Ordering data	Article No.	Article No.	
<b>WinCC OA – Video Cameras REDU V3.18</b> Extends Video Basic in a REDU system by a defined number of sources/cameras. <ul style="list-style-type: none"><li>• 1 Extension REDU</li><li>• 1 Extension REDU UPG</li><li>• 1 Extension REDU SUS</li><li>• 1 Extension REDU SMS</li><li>• 1 Extension REDU POS</li><li>• 10 Extensions REDU</li><li>• 10 Extensions REDU UPG</li><li>• 10 Extensions REDU SUS</li><li>• 10 Extensions REDU SMS</li><li>• 10 Extensions REDU POS</li><li>• 25 Extensions REDU</li><li>• 25 Extensions REDU UPG</li><li>• 25 Extensions REDU SUS</li><li>• 25 Extensions REDU SMS</li><li>• 25 Extensions REDU POS</li><li>• 50 Extensions REDU</li><li>• 50 Extensions REDU UPG</li><li>• 50 Extensions REDU SUS</li><li>• 50 Extensions REDU SMS</li><li>• 50 Extensions REDU POS</li><li>• 100 Extensions REDU</li><li>• 100 Extensions REDU UPG</li><li>• 100 Extensions REDU SUS</li><li>• 100 Extensions REDU SMS</li><li>• 100 Extensions REDU POS</li><li>• 250 Extensions REDU</li><li>• 250 Extensions REDU UPG</li><li>• 250 Extensions REDU SUS</li><li>• 250 Extensions REDU SMS</li><li>• 250 Extensions REDU POS</li><li>• 500 Extensions REDU</li><li>• 500 Extensions REDU UPG</li><li>• 500 Extensions REDU SUS</li><li>• 500 Extensions REDU SMS</li><li>• 500 Extensions REDU POS</li></ul>	<b>6AV6355-1AA31-8ES0</b> <b>6AV6355-1CA31-8ES0</b> <b>6AV6355-1DA00-0ES0</b> <b>6AV6355-1FA00-0ES0</b> <b>6AV6355-1GA00-0ES0</b> <b>6AV6355-1AA31-8ES1</b> <b>6AV6355-1CA31-8ES1</b> <b>6AV6355-1DA00-0ES1</b> <b>6AV6355-1FA00-0ES1</b> <b>6AV6355-1GA00-0ES1</b> <b>6AV6355-1AA31-8ES2</b> <b>6AV6355-1CA31-8ES2</b> <b>6AV6355-1DA00-0ES2</b> <b>6AV6355-1FA00-0ES2</b> <b>6AV6355-1GA00-0ES2</b> <b>6AV6355-1AA31-8ES3</b> <b>6AV6355-1CA31-8ES3</b> <b>6AV6355-1DA00-0ES3</b> <b>6AV6355-1FA00-0ES3</b> <b>6AV6355-1GA00-0ES3</b> <b>6AV6355-1AA31-8ES4</b> <b>6AV6355-1CA31-8ES4</b> <b>6AV6355-1DA00-0ES4</b> <b>6AV6355-1FA00-0ES4</b> <b>6AV6355-1GA00-0ES4</b> <b>6AV6355-1AA31-8ES5</b> <b>6AV6355-1CA31-8ES5</b> <b>6AV6355-1DA00-0ES5</b> <b>6AV6355-1FA00-0ES5</b> <b>6AV6355-1GA00-0ES5</b> <b>6AV6355-1AA31-8ES6</b> <b>6AV6355-1CA31-8ES6</b> <b>6AV6355-1DA00-0ES6</b> <b>6AV6355-1FA00-0ES6</b> <b>6AV6355-1GA00-0ES6</b>	<b>V3.17</b> <b>WinCC OA - RDB V3.17</b> For connecting the Oracle database to WinCC OA Server (Oracle licenses not included). <ul style="list-style-type: none"><li>• RDB</li><li>• RDB UPG</li><li>• RDB SUS</li><li>• RDB SMS</li><li>• RDB POS</li></ul>	<b>6AV6355-1AA31-7EA0</b> <b>6AV6355-1CA31-7EA0</b> <b>6AV6355-1DA31-7EA0</b> <b>6AV6355-1FA31-7EA0</b> <b>6AV6355-1GA31-7EA0</b>
		<b>WinCC OA - DB Logger V3.17</b> Allows export of data from WinCC OA to external databases. <ul style="list-style-type: none"><li>• DB Logger</li><li>• DB Logger UPG</li><li>• DB Logger SUS</li><li>• DB Logger SMS</li><li>• DB Logger POS</li></ul>	<b>6AV6355-1AA31-7EA1</b> <b>6AV6355-1CA31-7EA1</b> <b>6AV6355-1DA31-7EA1</b> <b>6AV6355-1FA31-7EA1</b> <b>6AV6355-1GA31-7EA1</b>
		<b>WinCC OA - CommCenter 1 V3.17</b> Remote alarming Basic Package 25 alarms. Output as SMS or email possible. <ul style="list-style-type: none"><li>• CommCenter 1</li><li>• CommCenter 1 UPG</li><li>• CommCenter 1 SUS</li><li>• CommCenter 1 SMS</li><li>• CommCenter 1 POS</li></ul>	<b>6AV6355-1AA31-7EC0</b> <b>6AV6355-1CA31-7EC0</b> <b>6AV6355-1DA31-7EC0</b> <b>6AV6355-1FA31-7EC0</b> <b>6AV6355-1GA31-7EC0</b>
		<b>WinCC OA - CommCenter 2 V3.17</b> Remote alarming Basic Package 250 alarms. Output as SMS or email possible. <ul style="list-style-type: none"><li>• CommCenter 2</li><li>• CommCenter 2 UPG</li><li>• CommCenter 2 SUS</li><li>• CommCenter 2 SMS</li><li>• CommCenter 2 POS</li></ul>	<b>6AV6355-1AA31-7EC1</b> <b>6AV6355-1CA31-7EC1</b> <b>6AV6355-1DA31-7EC1</b> <b>6AV6355-1FA31-7EC1</b> <b>6AV6355-1GA31-7EC1</b>
		<b>WinCC OA - CommCenter 3 V3.17</b> Remote alarming Basic Package 2 500 alarms. Output as SMS or email possible. <ul style="list-style-type: none"><li>• CommCenter 3</li><li>• CommCenter 3 UPG</li><li>• CommCenter 3 SUS</li><li>• CommCenter 3 SMS</li><li>• CommCenter 3 POS</li></ul>	<b>6AV6355-1AA31-7EC2</b> <b>6AV6355-1CA31-7EC2</b> <b>6AV6355-1DA31-7EC2</b> <b>6AV6355-1FA31-7EC2</b> <b>6AV6355-1GA31-7EC2</b>
		<b>WinCC OA - CommCenter 4 V3.17</b> Remote alarming Basic Package unlimited alarms. Output as SMS or email possible. <ul style="list-style-type: none"><li>• CommCenter 4</li><li>• CommCenter 4 UPG</li><li>• CommCenter 4 SUS</li><li>• CommCenter 4 SMS</li><li>• CommCenter 4 POS</li></ul>	<b>6AV6355-1AA31-7EC3</b> <b>6AV6355-1CA31-7EC3</b> <b>6AV6355-1DA31-7EC3</b> <b>6AV6355-1FA31-7EC3</b> <b>6AV6355-1GA31-7EC3</b>
<b>WinCC OA – Load Balancing V3.18</b> Enables load balancing of connections between WinCC OA Servers and ULC UX <ul style="list-style-type: none"><li>• Load Balancing</li><li>• Load Balancing UPG</li><li>• Load Balancing SUS</li><li>• Load Balancing SMS</li><li>• Load Balancing POS</li></ul>	<b>6AV6355-1AA31-8ET1</b> <b>6AV6355-1CA31-8ET1</b> <b>6AV6355-1DA00-0ET1</b> <b>6AV6355-1FA00-0ET1</b> <b>6AV6355-1GA00-0ET1</b>	<b>6AV6355-1AA31-8ET1</b> <b>6AV6355-1CA31-8ET1</b> <b>6AV6355-1DA00-0ET1</b> <b>6AV6355-1FA00-0ET1</b> <b>6AV6355-1GA00-0ET1</b>	<b>6AV6355-1AA31-7EC3</b> <b>6AV6355-1CA31-7EC3</b> <b>6AV6355-1DA31-7EC3</b> <b>6AV6355-1FA31-7EC3</b> <b>6AV6355-1GA31-7EC3</b>
<b>WinCC OA – WebSocket connection V3.18</b> Enables management of connections between WinCC OA Servers and WinCC OA ULC UX clients. <ul style="list-style-type: none"><li>• WebSocket connection</li><li>• WebSocket connection UPG</li><li>• WebSocket connection SUS</li><li>• WebSocket connection SMS</li><li>• WebSocket connection POS</li></ul>	<b>6AV6355-1AA31-8ET2</b> <b>6AV6355-1CA31-8ET2</b> <b>6AV6355-1DA00-0ET2</b> <b>6AV6355-1FA00-0ET2</b> <b>6AV6355-1GA00-0ET2</b>	<b>6AV6355-1AA31-8ET2</b> <b>6AV6355-1CA31-8ET2</b> <b>6AV6355-1DA00-0ET2</b> <b>6AV6355-1FA00-0ET2</b> <b>6AV6355-1GA00-0ET2</b>	<b>6AV6355-1AA31-7ED2</b> <b>6AV6355-1CA31-7ED2</b> <b>6AV6355-1DA31-7ED2</b> <b>6AV6355-1FA31-7ED2</b> <b>6AV6355-1GA31-7ED2</b>
		<b>WinCC OA - Custom Comp V3.17</b> Integration of a customer-specific manager, driver, script or graphic extension. <ul style="list-style-type: none"><li>• Custom Comp</li><li>• Custom Comp UPG</li><li>• Custom Comp SUS</li><li>• Custom Comp SMS</li><li>• Custom Comp POS</li></ul>	<b>6AV6355-1AA31-7ED2</b> <b>6AV6355-1CA31-7ED2</b> <b>6AV6355-1DA31-7ED2</b> <b>6AV6355-1FA31-7ED2</b> <b>6AV6355-1GA31-7ED2</b>

Ordering data	Article No.	Article No.
<b>WinCC OA - Custom Comp REDU V3.17</b>  Integration of a customer-specific manager, driver, script or graphic extension for REDU system. <ul style="list-style-type: none"><li>• Custom Comp REDU</li><li>• Custom Comp REDU UPG</li><li>• Custom Comp REDU SUS</li><li>• Custom Comp REDU SMS</li><li>• Custom Comp REDU POS</li></ul>	<b>6AV6355-1AA31-7ED3</b> <b>6AV6355-1CA31-7ED3</b> <b>6AV6355-1DA31-7ED3</b> <b>6AV6355-1FA31-7ED3</b> <b>6AV6355-1GA31-7ED3</b>	<b>WinCC OA - Maintenance V3.17</b> Simple maintenance management. Operating hours, switching cycles, message handling and notepad function. <ul style="list-style-type: none"><li>• Maintenance</li><li>• Maintenance UPG</li><li>• Maintenance SUS</li><li>• Maintenance SMS</li><li>• Maintenance POS</li></ul>
<b>WinCC OA - Dist System V3.17</b>  Extends a WinCC OA Server with the Multiserver option (up to 2 048 servers). <ul style="list-style-type: none"><li>• Dist System</li><li>• Dist System UPG</li><li>• Dist System SUS</li><li>• Dist System SMS</li><li>• Dist System POS</li></ul>	<b>6AV6355-1AA31-7EE0</b> <b>6AV6355-1CA31-7EE0</b> <b>6AV6355-1DA31-7EE0</b> <b>6AV6355-1FA31-7EE0</b> <b>6AV6355-1GA31-7EE0</b>	<b>WinCC OA - OPC UA Server V3.17</b> OPC Foundation-compliant server for WinCC OA Server allows OPC UA Clients to query data. <ul style="list-style-type: none"><li>• OPC UA Server</li><li>• OPC UA Server UPG</li><li>• OPC UA Server SUS</li><li>• OPC UA Server SMS</li><li>• OPC UA Server POS</li></ul>
<b>WinCC OA - Redundancy V3.17</b>  High availability with bumpless switchover. Both servers need a license in REDU systems. <ul style="list-style-type: none"><li>• Redundancy</li><li>• Redundancy UPG</li><li>• Redundancy SUS</li><li>• Redundancy SMS</li><li>• Redundancy POS</li></ul>	<b>6AV6355-1AA31-7EF0</b> <b>6AV6355-1CA31-7EF0</b> <b>6AV6355-1DA31-7EF0</b> <b>6AV6355-1FA31-7EF0</b> <b>6AV6355-1GA31-7EF0</b>	<b>WinCC OA - MindSphere V3.17</b> Enables connection of WinCC OA Server to MindSphere. Requires operation of a valid MindSphere Tenant. <ul style="list-style-type: none"><li>• MindSphere</li><li>• MindSphere UPG</li><li>• MindSphere SUS</li><li>• MindSphere SMS</li><li>• MindSphere POS</li></ul>
<b>WinCC OA - DRS V3.17</b>  Disaster Recovery System, remote Backup Control Center. 2 redundant systems (4 servers in total). <ul style="list-style-type: none"><li>• DRS</li><li>• DRS UPG</li><li>• DRS SUS</li><li>• DRS SMS</li><li>• DRS POS</li></ul>	<b>6AV6355-1AA31-7EF1</b> <b>6AV6355-1CA31-7EF1</b> <b>6AV6355-1DA31-7EF1</b> <b>6AV6355-1FA31-7EF1</b> <b>6AV6355-1GA31-7EF1</b>	<b>WinCC OA - Modbus Server V3.17</b> Enables data of a WinCC OA System to be queried by Modbus/TCP clients. <ul style="list-style-type: none"><li>• Modbus Server</li><li>• Modbus Server UPG</li><li>• Modbus Server SUS</li><li>• Modbus Server SMS</li><li>• Modbus Server POS</li></ul>
<b>WinCC OA - Secure V3.17</b>  Extended protection with Kerberos. Increases IT security level by using ticket-based authentication. <ul style="list-style-type: none"><li>• Secure</li><li>• Secure UPG</li><li>• Secure SUS</li><li>• Secure SMS</li><li>• Secure POS</li></ul>	<b>6AV6355-1AA31-7EG0</b> <b>6AV6355-1CA31-7EG0</b> <b>6AV6355-1DA31-7EG0</b> <b>6AV6355-1FA31-7EG0</b> <b>6AV6355-1GA31-7EG0</b>	<b>WinCC OA - Recipe V3.17</b> Creation of any recipe types and instances, transfer of the current process values as recipe. <ul style="list-style-type: none"><li>• Recipe</li><li>• Recipe UPG</li><li>• Recipe SUS</li><li>• Recipe SMS</li><li>• Recipe POS</li></ul>
<b>WinCC OA - Map V3.17</b>  Display of maps in WinCC OA. Open Street Map as well as own map material are supported. <ul style="list-style-type: none"><li>• Map</li><li>• Map UPG</li><li>• Map SUS</li><li>• Map SMS</li><li>• Map POS</li></ul>	<b>6AV6355-1AA31-7EH5</b> <b>6AV6355-1CA31-7EH5</b> <b>6AV6355-1DA31-7EH5</b> <b>6AV6355-1FA31-7EH5</b> <b>6AV6355-1GA31-7EH5</b>	

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA Add-ons

Ordering data	Article No.	Article No.
<b>WinCC OA - Report V3.17</b> Defined number of reporting clients for evaluation of WinCC OA data using a third-party tool. <ul style="list-style-type: none"><li>• 1 Reporting Client</li><li>• 1 Reporting Client UPG</li><li>• 1 Reporting Client SUS</li><li>• 1 Reporting Client SMS</li><li>• 1 Reporting Client POS</li><li>• 2 Reporting Clients</li><li>• 2 Reporting Clients UPG</li><li>• 2 Reporting Clients SUS</li><li>• 2 Reporting Clients SMS</li><li>• 2 Reporting Clients POS</li><li>• 5 Reporting Clients</li><li>• 5 Reporting Clients UPG</li><li>• 5 Reporting Clients SUS</li><li>• 5 Reporting Clients SMS</li><li>• 5 Reporting Clients POS</li><li>• 10 Reporting Clients</li><li>• 10 Reporting Clients UPG</li><li>• 10 Reporting Clients SUS</li><li>• 10 Reporting Clients SMS</li><li>• 10 Reporting Clients POS</li></ul>	<b>6AV6355-1AA31-7EM0</b> <b>6AV6355-1CA31-7EM0</b> <b>6AV6355-1DA31-7EM0</b> <b>6AV6355-1FA31-7EM0</b> <b>6AV6355-1GA31-7EM0</b> <b>6AV6355-1AA31-7EM1</b> <b>6AV6355-1CA31-7EM1</b> <b>6AV6355-1DA31-7EM1</b> <b>6AV6355-1FA31-7EM1</b> <b>6AV6355-1GA31-7EM1</b> <b>6AV6355-1AA31-7EM2</b> <b>6AV6355-1CA31-7EM2</b> <b>6AV6355-1DA31-7EM2</b> <b>6AV6355-1FA31-7EM2</b> <b>6AV6355-1GA31-7EM2</b> <b>6AV6355-1AA31-7EM3</b> <b>6AV6355-1CA31-7EM3</b> <b>6AV6355-1DA31-7EM3</b> <b>6AV6355-1FA31-7EM3</b> <b>6AV6355-1GA31-7EM3</b>	<b>WinCC OA - SmartSCADA Toolbox V3.17</b> Allows creation of key figure definitions and instances via formula editor or CONTROL. Contains 20 KPI instances. <ul style="list-style-type: none"><li>• SmartSCADA Toolbox</li><li>• SmartSCADA Toolbox UPG</li><li>• SmartSCADA Toolbox SUS</li><li>• SmartSCADA Toolbox SMS</li><li>• SmartSCADA Toolbox POS</li></ul> <b>6AV6355-1AA31-7EP0</b> <b>6AV6355-1CA31-7EP0</b> <b>6AV6355-1DA31-7EP0</b> <b>6AV6355-1FA31-7EP0</b> <b>6AV6355-1GA31-7EP0</b>
<b>WinCC OA - SmartSCADA KPI Ext. V3.17</b> Extends Toolbox by 100 KPI instances <ul style="list-style-type: none"><li>• SmartSCADA KPI Ext.</li><li>• SmartSCADA KPI Ext. UPG</li><li>• SmartSCADA KPI Ext. SUS</li><li>• SmartSCADA KPI Ext. SMS</li><li>• SmartSCADA KPI Ext. POS</li></ul>	<b>6AV6355-1AA31-7EP1</b> <b>6AV6355-1CA31-7EP1</b> <b>6AV6355-1DA31-7EP1</b> <b>6AV6355-1FA31-7EP1</b> <b>6AV6355-1GA31-7EP1</b>	
<b>WinCC OA - SmartSCADA Analytics V3.17</b> Time-limited license (1 year) for data analysis and learning of statistical models. Contains statistical toolbox "R". <ul style="list-style-type: none"><li>• SmartSCADA Analytics</li><li>• SmartSCADA Analytics UPG</li><li>• SmartSCADA Analytics SUS</li><li>• SmartSCADA Analytics SMS</li><li>• SmartSCADA Analytics POS</li></ul>		<b>6AV6355-1AA31-7EP2</b> <b>6AV6355-1CA31-7EP2</b> <b>6AV6355-1DA31-7EP2</b> <b>6AV6355-1FA31-7EP2</b> <b>6AV6355-1GA31-7EP2</b>
<b>WinCC OA - Video Light V3.17</b> Allows connection of 4 cameras/sources and an external video display. Cannot be extended. <ul style="list-style-type: none"><li>• Video Light</li><li>• Video Light UPG</li><li>• Video Light SUS</li><li>• Video Light SMS</li><li>• Video Light POS</li></ul>		<b>6AV6355-1AA31-7EQ0</b> <b>6AV6355-1CA31-7EQ0</b> <b>6AV6355-1DA31-7EQ0</b> <b>6AV6355-1FA31-7EQ0</b> <b>6AV6355-1GA31-7EQ0</b>
<b>WinCC OA - Video Basic V3.17</b> Enables native connection (ONVIF) of cameras/sources to a WinCC OA System. Includes all streaming, recording and playback functions. <ul style="list-style-type: none"><li>• Video Basic</li><li>• Video Basic UPG</li><li>• Video Basic SUS</li><li>• Video Basic SMS</li><li>• Video Basic POS</li></ul>		<b>6AV6355-1AA31-7EQ1</b> <b>6AV6355-1CA31-7EQ1</b> <b>6AV6355-1DA31-7EQ1</b> <b>6AV6355-1FA31-7EQ1</b> <b>6AV6355-1GA31-7EQ1</b>
<b>WinCC OA - Video Display V3.17</b> Extends the Video Basic system by an external display. A Video Display license is included in the Basic Package. <ul style="list-style-type: none"><li>• Video Display</li><li>• Video Display UPG</li><li>• Video Display SUS</li><li>• Video Display SMS</li><li>• Video Display POS</li></ul>		<b>6AV6355-1AA31-7EQ2</b> <b>6AV6355-1CA31-7EQ2</b> <b>6AV6355-1DA31-7EQ2</b> <b>6AV6355-1FA31-7EQ2</b> <b>6AV6355-1GA31-7EQ2</b>
<b>WinCC OA - Scheduler V3.17</b> Scheduling of daily, weekly and monthly programs, non-periodic events, priority assignment, override function. <ul style="list-style-type: none"><li>• Scheduler</li><li>• Scheduler UPG</li><li>• Scheduler SUS</li><li>• Scheduler SMS</li><li>• Scheduler POS</li></ul>	<b>6AV6355-1AA31-7EN0</b> <b>6AV6355-1CA31-7EN0</b> <b>6AV6355-1DA31-7EN0</b> <b>6AV6355-1FA31-7EN0</b> <b>6AV6355-1GA31-7EN0</b>	

Ordering data	Article No.	Article No.
<b>WinCC OA – Video V3.17</b> Extends Video Basic by a defined number of sources/cameras.		<b>WinCC OA – Video REDU V3.17</b> Extends Video Basic in a REDU system by a defined number of sources/cameras.
<ul style="list-style-type: none"> <li>• 1 Extension</li> <li>• 1 Extension UPG</li> <li>• 1 Extension SUS</li> <li>• 1 Extension SMS</li> <li>• 1 Extension POS</li> <li>• 10 Extensions</li> <li>• 10 Extensions UPG</li> <li>• 10 Extensions SUS</li> <li>• 10 Extensions SMS</li> <li>• 10 Extensions POS</li> <li>• 25 Extensions</li> <li>• 25 Extensions UPG</li> <li>• 25 Extensions SUS</li> <li>• 25 Extensions SMS</li> <li>• 25 Extensions POS</li> <li>• 50 Extensions</li> <li>• 50 Extensions UPG</li> <li>• 50 Extensions SUS</li> <li>• 50 Extensions SMS</li> <li>• 50 Extensions POS</li> <li>• 100 Extensions</li> <li>• 100 Extensions UPG</li> <li>• 100 Extensions SUS</li> <li>• 100 Extensions SMS</li> <li>• 100 Extensions POS</li> <li>• 250 Extensions</li> <li>• 250 Extensions UPG</li> <li>• 250 Extensions SUS</li> <li>• 250 Extensions SMS</li> <li>• 250 Extensions POS</li> <li>• 500 Extensions</li> <li>• 500 Extensions UPG</li> <li>• 500 Extensions SUS</li> <li>• 500 Extensions SMS</li> <li>• 500 Extensions POS</li> </ul>	<p><b>6AV6355-1AA31-7ER0</b>  <b>6AV6355-1CA31-7ER0</b>  <b>6AV6355-1DA31-7ER0</b>  <b>6AV6355-1FA31-7ER0</b>  <b>6AV6355-1GA31-7ER0</b>  <b>6AV6355-1AA31-7ER1</b>  <b>6AV6355-1CA31-7ER1</b>  <b>6AV6355-1DA31-7ER1</b>  <b>6AV6355-1FA31-7ER1</b>  <b>6AV6355-1GA31-7ER1</b>  <b>6AV6355-1AA31-7ER2</b>  <b>6AV6355-1CA31-7ER2</b>  <b>6AV6355-1DA31-7ER2</b>  <b>6AV6355-1FA31-7ER2</b>  <b>6AV6355-1GA31-7ER2</b>  <b>6AV6355-1AA31-7ER3</b>  <b>6AV6355-1CA31-7ER3</b>  <b>6AV6355-1DA31-7ER3</b>  <b>6AV6355-1FA31-7ER3</b>  <b>6AV6355-1GA31-7ER3</b>  <b>6AV6355-1AA31-7ER4</b>  <b>6AV6355-1CA31-7ER4</b>  <b>6AV6355-1DA31-7ER4</b>  <b>6AV6355-1FA31-7ER4</b>  <b>6AV6355-1GA31-7ER4</b>  <b>6AV6355-1AA31-7ER5</b>  <b>6AV6355-1CA31-7ER5</b>  <b>6AV6355-1DA31-7ER5</b>  <b>6AV6355-1FA31-7ER5</b>  <b>6AV6355-1GA31-7ER5</b>  <b>6AV6355-1AA31-7ER6</b>  <b>6AV6355-1CA31-7ER6</b>  <b>6AV6355-1DA31-7ER6</b>  <b>6AV6355-1FA31-7ER6</b>  <b>6AV6355-1GA31-7ER6</b></p>	<p><b>6AV6355-1AA31-7ES0</b>  <b>6AV6355-1CA31-7ES0</b>  <b>6AV6355-1DA31-7ES0</b>  <b>6AV6355-1FA31-7ES0</b>  <b>6AV6355-1GA31-7ES0</b>  <b>6AV6355-1AA31-7ES1</b>  <b>6AV6355-1CA31-7ES1</b>  <b>6AV6355-1DA31-7ES1</b>  <b>6AV6355-1FA31-7ES1</b>  <b>6AV6355-1GA31-7ES1</b>  <b>6AV6355-1AA31-7ES2</b>  <b>6AV6355-1CA31-7ES2</b>  <b>6AV6355-1DA31-7ES2</b>  <b>6AV6355-1FA31-7ES2</b>  <b>6AV6355-1GA31-7ES2</b>  <b>6AV6355-1AA31-7ES3</b>  <b>6AV6355-1CA31-7ES3</b>  <b>6AV6355-1DA31-7ES3</b>  <b>6AV6355-1FA31-7ES3</b>  <b>6AV6355-1GA31-7ES3</b>  <b>6AV6355-1AA31-7ES4</b>  <b>6AV6355-1CA31-7ES4</b>  <b>6AV6355-1DA31-7ES4</b>  <b>6AV6355-1FA31-7ES4</b>  <b>6AV6355-1GA31-7ES4</b>  <b>6AV6355-1AA31-7ES5</b>  <b>6AV6355-1CA31-7ES5</b>  <b>6AV6355-1DA31-7ES5</b>  <b>6AV6355-1FA31-7ES5</b>  <b>6AV6355-1GA31-7ES5</b>  <b>6AV6355-1AA31-7ES6</b>  <b>6AV6355-1CA31-7ES6</b>  <b>6AV6355-1DA31-7ES6</b>  <b>6AV6355-1FA31-7ES6</b>  <b>6AV6355-1GA31-7ES6</b></p>
		<b>WinCC OA - Web Server V3.17</b> Enables management of connections between WinCC OA Servers and WinCC OA ULC UX clients.
		<ul style="list-style-type: none"> <li>• Web Server</li> <li>• Web Server UPG</li> <li>• Web Server SUS</li> <li>• Web Server SMS</li> <li>• Web Server POS</li> </ul>
		<p><b>6AV6355-1AA31-7ET0</b>  <b>6AV6355-1CA31-7ET0</b>  <b>6AV6355-1DA31-7ET0</b>  <b>6AV6355-1FA31-7ET0</b>  <b>6AV6355-1GA31-7ET0</b></p>

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA IPC Packages

### Overview

WinCC OA IPC Packages are compact WinCC OA functional units designed for SIMATIC IPC hardware. They are sophisticated solutions which are offered as a bundle with corresponding Nanobox PCs, perfect for fast deployment.

The licenses allow the use of WinCC OA on SIMATIC IPCs of the 127, 227, and 277 series. These packages cannot be extended with further WinCC OA options, except the option with 4096 PowerTags.

The general WinCC OA Software or hardware requirements apply to the IPC Packages specified above.

These packages can only be ordered in combination with the corresponding additional hardware item.

SUS contracts can be purchased for IPC Packages, but no SMS.

### Design

#### PowerTags

IPC Packages are offered with different PowerTag Packages. The staggering allows 128, 512, 2048 or 4096 PowerTags. In contrast to Server Basic licenses, Runtime Package licenses **cannot** be extended with additional PowerTag Packages, except for the 4096 PowerTags option. The PowerTags purchased here also cannot be moved to other servers. A whole range of common options is provided by ordering a package.

#### UIs

A UI license (Desktop UI) is included in the package. More information on this can be found in the <User Interfaces> section

### Drivers

PowerTags	128	512	2 048	4 096
Included options	OPC UA/DA Server	OPC UA/DA Server	OPC UA/DA Server	OPC UA/DA Server
Included drivers	Selection of 3 desired WinCC OA Drivers <sup>1)</sup>	Selection of 3 desired WinCC OA Drivers <sup>1)</sup>	Selection of 3 desired WinCC OA Drivers <sup>1)</sup>	S7, OPC UA Client, OPC DA Client
Extendable	No	No	No	With all WinCC OA options

<sup>1)</sup> 3 instances of each available WinCC OA Driver without any additional option. Example: S7 + MQTT + IEC104

More information on drivers can be found under <Drivers>.

**Design****Add-ons**

IPC Packages include a Dist option, an RDB option and an NGA standard.  
 More information on options can be found under <Add-ons>.

**Hardware**

The following versions of SIMATIC Nanobox PCs are supported by WinCC OA:

**SIMATIC IPC227E /277E**

Hardware components	Specification
OS	Windows 10 Enterprise 2016 LTSB, 64-bit
Processor	Intel Celeron (N2807 / N2930)
RAM	2/4/8 GB
Hard disk	SSD / HDD
Graphics	Intel HD Graphics / DisplayPort
Network adapter	2x 10/100/1000 Mbps, RJ45

**SIMATIC IPC127E**

Hardware components	Specification
OS	Windows 10 Enterprise 2016 LTSB, 64-bit
Processor	Intel Atom (E3930 / E3940)
RAM	2/4 GB
Hard disk	SSD
Graphics	Intel HD Graphics / DisplayPort
Network adapter	2/3x Ethernet RJ45

**Ordering data****Article No.****V3.18****WinCC OA IPC Package V3.18**

- 128 PowerTags
- 128 PowerTags SUS
- 128 PowerTags POS
- 512 PowerTags
- 512 PowerTags SUS
- 512 PowerTags POS
- 2 048 PowerTags
- 2 048 PowerTags SUS
- 2 048 PowerTags POS
- 4 096 PowerTags
- 4 096 PowerTags SUS
- 4 096 PowerTags POS

**6AV6355-1AA31-8FA0****6AV6355-1DA00-0FA0****6AV6355-1GA00-0FA0****6AV6355-1AA31-8FA1****6AV6355-1DA00-0FA1****6AV6355-1GA00-0FA1****6AV6355-1AA31-8FA2****6AV6355-1DA00-0FA2****6AV6355-1GA00-0FA2****6AV6355-1AA31-8FA3****6AV6355-1DA00-0FA3****6AV6355-1GA00-0FA3****V3.17****WinCC OA IPC Package V3.17**

- 128 PowerTags
- 128 PowerTags SUS
- 128 PowerTags POS
- 512 PowerTags
- 512 PowerTags SUS
- 512 PowerTags POS
- 2 048 PowerTags
- 2 048 PowerTags SUS
- 2 048 PowerTags POS
- 4 096 PowerTags
- 4 096 PowerTags SUS
- 4 096 PowerTags POS

**6AV6355-1AA31-7FA0****6AV6355-1DA31-7FA0****6AV6355-1GA31-7FA0****6AV6355-1AA31-7FA1****6AV6355-1DA31-7FA1****6AV6355-1GA31-7FA1****6AV6355-1AA31-7FA2****6AV6355-1DA31-7FA2****6AV6355-1GA31-7FA2****6AV6355-1AA31-7FA3****6AV6355-1DA31-7FA3****6AV6355-1GA31-7FA3**

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

## WinCC OA Development Packages

### Overview

WinCC OA Inhouse licenses are time-limited developer licenses recommended for certified partners.

This license comprises a one-year right of usage under the following conditions:

- ETM provides a WinCC OA license with unlimited PowerTags and all license options (excluding SmartSCADA, Video and BACnet). Two development licenses are required to create a redundant system. The extensions listed above can also be purchased separately.
  - This development license is for internal use and cannot be forwarded to third parties.
  - This development license cannot be used either for customer tests (e.g. SAT, FAT) or in productive plants.
- Support and problem solution, as well as remote maintenance during office hours, up to the number of hours per year included in the license package for customer's employees on WinCC OA.

#### Note:

The workload for resolving product faults that were reported and reproducible is not deducted from this number of hours.

The license is invoiced each year in advance. The agreement is valid for one year and is then extended by a further year if neither of the contract parties cancels the contract 3 months before its expiry.

#### Upgrade of Inhouse Development licenses

WinCC OA Inhouse Development licenses are version-independent. They can therefore be used even after a version change. To use new license features, customers need to upgrade their Inhouse Development licenses.

Upgrades and updates of the WinCC OA Inhouse Development license to new WinCC OA versions during the contract period must be performed by the customers themselves. They receive an email notification relating to this.

To perform the update, customers need to log into the WinCC OA license portal with their license key and upgrade the desired licenses there. They can do this any time after receiving the email notification.

### Design

#### Inhouse DEV PARA

Extension for the Inhouse DEV Package by a full PARA license. With graphical editor (incl. symbol catalogs), script development environment and test framework.

#### Inhouse DEV BACnet

Extension of the WinCC OA Inhouse DEV Package by the complete BACnet development environment including EDE tool, EDE file interface, BACnet object library, BACnet driver and BACnet browser.

#### Inhouse DEV Video

Extension of the WinCC OA Inhouse DEV Package by a complete developer video package with unlimited video sources (cameras).

#### Inhouse DEV SmartSCADA

Extension of the WinCC OA Inhouse DEV Package by a complete developer package for SmartSCADA for use of the KPI framework with unlimited KPI instances.

Notice: Analytics model is not included and is not sold as a developer license. The standard Analytics Toolbox package can be added for an additional charge.

#### API Interface

Application programming interface. The API offers a series of functions that enable WinCC OA to be extended with special managers.

A manager is a program that communicates with the system via a protocol defined by WinCC OA. The license allows the development of own drivers using C++. One license is required for each WinCC OA Para Standard. For first-time orders, participation in a WinCC OA WS - Developer Workshop is strongly recommended.

Ordering data	Article No.
<b>WinCC OA – Inhouse DEV Package</b> 1 WinCC OA Server license (functionally unlimited) with almost all options (except Video, BACnet, SmartSCADA), 10 hotline hours, automatically extended after one year • 1 Inhouse DEV Package • 2 Inhouse DEV Packages • 5 Inhouse DEV Packages • 10 Inhouse DEV Packages	<b>6AV6355-1EA00-0GA0</b> <b>6AV6355-1EA00-0GA1</b> <b>6AV6355-1EA00-0GA2</b> <b>6AV6355-1EA00-0GA3</b>
<b>WinCC OA – Inhouse DEV PARA</b> Extends WinCC OA Inhouse DEV Package by additional PARA licenses. Automatically extended after 1 year. • 1 Inhouse DEV PARA • 2 Inhouse DEV PARA • 5 Inhouse DEV PARA • 10 Inhouse DEV PARA	<b>6AV6355-1EA00-0GB0</b> <b>6AV6355-1EA00-0GB1</b> <b>6AV6355-1EA00-0GB2</b> <b>6AV6355-1EA00-0GB3</b>
<b>WinCC OA – Inhouse DEV BACnet</b> BACnet development environment including EDE tool, EDE file interface, BACnet object library, BACnet driver, BACnet browser, automatically extended after 1 year.	<b>6AV6355-1EA00-0GC0</b>
<b>WinCC OA – Inhouse DEV Video</b> Developer video package, unlimited sources/cameras, automatically extended after 1 year.	<b>6AV6355-1EA00-0GC1</b>
<b>WinCC OA – Inhouse DEV SmartSCADA</b> SmartSCADA developer package, KPI framework with unlimited KPI instances, automatically extended after 1 year.	<b>6AV6355-1EA00-0GC2</b>
<b>WinCC OA – API Interface</b> Application programming interfaces for the development of own drivers (C++).	<b>6AV6355-1EA00-0GD0</b>

## Overview

Solution Frameworks are license packages for the implementation of specific applications at the customer. Each package contains a quota of consulting hours.

## Design

### Topology Package

The Topology package is an application framework for topological coloring of network representations. A qualitative statement is made as to which parts (nodes, line sections etc.) of a network are directly connected to specific feeders. This package includes one day of consulting services (WinCC OA Consulting 8h) for project-specific integration.

### APM Package

The Advanced Playback Manager software offers the possibility to play back the system status of a real-time system in a test simulation system. Snapshot (time), playback (time range) and training sequence are included functions. The APM package does not include simulation of the process or the connected PLCs.

This package includes one day of consulting services (WinCC OA Consulting 8h) for project integration.

A WinCC OA RDB license (ORACLE connection) is required for the application.

### AMS Packages

The Advanced Maintenance Suite (AMS) Package includes the application with a maximum number of alarm/event DPs to assigned checklists, AMS Reports and AMS Importers. All I/O DPs that are linked to a list and trigger work orders are counted. AMS Reports also requires a license for Crystal Reports 2016 (RT V13.0). One day consulting service (WinCC OA Consulting 8h) is included.

AMS Reports and Importer are not available for Linux distributions.

AMS Packages are available in different sizes (see table below). An existing WinCC OA Server is required for the application. The package does not include further support.

AMS Package	Qty. alarm/event DP	License validity	Extendable
Starter	20	90 days	No
Starter	20	Unlimited	No
Small	100	Unlimited	No
Medium	1 000	Unlimited	No
Large	5 000	Unlimited	Yes, via WinCC OA AMS Package Extension
Unlimited	Unlimited	Unlimited	No

The WinCC OA AMS Package Extension includes an upgrade for Advanced Maintenance Station packages by 1 000 I/O each. It is only applicable to the WinCC OA AMS Package Large.

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Software and Software Services

**WinCC OA Solution Frameworks**

Ordering data	Article No.	Article No.
<i>V3.18</i>		
<b>WinCC OA - Topology Package</b>		<b>WinCC OA - AMS Package Small V3.18</b>
<b>V3.18</b> Application framework for topological coloring of network representations + consulting.		Advanced Maintenance Suite with max. 100 alarm/event DP + consulting.
<ul style="list-style-type: none"> <li>• Topology Package</li> <li>• Topology Package UPG</li> <li>• Topology Package SUS</li> <li>• Topology Package SMS</li> <li>• Topology Package POS</li> </ul>	<b>6AV6355-1AA31-8HA0</b> <b>6AV6355-1CA31-8HA0</b> <b>6AV6355-1DA00-0HA0</b> <b>6AV6355-1FA00-0HA0</b> <b>6AV6355-1GA00-0HA0</b>	<b>6AV6355-1AA31-8HC2</b> <b>6AV6355-1CA31-8HC2</b> <b>6AV6355-1DA00-0HC2</b> <b>6AV6355-1FA00-0HC2</b> <b>6AV6355-1GA00-0HC2</b>
<b>WinCC OA - APM Package V3.18</b>		<b>WinCC OA - AMS Package Medium V3.18</b>
Playback of real-time system status in test simulation system + consulting.		Advanced Maintenance Suite with max. 1 000 alarm/event DP + consulting.
<ul style="list-style-type: none"> <li>• APM Package</li> <li>• APM Package UPG</li> <li>• APM Package SUS</li> <li>• APM Package SMS</li> <li>• APM Package POS</li> </ul>	<b>6AV6355-1AA31-8HB0</b> <b>6AV6355-1CA31-8HB0</b> <b>6AV6355-1DA00-0HB0</b> <b>6AV6355-1FA00-0HB0</b> <b>6AV6355-1GA00-0HB0</b>	<b>6AV6355-1AA31-8HC3</b> <b>6AV6355-1CA31-8HC3</b> <b>6AV6355-1DA00-0HC3</b> <b>6AV6355-1FA00-0HC3</b> <b>6AV6355-1GA00-0HC3</b>
<b>WinCC OA - AMS Package Starter V3.18</b>	<b>6AV6355-1AA31-8HC0</b>	<b>WinCC OA - AMS Package Large V3.18</b>
90-day trial license for Advanced Maintenance Suite + consulting.		Advanced Maintenance Suite with max. 5 000 alarm/event DP + consulting.
<b>WinCC OA - AMS Package Entry V3.18</b>		
Advanced Maintenance Suite with max. 20 alarm/event DP + consulting.		
<ul style="list-style-type: none"> <li>• AMS Package Entry</li> <li>• AMS Package Entry UPG</li> <li>• AMS Package Entry SUS</li> <li>• AMS Package Entry SMS</li> <li>• AMS Package Entry POS</li> </ul>	<b>6AV6355-1AA31-8HC1</b> <b>6AV6355-1CA31-8HC1</b> <b>6AV6355-1DA00-0HC1</b> <b>6AV6355-1FA00-0HC1</b> <b>6AV6355-1GA00-0HC1</b>	<b>6AV6355-1AA31-8HC4</b> <b>6AV6355-1CA31-8HC4</b> <b>6AV6355-1DA00-0HC4</b> <b>6AV6355-1FA00-0HC4</b> <b>6AV6355-1GA00-0HC4</b>
<b>WinCC OA - AMS Package Unlimited V3.18</b>		<b>WinCC OA - AMS Package Unlimited V3.18</b>
Advanced Maintenance Suite with unlimited alarm/event DP + consulting.		Advanced Maintenance Suite with unlimited alarm/event DP + consulting.
<ul style="list-style-type: none"> <li>• AMS Package Unlimited</li> <li>• AMS Package Unlimited UPG</li> <li>• AMS Package Unlimited SUS</li> <li>• AMS Package Unlimited SMS</li> <li>• AMS Package Unlimited POS</li> </ul>		<b>6AV6355-1AA31-8HC5</b> <b>6AV6355-1CA31-8HC5</b> <b>6AV6355-1DA00-0HC5</b> <b>6AV6355-1FA00-0HC5</b> <b>6AV6355-1GA00-0HC5</b>
<b>WinCC OA - AMS Package Extension V3.18</b>		<b>WinCC OA - AMS Package Extension V3.18</b>
Upgrade for Advanced Maintenance Suite Package Large by 1 000 alarm/event DP.		Upgrade for Advanced Maintenance Suite Package Large by 1 000 alarm/event DP.
<ul style="list-style-type: none"> <li>• AMS Package Extension</li> <li>• AMS Package Extension UPG</li> <li>• AMS Package Extension SUS</li> <li>• AMS Package Extension SMS</li> <li>• AMS Package Extension POS</li> </ul>	<b>6AV6355-1AA31-8HC6</b> <b>6AV6355-1CA31-8HC6</b> <b>6AV6355-1DA00-0HC6</b> <b>6AV6355-1FA00-0HC6</b> <b>6AV6355-1GA00-0HC6</b>	

Ordering data	Article No.	Article No.
<b>V3.17</b>		
<b>WinCC OA - Topology Package V3.17</b>  Application framework for topological coloring of network representations + consulting. <ul style="list-style-type: none"><li>• Topology Package</li><li>• Topology Package UPG</li><li>• Topology Package SUS</li><li>• Topology Package SMS</li><li>• Topology Package POS</li></ul>	<b>6AV6355-1AA31-7HA0</b> <b>6AV6355-1CA31-7HA0</b> <b>6AV6355-1DA31-7HA0</b> <b>6AV6355-1FA31-7HA0</b> <b>6AV6355-1GA31-7HA0</b>	<b>WinCC OA – AMS Package Medium V3.17</b>  Advanced Maintenance Suite with max. 1 000 alarm/event DP + consulting. <ul style="list-style-type: none"><li>• AMS Package Medium</li><li>• AMS Package Medium UPG</li><li>• AMS Package Medium SUS</li><li>• AMS Package Medium SMS</li><li>• AMS Package Medium POS</li></ul> <b>6AV6355-1AA31-7HC3</b> <b>6AV6355-1CA31-7HC3</b> <b>6AV6355-1DA31-7HC3</b> <b>6AV6355-1FA31-7HC3</b> <b>6AV6355-1GA31-7HC3</b>
<b>WinCC OA - APM Package V3.17</b>  Playback of real-time system status in test simulation system + consulting. <ul style="list-style-type: none"><li>• APM Package</li><li>• APM Package UPG</li><li>• APM Package SUS</li><li>• APM Package SMS</li><li>• APM Package POS</li></ul>	<b>6AV6355-1AA31-7HB0</b> <b>6AV6355-1CA31-7HB0</b> <b>6AV6355-1DA31-7HB0</b> <b>6AV6355-1FA31-7HB0</b> <b>6AV6355-1GA31-7HB0</b>	<b>WinCC OA – AMS Package Large V3.17</b>  Advanced Maintenance Suite with max. 5 000 alarm/event DP + consulting. <ul style="list-style-type: none"><li>• AMS Package Large</li><li>• AMS Package Large UPG</li><li>• AMS Package Large SUS</li><li>• AMS Package Large SMS</li><li>• AMS Package Large POS</li></ul> <b>6AV6355-1AA31-7HC4</b> <b>6AV6355-1CA31-7HC4</b> <b>6AV6355-1DA31-7HC4</b> <b>6AV6355-1FA31-7HC4</b> <b>6AV6355-1GA31-7HC4</b>
<b>WinCC OA – AMS Package Starter V3.17</b>  90-day trial license for Advanced Maintenance Suite + consulting.	<b>6AV6355-1AA31-7HC0</b>	<b>WinCC OA - AMS Package Unlimited V3.17</b>  Advanced Maintenance Suite with unlimited alarm/event DP + consulting. <ul style="list-style-type: none"><li>• AMS Package Unlimited</li><li>• AMS Package Unlimited UPG</li><li>• AMS Package Unlimited SUS</li><li>• AMS Package Unlimited SMS</li><li>• AMS Package Unlimited POS</li></ul> <b>6AV6355-1AA31-7HC5</b> <b>6AV6355-1CA31-7HC5</b> <b>6AV6355-1DA31-7HC5</b> <b>6AV6355-1FA31-7HC5</b> <b>6AV6355-1GA31-7HC5</b>
<b>WinCC OA - AMS Package Entry V3.17</b>  Advanced Maintenance Suite with max. 20 alarm/event DP + consulting. <ul style="list-style-type: none"><li>• AMS Package Entry</li><li>• AMS Package Entry UPG</li><li>• AMS Package Entry SUS</li><li>• AMS Package Entry SMS</li><li>• AMS Package Entry POS</li></ul>	<b>6AV6355-1AA31-7HC1</b> <b>6AV6355-1CA31-7HC1</b> <b>6AV6355-1DA31-7HC1</b> <b>6AV6355-1FA31-7HC1</b> <b>6AV6355-1GA31-7HC1</b>	<b>WinCC OA - AMS Package Extension V3.17</b>  Upgrade for Advanced Maintenance Suite Package Large by 1 000 alarm/event DP. <ul style="list-style-type: none"><li>• AMS Package Extension</li><li>• AMS Package Extension UPG</li><li>• AMS Package Extension SUS</li><li>• AMS Package Extension SMS</li><li>• AMS Package Extension POS</li></ul> <b>6AV6355-1AA31-7HC6</b> <b>6AV6355-1CA31-7HC6</b> <b>6AV6355-1DA31-7HC6</b> <b>6AV6355-1FA31-7HC6</b> <b>6AV6355-1GA31-7HC6</b>
<b>WinCC OA – AMS Package Small V3.17</b>  Advanced Maintenance Suite with max. 100 alarm/event DP + consulting. <ul style="list-style-type: none"><li>• AMS Package Small</li><li>• AMS Package Small UPG</li><li>• AMS Package Small SUS</li><li>• AMS Package Small SMS</li><li>• AMS Package Small POS</li></ul>	<b>6AV6355-1AA31-7HC2</b> <b>6AV6355-1CA31-7HC2</b> <b>6AV6355-1DA31-7HC2</b> <b>6AV6355-1FA31-7HC2</b> <b>6AV6355-1GA31-7HC2</b>	

## HMI software

### SIMATIC WinCC OA

#### SIMATIC WinCC OA Services

##### Overview

###### **SIMATIC WinCC OA Services**

SIMATIC WinCC Open Architecture is a SCADA system for visualizing and operating processes, production flows, machines and plants in all industrial sectors.

This high degree of flexibility requires comprehensive support for our customers and especially our partners. WinCC OA staff are happy to provide support for a wide range of challenges.

Services are offered in the following categories:

- Support: Support for errors within the scope of maintenance and update contracts
- Consulting: Consulting and configuration activities
- Solution: Development activities based on precise, technical specifications
- Trainings: Defined trainings and hands-on trainings
- Travel costs: For consulting or trainings on site
- Update and maintenance costs: Entitlement to upgrade the software and for support services
- Trade goods: Third-party goods sold through WinCC OA

##### Note:

These are services of the product supplier.

**Overview****WinCC OA Support**

WinCC OA support can only be purchased in addition to a currently valid Software Maintenance Service (SMS) or In house Development Package.

Support requests can be submitted online around the clock, 365 days a year. Service requests cannot be submitted by email.

The customer request is received by Siemens Industry Support (1st level), further processing is performed by the WinCC OA Product Support specialists (2nd level), who are available during Austrian normal working hours, Monday to Friday 9 am to 5 pm CEST/CET.

A support agreement is concluded for 12 months and must be renewed thereafter.

The corresponding pool of hours is also available for this period. Unused hours expire and will be charged for 12 months from the date of purchase.

Support hours are for general product information and product related support.

"WinCC OA Consulting" handles specific, project-related information.

**Design**

Online Support Requests can be made directly to the Online Support Portal via the link  
<https://support.industry.siemens.com/My/ww/en/requests#createRequest>.

Further communication in this regard take places via email. You will be contacted by WinCC OA Product Support via email when they are working on your service request. You can reply to this email if you wish to send additional information.

During the initial contact, registration of the customer master data may take some time.

A member of the WinCC OA Product Support team will then perform further processing of your support request.

You can check the status of your service request and edit your service requests on the Siemens Support Portal (<http://www.siemens.com/industry/supportrequest>).

What information is required for a service request to WinCC OA Support?

When making a service request to WinCC OA Support, the following information must always be included:

- WinCC OA version: Version number and service pack (if applicable)
- List of the installed WinCC OA patches
- Operating system
- System configuration: Single system, redundant system, distributed system
- Detailed problem description and/or step-by-step description, steps for reproducing the reported problem.
- Example:
  - WinCC OA version 3.18  
Patch level: P001  
Operating system: Windows10 64-bit  
System configuration: Redundant system
  - WinCC OA version 3.16  
Patch level: P025  
Operating system: Red Hat Enterprise 8  
System configuration: Distributed single system

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Services

## WinCC OA Support

### Design

#### Problem classifications:

Only registered requests can be processed with appropriate priority. WinCC OA Product Support classifies each case according to its urgency.

Information about WinCC OA versions and operating systems used is required for this.

The following problem classifications exist:

Priority	High (A)	Medium (B)	Low (C)
<b>Problem type</b>	Crash of a WinCC OA Core process, Inoperable system and similar	Limited functionality, operation only possible with time-/cost-intensive workaround solutions	Standard questions on the product and product properties, minor malfunctions
<b>Average reaction time <sup>1)</sup></b>	3 workdays	8 workdays	14 workdays

<sup>1)</sup> The reaction time is the time between the receipt of the product support request and the first response from ETM Customer Care. Please note that the reaction times are average processing times that only apply during Austrian working hours from Monday to Friday, 9 am to 5 pm CEST, unless your contract states otherwise.

#### Support for current and past versions:

Standard product support for SIMATIC WinCC Open Architecture includes the current as well as the last two versions. This does not apply to customers with a corresponding maintenance agreement concluded with ETM. If required, please contact us to discuss a possible migration to a higher version.

WinCC OA Product Support supports the following versions (including Service Packs SP1 and SP2 and all official patches):

Date	Release	Supported versions		
		Current	Current-1	Current-2
May 2018	V3.16	V3.16	V3.15	V3.14
January 2020	V3.17	V3.17	V3.16	V3.15
May 2021	V3.18	V3.18	V3.17	V3.16

#### Notes on fault reporting:

Faults must be reported and delivered to WinCC OA Product Support in a reproducible manner - see <https://www.winccoa.com/support.html>.

If WinCC OA Product Support receives too little information, or if the type of the fault makes it unlikely that the fault can be reproduced by WinCC OA Product Support using the WinCC OA Product Support standard test capabilities, WinCC OA Product Support may refuse to take steps to reproduce the fault.

If WinCC OA Product Support does not receive a response to a support request within 3 months, the request will be closed.

If WinCC OA Product Support does not receive any further feedback from the customer on a solution provided by WinCC OA Product Support within 28 days, the request will be closed automatically.

Total times for reproduction of faults by WinCC OA Product Support are limited by the total number of support hours.

The customer must report the fault and make it reproducible on a supported WinCC OA version with all patches installed on an operating system supported by WinCC OA. If the fault originates from a WinCC OA third-party software component, WinCC OA Product Support notifies the relevant supplier of the fault and the respective support conditions of the supplier apply.

Discontinuation of third-party software (e.g. database system) and/or operating system (e.g. Windows version) supported by WinCC OA leads automatically and immediately to the discontinuation of WinCC OA in combination with the discontinued third-party software and/or the operating system.

Access to Customer Care is reserved for customer employees trained on WinCC OA.

Support is provided by WinCC OA product specialists without customer-specific project know-how. (Specific project consulting can be provided by a WinCC OA consultant via a separate consulting agreement).

Ordering data	Article No.
<b>WinCC OA – Hotline Support</b> Use of the hotline support to the extent of the hours ordered. <ul style="list-style-type: none"><li>• 10 h</li><li>• 15 h</li><li>• 20 h</li></ul>	<b>6AV6355-2AA00-0BC1</b> <b>6AV6355-2AA00-0BC2</b> <b>6AV6355-2AA00-0BC3</b>
<b>WinCC OA replacement license issue</b> Flat fee for issuing a replacement license.	<b>6AV6355-2AA00-0BC4</b>

## HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Services

### WinCC OA Consulting

#### Overview

Consulting refers to pure consulting activities with optional configuration support within the scope of the agreements as well as within the scope of special products ("Solution Frameworks"), which are to be adapted to individual customer requirements according to existing routines.

Consulting is a service provided by WinCC OA. This is calculated at an hourly rate. It is based on 8 hours per working day during normal working hours, defined according to Austrian working days, Monday to Friday from 9 am to 5 pm CET. If this time is exceeded, the following surcharges apply:

- 50% outside of normal working hours (6 pm until 8 am) and on Saturdays
- 100% on Sundays and Austrian holidays

In the course of ordering a project, it is also possible to order a pool of hours of consulting services. Corresponding working hours are then removed from the pool.

The hourly rate refers to project-related, location-independent work – it does not require travel to the customer or to a location. If travel is desired, it must be ordered as <Travel costs>.

Travel time is viewed as working time and, if not agreed separately, is invoiced accordingly by ETM. The hours actually used, according to the timesheet, are invoiced.

"Trainings" as well as development of adapted product components ("Solutions") can be ordered separately.

Likewise, any telephone support within the scope of a maintenance contract is not linked to this contingent, but must be ordered separately (for details, see: "UPG", "SUS", "SMS"). Additional ordering of "Support" services is also possible, but is not automatically included in the consulting services.

Before making your order, please coordinate the availability of the WinCC OA trainers and consultants with ETM in good time.

#### Ordering data

#### Article No.

##### WinCC OA - Consulting

Includes staggered number of hours of consulting services

- Consulting 1h
- Consulting 8h
- Consulting 25h
- Consulting 50h
- Consulting 100h

**6AV6355-3AA00-0BA0**

**6AV6355-3AA00-0BA1**

**6AV6355-3AA00-0BA4**

**6AV6355-3AA00-0BA2**

**6AV6355-3AA00-0BA3**

## Overview

Solution is a customer-specific software development based on precise technical specifications.

How this development is positioned in the product, effects on maintenance responsibility and handover to the customer must be clarified in the course of planning.

Solutions are a service provided by WinCC OA. This is calculated at an hourly rate. It is based on 8 hours per working day during normal working hours, defined according to Austrian working days, Monday to Friday from 9 am to 5 pm CET. Exceeding this time and activities outside normal working hours will be invoiced proportionately with increased costs.

The hourly rate refers to project-related, location-independent work – it does not require travel to the customer or to a location. Trainings, as well as pure consulting and configuration activities, can be ordered separately.

In the course of project implementation, it makes sense to make use of the various services that are available as part of the support services.

## Ordering data

### Article No.

#### WinCC OA – Solution Custom

Customer-specific, individually offered software development according to specification.

**6AV6355-3CA00-0BB1**

#### WinCC OA – Solution 1 hour

1 hour hourly rate for software development according to specification.

**6AV6355-3CA00-0BB0**

## HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Services

### WinCC OA Trainings

#### Overview

Trainings for handling WinCC OA and various WinCC OA features in detail. Trainings are conducted by certified WinCC OA trainers. Price per participant. Contact information must be provided to make an appointment.

Lunch is included in the price for trainings held at ETM in Eisenstadt. If possible, participants should bring their own notebooks to the training (64-bit operating system).

ETM reserves the right to postpone training courses to the next possible date if the minimum number of registrations is not reached.

Current requirements as well as additional detailed information regarding minimum hardware and software requirements can be accessed at any time via the following link:

[http://www.etm.at/download/doc\\_wincocoabas\\_EN.pdf](http://www.etm.at/download/doc_wincocoabas_EN.pdf)

**All mandatory ECC examinations (including late registrations or changes of training participants) must be performed by the SIEMENS unit responsible for the order (if AWV category 1).**

3

#### Design

##### Certified WinCC OA Basic Training

This trainer-led course provides the participants with the necessary knowledge to successfully design and create a WinCC OA application within five days. This course is aimed at employees who want to gain initial experience in WinCC OA. Course participants require computer skills (MS Windows, keyboard and mouse) as well as knowledge of PLCs and networks. Basic knowledge in programming is advantageous. Participants should bring along a suitable laptop on which a WinCC OA Training version will be installed for practice purposes.

Minimum of 3 registrations. Training is limited to a maximum of 10 participants.

##### Certified WinCC OA Extended Engineer Workshop

In this three-day course, participants will gain a deeper insight into the internal mechanisms and details of WinCC OA. Topics include debugging, performance, communication between the individual managers and "Do's and Don'ts" in scripting. To get the maximum benefits from these topics, a current customer project is used as a basis for discussion and the mechanisms are shown and discussed. Additional topics (e.g. Add-ons of WinCC OA or special functions) can be selected and have to be agreed with the trainer in advance.

We recommend attending the Engineer Workshop only after initial project experiences – at the earliest 3 months after WinCC OA Basic Training.

Minimum of 2 registrations.

Training is limited to a maximum of 8 participants.

##### Certified WinCC OA Consultant

Over three days in this course, participants will gain the knowledge and skills required to create complex and large WinCC OA projects. Data structures, graphical references and system architectures of large, distributed and redundant systems are built, among other things. Troubleshooting and error analysis are further topics of this course. Here, too, further topics (e.g. Add-ons of WinCC OA or special functions) can be agreed with the trainer in advance.

Minimum 2 registrations.

The training is limited to max. 8 participants.

##### Certified WinCC OA Developer Workshop

In this three-day course, the participants obtain specialized knowledge and the skills required to use the WinCC OA API Toolkit. It shows how to design customer drivers, managers and/or CTRL extensions (dlls).

##### Certified WinCC OA Extended Developer Workshop

This trainer-led course provides experienced participants with the knowledge and skills necessary to use the WinCC OA API Toolkit in three days. In this course, participants will learn how to create special CTRL extensions (DLLs), managers and/or simple drivers.

Minimum 2 registrations

Training is limited to a maximum of 6 participants.

##### Certified WinCC OA Security Workshop

In this three-day, trainer-led workshop, experienced participants will gain the knowledge and skills required to use WinCC OA as a process control system in a secure network environment as described in the WinCC OA Security Guideline. This course offers participants an introduction to the security mechanisms available in WinCC OA.

Minimum 2 registrations.

Training is limited to a maximum of 8 participants.

##### Certified WinCC OA Safety Engineer Workshop

In this two-day trainer-led workshop, experienced participants will gain the specialist knowledge and the skills required to set up safety-relevant WinCC OA projects. The specified framework and operating conditions are discussed in detail and the resulting effects on the customer project are discussed.

Minimum 2 registrations.

##### WinCC OA Update Training

This one-day course led by a trainer gives experienced WinCC OA specialists an insight into the latest features and functions of the current WinCC OA version. This course is obligatory for "Certified Engineer" or "Certified Consultant" in order to maintain the certification status already achieved.

Minimum of 5 registrations.

## Design

### WinCC OA Object-oriented Programming

This trainer-led course over 2 days provides participants with the knowledge required to successfully use the script language CTRL++ integrated in WinCC OA for realizing object-oriented concepts as well as the concept of object-oriented Panel references. This course is thus aimed at employees who autonomously program in WinCC OA, both Panel-dependent and Panel-independent.  
 Minimum of 2 registrations.

### WinCC OA Video Training

One-day training to learn the Video option of WinCC OA.

### WinCC OA Video Expert Training

This trainer-led course over 2 days provides participants with the knowledge required to plan and successfully commission plants with video cameras using WinCC OA VIDEO.  
 In presentations and practical exercises, the course teaches the technical basics for installing distributed video systems, installing cameras and optimizing bandwidth requirements. This course is aimed both at technical project managers who plan SCADA systems with video and at employees who use WinCC OA to program, set up and commission such systems.

### WinCC OA SmartSCADA Training

The two-day training course, led by a lecturer, offers experienced participants the opportunity to acquire the knowledge and skills required to use the WinCC OA SmartSCADA assistants (KPIs, data mining and classification) included in the scope of delivery of the SmartSCADA Add-on. A demo project with data for analysis serves as a training basis including exercises for participants.  
 Minimum of 2 registrations. Training is limited to a maximum of 8 participants.

### WinCC OA BACnet Workshop

In this one and a half day training, experienced WinCC OA engineers will be familiarized with using the WinCC OA BACnet development environment. The topics covered are development environment, library, drivers and similar.

### WinCC OA AMS Workshop

This three-day workshop covers the administration and customization of the Advanced Maintenance Suite (AMS), how trouble tickets are dispatched and their status can be tracked, as well as the evaluation of the achieved results using reports.

### WinCC OA IOT Suite Admin Training

This one-day, trainer-led course conveys to participants the skills and knowledge required to successfully set up a Siemens Nanobox, such as an IPC227E, with Siemens Industrial OS, the IOT OPA (On Premise Administration) and the IOT Suite. Training on using the IOT Suite is also provided so that the participants can share their knowledge and train other IOT Suite users.

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA Services

**WinCC OA Trainings**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>Certified WinCC OA Basic Training</b> Training for getting started with WinCC OA. Duration: 5 days	<b>6AV6355-3BA00-0BA0</b>	<b>6AV6355-3BA00-0BD0</b> Training for new functionalities in WinCC OA. Duration: 1 day.
<b>Certified WinCC OA Engineer Workshop</b> Training for future engineers of WinCC OA. Duration: 3 days	<b>6AV6355-3BA00-0BB0</b>	<b>6AV6355-3BA00-0BE0</b> Training for object-oriented programming and Panels. Duration: 2 days
<b>Certified WinCC OA Consultant</b> Training for creating complex systems with WinCC OA. Duration: 3 days.	<b>6AV6355-3BA00-0BC0</b>	<b>6AV6355-3BA00-0BE1</b> Training to learn the Video option of WinCC OA. Duration: 1 day.
<b>Certified WinCC OA Developer Workshop</b> Training to obtain basic knowledge for development with WinCC OA. Duration: 3 days.	<b>6AV6355-3BA00-0BC1</b>	<b>6AV6355-3BA00-0BE2</b> Training to expand knowledge on the Video option of WinCC OA. Duration: 2 days
<b>Certified WinCC OA Extended Developer WS</b> Training for detailed knowledge of the WinCC OA API. Duration: 3 days.	<b>6AV6355-3BA00-0BC2</b>	<b>6AV6355-3BA00-0BE3</b> Training for the use and handling of WinCC OA Add-on SmartSCADA. Duration: 2 days.
<b>Certified WinCC OA Security Workshop</b> Training to learn security mechanisms in WinCC OA. Duration: 3 days.	<b>6AV6355-3BA00-0BC3</b>	<b>6AV6355-3BA00-0BE4</b> Training to learn the BACNet option. Duration: 1.5 days
<b>Certified WinCC OA Safety Engineer WS</b> Training for future SAFETY engineers of WinCC OA. Duration: 2 days	<b>6AV6355-3BA00-0BC4</b>	<b>6AV6355-3BA00-0BE5</b> Training to learn the Advanced Maintenance Suite. Duration: 3 days
		<b>6AV6355-3BA00-0BK0</b> Training to learn the WinCC OA IOT Suite Admin Training. Duration: 1 day

**Overview**

Services for "Consulting" and "Training" are charged at an hourly rate. The hourly rate refers to project-related, location-independent work – it does not require travel to the customer or to a location.

Travel costs are to be agreed upon additionally and include cost for both time and travel for WinCC OA employees involved. A definite commitment for a trip must be agreed separately.

Depending on the distance and the agreed means of transport, flat-rate travel costs for arrival and departure or freely configurable contingents – also for longer stays and customizations – are offered.

**Ordering data****Article No.**

<b>WinCC OA – Travel costs</b> Fixed price for travel allowance, including travel time and costs. • TC up to 100 km • TC up to 300 km • TC up to 500 km	<b>6AV6355-3DA00-0BF0</b> <b>6AV6355-3DA00-0BF1</b> <b>6AV6355-3DA00-0BF2</b>
<b>WinCC OA – Travel costs flight EU</b> Fixed price for travel allowance for a flight within the EU.	<b>6AV6355-3DA00-0BF3</b>
<b>WinCC OA – Travel costs journey time</b> Hourly rate for travel time	<b>6AV6355-3DA00-0BG0</b>
<b>WinCC OA – Travel costs rental car</b> Fixed price travel allowance for a rental car per day	<b>6AV6355-3DA00-0BG1</b>
<b>WinCC OA – Travel costs overnight accom.</b> Fixed price travel allowance for one overnight stay	<b>6AV6355-3DA00-0BG2</b>
<b>WinCC OA – Travel costs meals</b> Fixed price for meals for one day	<b>6AV6355-3DA00-0BG3</b>

# HMI software

SIMATIC WinCC OA

SIMATIC WinCC OA Services

## WinCC OA Trade goods

### Overview

Trade goods include WinCC OA components that are purchased and distributed under the name **WinCC OA**. These include third-party products such as licenses for Oracle DB, as well as hardware dongles, data storage media and certificates.

More information about licenses and shipping under "More information".

### Design

#### Oracle licenses

##### General

The WinCC OA Basic Package includes the HDB database (flat file DB). Alternatively, historical data can be archived in Oracle. The WinCC OA RDB Add-on is required for this purpose. In terms of hardware, separate computers must be provided for Oracle databases.

In the event that Oracle makes changes to the price list, availability or licensing conditions in the meantime, WinCC OA reserves the right to adjust all Oracle prices and licensing conditions stated in this offer accordingly.

This reserved right to adjustment is valid from the time the offer is made until an Oracle license agreement with the end customer is legally valid.

If the Oracle licenses are not obtained via WinCC OA, WinCC OA provides no Oracle support. WinCC OA Support services end at the RDB-Oracle interface. WinCC OA does not provide any services for Oracle installation or for setting up the WinCC OA RDB Manager.

Please observe the supported operating systems according to the WinCC OA documentation and the Oracle documentation.

##### ASFU

As an option, Oracle licenses can be obtained as so-called ASFU (Application Specific Full Use) licenses. However, the use of an ASFU license is subject to certain technical requirements. These are listed in the attached Oracle License Agreement. The obligations of this agreement must be passed on by WinCC OA to the complete supply chain and must therefore be signed by the end customer. Only an agreement signed by the end customer allows use as ASFU license.

WinCC OA cannot supply the ASFU license until the ASFU Oracle agreement signed by the end customer is available.

If, in exceptional cases, supply of the ASFU license by WinCC OA is necessary before a signed ASFU Oracle agreement is available, this must be communicated in writing.

If the ASFU Oracle agreement signed by the end customer is not submitted within 60 days after supply of the ASFU license via WinCC OA, 40% of the Oracle list price will be charged and the license will be upgraded to an Oracle FU license.

To be able to process the supply of the Oracle license, we need the following information with the order:

- End user name (company name)
- End user address, town, country
- End user contact details, email address
- Signed ASFU Oracle agreement

Note that Oracle Software Update License & Support is mandatory for the first year and is provided by WinCC OA. Oracle Software Update License & Support can be ordered directly for the subsequent years.

##### Full Use

As an option, Oracle licenses can be purchased as so-called FU (Full Use) licenses. Here, the end customer receives an email directly from Oracle with the download link. The contract (OLSA) between end customer and Oracle is confirmed by 1-click. However, the use of an FU license is subject to certain technical requirements.

To be able to process the supply of the Oracle license, we need the following information with the order:

- End user name (company name)
- End user address, town, country
- End user contact details, email address

Note that Oracle Software Update License & Support is mandatory for the first year and is provided by Oracle based on the CSI number of the license. For subsequent years, Oracle Software Update License & Support can be ordered directly from Oracle by the end customer.

##### Oracle configurations

All the following standard Oracle configurations are based on "Oracle Standard Edition 2" processor licenses in the selected license type (FU / ASFU).

##### One Single Oracle database server

Please note that the use of the "Oracle Standard Edition 2" is only permitted under the following hardware conditions: Max. 2 CPU sockets and max. 2 CPUs per Oracle Server

##### Two Oracle database servers in a cluster configuration

Please note that the use of the "Oracle Standard Edition" is only permitted under the following hardware conditions: Max. 4 CPU sockets and max. 2 CPUs per Oracle Server – The offer includes licenses for max. 2 CPUs.

Please note that operation of a cluster database in the cluster configuration is no longer supported as of Oracle version 19c Standard Edition 2.

The database can be installed in a cluster configuration, but only operated as single instance database. In this case, the higher availability is guaranteed by "Switchover" and "Failover" methods. The database is only active on one cluster node in the cluster configuration.

##### DRS with one Single Oracle database server per location

Please note that the use of the "Oracle Standard Edition 2" is only permitted under the following hardware conditions: Max. 2 CPU sockets and max. 2 CPUs per Oracle Server – The offer includes the license for 1 CPU.

##### DRS with two Oracle database servers in a cluster configuration & one Single Oracle database server

Please note that the use of the "Oracle Standard Edition 2" is only permitted under the following hardware conditions:

- Single server: Max. 2 CPU sockets and max. 2 CPUs per Oracle Server
- Cluster: Max. 4 CPU sockets and max. 2 CPUs per Oracle Server

Please read the note in 4.2 for Oracle as of version 19c

**Design**

DRS with two Oracle database servers in a cluster configuration per location

Please note that the use of the "Oracle Standard Edition 2" is only permitted under the following hardware conditions:  
 Max. 4 CPU sockets and max. 2 CPUs per Oracle Server.  
 Please read the note in 4.2 for Oracle as of version 19c.

**Hardware**Hardware dongles

WinCC OA offers USB hardware dongles for operation with a license bound to the dongle. Dongles can also be used to temporarily replace hardware-bound licenses of operator stations or servers.

Dongles can be purchased in three different types. The standard and micro versions are compatible with the CodeMeter licensing procedure introduced in WinCC OA V3.17.

The WIBU version must be selected to operate WinCC OA V3.16 and lower with a hardware dongle.

Data storage medium

WinCC OA installation software is available on DVD.

Certificates

WinCC OA issues certificates for training graduates.  
 Participation in WinCC OA Training conducted by a "Train-the-Trainer" certified trainer is a prerequisite.

A flat fee is charged for express delivery of WinCC OA goods (WinCC OA on data storage medium, WinCC OA dongle etc.).

**Ordering data****Article No.**

<b>WinCC OA – ORACLE SE2 ASFU</b> Oracle Standard Edition 2 Processor ASFU license including first year maintenance	<b>6AV6355-4AA00-0AA0</b>
<b>WinCC OA – ORACLE SE2 ASFU SUS</b> One year maintenance for Oracle Standard Edition 2 processor license ASFU	<b>6AV6355-4AA00-0AA1</b>
<b>WinCC OA – ORACLE SE2 FU (full use)</b> Oracle Standard Edition 2 Processor license SE2 full use including first year maintenance	<b>6AV6355-4AA00-0AA2</b>
<b>WinCC OA – ORACLE SE2 FU SUS</b> One year maintenance for Oracle Standard Edition 2 processor license full use.	<b>6AV6355-4AA00-0AA3</b>
<b>WinCC OA Dongle</b> USB hardware dongle for dongle-bound licenses. <ul style="list-style-type: none"> <li>• WinCC OA – Dongle Standard</li> <li>• WinCC OA – Dongle Standard Micro</li> <li>• WinCC OA – Dongle (Wibukey, outdated)</li> </ul>	<b>6AV6355-4BA00-0AB0</b> <b>6AV6355-4BA00-0AB1</b> <b>6AV6355-4BA00-0AB2</b>
<b>WinCC OA – On data storage medium V3.18</b> WinCC OA Software DVD – Version V3.18 on data storage medium	<b>6AV6355-4BA31-8AB3</b>
<b>WinCC OA – On data storage medium V3.17</b> WinCC OA Software DVD – Version V3.17 on data storage medium	<b>6AV6355-4BA31-7AB3</b>
<b>WinCC OA – Certificates</b> Issue and send a certificate for participants of WinCC OA Training course.	<b>6AV6355-4BA00-0AB4</b>
<b>WinCC OA – Express delivery</b> Flat fee for express delivery of WinCC OA Trade goods.	<b>6AV6355-4BA00-0AB5</b>

## HMI software

### SIMATIC WinCC OA

#### SIMATIC WinCC OA IOT Suite

##### Overview

###### **SIMATIC WinCC OA IOT Suite**

SIMATIC WinCC OA IOT Suite is an IoT system consisting of an IOT Box on the machine for visualizing and analyzing processes, production sequences, machines and production lines in real-time and the IOT OPA as a maintenance service provider for all connected IOT Boxes, specially developed for the food and beverage industries.

The IOT Box is based on the SCADA system SIMATIC WinCC Open Architecture V3.16, which has been on the market for many years. A highly simplified user interface enables the machine operator without special previous knowledge and in a playful way to gain deeper insights into the process sequences and to generate a new level of transparency and analysis options for optimizing the processes of a machine by entering non-machine information.

Current version:

- SIMATIC IOT Suite V1.2

##### More information

###### Important:

All offered order numbers include only the SW licenses for operating an IOT Box and/or an IOT OPA. Hardware and operating systems are not included and must be purchased separately.

More information about hardware can be found under:

<https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/5101001?tree=CatalogTree>

And about the operating system under:

<https://mall.industry.siemens.com/mall/en/WW/Catalog/Products/10355854?tree=CatalogTree>

The IOT OPA can be understood as a maintenance contract of an IOT Box in the conventional sense. The maintenance of the Box and the purchase of the latest apps and updates is ensured by commissioning the IOT OPA.

However, the IOT Boxes can also be operated without the IOT OPA, in which case they only lose the infrastructural services such as automated maintenance and extendability, as well as the backup of a Box at a central location.

From a sustainability point of view, an Internet connection is recommended both on an IOT Box and on the IOT OPA. Above all, an Internet connection on the IOT OPA in connection with a Linux Repository is strongly recommended.

More information is available on the Internet at:

<http://www.siemens.com/wincc-oa-iot-suite>

**Overview****WinCC IOT Box**

The IOT Box is a self-contained visualization system based on IPCs, Industrial OS and SIMATIC WinCC OA, which can be commissioned by the customer (maintenance or electrician) within a few hours.

The currently available functionalities (apps) for connectivity, visualization or OEE (Overall Equipment Efficiency) are easy to configure and enable machine operators themselves to find the required insights for process optimization or to collect data and/or to exchange the data within the company using publish/subscribe mechanisms.

A large number of apps are already available in the basic IOT Box.

**Function**

Available apps	Task
<b>S7 App</b>	With the S7 App, nothing stands in the way of a connection to the conventional PLCs from SIEMENS.  S7-300/-400 series, S7-1200/S7-1500 series and S5, as well as S7-200, LOGO 0BA7, LOGO 0BA8 and SINUMERIK PowerLine are supported.  You only need to know the (IP) address of the PLC and the type of PLC to establish a connection. Data points of the selected PLC can be imported using the I/O address or, if available, a CSV file.
<b>S7 Plus App</b>	In contrast to the S7 App, the S7 Plus App allows access to modern SIMATIC PLCs via browsing.
<b>OPC UA Client App</b>	The OPC UA Client app enables you to query any data of an OPC UA Server and transfer it to the data management of the IOT Box. After selecting a server, its data management is automatically queried and displayed. This can then be transferred to the box by simply selecting the data points.
<b>Subscribe App</b>	The Subscribe app is used by the IOT Box to request and retrieve data from another IOT Box, if it has been published on the source device. In general, no data is exchanged between the devices without explicit permission. This is an internal system communication with the highest security standards.
<b>Publish App</b>	You can use the Publish app to publish recorded, calculated or mapped data of an IOT Box to other IOT Boxes. In general, no data is exchanged between the devices without explicit permission. This is an internal system communication with the highest security standards.

**Data Mapping App**

The Data Mapping app enables you to map or convert collected data into importable structures. This serves to standardize data communication within a company. Pre-defined standard formats, such as OMAC, are already available. Others can be easily defined and imported via CSV files. You can also define your own data structures within the app and link them to data management.

**Rules App**

Intelligent pre-processing of data is an essential part of data concentration. However, advanced logic can also be created and applied in the Rules app. A logical and arithmetic rule-based editor enables the creation of rules, which can also be instantiated at a later point in time. The basis is formed by a powerful scripting engine (CTRL), which executes any input of CTRL scripts. This means that not only logical or arithmetical logic operations can be realized.

**OEE App**

The OEE app is the heart of the IOT Box, as the first of many value-added applications to follow. Using input data from the Mapping app, this app calculates the efficiency of machines. A time reference can be introduced using a shift calendar and with the help of reasons for malfunctions (pre-defined or defined by the operator), information originating beyond the machine itself can also be included in an analysis. The user thus gains a new depth of analysis and optimization potential.

**Dashboard App**

The OEE app and the Dashboard app are used to display collected or calculated values. All available data can be displayed in specially structured display formats here. Using a tag browser, the data is simply dragged and dropped into the display areas, where a wide variety of display formats can be selected. The arrangement of the display elements is also freely selectable. The user is thus able to create and save required displays independently. Different images can also be created using several index tabs to allow quick access to all desired display formats and depths at runtime.

**Update Center App**

The Update Center manages the apps and system software on the IOT Box. Via a connection to a central IOT OPA, the latest app extensions can be easily downloaded and installed without any user interaction. The app provides information about the latest available versions and updates and also allows the user to extend or reduce functionality/apps on the IOT Box. In the system environment, user administration can be used to specify whether this should be done locally by the user or centrally by IT.

**HMI software**

SIMATIC WinCC OA

SIMATIC WinCC OA IOT Suite

**WinCC OA IOT Box****Function**

<b>Snapshot App</b>	The Snapshot App allows you to create snapshots of a collection of tags using various triggers. These tag snapshots are saved in the app itself and can be exported as CSV.
<b>System Log App</b>	The System Log App shows current and historical log entries on the IOT Box. These include system messages as well as update information and error messages.
<b>System App</b>	The network settings of an IOT Box and the configuration of the time synchronization servers can be performed in the System App. It is also possible to connect to the associated IOT OPA to be able to use all services such as app updates or the OPA Filestore. The entire User Management of the Box as well as the CERT Store can be found in the System App.
<b>S5 App</b>	The S5 App allows S5 PLCs to be connected to the IOT Suite via the H1 ISO protocol.
<b>Ethernet IP App</b>	The Ethernet IP App allows various PLCs that support the PCCC Standard or the Native EIP Standard to be connected to the IOT Suite.
<b>MindSphere App</b>	Data from the IOT Suite can be pushed to various MindSphere assets with the MindSphere App. The output data for this is individual IOT Suite tags.
<b>Modbus App</b>	A Modbus TCP/IP client is integrated in the IOT Suite with the Modbus App. In addition to individual registers, subindices can also be addressed.
<b>MQTT Client App</b>	The MQTT Client App enables the IOT Suite to connect to conventional MQTT brokers and subscribe to a wide range of topics.
<b>MTConnect App</b>	Data from supported CNC machines can be read out with the MT Connect App.

**Ordering data****Article No.****WinCC OA IOT - IOT Box SW**

Licenses for running the IOT Box SW on SIMATIC Nanobox (IPC2XX) and Industrial Linux

- 1x IOT Box SW
- 10x IOT Box SW
- 20x IOT Box SW

**6AV6356-1AA31-7AA0****6AV6356-1AA31-7AA1****6AV6356-1AA31-7AA2**

## Overview

IOT OPA is the central core of the IOT Suite and deals exclusively with the management, administration and maintenance of the connected IOT Boxes. It is possible to operate this web-based service both within a plant and in a cloud.

An Internet connection is desirable, but not mandatory.

Via the IOT OPA, new devices of the IOT Suite are integrated into the system or devices that are no longer needed are removed. It provides the connected systems with the latest updates and app extensions. With an existing Internet connection to its central cloud storage, it can automatically download the latest apps and make them available to the system. This is also possible without an Internet connection, but requires the manual acquisition of this data.

A status model of the IOT Box and the apps enables control of the specific data that can or may be distributed to specific IOT Boxes. An IOT OPA can also remotely update, functionally extend or reduce IOT Boxes within the administration. The initial installation of an IOT Box is also made possible by the IOT OPA, because all required applications and the system software are stored in its memory.

Runs on:

- Debian Buster
- On the hardware platforms:  
All common PC platforms and virtualized environments

OPA licenses are limited in time with a validity of 1 year from purchase. The validity of the license is automatically extended upon expiration, if not canceled 3 months before the end of the year.

## Function

Functions	Task
<b>Dashboard</b>	The dashboard displays both the current status of the IOT OPA and the installed version.
<b>Applications</b>	You can find all available apps under Applications, including their version and status in the OPA store. From here, apps can be distributed to devices or their status can be changed.
<b>Devices</b>	The device view shows all connected IOT Boxes, including their status information. You can add new IOT Boxes and change their status here.
<b>Device Configuration</b>	The Device Configuration view displays detailed information about the connected IOT Box. This includes information about installed software (firmware, operating system, apps, etc.) as well as an update history, its name and local location.
<b>Backup and Restore</b>	From this display, you can upload configurations of a selected IOT Box to the IOT OPA or restore them to the IOT Box.
<b>Files</b>	The OPA Filestore describes a central data store that can be read and written both via the web server and via connected IOT Boxes. In this way, for example, an app can save data retentively and store it at a central storage location.
<b>Settings</b>	Different templates that relate to app installations can be configured in the properties of the IOT OPA. Here you can also find settings for synchronizing the IOT OPA with its central IOT repository on the Internet, so that you can obtain the latest updates and apps from it.
<b>Log</b>	This view shows the processes that have been executed on the IOT OPA. This allows the state of the IOT Box or actions performed with a connected IOT Box to be traced.

## Ordering data

### Article No.


<b>WinCC OA IOT - OPA</b> Time-limited license (1 year). Secure administration of up to 10 WinCC OA IOT Box devices including updates	<b>6AV6356-1BA31-7BA0</b>
<b>WinCC OA IOT - OPA Extension</b> Time-limited license (1 year). Extension for secure administration of up to 10 additional IOT Boxes	<b>6AV6356-1BA31-7BA1</b>

## Automation software

SCADA software

### SIMATIC Information Server

#### Overview

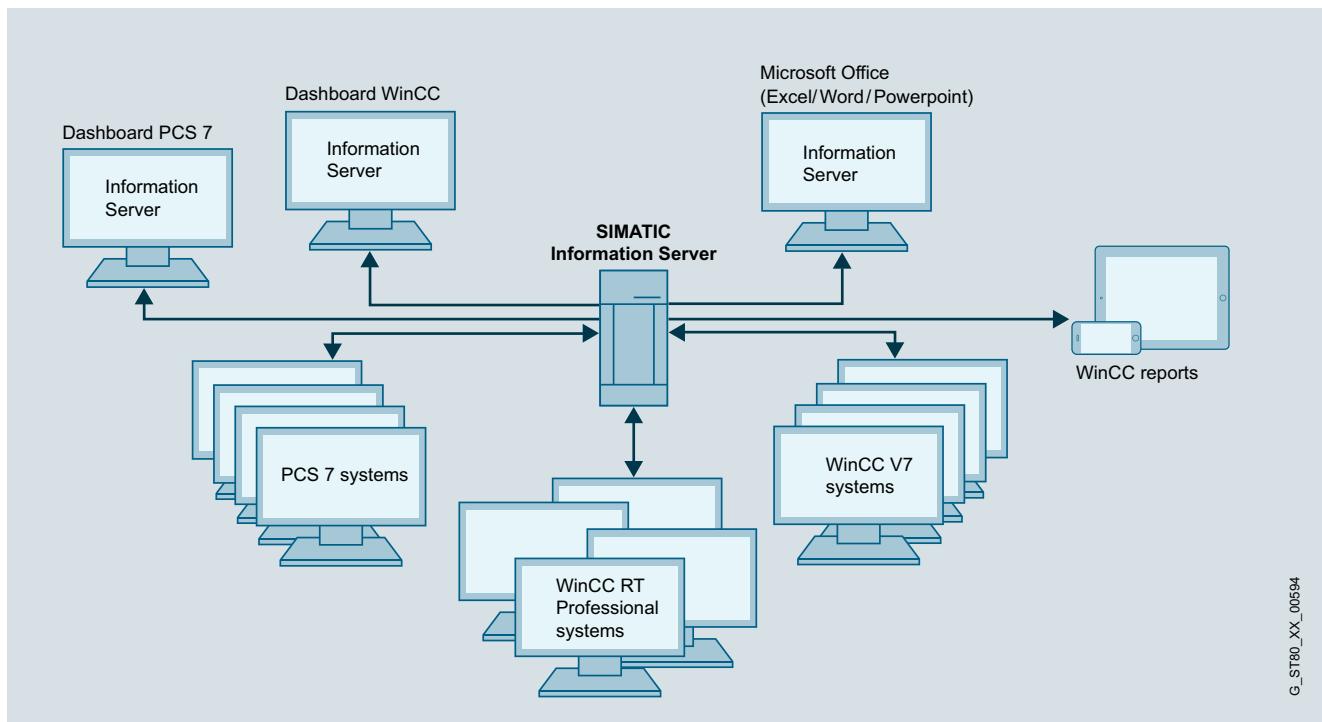

G\_ST80\_XX\_00594

#### Information Server 2014 SP3

Information Server 2014 SP3 is an open, web-based reporting system for interactive areas.

Reports can be used in Internet Explorer, Excel, Word or PowerPoint, as well as for Adobe Reader (PDF).

The SIMATIC Information Server has access to archived process values and messages, and can be used either directly in conjunction with WinCC / WinCC/RT Professional / PCS7 OS as well as with Process Historian 2014 SP3.

- Access to archived process values and messages from WinCC V7, WinCC RT Professional and WinCC/PerformanceMonitor according to compatibility specifications
- Process Historian 2014 SP3
- Open reporting system with report templates in RDL or Excel format
- Through add-ins for Microsoft Office environments, direct access to the archived data of the Process Historian or WinCC can be easily established.
- Reports can be integrated directly in Word and Excel, thus greatly simplifying work steps.
- Process values can be displayed in tabular or graphic form depending on various filter functions
- Support of subscriptions for a cyclical or event-driven report generation, including sending of emails
- Web-based parameter assignment of the report templates
- Use of the standard tools MS Excel, MS Word and MS PowerPoint for individual report templates
- Reporting system based on MS Reporting Services for more complex individual report templates

- Can be used for HTML5-enabled tablet PCs larger than 10.5"
- Automatic cyclic and event-based reporting (PDF, Excel, Word, PowerPoint)
- Central storage and automatic transmission of reports created by email
- Data security thanks to access protection, user administration, SSL encryption and SMTP authentication

#### Licenses

- Basic Packages include the program software as well as three client access licenses and a data source license. This gives access to one data source for up to three clients.
- The number of simultaneous client access operations can be incremented at any time using Information Server client access licenses.
- Additional data sources can be integrated at any time using additive data source licenses.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>


Ordering data	Article No.	More information
<b>SIMATIC Information Server 2014 SP3 "Basic Package"</b>	<b>6AV6361-2AA01-4AA0</b>	
<ul style="list-style-type: none"> <li>• Information Server</li> <li>• Information Server - Client access (3)</li> <li>• Information Server - Data source access (1)</li> </ul>		
<u>As download</u>	<b>6AV6361-2AA01-4AH0</b>	
<ul style="list-style-type: none"> <li>• Information Server</li> <li>• Information Server - Client access (3)</li> <li>• Information Server - Data source access (1)</li> </ul>		
<b>SIMATIC Information Server</b>		
Client and data source license, version-independent		
<ul style="list-style-type: none"> <li>• 1 Client access</li> <li>• 3 Client access</li> <li>• 5 Client access</li> <li>• 10 Client access</li> <li>• 1 Data source access</li> <li>• 3 Data source access</li> </ul>	<b>6AV6361-2BD00-0AD0</b> <b>6AV6361-2BE00-0AD0</b> <b>6AV6361-2BF00-0AD0</b> <b>6AV6361-2BG00-0AD0</b> <b>6AV6361-2CD00-0AD0</b> <b>6AV6361-2CE00-0AD0</b>	
<u>As download</u>		
<ul style="list-style-type: none"> <li>• 1 Client access</li> <li>• 3 Client access</li> <li>• 5 Client access</li> <li>• 10 Client access</li> <li>• 1 Data source access</li> <li>• 3 Data source access</li> </ul>	<b>6AV6361-2BD00-0AJ0</b> <b>6AV6361-2BE00-0AJ0</b> <b>6AV6361-2BF00-0AJ0</b> <b>6AV6361-2BG00-0AJ0</b> <b>6AV6361-2CD00-0AJ0</b> <b>6AV6361-2CE00-0AJ0</b>	
<b>Upgrade</b>		
<b>Upgrade Information Server 2013 to Information Server 2014 SP3</b>	<b>6AV6361-2AA01-4AE0</b>	
<u>As download</u>		
<b>Upgrade Information Server 2013 to Information Server 2014 SP3</b>	<b>6AV6361-2AA01-4AK0</b>	

## Automation software

SCADA software

### SIMATIC Process Historian

#### Overview

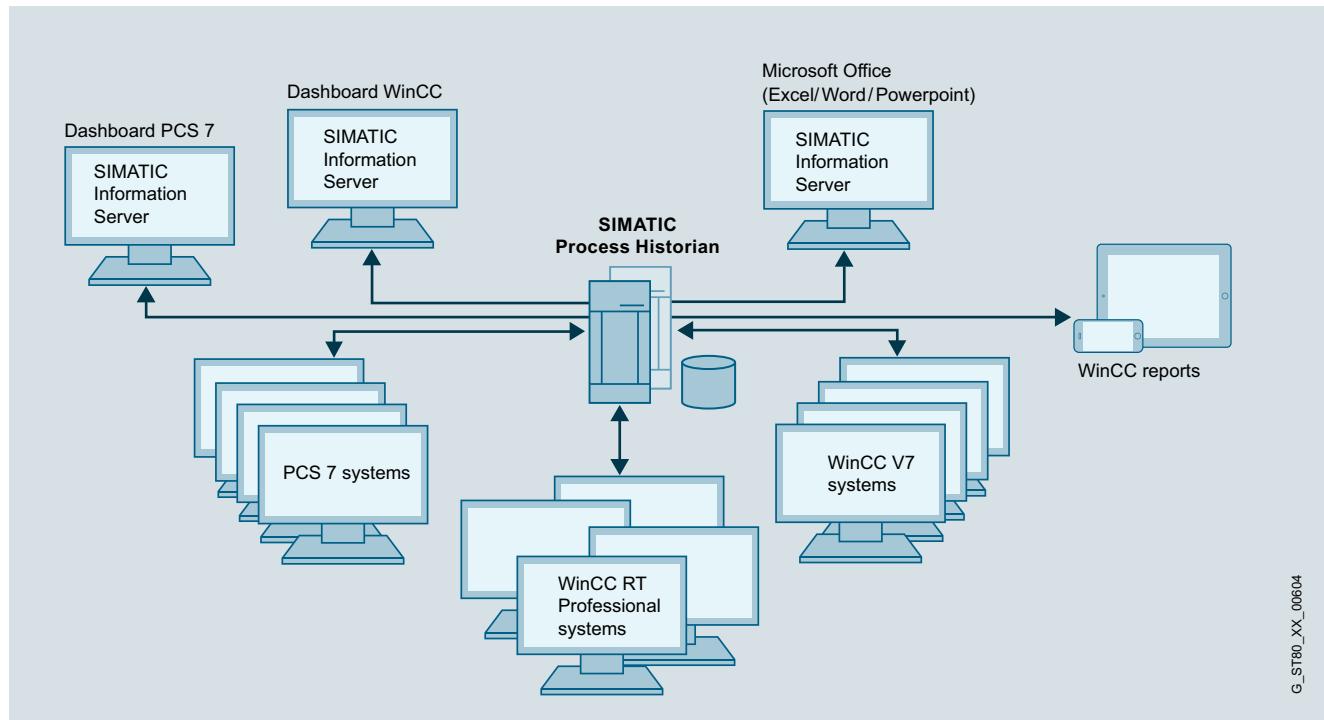

G\_ST80\_XX\_00604

#### SIMATIC Process Historian

The Process Historian is a high-performance, long-term archiving server solution that stores WinCC process values and messages in a central database. The system offers full scalability for performance and scope: It records and stores data from one or more WinCC, WinCC RT Professional and PCS 7 projects.

The number of connected single stations, servers, or redundant server pairs is unrestricted. SIMATIC Process Historian is designed for use throughout your plant, and is positioned below the corporate management level (ERP, MES).

The SIMATIC Information Server is used as a reporting system for the Process Historian. It accesses the central database of the Process Historian and visualizes the data in clear, user-friendly displays on WinCC stations or office PCs. The central Process Historian database provides access to real-time data throughout the plant.

This data is the key to sustainable plant optimization measures. Since the archive system can be fully integrated, no additional engineering is required. SIMATIC Process Historian uses the integrated relational database, SQL Server from Microsoft®. No complex reconfiguration is needed because the archive system is integrated into WinCC. Selected WinCC process values or messages are archived long-term on a time or event-driven basis.

The Process Historian is used for the long-term archiving of process values and messages.

#### SIMATIC Process Historian 2014 SP3

- Central, plant-wide long-term archive as corporate information hub
- Real-time archiving of process values and messages from WinCC V7, WinCC RT Professional and WinCC/PerformanceMonitor according to compatibility specifications
- High performance with very large data volumes
- Data access via OPC UA server
- Migration support for data migration from WinCC/ Storage plus, CAS Storage plus and WinCC segments.
- High availability thanks to redundancy concept with observer/witness server for increasing data security
- High degree of security due to integrated, complete backup and restore of all segments (disaster recovery)
- Enhanced data security through store and forward mechanism
- Scalable without breaks in production
- Maximum data transparency
- High degree of security thanks to integrated backup system
- Simple and fast management and diagnostics with the Process Historian Management "Dashboard"
- Batch functionality in accordance with PCS 7 specifications

## Overview

### Licenses

- The Basic Package includes the runtime software and the single license for one installation.
- The SIMATIC Process Historian supports archiving of any amount of data.  
The archive data is licensed at the data source, for example, in WinCC systems (archive tags for WinCC V7 or logging tags of WinCC Logging for WinCC Professional RT).
- The redundancy package is required for the redundant Process Historian; existing Basic Package installations can be converted with the redundancy option.
- The OPC UA interface needs a separate license.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

Ordering data	Article No.	Article No.
<b>SIMATIC Process Historian 2014 SP3</b>		
<ul style="list-style-type: none"> <li>Basic Package, single license Contents: Set (1x DVD + 1x USB)</li> <li>Redundancy Package, single license (Redundancy Complete) for 2 installations 2 x Process Historian Server 2 x Process Historian Server Redundancy contents: Set (1x DVD + 1x USB)</li> <li>Redundancy for BSC PCK, single license, license key on USB flash drive</li> </ul> <p>As download</p> <p>Email address essential for delivery</p> <ul style="list-style-type: none"> <li>Basic Package, single license, license key download</li> <li>Redundancy Package, single license (Redundancy Complete) for 2 installations 2 x Process Historian Server 2 x Process Historian Server Redundancy, license key download</li> <li>Redundancy for BSC PCK, single license, license key download</li> </ul>	<b>6AV6361-1AA01-4AA0</b> <b>6AV6361-1BA01-4AA0</b> <b>6AV6361-1CA00-0AD0</b> <b>6AV6361-1AA01-4AH0</b> <b>6AV6361-1BA01-4AH0</b> <b>6AV6361-1CA00-0AJ0</b> <b>6AV6361-1HA01-4AB0</b> <b>6AV6361-1HA01-4AJ0</b>	<i>Upgrades</i> <b>Upgrade of CAS (Central Archive Server)</b> Upgrade of CAS V7.0 SP3 or Process Historian 2013 to Process Historian 2014 SP3 <ul style="list-style-type: none"> <li>SW and documentation on DVD; license key on USB flash drive, contents: Set (1x DVD + 1x USB)</li> <li>SW and license key download, email address essential for delivery</li> </ul> SIMATIC WinCC/CAS Upgrade Central Archive Server V6.2->V7.0 SP3 <ul style="list-style-type: none"> <li>Upgrade from CAS V6.2 to V7.0 SP3</li> <li>Upgrade from CAS V6.2 ASIA to V7.0 SP3 ASIA</li> </ul> <b>6AV6361-1AA01-4AE0</b> <b>6AV6361-1AA01-4AK0</b> <b>6AV6371-1DQ17-0XX3</b> <b>6AV6371-1DQ17-0XV3</b>

3

### More information

More information is available at:

<http://www.siemens.com/simatic-process-historian>

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager:  
<http://www.siemens.com/simatic-licenses>

## Automation software

SCADA software

### WinCC IndustrialDataBridge

#### Overview

##### **WinCC IndustrialDataBridge**

- The WinCC IndustrialDataBridge option uses standard interfaces in order to connect the automation world with the world of IT and to ensure a two-way information flow.
- Using the SIMATIC WinCC IndustrialDataBridge, communication links between different data sources and data targets can be created by means of simple configuration/parameter assignment. The IndustrialDataBridge can either be integrated into WinCC or used as a stand-alone application (not in conjunction with WinCC).
- Its use is very flexible, due to the support of different database formats and standard interfaces. On top of this, it offers easy configuration instead of programming, which permits fast and secure deployment.
- Data sources for WinCC IndustrialDataBridge can include WinCC Runtime Professional (V13 SP1 or higher).

#### Licenses

- WinCC/IDB basic license for 100 tags (connections between data points corresponds to one tag)
- Depending on the amount of data, the number of IDB tags can be increased through additive PowerPacks
- The licenses are additive for the number of connections as of version 7.4 (countable).

Additional information is available on the Software Update Service, license types, online software delivery and handling your software licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

#### Ordering data

#### Article No.

##### **SIMATIC WinCC IndustrialDataBridge 7.5 for WinCC**

For data exchange with databases and OPC servers; language versions: English, German, Simplified Chinese, Japanese

- Basic package
- With 300 tags (countable)
- With 1 000 tags (countable)
- With 3 000 tags (countable)

##### As download

- Basic package
- With 300 tags (countable)
- With 1 000 tags (countable)
- With 3 000 tags (countable)

**6AV6362-4AA07-5AA0**  
**6AV6362-4AD00-0BB0**  
**6AV6362-4AF00-0BB0**  
**6AV6362-4AH00-0BB0**

**6AV6362-4AA07-5AH0**  
**6AV6362-4AD00-0AH0**  
**6AV6362-4AF00-0AH0**  
**6AV6362-4AH00-0AH0**

##### **SIMATIC WinCC IndustrialDataBridge 7.4 SP1 for WinCC**

For data exchange with databases and OPC servers; language versions: English, German, Simplified Chinese, Japanese

- Basic package
- With 300 tags (countable)
- With 1 000 tags (countable)
- With 3 000 tags (countable)

**6AV6362-4AA07-4AA0**  
**6AV6362-4AD00-0BB0**  
**6AV6362-4AF00-0BB0**  
**6AV6362-4AH00-0BB0**

##### As download

- Basic package
- With 300 tags (countable)
- With 1 000 tags (countable)
- With 3 000 tags (countable)

**6AV6362-4AA07-4AH0**  
**6AV6362-4AD00-0AH0**  
**6AV6362-4AF00-0AH0**  
**6AV6362-4AH00-0AH0**

##### **SIMATIC WinCC IndustrialDataBridge upgrade**

- From V7.4 to V7.5
- From V7.2/7.3 to V7.5
- From V7.x to V7.4 SP1
- From V7.x to V7.3

**6AV6362-4AA07-5AE1**  
**6AV6362-4AA07-5AE0**  
**6AV6362-4AA07-4AE0**  
**6AV6371-1DX07-3XX3**

##### As download

- From V7.4 to V7.5
- From V7.2/7.3 to V7.5
- From V7.x to V7.4 SP1
- From V7.x to V7.3

**6AV6362-4AA07-5AK1**  
**6AV6362-4AA07-5AK0**  
**6AV6362-4AA07-4AK0**  
**6AV6371-1KX07-3XX3**


#### More information

More information is available at:

<http://www.siemens.com/idb>

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

## Overview

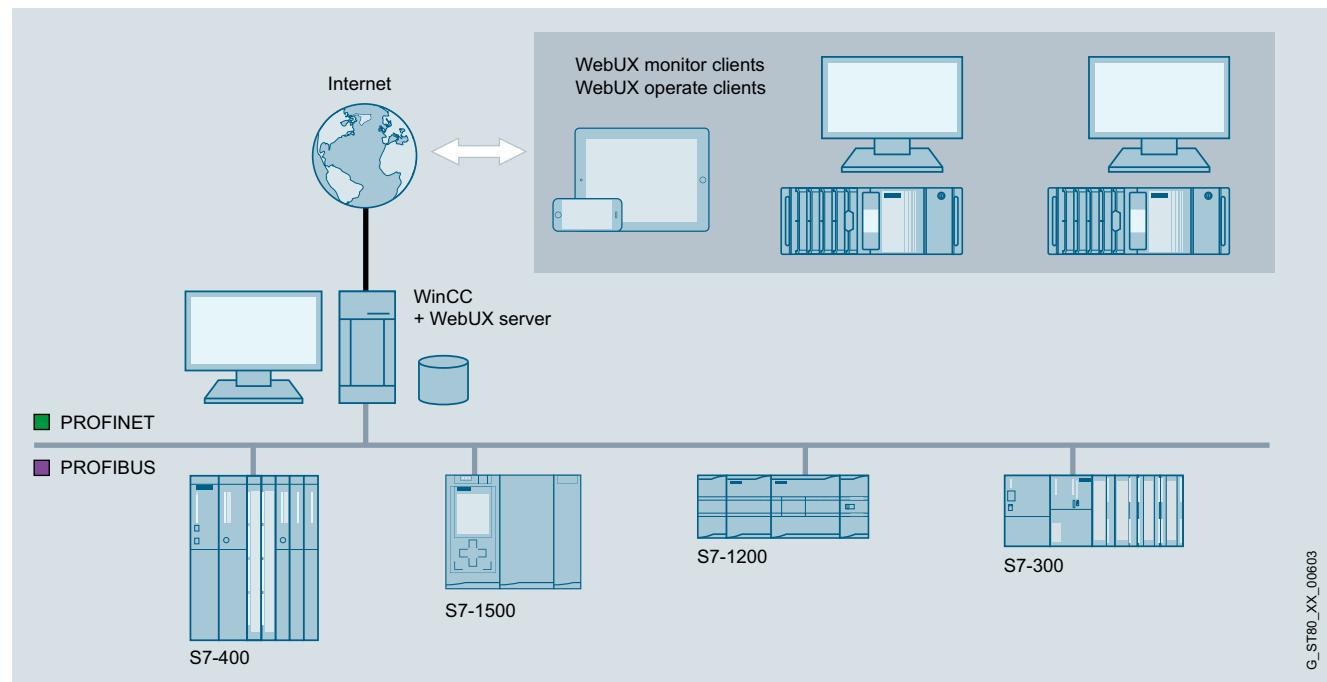

## WinCC WebUX

The WinCC WebUX option permits mobile, platform and browser-independent operator control and monitoring via the Internet or the in-house intranet or LAN. WinCC WebUX is delivered with the WinCC system. Following installation, the WinCC Runtime system operates as WinCC WebUX server.

The images for the WinCC WebUX are created using the graphic editor. The WinCC picture is stored in the corresponding format in the project through the "web-capable" picture property. Using the service platform IIS (Internet Information Server), the files are made available for the Internet. No installation on the client is required for using the WebUX. WinCC WebUX can be used independent of the industrial sector, for example in service for the acknowledgment of alarm messages, in quality assurance for monitoring important production data, or in management for obtaining a quick overview of key production figures.

The WebUX server itself does not require a basic license. Clients that are simultaneously logged into the server are licensed. Regarding licensing, it is differentiated between Monitor Clients (read only) and Operate Clients (reading and writing of values). WinCC WebUX can be used immediately due to a free Monitor Client that is included in the WinCC package.

### Licenses

- A (server-based) license is required to use the WebUX server. This is a graduated license based on the number of simultaneous web access operations and can be incremented at any time.
- We distinguish between Monitor and Operate Clients for licensing purposes.
- Flexible number of clients thanks to additive (countable) licenses (floating client)
- The WinCC/WebUX and WinCC/WebNavigator licenses can be combined, if necessary.
- The WinCC server version and version of the mobile clients do not have to be the same
- One free Monitor Client in the WinCC system

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:  
<http://www.siemens.com/simatic-licenses>

## Automation software

SCADA software

### WinCC WebUX

Ordering data	Article No.	Article No.
<b>SIMATIC WinCC WebUX</b>		
<b>Monitor clients:</b>		
• 1 client (countable)	<b>6AV6362-2AB00-0BB0</b>	<b>6AV6362-2BB00-0BB0</b>
• 3 clients (countable)	<b>6AV6362-2AD00-0BB0</b>	<b>6AV6362-2BD00-0BB0</b>
• 10 clients (countable)	<b>6AV6362-2AF00-0BB0</b>	<b>6AV6362-2BF00-0BB0</b>
• 30 clients (countable)	<b>6AV6362-2AJ00-0BB0</b>	<b>6AV6362-2BJ00-0BB0</b>
• 100 clients (countable)	<b>6AV6362-2AM00-0BB0</b>	<b>6AV6362-2BM00-0BB0</b>
<b>As download</b>		
• 1 client (countable)	<b>6AV6362-2AB00-0AH0</b>	<b>6AV6362-2BB00-0AH0</b>
• 3 clients (countable)	<b>6AV6362-2AD00-0AH0</b>	<b>6AV6362-2BD00-0AH0</b>
• 10 clients (countable)	<b>6AV6362-2AF00-0AH0</b>	<b>6AV6362-2BF00-0AH0</b>
• 30 clients (countable)	<b>6AV6362-2AJ00-0AH0</b>	<b>6AV6362-2BJ00-0AH0</b>
• 100 clients (countable)	<b>6AV6362-2AM00-0AH0</b>	<b>6AV6362-2BM00-0AH0</b>

#### Note:

The licenses are cumulative, i.e. one 10-client license and one 30-client license permit access by 40 clients.

Operate licenses can be used as Monitor licenses as of V14/V7.4.

Licenses from V7.3 can continue to be used in V7.4 without upgrading.

You can find more information at:

<http://www.siemens.com/wincx-webux>

**Overview****WinCC Premium Add-ons**

With the proven WinCC Premium Add-ons based on the SCADA software SIMATIC WinCC, Siemens offers a modularly expandable, complete solution for the optimum interaction of processes in production, quality assurance, maintenance and system integration. The products respond to a broad spectrum of today's challenges in digitalization and are consistently directed towards comprehensive and economical solutions based on standard software components.

The following Premium Add-ons are available:

- **PM-CONTROL**  
is a cross-industry recipe system for user-friendly creation and management of recipes with integrated order control
- **PM-QUALITY**  
is a modular and sector-independent archive system for order-related or batch-related acquisition of process and production data
- **PM-ANALYZE**  
is used for locating sources of error or weak spots in plants by analyzing messages and process values
- **PM-MAINT**  
is a sector and technology-neutral maintenance system for use in preventive maintenance.
- **PM-MES Interface**  
is a bidirectional communication interface between PM-CONTROL, PM-QUALITY and MES systems
- **PM-LOGON**  
offers the operator a convenient and fast logon to the operating system using a company ID card via a card reader
- **PM-OPEN EXPORT**  
offers a flexible, low-cost solution for exporting current process data and archive data from WinCC into freely formatted text files
- **PM-OPEN IMPORT**  
enables the WinCC flexible archives to be automatically read into the WinCC system
- **PM-OPEN MINDCONNECT**  
allows transparent access to production reports created by PM-QUALITY and/or PM-ANALYZE via the MindSphere app
- **PM-AGENT**  
enables the connection of several WinCC systems to the PM products
- **Universal PM-Package**  
in combination with a supplementary agreement, provides a cost-effective way to always work with the latest versions of the PM products for testing and configuration purposes and is therefore aimed exclusively at resellers of PM products and OEMs
- **COPYPROJECT**  
is used to duplicate a complete WinCC V7 project including all Runtime archive databases during runtime
- **PM-GRID CONTROL**  
enables display of data from different sources and is used wherever the flexible display of tables within the WinCC Runtime environment is required

**More information**

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>


## Automation software

SCADA software

Process management - Add-ons

### PM-CONTROL

#### Overview

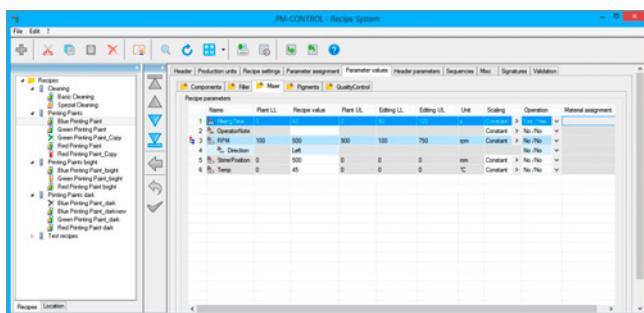

PM-Control system software

Production rules, recipes or parameter data records are required as specifications for production in a wide variety of industries; they must be managed in a high-performance database, monitored for changes and clearly presented. These specifications result in production orders which are used to plan the production sequence.

With PM-CONTROL, the user has flexible parameter control at his disposal, with an operator interface that can be seamlessly integrated into the WinCC user interface.

Parameters of different types are saved in data records as recipes. The logging of recipe changes in an Audit Trail, the support of single or duplicate electronic signatures and the automatic versioning of recipe data records make PM-CONTROL an ideal tool in the regulated industry.

PM-CONTROL is equipped for complex tasks with automatic scaling of quantities, dynamic calculation of recipe values combined with convenient order scheduling and including automatic transfer of scheduled orders to the production units.

Enhancements such as the graphic planning board for order display, the rule-based check of recipe parameters as well as the option for creating a completely customized recipe editor continue the trend toward more user-friendliness, transparency and flexibility. The openness of PM-CONTROL enables problem-free connection to higher-level host systems (e.g. MRP systems) at the plant and production management level.

Customized for simple use cases with manual retrieval of recipes from the recipe database, PM-CONTROL is offered in a compact version.

#### Odering data

#### Article No.

##### **PM-CONTROL system software Type S "Compact" version**

Single-user/multi-user system server  
that runs on interconnected WinCC system and comprises a topology manager, recipe system, and ActiveX Control for recipe preselection (several autonomous production units)

**9AE7110-2SS10-1AA0**

##### **PM-CONTROL system software Type S "Standard" version**

Single-user/multi-user system server  
that runs on interconnected WinCC system and comprises a topology manager, recipe system, and order control (one production unit)

**9AE7110-2SS20-1AA0**

##### **PM-CONTROL system software Type S "Professional" version**

Single-user/multi-user system server  
that runs on interconnected WinCC system and comprises a topology manager, recipe system, and order control (several autonomous and interlinked production units)

**9AE7110-2SS30-1AA0**

##### **PM-CONTROL system software Type C**

Multi-user system client  
that runs with Type S system package (Compact, Standard, Professional) on an interconnected WinCC system or as thin client (without WinCC) with a recipe system and order control

**9AE7110-4SC03-1AA0**

Note:

Additional PM-CONTROL configurations available on request

#### More information


Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

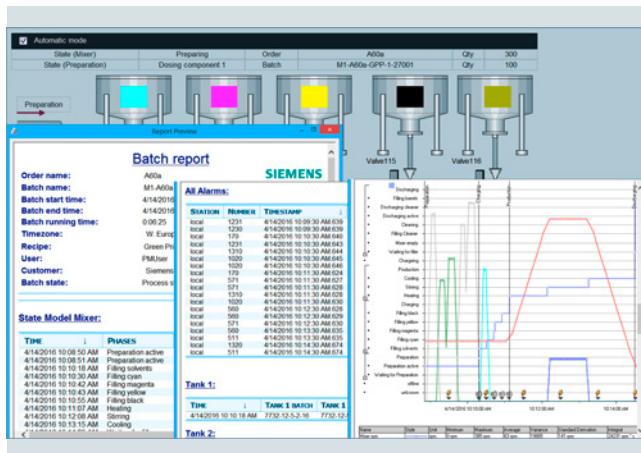**Overview**

PM-Quality system software

The proof of quality in the form of a manufacturing report, which is obligatory for FDA-regulated industries, is now a standard requirement in almost all industries.

The strengths of PM-Quality are the core functions of a comprehensive quality management system such as the complete acquisition, preparation and archiving of batch-related data such as trend curves, messages, production setpoint and actual values, Audit Trails and laboratory values.

Data from WinCC, PCS 7, WinCC (TIA) RT Professional and Advanced, via text import, OPC/DA and OPC/UA can be combined from various sources, compiled into meaningful reports and archived over a long period. PM-Quality ensures the required transparency, both if seamlessly integrated into the user interface of WinCC, PCS 7 or WinCC RT Professional and Advanced (TIA Portal) and as a stand-alone application.

The processing of measured values with the aid of graphical calculation rules, the integration of day, week and shift logs with an integrated shift calendar, and the creating of reports in Microsoft Excel are consistent expansions of the proven functionality of PM-Quality.

**Ordering data****Article No.****PM-Quality system software Type S "Standard" version**

9AE7111-2SS20-1AA0

Single-user/multi-user system server that runs on an interconnected WinCC system for one production unit

**PM-Quality system software Type S "Professional" version without Data Center**

9AE7111-2SS30-1AA0

Single-user/multi-user system server that runs on an interconnected WinCC system for multiple autonomous and interlinked production units.

**PM-Quality system software Type S "Professional" version with Data Center**

9AE7111-2SS30-1AB0

For data redundancy synchronization. The system package is to be installed on both redundant computers.

**PM-Quality system software Type C**

9AE7111-4SC01-1AA0

Multi-user system client that runs with the Type S system package on an interconnected WinCC system or as thin client (without WinCC)

## Note:

Additional PM-Quality configurations available on request.

**More information**

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

## Automation software

SCADA software

Process management - Add-ons

### PM-ANALYZE

#### Overview



#### Ordering data

#### Article No.

##### PM-ANALYZE Type S system software

9AE7112-1SS01-1AA0

Single-user/multi-user system server that runs on an interconnected WinCC system

##### PM-ANALYZE Type C system software

9AE7112-4SC01-1AA0

#### Note:

Additional PM-ANALYZE configurations available on request.

#### More information

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

### PM-ANALYZE

Recorded process values as well as hardware interrupts, fault, status and operation messages from various sources contain a wealth of information which often only becomes visible by means of computer-aided analysis. Reduced downtime and maintenance times, early detection of signs of wear and tear, localization of error sources or weak points are just a few examples. Problems in the production plant are signaled by alarms which are the starting point for evaluations and analyses with PM-ANALYZE.


PM-ANALYZE not only enables chronological display of process values and messages from different sources, but also offers an optimal overview with its convenient filters and analysis options, even with large amounts of data.

The process values represent the basis for the analysis and optimization of the production process. The extensive selection of charts for mapping the process values in PM-ANALYZE offers new perspectives for the representation and analysis of the production process. Problems in the production plant are signaled by alarms. Convenient filter settings limit the message display to the essential information.

One particular strength of PM-ANALYZE is simultaneous display of charts and messages in a single workspace. Alarms in tables and in statistical evaluations parallel to process values in charts show the spectrum of production data at a glance. Workspaces can either be integrated directly into process pictures or displayed and evaluated using a separate client application.

In addition, analysis events can be transferred directly to Microsoft Excel for further processing. This enables reports to be generated via Microsoft Excel, for example, where a report is generated daily and filled with data. Manual input forms can be used to add manual and laboratory values.

## Overview

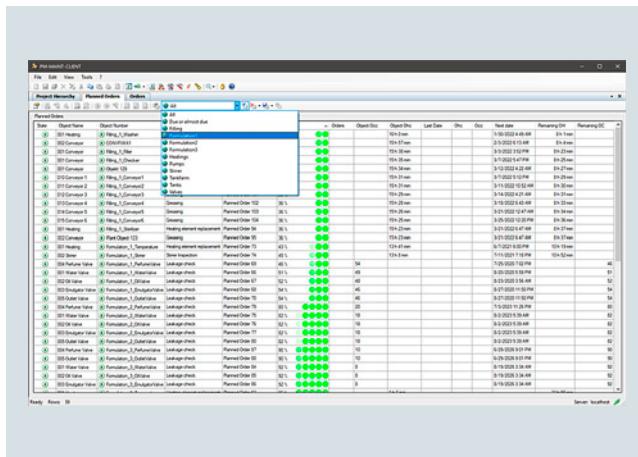

## PM-MAINT

Efficient maintenance planning is of crucial importance to ensure and maintain the maximum availability of a plant.

PM-MAINT is a maintenance management system for all industries and is designed for use on the production level. By providing various connection options to the existing automation landscape, PM-MAINT enables performance-based planning that is based on real machine runtimes and machining cycles in addition to purely calendar-based planning.

PM-MAINT supports maintenance in the recording and complete documentation of unplanned repairs by means of easy and comprehensible work sequences with a high level of user-friendliness.

Maintenance information calculated by PM-MAINT, such as recommended maintenance dates, can be displayed in the existing HMI user interface for the respective aggregates. Repair requests can easily be created directly by the machine operator.

All operator actions are recorded in a log and can be traced at any time.

## Ordering data

## Article No.

### PM-MAINT Type S system software

9AE7104-2SS30-1AA0

Single-user/multi-user system server that runs on an interconnected WinCC system

### PM-MAINT Type C system software

9AE7104-4SC00-1AA0

Multi-user system client that runs with system package Type S on an interconnected WinCC system or as thin client (without WinCC)

## Note:

Additional PM-MAINT configurations available on request.

## More information

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>


## Automation software

SCADA software

Process management - Add-ons

### PM-MES Interface

#### Overview

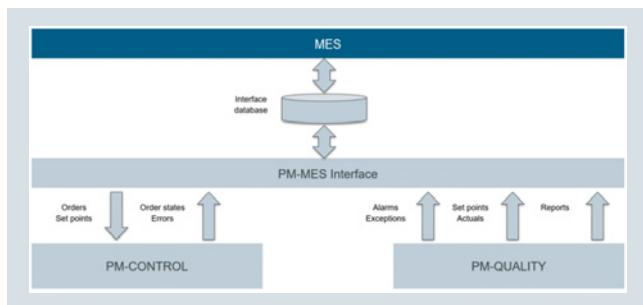

#### PM-MES Interface

The PM-MES interface enables seamless integration of the SCADA level with MES systems. It builds on the functionality of PM-CONTROL and PM-QUALITY to create a standardized API layer that can be used from the MES side without the need to create custom scripts on the SCADA side.

The PM-MES interface is a bidirectional communication interface between PM-CONTROL, PM-QUALITY and MES systems. Communication is implemented via a Microsoft SQL Server interface database.

#### Ordering data

#### Article No.

##### PM-MES Interface

Single-user / multi-user system, can be run in conjunction with PM-CONTROL V11.6 and V11.7 and with PM-QUALITY V10.5 and V10.6

**9AE7110-2SX30-1AA0**

#### More information

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

**Overview****PM-LOGON**

The PM-LOGON software product offers the operator a user-friendly and fast logon to the operating system with the company ID card via a card reader.

PM-LOGON assigns an RFID card to an operator and logs the operator on to the target system as soon as the operator's RFID card enters the reader field of the connected RFID reader.

In this way, PM-LOGON automates manual entry of user name and password at the target system.

**Ordering data****Article No.**

<b>PM-LOGON system software</b> <b>Type S</b>	<b>9AE7123-1SS01-1AA0</b>
<b>PM-LOGON system software</b> <b>Type C</b>	
License file for:	
• 10 users	<b>9AE7123-1SC00-1AA0</b>
• 50 users	<b>9AE7123-1SC01-1AA0</b>
• 100 users	<b>9AE7123-1SC02-1AA0</b>
• 500 users	<b>9AE7123-1SC03-1AA0</b>
• 1 000 users	<b>9AE7123-1SC04-1AA0</b>
• 2 000 users	<b>9AE7123-1SC05-1AA0</b>
• 5 000 users	<b>9AE7123-1SC06-1AA0</b>
• 10 000 users	<b>9AE7123-1SC07-1AA0</b>

**More information**

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>


# Automation software

SCADA software

Process management - Add-ons

## PM-OPEN EXPORT

### Overview

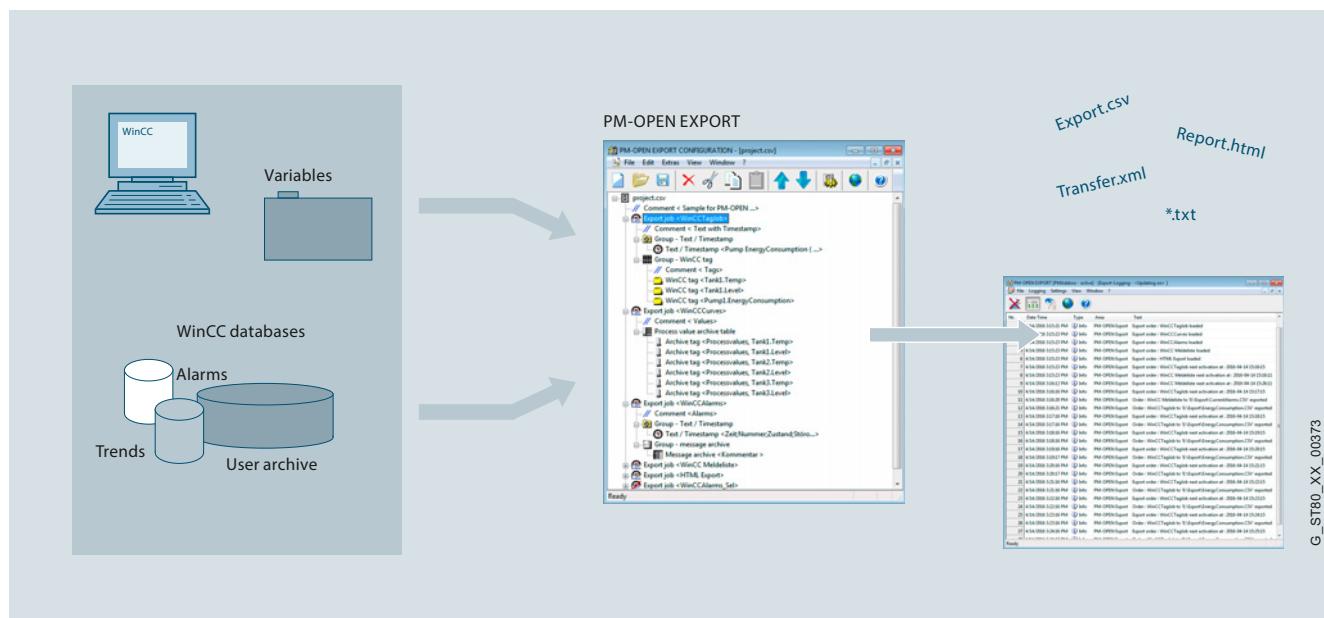

PM-OPEN EXPORT

Flexible and low-cost solution, for exporting current process data (tags) and archive data (alarm log, process value log, user log) from WinCC / PCS 7 / WinCC RT Professional (TIA Portal) into freely formatted text files (ASCII, CSV, HTML/XML format).

### Ordering data

### Article No.

#### PM-OPEN EXPORT system software

**9AE7106-1SS01-1AA0**

Single-user system; can run on interconnected WinCC system

Note:

Additional PM-OPEN EXPORT configurations available on request.

### More information


Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

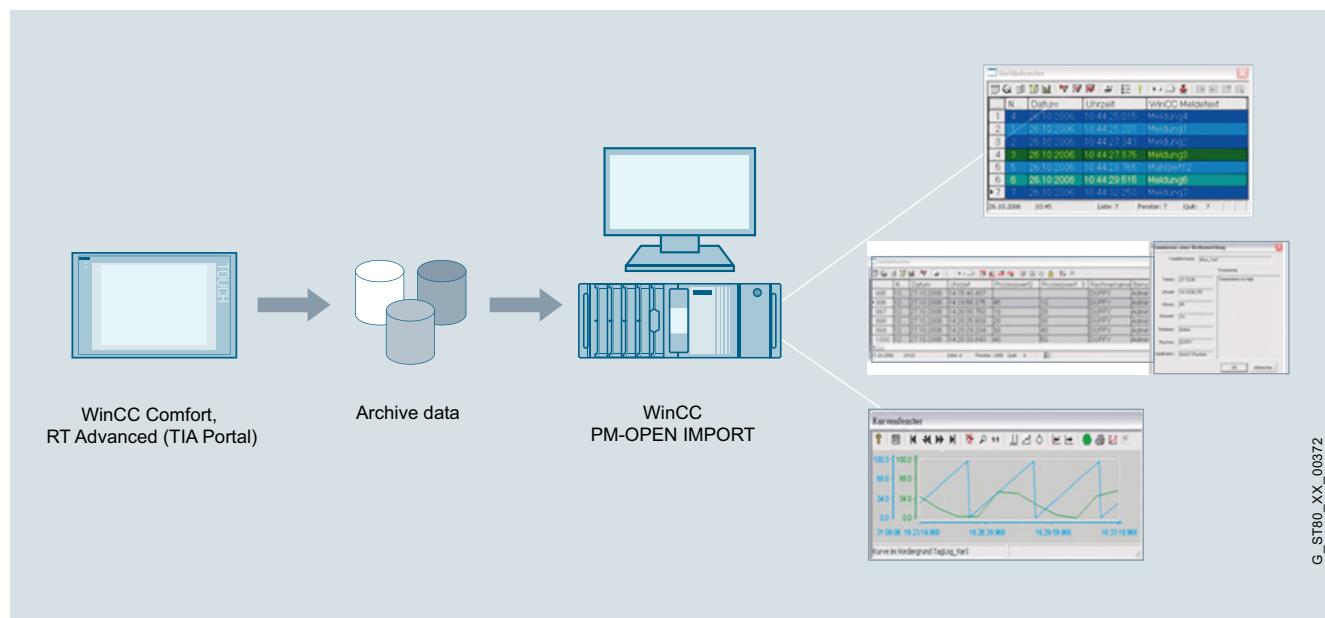**Overview**

3

G\_STB0\_XX\_00372

Process data (tags and messages) and operator actions (Audit Trail) are archived locally as CSV files on SIMATIC WinCC Comfort Panels or systems with WinCC RT Advanced (TIA Portal). With PM-OPEN IMPORT, this data can be centrally and chronologically compiled on a higher-level system and also be safely saved there in database format for the long term. The original time stamps are, of course, retained when importing the data into the WinCC system. The standard resources of the higher-level WinCC system (WinCC RT Professional (TIA Portal), WinCC, PCS 7) are used for display and evaluation.

With PM-OPEN IMPORT, the requirements for the safe, central and long-term archiving of relevant data in the overall automation landscape (from the panel to the higher-level SCADA system) are satisfied as per the guidelines of the Food and Drug Administration (FDA) 21 CFR Part 11 and the EU directive 178/2002.

**Ordering data****Article No.****PM-OPEN IMPORT system software**

9AE7114-1SS01-1AA0

Single-user system; can run on interconnected WinCC system

**Note:**

Additional PM-OPEN IMPORT configurations available on request.

**More information**

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

## Automation software

SCADA software

Process management - Add-ons

### PM-OPEN MINDCONNECT

#### Overview

##### **PM-OPEN MINDCONNECT**

PM-OPEN MINDCONNECT automatically and securely uploads production reports generated by PM-QUALITY or PM-ANALYZE into the Siemens MindSphere Cloud. To facilitate this, a communication channel is established between a virtual asset defined in MindSphere and PM-OPEN MINDCONNECT.

This enables a fully customizable solution where, for example, the distribution of reports is organized according to plant area, location or other suitable criteria.

#### Ordering data

#### Article No.

##### **PM-OPEN MINDCONNECT**

Single-user system, running on interconnected WinCC system with PM-ANALYZE or PM-QUALITY

**9AE7124-1SS01-1AA0**

#### More information

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

**Overview****PM-AGENT**

PM-AGENT is used for communication between PM-QUALITY, PM-CONTROL, PM-MAINT, PM-ANALYZE and PM OPEN HOST/S with the SIMATIC WinCC / RT Professional / PCS 7 systems.

Data from the above systems (tags, messages) can be sent and received.

**Ordering data****Article No.****PM-AGENT**

Single station system; runs on interconnected WinCC system

**9AE7117-2SS01-1AA0**

**More information**

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

## Automation software

SCADA software

Process management - Add-ons

### UNIVERSAL PM-PACKAGE

#### Overview

##### ***Universal PM-Package***

The Universal PM-Package, in combination with a supplementary agreement, provides a cost-effective way to always work with the latest versions of the PM products for testing and configuration purposes and is therefore aimed exclusively at resellers of PM products and OEMs.

#### Ordering data

#### Article No.

UNIVERSAL PM-PACKAGE

9AE7121-1AB01-0AA0

#### More information

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

**Overview****COPYPROJECT**

COPYPROJECT is used to duplicate a complete WinCC V7 project including all runtime archive databases without exiting runtime.

Backups can be made in the background either manually or automatically, e.g. according to a daily schedule, whereby COPYPROJECT dynamically adapts the names of the destination directories to indicate the time of the backup.

**Ordering data****Article No.****COPYPROJECT**

Single station system; can run on interconnected WinCC system

**9AE7141-2SS01-1AA0**

**More information**

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim

Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

## Automation software

SCADA software

Process management - Add-ons

### PM-GRID CONTROL

#### Overview

##### **PM-GRID Control**

PM-GRID Control enables display of data from different sources and is used wherever the flexible display of tables within the WinCC Runtime environment is required

#### Ordering data

#### Article No.

##### **PM-GRID CONTROL**

Single station system; can run on interconnected WinCC system

**9AE7141-2SS03-1AA0**

#### More information

Siemens AG  
Digital Industries  
WinCC Competence Center Mannheim


Tel.: +49 (0)621 1723-1010

Email: [winccaddon.automation@siemens.com](mailto:winccaddon.automation@siemens.com)

More information is available on the Internet at:

<http://www.siemens.com/process-management>

## Overview

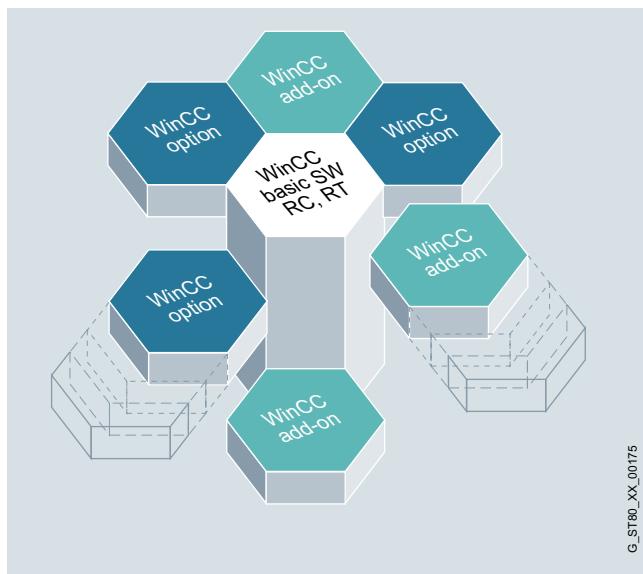

### WinCC Premium Add-ons – Solutions for all sectors and technologies

The basic system is designed to be independent of any specific technology or industrial sector, to be modular and flexibly expandable and to permit not only simple single-user applications in mechanical engineering, but also complex multi-user solutions or even distributed systems with several servers and clients in plant engineering. WinCC Premium Add-ons are supplementary products that have been created by competent partners working in the specific sectors and technologies and represent interesting expansions for WinCC.

WinCC Premium Add-ons are not DF (Siemens) products, but the products of partners who are committed to complying with certain quality features and boundary conditions. The Premium Add-ons are checked, for example, in the Siemens Test Center for their compatibility with the basic WinCC system and supported in the first instance by the central hotline. As they are important application- and sector-specific add-on products for SIMATIC WinCC, they are marketed jointly by Siemens and the respective add-on suppliers. The WinCC Premium Add-on products can be found on the Internet (see More information) and in the "Online WinCC Premium Add-on Catalog".

#### Premium Add-ons for Connectivity:

- **PM-OPEN IMPORT system software**  
enables the WinCC flexible archives to be automatically read into the WinCC system.
- **PM-OPEN EXPORT system software**  
offers a flexible, low-cost solution for exporting current process data and archive data from WinCC into freely formatted text files.
- **PM-OPEN MINDCONNECT**  
allows transparent access to production reports created by PM-QUALITY and/or PM-ANALYZE via the MindSphere app.
- **TOP Server**  
is a proven OPC data integration platform with a large number of OPC device drivers.
- **TOP Server UCON**  
enables separate OPC device drivers to be created by Point-Click configuration.

#### Premium Add-on for process management:

- **PM-ANALYZE**  
is used for locating sources of error or weak spots in plants by analyzing messages and process values.
- **PM-CONTROL system software**  
is a cross-industry recipe system for user-friendly creation and management of recipes with integrated order control.
- **PM-QUALITY system software**  
is a modular and sector-independent archive system for order-related or batch-related acquisition of process and production data.
- **PM-MES Interface**  
Configurable bi-directional interface between WinCC in combination with PM-CONTROL/PM-QUALITY and MES systems for cost-effective implementation of vertical integration solutions without programming workload.

#### Premium Add-on for sector products:

- **ACRON 7 for WinCC**  
is used for long-term archiving and logging of process data for small to medium-sized plants, specifically in the water supply and treatment industry.
- **Sm@rtlib function library**  
provides function blocks for S7-300/400 as well as faceplates and icons for WinCC and WinCC flexible from the areas of process industry, HVAC, pharmaceuticals and energy.

#### Premium Add-on for configuration tools:

- **DCC TranslationEditor**  
for the efficient, secure translation of multilingual visualizations with in-built features for quality assurance.

## Automation software

SCADA software

### WinCC Add-ons and partner management

#### Overview

Premium Add-on for diagnostics and maintenance:

- **ACC Alarm Management System**

enables messages to be passed from the visualization system to mobile radio call receivers, such as cell phones or pagers, etc.

- **PM-MAINT system software**

is a sector and technology-neutral maintenance system for use in preventive maintenance.

#### Competent partners

With SIMATIC WinCC, you not only get excellent products to suit your requirements, but we will also support you with selecting a partner for your automation solution. In our global network of Siemens Automation Solution Providers you will always find competent contacts in your area. In addition, Siemens-internal WinCC Competence Centers and WinCC Specialists support external system integrators with WinCC customer and industry-specific implementation of efficient solutions.

#### WinCC Competence Centers

Mannheim: Process management

- Sector-independent solutions and products in the fields of production, environment, maintenance and diagnostics
- Connectivity tools, system integration, connection to SAP R/3
- Support of FDA validation and WinCC ODK

Stuttgart: Production technology

- Solutions for maintenance management
- Alarm management

Plano, Texas (USA)

Migration of FactoryLink to SIMATIC WinCC

- Support for customers with migration projects
- Optimization of automated migration tools
- Support for FactoryLink customers with CSS contracts

#### More information

##### **WinCC Competence Centers**

Additional information is available on the Internet at:  
<http://www.siemens.com/process-management>

##### **Siemens Solution Partners Automation**

Additional information is available on the Internet at:  
<http://www.siemens.com/automation/solutionpartner>

##### **WinCC Specialists**

Additional information is available on the Internet at:  
<http://www.siemens.com/wincc-specialists>

##### **WinCC Premium Add-ons**

Additional information is available on the Internet at:  
<http://www.siemens.com/wincc-addons>

**Overview****BRAUMAT / SISTAR**

BRAUMAT / SISTAR is the tried and tested control system for the automation of recipe and batch-controlled production processes like those used in the food and beverages industry, but also in other industries.

The following industries can be cited as examples:

- Beer production
- Milk processing
- Battery manufacturing
- Mixing processes
- And other comparable batch-oriented production processes

The system software is attuned to the technological requirements of such production processes and contains the following functions, among others:

- PLC-based recipe control by processing the specified product recipes
- Operator control and monitoring system with server/client architecture
- Graphics-based recipe and order management
- Automatic weighing and dosage of raw materials and inputs
- Route control of pipe and valve-related transport procedures (e.g. in tank farms)
- Messaging and logging
- Test and diagnostics
- Engineering and configuration tools

**BRAUMAT / SISTAR Lean**

In addition to the BRAUMAT / SISTAR standard system ("Standard edition"), the Lean edition of BRAUMAT / SISTAR is also available.

This is especially aimed at the needs of smaller plants (e.g. microbreweries and craft breweries) or encapsulated plant units (e.g. thermal treatment such as 'short-time heating') and provides an easy and cost-effective entry-level system.

**Ordering data****Article No.**

<b>BRAUMAT / SISTAR</b>	
<b>BRAUMAT / SISTAR Engineering</b>	
<b>BRAUMAT / SISTAR Engineering V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-0AX08-0YA5</b> <b>6DL5210-0AX08-0DA5</b>
<b>Upgrade V7.5 -&gt; V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-0AX08-0YE5</b> <b>6DL5210-0AX08-0DE5</b>
<b>Upgrade V7.x -&gt; V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-0AX08-0YG5</b> <b>6DL5210-0AX08-0DG5</b>
<b>BRAUMAT / SISTAR Engineering V7.5</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-0AX57-0YA5</b> <b>6DL5210-0AX57-0DA5</b>
<b>Upgrade 7.x -&gt; V7.5</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-0AX57-0YE5</b> <b>6DL5210-0AX57-0DE5</b>
<b>BRAUMAT / SISTAR IOS Server</b>	
<b>BRAUMAT / SISTAR IOS Server V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1BX08-0YA0</b> <b>6DL5210-1BX08-0DA0</b>
<b>Upgrade V7.5 -&gt; V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1BX08-0YE0</b> <b>6DL5210-1BX08-0DE0</b>
<b>Upgrade 7.x -&gt; V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1BX08-0YG0</b> <b>6DL5210-1BX08-0DG0</b>
<b>BRAUMAT / SISTAR IOS Server V7.5</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1BX57-0YA0</b> <b>6DL5210-1BX57-0DA0</b>
<b>Upgrade 7.x -&gt; V7.5</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1BX57-0YE0</b> <b>6DL5210-1BX57-0DE0</b>
<b>BRAUMAT / SISTAR RCS Server (Route Control System)</b>	
<b>BRAUMAT / SISTAR RCS Server V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1DX08-2YB0</b> <b>6DL5210-1DX08-2DB0</b>
<b>Upgrade V7.5 -&gt; V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1DX08-2YE0</b> <b>6DL5210-1DX08-2DE0</b>
<b>Upgrade 7.x -&gt; V8.0</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1DX08-2YG0</b> <b>6DL5210-1DX08-2DG0</b>
<b>BRAUMAT / SISTAR RCS Server V7.5</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1DX57-2YB0</b> <b>6DL5210-1DX57-2DB0</b>
<b>Upgrade 7.x -&gt; V7.5</b>	
<ul style="list-style-type: none"> <li>• As package</li> <li>• Download <sup>1)</sup></li> </ul>	<b>6DL5210-1DX57-2YE0</b> <b>6DL5210-1DX57-2DE0</b>

# Automation software

## BRAUMAT

### BRAUMAT / SISTAR

Ordering data	Article No.	Article No.
<b>BRAUMAT / SISTAR Multi Area Client</b>		<b>BRAUMAT / SISTAR SQL Adapter Server</b>
<b>BRAUMAT / SISTAR Multi Area Client V8.0</b>	<b>6DL5210-1CX08-0YB5 6DL5210-1CX08-0DB5</b>	<b>BRAUMAT / SISTAR SQL Adapter Server V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade V7.5 -&gt; V8.0</b>	<b>6DL5210-1CX08-0YE5 6DL5210-1CX08-0DE5</b>	<b>Upgrade V7.5 -&gt; V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade 7.x -&gt; V8.0</b>	<b>6DL5210-1CX08-0YG5 6DL5210-1CX08-0DG5</b>	<b>Upgrade 7.x -&gt; V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>BRAUMAT / SISTAR Multi Area Client V7.5</b>	<b>6DL5210-1CX57-0YB5 6DL5210-1CX57-0DB5</b>	<b>BRAUMAT / SISTAR SQL Adapter Server V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade 7.x -&gt; V7.5</b>	<b>6DL5210-1CX57-0YE5 6DL5210-1CX57-0DE5</b>	<b>Upgrade 7.x -&gt; V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>BRAUMAT / SISTAR Single Area Client</b>		<b>BRAUMAT / SISTAR MES API IOS V8.0</b>
<b>BRAUMAT / SISTAR Single Area Client V8.0</b>	<b>6DL5210-1SX08-0YB5 6DL5210-1SX08-0DB5</b>	<b>BRAUMAT / SISTAR MES API IOS V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>BRAUMAT / SISTAR Conversion Single -&gt; Multi Area Client V8.0</b>	<b>6DL5210-1SX08-0YD5 6DL5210-1SX08-0DD5</b>	<b>Upgrade V7.5 -&gt; V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>BRAUMAT / SISTAR PCU (Process Control Unit)</b>		<b>Upgrade 7.x -&gt; V8.0</b>
<b>BRAUMAT / SISTAR PCU V8.0</b>	<b>6DL5210-1EX08-0YB0 6DL5210-1EX08-0DB0</b>	<b>Upgrade 7.x -&gt; V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade V7.5 -&gt; V8.0</b>	<b>6DL5210-1EX08-0YE0 6DL5210-1EX08-0DE0</b>	<b>Upgrade 7.x -&gt; V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade 7.x -&gt; V8.0</b>	<b>6DL5210-1EX08-0YG0 6DL5210-1EX08-0DG0</b>	<b>BRAUMAT / SISTAR MES API Server</b>
• As package • Download <sup>1)</sup>		<b>BRAUMAT / SISTAR MES API Server V8.0</b>
<b>BRAUMAT / SISTAR PCU V7.5</b>	<b>6DL5210-1EX57-0YB0 6DL5210-1EX57-0DB0</b>	<b>BRAUMAT / SISTAR MES API Server V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade 7.x -&gt; V7.5</b>	<b>6DL5210-1EX57-0YE0 6DL5210-1EX57-0DE0</b>	<b>Upgrade V7.5 -&gt; V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>BRAUMAT / SISTAR SQL Adapter IOS</b>		<b>Upgrade 7.x -&gt; V8.0</b>
<b>BRAUMAT / SISTAR SQL Adapter IOS V8.0</b>	<b>6DL5210-1FX08-2YB0 6DL5210-1FX08-2DB0</b>	<b>Upgrade 7.x -&gt; V8.0</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade V7.5 -&gt; V8.0</b>	<b>6DL5210-1FX08-2YE0 6DL5210-1FX08-2DE0</b>	<b>BRAUMAT / SISTAR MES API Server V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade 7.x -&gt; V8.0</b>	<b>6DL5210-1FX08-2YG0 6DL5210-1FX08-2DG0</b>	<b>Upgrade 7.x -&gt; V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>BRAUMAT / SISTAR SQL Adapter IOS V7.5</b>	<b>6DL5210-1FX57-2YB0 6DL5210-1FX57-2DB0</b>	<b>BRAUMAT / SISTAR MES API Server V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>
<b>Upgrade 7.x -&gt; V7.5</b>	<b>6DL5210-1FX57-2YE0 6DL5210-1FX57-2DE0</b>	<b>Upgrade 7.x -&gt; V7.5</b>
• As package • Download <sup>1)</sup>		• As package • Download <sup>1)</sup>

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

Ordering data	Article No.	Article No.
<b>BRAUMAT / SISTAR Lean</b>		
<b>BRAUMAT / SISTAR Lean V8.0</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HB08-0YA0</b> <b>6DL5210-1HB08-0DA0</b>	<b>Upgrade</b> <b>Lean4 V7.5 -&gt; V8.0</b> • As package • Download <sup>1)</sup>
<b>PowerPack +12 V8.0</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HX08-0YF0</b> <b>6DL5210-1HX08-0DF0</b>	<b>6DL5210-1HB08-0YE0</b> <b>6DL5210-1HB08-0DE0</b>
<b>BRAUMAT / SISTAR Lean V7.5</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HB57-0YA0</b> <b>6DL5210-1HB57-0DA0</b>	<b>Upgrade</b> <b>Lean16 V7.5 &gt; V8.0</b> • As package • Download <sup>1)</sup>
<b>PowerPack +12 V7.5</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HX57-0YF0</b> <b>6DL5210-1HX57-0DF0</b>	<b>6DL5210-1HD08-0YE0</b> <b>6DL5210-1HD08-0DE0</b>
<b>BRAUMAT / SISTAR Convert Lean -&gt; IOS</b>		
<b>Lean4 -&gt; IOS V8.0</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HB08-0YD0</b> <b>6DL5210-1HB08-0DD0</b>	<b>Upgrade</b> <b>Lean28 V7.5 &gt; V8.0</b> • As package • Download <sup>1)</sup>
<b>Lean16 -&gt; IOS V8.0</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HD08-0YD0</b> <b>6DL5210-1HD08-0DD0</b>	<b>Upgrade</b> <b>Lean40 V7.5 &gt; V8.0</b> • As package • Download <sup>1)</sup>
<b>Lean28 -&gt; IOS V8.0</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HF08-0YD0</b> <b>6DL5210-1HF08-0DD0</b>	<b>6DL5210-1HF08-0YE0</b> <b>6DL5210-1HF08-0DE0</b>
<b>Lean40 -&gt; IOS V8.0</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HH08-0YD0</b> <b>6DL5210-1HH08-0DD0</b>	<b>Upgrade</b> <b>Lean16 V7.x &gt; V7.5</b> • As package • Download <sup>1)</sup>
<b>Lean4 -&gt; IOS V7.5</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HB57-0YD0</b> <b>6DL5210-1HB57-0DD0</b>	<b>6DL5210-1HD57-0YE0</b> <b>6DL5210-1HD57-0DE0</b>
<b>Lean16 -&gt; IOS V7.5</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HD57-0YD0</b> <b>6DL5210-1HD57-0DD0</b>	
<b>Lean28 -&gt; IOS V7.5</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HF57-0YD0</b> <b>6DL5210-1HF57-0DD0</b>	
<b>Lean40 -&gt; IOS V7.5</b>		
• As package • Download <sup>1)</sup>	<b>6DL5210-1HH57-0YD0</b> <b>6DL5210-1HH57-0DD0</b>	


<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

# Automation software

Software for energy management

## Introduction

### Overview

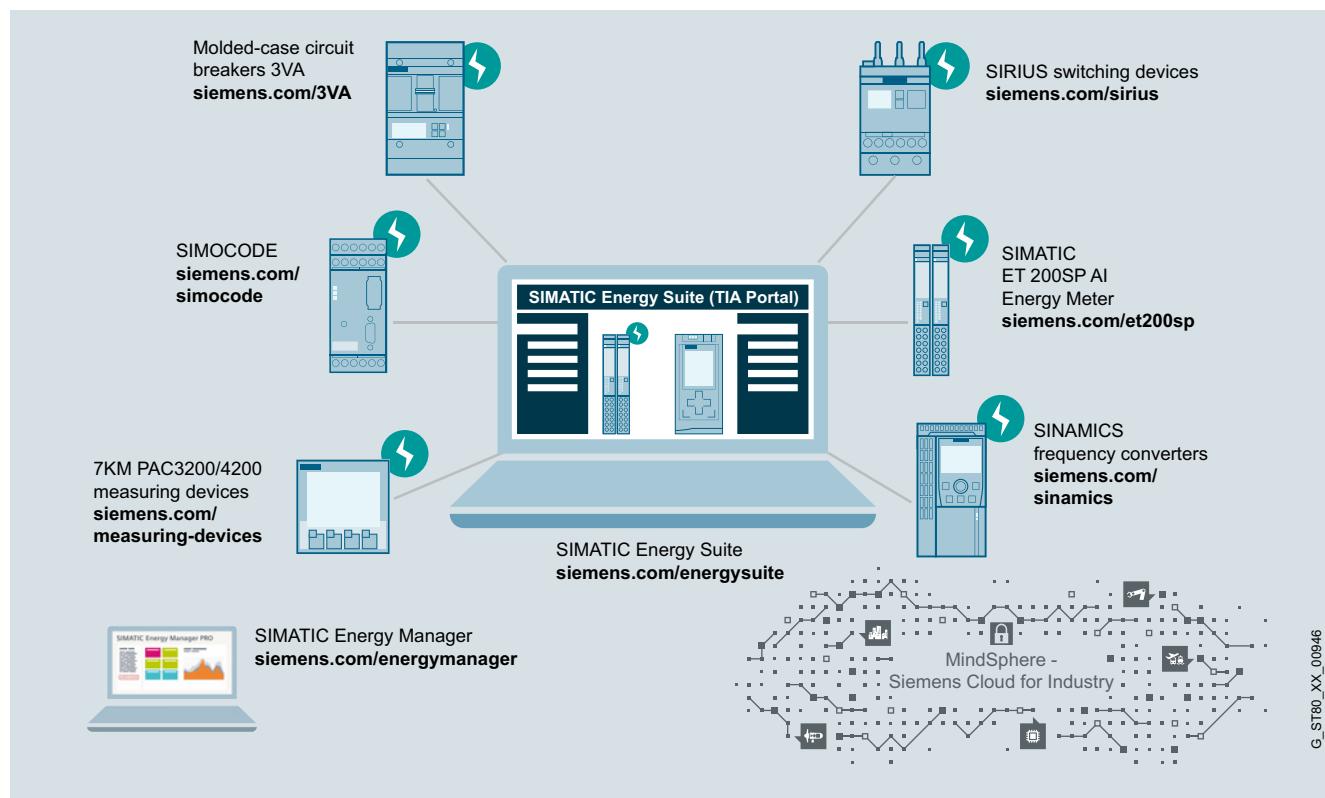


Energy Management, system overview

SIMATIC offers numerous reasons for corporate energy management in industrial plants.

However, there is one in particular: It makes an important contribution towards improving plant productivity. This results in enhanced competitiveness. Energy management with SIMATIC makes energy flows transparent in production plants. This supports the analysis and derivation of energy saving potential.

The result: Permanently increased efficiency, higher productivity and an improved cost situation.

<http://www.siemens.com/simatic-energy-management>

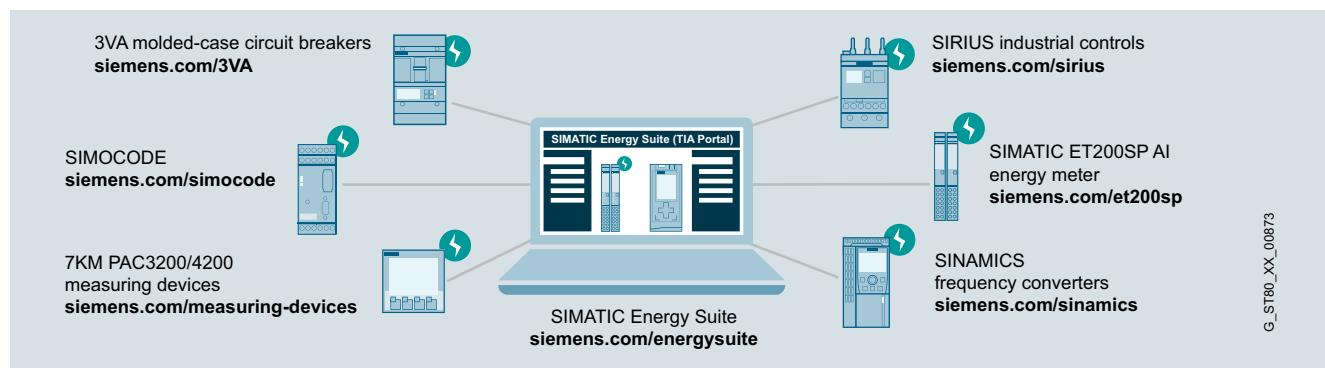**Overview**

G\_ST80\_XX\_00873

**SIMATIC Energy Suite – Energy data acquisition and load management**

A high energy consumption and automated production are typical for many industries. If you want to keep your energy costs under control in the long term and you are already focusing on the digital future, you will equip your plant with integrated energy measuring technology, thus anchoring your energy management in the automation of your production processes – which is where most energy is consumed.

SIMATIC Energy Suite as an integrated option for the TIA Portal efficiently links energy management with automation, thus creating energy transparency in the production system.

**Functional enhancement for energy efficiency evaluation of machines:**

Especially for evaluation of the product-related energy efficiency of machines, the S7 instruction "Energy efficiency monitor for machines" extends the scope of the SIMATIC Energy Suite functions.

As part of the instruction library of STEP 7 (TIA Portal), the function can be integrated in the machine control system by the machine manufacturer.

By linking the energy consumption, the production counter and the operating state, easy evaluation of the energy efficiency is possible based on energy performance indicators (EnPI).

# Automation software

Software for energy management

## SIMATIC Energy Suite

Ordering data	Article No.	Technical specifications
<b>Engineering package</b> Includes installation medium, floating license for engineering as well as license certificates <sup>3)</sup> for 10 energy objects <sup>1)</sup> (2x5 EnO).		
<b>SIMATIC Energy Suite V16 Engineering</b> including 10 energy objects <sup>1)</sup> (2x5 EnO) • As package • Download <sup>4)</sup>	<b>6AV2108-0AA06-0AA5</b> <b>6AV2108-0AA06-0AH5</b>	<b>SIMATIC Energy Suite V16</b> <b>PC hardware requirements</b> • In accordance with the requirement of the TIA Portal components: - SIMATIC STEP 7 (TIA Portal) - SIMATIC WinCC Professional, Advanced, Comfort, Basic
<b>SIMATIC Energy Suite Upgrade V14 or 15 to V16</b> • As package • Download <sup>4)</sup>	<b>6AV2108-3AA06-0AE5</b> <b>6AV2108-3AA06-0AK5</b>	<b>Operating system requirements</b> • In accordance with the requirement of the TIA Portal components: - SIMATIC STEP 7 (TIA Portal) - SIMATIC WinCC Professional, Advanced, Comfort, Basic
<b>Trial package</b>		
<b>SIMATIC Energy Suite V16 Engineering Trial (21 days)</b> As package	<b>6AV2108-0AA06-0AA7</b>	<b>Supported STEP 7 version</b> • SIMATIC STEP 7 V16
<b>SIMATIC Energy Suite Engineering Software Update Service<sup>5)</sup></b> • Data storage medium package • Download <sup>4)</sup> Email address required for delivery	<b>6AV2108-0AA00-0AL0</b> <b>6AV2108-0AA00-0AY0</b>	<b>Supported WinCC versions</b> • SIMATIC WinCC V16 Professional, Advanced, Comfort, Basic
<b>PLC runtime licenses<sup>2)</sup></b> Includes license certificates <sup>3)</sup> for activating additional energy objects <sup>1)</sup> (EnO).		<b>Supported SIMATIC CPUs</b> • SIMATIC Energy Suite • S7 Energy Efficiency Monitor for Machines
<b>SIMATIC Energy Suite S7-1500</b> SIMATIC Energy Suite S7-1500, 5 energy objects <sup>1)</sup> (1 x 5 EnO) • As package • Download <sup>4)</sup>	<b>6AV2108-0CF00-0BB0</b> <b>6AV2108-0CF00-0BH0</b>	• Runs on all S7-1500 CPUs (except S7-1500S) and ET 200SP CPU; with FW V2.0 and higher. • Runs on all S7-1500 CPUs and ET 200SP CPUs; with FW V2.1 • Runs on all S7-1200 CPUs; with FW V4.2
SIMATIC Energy Suite S7-1500, 10 energy objects <sup>1)</sup> (1 x 10 EnO) • As package • Download <sup>4)</sup>	<b>6AV2108-0CH00-0BB0</b> <b>6AV2108-0CH00-0BH0</b>	
SIMATIC Energy Suite S7-1500, 10 energy objects <sup>1)</sup> (2 x 5 EnO) • As package • Download <sup>4)</sup>	<b>6AV2108-0DF00-0BB0</b> <b>6AV2108-0DF00-0BH0</b>	
SIMATIC Energy Suite S7-1500, 50 energy objects <sup>1)</sup> (5 x 10 EnO) • As package • Download <sup>4)</sup>	<b>6AV2108-0FH00-0BB0</b> <b>6AV2108-0FH00-0BH0</b>	
SIMATIC Energy Suite S7-1500, 100 energy objects <sup>1)</sup> (10 x 10 EnO) • As package • Download <sup>4)</sup>	<b>6AV2108-0HH00-0BB0</b> <b>6AV2108-0HH00-0BH0</b>	
<b>S7 Energy Efficiency Monitor for Machines</b> Includes license certificate <sup>5)</sup> for activating the S7 instruction for energy efficiency evaluation especially for machines		
<b>S7 Energy Efficiency Monitor for Machines S7-1500 / S7-1200</b> • As package • Download <sup>4)</sup>	<b>6AV2108-1CF00-0BB0</b> <b>6AV2108-1CF00-0BH0</b>	

<sup>1)</sup> Energy objects (EnO) are used for licensing the recording functionality and the load management. This requires: - 1 recording object (measuring point) = 1x energy object - 1 actuator object (consumer or producer) = 3x energy objects


<sup>2)</sup> PLC runtime licenses are countable and version-neutral

<sup>3)</sup> The correct number of existing license certificates must be configured in the properties of the CPU hardware in the TIA Portal.

<sup>4)</sup> For up-to-date information and download availability:  
<http://www.siemens.com/tia-online-software-delivery>

<sup>5)</sup> The license number on the certificate is used to activate the S7 instruction; one license certificate is required for each machine.

## Overview

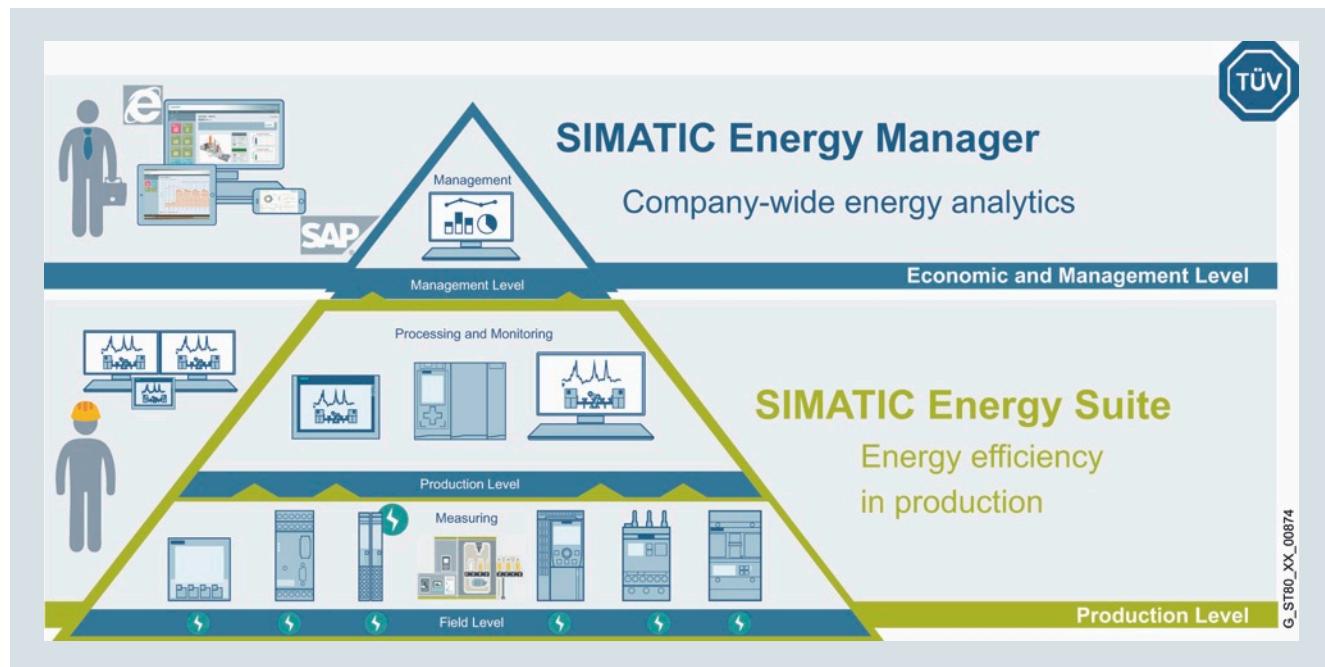

### SIMATIC Energy Manager V7.2 energy management system

SIMATIC Energy Manager V7.2 makes energy flows and costs transparent – in both infrastructure and production.

SIMATIC Energy Manager provides users with a scalable, non-sector-specific energy data management system. Its functions range from energy monitoring, energy controlling, energy invoicing, baseline management and prognosis, through to the management of energy efficiency measures. Among other things, SIMATIC Energy Manager provides an extensive and easy-to-use report system, as well as a dynamic, widget-based web dashboard for analyzing and distributing data once it has been acquired and analyzed.

**SIMATIC Energy Manager** is available in a **Basic** and a **PRO version**.

#### Advantages:

- Appropriate energy efficiency measures can be devised based on performance indicators and display options. When implemented successfully, cost savings are achieved.
- Power monitoring offers the basis for a secure power supply

- Transparency at cost center level raises employee awareness and forms the basis for specifying clear, easy-to-understand aims, as well as for monitoring their achievement
- Technological processes and plants in production (for example: analysis based on machine status) can easily be connected and allow for energy performance evaluation
- Transparency combined with prognosis functions increases planning reliability and opens up new opportunities in energy procurement
- Energy controlling, with its flexible reporting and analysis functions, helps to ensure that efficient systems remain efficient
- Characteristic values can be freely defined to facilitate substantiated statements on increasing the efficiency of power generation systems and consumers
- Transparency – with the OPC UA (HA) server, data can be made available to additional applications
- It fulfills the legal obligations for monitoring and reporting on greenhouse gas emissions (CO<sub>2</sub> emissions)

## Automation software

Software for energy management

### SIMATIC Energy Manager

#### Overview

##### Energy Manager Basic:

- Easy configuration of dashboards, charts and reports
- With power monitoring, it is possible to analyze detail data of the measuring instruments
- Configuration of data points and the OPC UA, OPC DA, OPC HDA, Energy Suite, WinCC/PCS 7, Modbus/TCP, Modbus/TCP, Desigo CC and ASCII interfaces, as well as manual data acquisition
- Definition of derived data points in order to store performance indicators as a time series and export them, for example.
- Simple authorization concept
- Web client available in the languages DE, EN, IT, FR, ES, ZH
- Configuration of performance indicators data with a formula editor
- Configuration of parameters to display prices or factors
- Tabular overview and options for structuring data sources, data points, performance indicators and parameters
- Configuration of essential settings, e.g. email settings, backup, units, regional settings, account settings
- Provision of data with the OPC UA server

##### Energy Manager PRO:

- The S7 energy efficiency monitor as an instruction in the TIA Portal allows machine status-related energy data acquisition. Data is transferred to Energy Manager PRO via a communication module.
- Uniform and comparable display of efficiency indicators of machines/lines/cost centers
- Display of energy consumption and costs at machine level and cost center level
- Energy consumption and costs per workpiece or shift
- Benchmarking of same machines/workpieces from different manufacturers

##### Note:

Upgrading from SIMATIC Energy Manager 7.1 to SIMATIC Energy Manager 7.2 is possible at any time and is included in the SIMATIC Energy Manager SUS.

#### Ordering data

#### Article No.

##### **SIMATIC Energy Manager V7.2**

###### Standard scope of supply

- SIMATIC Energy Manager Basic incl. 50 tags<sup>1)</sup>
- SIMATIC Energy Manager PRO incl. 50 tags<sup>1)</sup>
- SIMATIC Energy Manager PRO Powerpack Basic -> PRO
- Tag Package 50<sup>1)</sup>
- Tag Package 100<sup>1)</sup>
- Tag Package 250<sup>1)</sup>
- Tag Package 500<sup>1)</sup>
- Tag Package 1 000<sup>1)</sup>
- Tag Package 5 000<sup>1)</sup>
- Tag Package 30 000<sup>1)</sup>

###### Download

- SIMATIC Energy Manager Basic incl. 50 tags<sup>1)</sup>
- SIMATIC Energy Manager PRO incl. 50 tags<sup>1)</sup>
- SIMATIC Energy Manager PRO Powerpack Basic -> PRO
- Tag Package 50<sup>1)</sup>
- Tag Package 100<sup>1)</sup>
- Tag Package 250<sup>1)</sup>
- Tag Package 500<sup>1)</sup>
- Tag Package 1 000<sup>1)</sup>
- Tag Package 5 000<sup>1)</sup>
- Tag Package 30 000<sup>1)</sup>

##### **SIMATIC Energy Manager extensions**

###### Standard scope of supply

- SIMATIC Energy Manager, 3 web clients<sup>4)</sup>
- SIMATIC Energy Manager, 20 web clients<sup>4)</sup>
- SIMATIC Energy Manager, 60 web clients<sup>4)</sup>
- SIMATIC Energy Manager PRO client<sup>4)</sup>
- SIMATIC Energy Manager PRO Planning and Forecast
- SIMATIC Energy Manager PRO acquisition component

###### Download

- SIMATIC Energy Manager, 3 web clients<sup>4)</sup>
- SIMATIC Energy Manager, 20 web clients<sup>4)</sup>
- SIMATIC Energy Manager, 60 web clients<sup>4)</sup>
- SIMATIC Energy Manager PRO client<sup>4)</sup>
- SIMATIC Energy Manager PRO Planning and Forecast
- SIMATIC Energy Manager PRO acquisition component

Ordering data	Article No.	Article No.
<b>SIMATIC Energy Manager PRO Consumer Package</b>		
<u>Standard scope of supply</u>		<b>SIMATIC Energy Manager upgrades</b>
<ul style="list-style-type: none"> <li>• Consumer Package 1 with S7 EE monitor<sup>3)</sup></li> <li>• Consumer Package 5 with S7 EE monitor<sup>3)</sup></li> <li>• Consumer Package 25 with S7 EE monitor<sup>3)</sup></li> <li>• Consumer Package 1 without S7-EE monitor</li> <li>• Consumer Package 5 without S7-EE monitor</li> <li>• Consumer Package 25 without S7-EE monitor</li> </ul>	<b>6AV6372-2DF67-1AX0</b>	<u>Standard scope of supply</u>
<u>Download</u>		<ul style="list-style-type: none"> <li>• Upgrade of systems with up to 50 tags and/or 1 Consumer Package</li> <li>• Upgrade of systems with up to 100 tags and/or 5 Consumer Packages</li> <li>• Upgrade of systems with up to 500 tags and/or 25 Consumer Packages</li> <li>• Upgrade of systems with up to 5 000 tags and/or 100 Consumer Packages</li> <li>• Upgrade of systems with more than 5 000 tags and/or more than 100 Consumer Packages</li> </ul>
<ul style="list-style-type: none"> <li>• Consumer Package 1 with S7 EE monitor<sup>3)</sup></li> <li>• Consumer Package 5 with S7 EE monitor<sup>3)</sup></li> <li>• Consumer Package 25 with S7 EE monitor<sup>3)</sup></li> <li>• Consumer Package 1 without S7-EE monitor</li> <li>• Consumer Package 5 without S7-EE monitor</li> <li>• Consumer Package 25 without S7-EE monitor</li> </ul>	<b>6AV6372-2DF67-1AH0</b>	<u>Download</u>
	<b>6AV6372-2DF67-1BH0</b>	<ul style="list-style-type: none"> <li>• Upgrade of systems with up to 50 tags and/or 1 Consumer Package</li> <li>• Upgrade of systems with up to 100 tags and/or 5 Consumer Packages</li> <li>• Upgrade of systems with up to 500 tags and/or 25 Consumer Packages</li> <li>• Upgrade of systems with up to 5 000 tags and/or 100 Consumer Packages</li> <li>• Upgrade of systems with more than 5 000 tags and/or more than 100 Consumer Packages</li> </ul>
	<b>6AV6372-2DF67-1CH0</b>	
	<b>6AV6372-2DF77-1AH0</b>	
	<b>6AV6372-2DF77-1BH0</b>	
	<b>6AV6372-2DF77-1CH0</b>	
<b>SIMATIC Energy Manager SUS<sup>2)</sup></b>		<b>SIMATIC Energy Manager TRIAL</b>
<u>Standard scope of supply</u>		<u>Standard scope of supply</u>
<ul style="list-style-type: none"> <li>• For max. additional 50 tags and/or 1 Consumer Package<sup>2)</sup></li> <li>• For max. additional 100 tags and/or 5 Consumer Packages<sup>2)</sup></li> <li>• For max. additional 500 tags and/or 25 Consumer Packages<sup>2)</sup></li> <li>• For max. additional 5 000 tags and/or 100 Consumer Packages<sup>2)</sup></li> <li>• For more than 5 000 tags and/or 100 Consumer Packages<sup>2)</sup></li> </ul>	<b>6AV6372-2DF00-0CL0</b>	<b>6AV6372-2DF17-2AX0</b>
<u>Download</u>		
<ul style="list-style-type: none"> <li>• For max. additional 50 tags and/or 1 Consumer Package<sup>2)</sup></li> <li>• For max. additional 100 tags and/or 5 Consumer Packages<sup>2)</sup></li> <li>• For max. additional 500 tags and/or 25 Consumer Packages<sup>2)</sup></li> <li>• For max. additional 5 000 tags and/or 100 Consumer Packages<sup>2)</sup></li> <li>• For more than 5 000 tags and/or 100 Consumer Packages<sup>2)</sup></li> </ul>	<b>6AV6372-2DF00-0CY0</b>	
	<b>6AV6372-2DF00-0DY0</b>	
	<b>6AV6372-2DF00-0FY0</b>	
	<b>6AV6372-2DF00-0HY0</b>	
	<b>6AV6372-2DF70-0XY0</b>	

<sup>1)</sup> The tag packages dynamically expand the number of tags. The total number of tags is incremented by the value of the tag package in each case.

<sup>2)</sup> The SUS contract runs for 1 year. The contract is automatically extended by a further year unless canceled 3 months prior to expiration.

<sup>3)</sup> The license number on the certificate is used to activate the S7 instruction; a separate license certificate is required for each machine.

<sup>4)</sup> The Client license and Web Client license are licensing which only takes into account one simultaneous access. Example: If 5 users use the Energy Manager via the web client but only 3 work with it simultaneously, only 3 web client licenses are necessary. The same applies for the desktop client.

## Automation software

Software for energy management

### SIMATIC Energy Manager

#### Technical specifications

<b>SIMATIC Energy Manager PRO V7.2</b>	
<b>Operating system</b>	<ul style="list-style-type: none"> <li>Windows Server 2008 R2 (English/German)</li> <li>Windows Server 2012 R2 (English/German)</li> <li>Windows Server 2016 (English/German)</li> <li>Windows Server 2019 (English/German)</li> <li>Windows 7 Professional/Ultimate SP1 (English/German)</li> <li>Windows 8.1 Pro/Enterprise 64-bit (English/German)</li> <li>Windows 10 Pro/Enterprise 64-bit (English/German)</li> <li>Minimum of 16 GB RAM</li> </ul>
<b>Interface</b>	In addition to an interface to WinCC, PCS7, Desigo CC and S7 controllers Energy Manager PRO also offers the latest interface standards such as OPC DA, OPC HDA, OPC UA, MODBUS TCP, ODBC, ASCII and XML.
<b>WinCC versions<sup>1)</sup></b>	<ul style="list-style-type: none"> <li>SIMATIC WinCC V7.3 SE, V7.4, V7.5</li> <li>SIMATIC WinCC RT Professional V14, V15, V15.1</li> </ul>
<b>PCS 7 versions<sup>2)</sup></b>	<ul style="list-style-type: none"> <li>SIMATIC PCS 7 V8.2</li> <li>SIMATIC PCS 7 V9</li> </ul>
<b>Virtualization</b>	<ul style="list-style-type: none"> <li>VMWare Workstation 12.5, 14, 15</li> <li>VMWare ESX 6.5, 6.7</li> <li>Microsoft Hyper-V for Windows Server 2012 R2, 2016, 2019</li> <li>Microsoft Hyper-V server 2012 R2, 2016, 2019</li> </ul>

#### More information

Additional information is available on the Internet at:

<http://www.siemens.com/energymanager>

<sup>1)</sup> If an acquisition component is installed on a WinCC system, these requirements must also be complied with

<sup>2)</sup> The SIMATIC Energy Manager PRO system for connection to the PCS 7 must always be installed on a separate PC

## Industrial Edge




<b>4/2</b>	<b>Overview</b>
<b>4/4</b>	<b>Industrial Edge Management</b>
<b>4/6</b>	<b>Industrial Edge apps</b>
4/7	Data Service
4/8	Energy Manager
4/9	EtherNet/IP Connector
4/10	Inventory
4/11	LiveTwin
4/12	Machine Insight
4/13	Modbus TCP Connector
4/14	Notifier
4/15	Performance Insight
4/16	SIMATIC Automation Tool
4/17	Partner apps
<b>4/18</b>	<b>Industrial Edge devices</b>

# Industrial Edge

## Introduction

### Overview

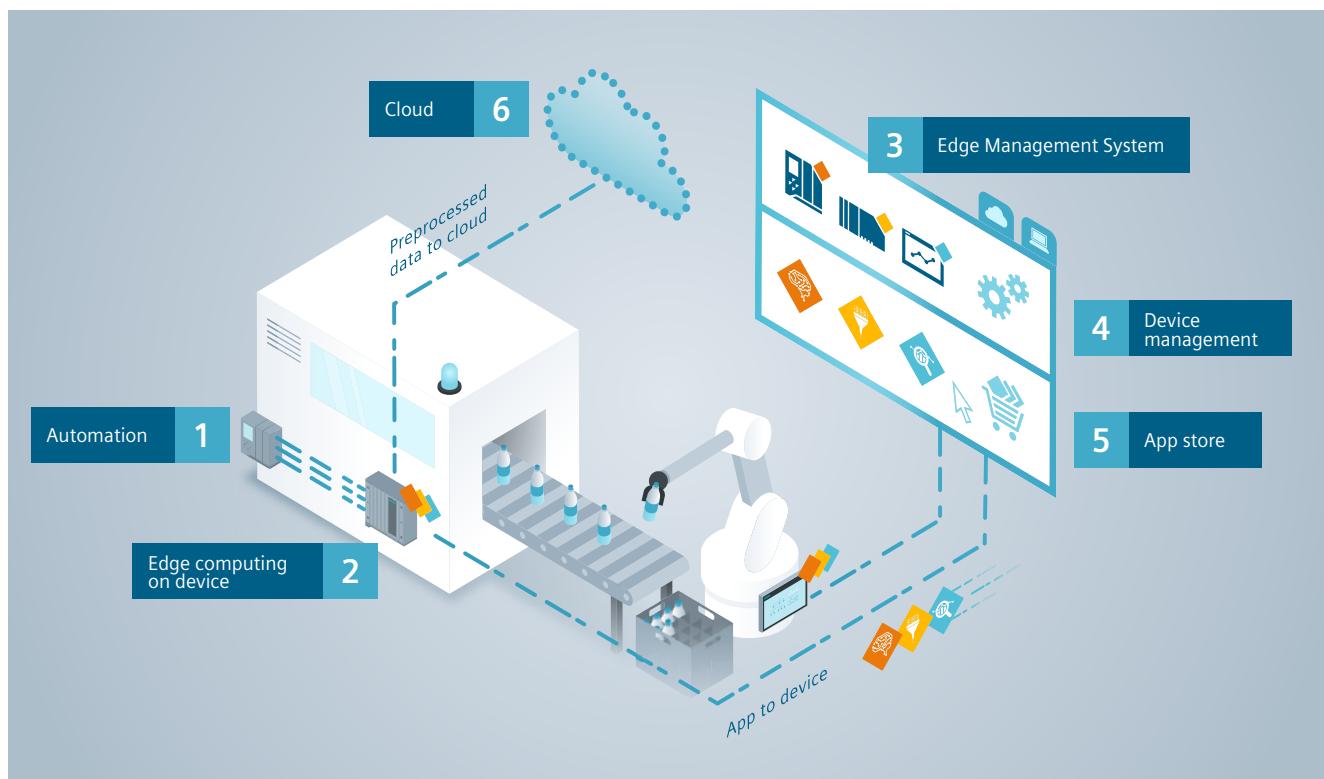

4

### Industrial Edge

Expands the industrial automation technology with openness and flexibility for simple and intuitive processing, analysis and saving of production data.

Provides an integrated and secure runtime environment for running high-level programming language-based Edge applications (on the basis of the Docker IT standard) for local and powerful data processing and analysis at the automation level.

As compared to conventional PC-based systems, Industrial Edge enables an integrated connection to automation and cloud systems without additional programming workload and offers the option to manage Edge devices and software worldwide with one central management system. This makes data processing solutions future-proof to the maximum possible extent and enables new possible applications such as centralized software administration and versioning, for example for global recipe management.

Industrial Edge comprises the following products:

- Industrial Edge devices with Industrial Edge Runtime for running Edge applications at the automation level
- Industrial Edge applications
- Industrial Edge Management for central management of Edge devices and applications
- Industrial Edge Hub as central entry point for Edge-related software downloads and additional information, such as user documentation.

**Benefits**

- Increase in flexibility and openness of existing and new automation systems allows innovative data processing concepts
- Long-term security and scalability of innovative data processing software solutions across hundreds of devices based on open application standards such as Docker
- Time savings during development of high-level programming language-based software solutions in industrial environments thanks to:
  - Security by default – Manual security hardening of open PC systems is no longer necessary
  - Integrated connectivity to field or cloud – Manual programming and implementation of connectivity, such as OPC UA or SIMATIC S7, is no longer necessary
- Time savings and reduced workload thanks to convenient central administration and diagnostics of Edge devices and Edge applications
  - Reduction of on-site service costs due to the central remote upatability of software on Edge devices
  - Time savings and reduced workload for software updates with 1-click bulk app downloads
  - Reduction of error sources through the standardization of software (apps) using integrated version management
- Decreased dependency of cloud systems and enhanced data processing intelligence in the field through native integration of Edge applications in automation systems
  - Realization of soft real time and latency-critical applications for data processing through integration of Edge Runtime in automation systems
  - Reduction of additional hardware usage through native integration in control and visualization systems (SIMATIC) and network components (SCALANCE)
- Ready-made Edge applications make for a simple start in intelligent data processing and usage

**Application**

Proprietary Edge applications or those developed by Siemens or third parties allow a wide variety of uses:

- Local production data processing and analysis based on high-level programming languages and artificial intelligence – can be used directly on the process without repercussions
- Local data collection, logging and archiving using object-oriented and relational databases for error localization with hitlists, directly at the process
- Production data harmonization and conversion of legacy protocols such as Modbus TCP to Industry 4.0 protocols such as OPC UA for data exchange with MES/IT systems
- IoT Gateway applications: Data transfer from automation systems to corporate IT/cloud infrastructure with local intelligence for data selection and processing
- Local production data visualization using web server, e.g. based on HTML5
- Coordinated intervention in automation systems (closed-loop) based on local, calculated analysis results, e.g. a 2D behavior simulation of machine components.

In principle, Industrial Edge is useful wherever multiple PC systems, preferably widely distributed, are used which today require more or less time-consuming manual maintenance and updating.

- Production and process automation
- Building automation
- Power engineering and distribution

You can find more information on the Internet at:

<http://www.siemens.com/industrial-edge>

# Industrial Edge

## Industrial Edge Management

### Overview

The screenshot shows the Industrial Edge Management software interface. On the left is a vertical sidebar with icons for navigation. The main area has two main sections:

- Edge Device Management**: This section shows three devices connected to the system:
  - 192.168.2.1: Represented by a blue icon with a gear and a yellow square.
  - 192.168.178.1: Represented by a blue icon with three vertical bars and a yellow square.
  - 192.168.1.1: Represented by a blue icon with a line graph and a yellow square.
 To the right of these icons are two lists of features:
  - Automation and Cloud Connectivity configuration
  - Remote device diagnosis
- App Store / App Management**: This section shows three app management functions:
  - Software versioning (represented by an orange diamond icon with a brain).
  - Mass app download and update (represented by a yellow diamond icon with a funnel).
  - Remote app diagnosis (represented by a blue diamond icon with a magnifying glass over a chart and a cursor).
 To the right of these icons are two lists of features:
  - Software versioning
  - Mass app download and update
  - Remote app diagnosis

4

### ***Industrial Edge Management (central Edge devices and application software management)***

Industrial Edge Management is the central infrastructure with which all connected Edge devices and their software can efficiently be operated and managed over the complete lifecycle within a factory or worldwide.

Instead of having to run software updates and security patches on each device individually, you control everything centrally from one system, which can be installed on-premises, within the IT infrastructure or in private/public cloud solutions as required.

The system is offered as:

- Installation for PCs and IT cloud infrastructures via an ISO image
- Software as a service solution based on SIEMENS MindSphere (planned)

Moreover, Industrial Edge Management offers access to innumerable Edge applications of customers, partners and Siemens in the context of the open ecosystem.

#### Unified Comfort Panel with integrated Edge device management

In addition to central management of all connected Edge devices, the SIMATIC HMI Unified Comfort Panel offers the possibility to run the Edge applications and to manage, start and stop Edge applications directly on the HMI.

### **Licenses**

#### Industrial Edge Hub Access:

To obtain access to the Industrial Edge Management software, you first need access to the Industrial Edge Hub, which is available globally.

This is done using the Industrial Edge Hub Access license. The Industrial Edge Hub contains all the information you need to commission an Industrial Edge solution such as documentation, software (Edge Management system, Edge App Publisher) for download.

The scope of supply includes the option of connecting and managing one (1) Edge device per Industrial Edge Management system free of charge.

#### Industrial Edge Management license:

An annual fee is charged for each additional Industrial Edge device that is connected with the central Edge management for the central update, firmware updates, security patches and continuous further development of the system.

Each connected device requires one (1) Industrial Edge Management license.

The previously customary one-off fee for software does not apply at all to the Industrial Edge Management. Licensing is implemented for a period of one year based on the number of connected Edge devices (software update contract).

## Industrial Edge Management

**Benefits**

- Maintenance and update work during operation, which previously had to be performed manually, e.g. using a USB flash drive on devices or remote desktop connections, is reduced due to the central software management.
- In addition, the commissioning workload (installing the operating system, security hardening, manual installation of application software, user management) for PC-based systems is reduced thanks to the ready-to-use Edge Runtime, on which any Industrial Edge applications can be installed.
- Industrial Edge allows the industrial application and use of Edge Computing on hundreds of machines and devices, also distributed globally.
- Security patches are provided by Siemens and can be rolled out to all devices in a centralized manner.
- The devices and applications can be adapted to new requirements at any time. Apps can be distributed to connected Edge devices with one click, meaning that the infrastructure grows with the customer's changes.

**Ordering data****Article No.****Industrial Edge Hub Access**

Enables access to additional Industrial Edge Hub and therefore to additional Industrial Edge software (Industrial Edge Management, Industrial Edge apps, and developer tools)  
Basic requirement for working with Industrial Edge.  
The scope of supply includes the option of managing one (1) Edge device per Edge management system free of charge.

6ES7823-0EE00-4AX0

**Industrial Edge Management license**

License to manage one (1) additional Edge device centrally for 1 year and connect it to the Industrial Edge Management system

6ES7823-0EE00-4AY0

**More information**

You can find more information about products and solutions on the Internet at:

<http://www.siemens.com/industrial-edge>

# Industrial Edge

## Industrial Edge apps

### Overview

#### **Industrial Edge applications**

Industrial Edge apps enable information technology such as object-oriented programming, databases, data layers and artificial intelligence to be embedded in the control level.

Industrial Edge apps enable innovative applications relating to diagnostics and analysis of large, highly frequent data volumes in the automation and manufacturing environment, such as preventive maintenance. They are provided by partners and by Siemens and can be developed for specific customers based on individual requirements.

The proprietary development of Industrial Edge apps takes place based on Docker technology with programming languages such as C, C++, C#, Java, Python, Node.js. Due to the use of container technology, developed Industrial Edge apps can be scaled up to the cloud across devices.

In line with the openness concept, Industrial Edge apps can combine any applications, for example web servers, web sockets, databases, complex calculations and more, including open source-based components. Integrated apps, e.g. based on the open source framework Node-Red or Mendix, allow you to get started quickly with local data processing.

The following Industrial Edge apps are already available or will be available soon:

- Data Service
- Energy Manager
- EtherNet/IP Connector
- Inventory
- LiveTwin
- Machine Insight
- Modbus TCP Connector
- Notifier
- Performance Insight
- SIMATIC Automation Tool
- Partner apps

Furthermore, a large number of applications are included in the Industrial Edge offering as standard, or can be obtained as an application example free of charge:

- Flow Creator (available free of charge in the Industrial Edge Hub)
- Cloud Connector (available free of charge in the Industrial Edge Hub)
- SIMATIC S7 Connector incl. OPC UA (available free of charge in the Industrial Edge Hub)
- Data Service (available free of charge in the Industrial Edge Hub)
- SIMOTION Trace Connector (application example)

The following Industrial Edge apps and other apps will be available at a later time:

- PROFINET IO Connector
- Device Scanner Service
- SIMATIC Automation Tool

#### **Licenses**

There are no additional costs for Industrial Edge applications developed by you in high-level programming languages based on Docker.

Siemens applications are licensed individually and on an annual basis with a software update contract.

**Overview****Industrial Edge app - Data Service**

Data Service is the tool to store and structure the data of the connected machine.

In addition, calculated data, such as the KPIs of Performance Insight, is stored in the Data Service.

Higher-level apps, such as Performance Insight, access the structure and data storage of the Data Service and receive their machine data from it.

**Benefits**

Overview of local machine and data store

- Connected – Immediately connectable with standardized connectors for industrial communication
- Fast – Easy connection to the database via an API
- Convenient – Aggregations are retrieved directly through the API
- Structured – Create and configure assets to map a structure
- Secure - Store data in a dedicated data structure

**Function**

Data Service connects the plant to the app. All data sent via the plant bus ends up in the Data Service and can be stored there in a structured manner. The various connectors (e.g. S7 Connector in the Industrial Edge or Open Pipe in the Unified Comfort Panel) can serve as the plant bus.

Data Service is a centrally usable element for structuring and storing data that can be used by other Edge apps via an API interface so that they do not have to implement their own data management. Functions such as aggregations, data storage and structuring are available.

Each node in the structure is referred to as an asset and helps to divide the machine into different areas. Based on the structure, it is easier to provide specific data for all higher-level apps, such as Performance Insight or other apps, even those developed in-house.

**Ordering data****Article No.**

<b>Industrial Edge app Data Service</b>	
• 250 GB	<b>6AV2170-1JA00-0AA0</b>
• 4 TB	<b>6AV2170-1JA01-0AA0</b>
• Max.	<b>6AV2170-1JA02-0AA0</b>
<b>Development Kit<sup>1)</sup></b>	free
<b>Ecosystem Version (50 GB)</b>	free

<sup>1)</sup> The Development Kit provides a simulation service to simulate the plant data. In addition, the data can be stored for up to one week or up to 20 GB.

# Industrial Edge

## Industrial Edge apps

### Energy Manager

#### Overview

##### **Industrial Edge app – Energy Manager**

Energy Manager forms the basis for energy optimization – from the machine to the entire plant. With Energy Manager, the user can define KPIs in a few simple steps and display them in a suitable way on the dashboard. A pre-defined dashboard enables analysis of the consumption of various media, the costs and the corresponding CO<sub>2</sub> emission. Integrated analysis functionality enables rapid data analysis to generate information.

#### Benefits

- Flexible – Individual calculation of KPIs to derive energy efficiency measures
- Adaptable – Dashboards that can be quickly changed and adapted to the requirements of the respective user group at any time
- Optimally informed – Analysis of KPIs as diagram, value, gauge, pie, heatmap and Gantt chart
- Overview of energy flows in the Sankey diagram or display of energy data in a continuous line to indicate the utilization of plants
- Expandable – Addition of KPIs, dashboards to existing plants without production downtimes

#### Application

The Industrial Edge app Energy Manager serves all user groups in the company interested in energy data – from the operator of individual machines, the production manager, the energy manager to the manager who keeps an eye on energy budget compliance.

The Industrial Edge app Energy Manager provides users with a scalable and industry-independent energy data management system.

#### Function

With the Energy Manager Industrial Edge app, the energy measured values of the plants can be processed into meaningful KPIs.

A formula editor can be used to define KPIs, and these can be displayed on the dashboard in the same way as the measured values.

The calculated KPIs are visualized by means of dashboards, which are integrated directly in the app.

The dashboards can be individually adapted, deleted and edited at any time.

All widgets that are available for visualization can be adapted to your own requirements at any time.

A pre-defined dashboard allows the user to analyze the media consumption of a plant. In addition to the energy consumption, the costs and the CO<sub>2</sub> emissions, the user also sees the consumption per unit, the energy costs per unit and the CO<sub>2</sub> emissions per unit.

#### Ordering data

#### Article No.

##### **Energy Manager**

- Main Product; Basic license; this includes the "Energy Manager" app and 3x assets <sup>1)</sup> <sup>2)</sup>
- Asset

**6AV2170-0JA20-0AA0**

**6AV2170-0JA21-0AA0**

<sup>1)</sup> An asset corresponds to a node in the tree structure. A node requires a license when an Energy Manager object (widget, dashboard, KPI) is used.

<sup>2)</sup> Each additional asset used by the customer for Energy Manager must be procured by means of an additional license.

**Overview****Ethernet/IP Connector**

Ethernet/IP Connector enables the connection of Ethernet/IP devices, for reading and writing process values from the automation technology. It provides the data via IE data bus for Industrial Edge applications and services.

Industrial Edge app developers and users can use the data in their own and existing applications and services, e.g. Data Service.

Industrial Edge Connectors provide a unified data interface to reduce development work for Industrial Edge apps. This enables innovative & modular software solutions

Industrial Edge Connectors can be combined with SIEMENS Industrial Edge apps, e.g. Performance Insight, Notifier, Energy Manager, and many more.

**Benefits**

- Flexible application to connect existing machines or lines to an Industrial Edge device via Ethernet/IP
- Connection of machines without or with adaptation of machines
- Modular software architecture for flexible combination with other IE apps, IE services and IE connectors

**Function**

- Provides data via unified payload via MQTT for Industrial Edge apps and microservices
- Unified data interface for S7 Connector, Modbus TCP Connector, Ethernet/IP Connector and PROFINET IO Connector
- The following communication partners have been tested:
  - Allen-Bradley ControlLx
  - Allen-Bradley CompactLogix
  - Allen-Bradley MicroLogix
  - Allen-Bradley GuardLogix (standard tags)
  - Allen-Bradley SLC

**Ordering data****Article No.****Ethernet/IP Connector**

Basic license per app installation incl. connection to 16 Modbus TCP servers

**6AV2170-0KA50-0AA0**

# Industrial Edge

## Industrial Edge apps

### Inventory

#### Overview

##### **Industrial Edge app Inventory**

Industrial Edge app Inventory scans and visualizes the installed PROFINET & network components of a plant and machine.

The detected PROFINET & network components are aggregated in an overview, detail information displayed in a detail view, and release checks performed via whitelist/blacklist.

In addition, the installed PROFINET & network components can be started and managed centrally via MQTT.

#### Function

- Integrated scan of automation components based on industrial standards
- Whitelist and blacklist support for customer-specific firmware releases
- MQTT interface for central management of installed PROFINET & network components

#### Ordering data

#### Article No.

**Industrial Edge app Inventory**

Basic license per app installation

**6AV2170-0JA40-0AA0**

#### Benefits

- Reduction of maintenance and operating costs
- Real-time overview of installed PROFINET & network components for optimization of maintenance intervals
- Check of hardware and software versions according to customer-specific releases

#### Application

- Suitable for a large number of industrial applications
- For new and existing systems

## Overview

Industrial Edge app LiveTwin enables users of Siemens Industrial Edge to easily and directly run 1D simulation models. LiveTwin Edge app can run a wide variety of 1D simulation models, such as simulations of mechatronic systems.

The following scenarios are possible:

- Export simulation models directly from MATLAB® Simulink®, Amesim, Open Modelica, and more than 100 other simulation tools and simply play them in the Siemens Edge devices. No additional engineering work is required.
- Execute simulations that were created in different domain-specific tools and wire all parts to each other.
- Use the natively supported interfaces of Siemens Industrial Edge to connect the simulation to the automation and further systems.

## Benefits

Due to the proximity of Industrial Edge to the process, a high-cycle (10 ms) data connection with the PLC is possible. LiveTwin support the calculation of virtual sensors, "Model Predictive Control", status monitoring and many other simulations.

## Application

For new and existing systems for:

- Process optimization
- Savings in hardware costs
- Predictive maintenance
- Reduction in downtimes

## Function

Industrial Edge app LiveTwin is compatible with the FMI standard<sup>1)</sup> and therefore compatible with the most important 1D simulation tools on the market, including Simcenter Amesim (for multi-physics models), MATLAB® Simulink®, Ansys and many others.

Industrial Edge app LiveTwin is software that is independent of the simulation tool. It is fully integrated in MATLAB® Simulink® and can run models that were exported to a destination with Simulink Coder as code in C++.

Industrial Edge app LiveTwin is integrated in the Siemens Industrial Edge ecosystem with the Industrial Edge app Flow Creator.

This integration enables the user to pre-process and collect data, among other things, with the wireframe of the Flow app and the portability of LiveTwin simulation models.

Users can import various models of different simulation tools directly into LiveTwin and create model instances, connect the models with Flow Creator, and run the various models together without additional runtime for each individual simulation software that was used originally to create the models. This shows the portability, compatibility and independence of the simulation software used.

<sup>1)</sup> Functional mockup interface: <https://fmi-standard.org/>

## Ordering data

## Article No.

LiveTwin Edge app

6AV2170-0BL00-0AA0

# Industrial Edge

## Industrial Edge apps

### Machine Insight

#### Overview

##### **Machine Insight**

Machine Insight monitors industrial machines incl. automation components and provides an overview of the historical states of machines and plants.

In this way, maintenance engineers can retrospectively evaluate and analyze changes and states of the machines and resolve failure times after they have already been acknowledged.

Through this retrospective diagnostics, failure times of systems and machines can be reduced to a minimum.

#### Benefits

- Simple and retrospective diagnostics of machines and automation components to reduce downtimes
- Automatic logging of changes to simplify troubleshooting and trace warranties, e.g. program updates of the SIMATIC S7 CPU
- Visualization of machine and automation information in a patented Web UI to detect error causes quickly and easily

#### Function

- SIMATIC S7-1200 & S7-1500 support (system diagnostics and alarms)
- Logging of machine and device states
- Configuration of customer-specific machine states
- Automatic logging of machine changes

#### Ordering data

#### Article No.

##### **Machine Insight**

- Basic license per app installation incl. 1 diagnostics connection
- 1 additional S7-1200 diagnostics connection
- 1 additional S7-1500 diagnostics connection

**6AV2170-0JA30-0AA0**

**6AV2170-0JA31-0AA0**

**6AV2170-0JA32-0AA0**

**Overview****Modbus TCP Connector**

Modbus TCP Connector enables the connection of Modbus TCP devices, for reading and writing process values from the automation technology.

It provides the data via IE data bus for Industrial Edge applications and services.

Industrial Edge app developers and users can use the data in their own and existing applications and services, e.g. Data Service.

Industrial Edge Connectors provide a unified data interface to reduce development work for Industrial Edge apps. This enables innovative & modular software solutions.

Industrial Edge Connectors can be combined with SIEMENS Industrial Edge apps, e.g. Performance Insight, Notifier, Energy Manager, and many more.

**Benefits**

- Flexible application to connect existing machines or lines to an Industrial Edge device via Modbus TCP
- Connection of machines without or with adaptation of machines
- Modular software architecture for flexible combination with other IE apps, IE services and IE connectors

**Function**

- Provides data via unified payload via MQTT for Industrial Edge apps and microservices
- Unified data interface for S7 Connector, Modbus TCP Connector, Ethernet/IP Connector and PROFINET IO Connector
- The following communication partners have been tested:
  - Modicon Compact series
  - Modicon Quantum series
  - Modicon Momentum series
  - Modicon Premium series
  - Modicon Micro series
  - Modicon M340 series

**Ordering data****Article No.**

<b>Modbus TCP Connector</b> Industrial Edge Connector, 12-month license, For communication with 16 Modbus TCP servers Email address required for delivery Requirement: Industrial Edge Access (6ES7823-0EE00-4AX0)	<b>6AV2170-0KA40-0AA0</b>
---	---------------------------

**Accessories****Article No.**

<b>Industrial Edge Access for Industrial Edge Hub</b> For Industrial Edge Hub and initial access to Industrial Edge software components. Requirement for working with Industrial Edge platform Email address essential for delivery Limited sales release	<b>6ES7823-0EE00-4AX0</b>
--	---------------------------

# Industrial Edge

## Industrial Edge apps

### Notifier

#### Overview

##### **Industrial Edge app Notifier**

Industrial Edge app Notifier monitors customer-specific assets and sends notifications directly to employees' smartphones or smartwatches.

As soon as an employee accepts a notification, everyone can see who is handling the notification – this also simplifies the coordination of service technicians, for example.

Due to this fast reaction time of the operators, failure times of systems and machines can be reduced to a minimum.

#### Benefits

- Notifications are detected without delay and not only during the next manual check of the plants
- Notifications reach employees wherever they are

#### Application

- Suitable for a large number of industrial applications
- For maintenance and repair personnel to streamline the alarm messaging and coordination process
- For new and existing systems

#### Function

- Monitoring of plant and machine data
- Notifications are based on easy-to-manage user-defined rules
- Freely selectable notification texts
- Notifications on smartphones and smartwatches<sup>1)</sup> within a Wi-Fi network
- Supports notification types: Alert, warning and information

<sup>1)</sup> The availability and compatibility with various devices is continuously expanded. You must check before purchasing whether the desired device and operating system are already supported.

#### Ordering data

#### Article No.

##### **Ind. Edge app Notifier**

- Main Product; Basic license per app installation incl. 15 notification rules
- Additional Notification Rules; Basic license per app installation incl. 15 notification rules + 15 additional notification rules

**6AV2170-0JA00-0AA0**

**6AV2170-0JA01-0AA0**

**Overview****Industrial Edge app Performance Insight**

Industrial Edge app Performance Insight provides the option to visualize and analyze machine parameters and process data directly on the device.

Individual key performance indicators (KPIs) can be calculated and visualized with Performance Insight. Built-in data aggregations enable the evaluation of existing data.

**Benefits**

- Show vulnerabilities in production processes and derive potentials for optimization
- Flexible due to individual calculation of plant-specific key performance indicators in the Edge environment
- Adaptable due to quickly modifiable dashboards which can be adapted at any time to the user's requirements
- Optimally informed due to analysis of KPIs as diagram, value, gauge, pie, heatmap and Gantt chart
- Expandable through addition of KPIs to existing plants without production downtimes

**Application**

Serves all user groups - from the operator of single machines who quickly requires a dashboard on site to monitor individual machines, through to the management that wants to obtain an overview of the most important plant KPIs.

**Function**

With the Industrial Edge app Performance Insight, the measured values of the plants can be processed into meaningful KPIs.

Using the KPI definition, recurring KPIs can be stored as templates and reused multiple times at the locations where they are needed.

All calculations can be individually adapted to customer requirements using the formula editor. The calculated KPIs are visualized by means of dashboards, which are integrated directly in the app.

The dashboards can be individually adapted, deleted and edited at any time. All widgets that are available for visualization can be adapted to your own requirements at any time.

**Ordering data****Article No.****Industrial Edge app  
Performance Insight**

- Basic license per app installation incl. 3 assets
- 1 additional asset license

**6AV2170-0JA10-0AA0****6AV2170-0JA11-0AA0****Note:**

The basic license Performance Insight licenses the "Performance Insight" app and three assets<sup>1)</sup>.

Each additional asset used by the customer for Performance Insight must be procured by means of an additional license.

<sup>1)</sup> An asset corresponds to a node in the tree structure. A node requires a license when a Performance Insight object (widget, dashboard, KPI) is used.

# Industrial Edge

## Industrial Edge apps

### SIMATIC Automation Tool

#### Overview

##### **SIMATIC Automation Tool**

The SIMATIC Automation Tool enables users to manage TIA automation components during commissioning, maintenance tasks and in case of service.

What makes the SIMATIC Automation Tool special is that it is based on TIA Portal projects and a CPU update can be performed independently of the engineering framework.

#### Function

- Integrated scan of automation components based on industrial standards
- Change of IP address and network mask for SIMATIC S7-1200 and S7-1500 modules
- Updating module firmware
- Updating module application software by transferring the TIA project file

#### Benefits

- Reduction of maintenance and operating costs
- Check of hardware and software versions
- Assignment of IP address and network mask during commissioning of SIMATIC modules
- Updating firmware and TIA projects on S7-1200 and S7-1500

#### Ordering data

#### Article No.

##### **SIMATIC Automation Tool**

- Basic license per app installation incl. 1x CPU test connection
- Basic license per app installation incl. 1x S7-1200 connection
- Basic license per app installation incl. 1x S7-1500 connection

**6AV6676-6EA00-0AA0**

**6AV6676-6EA00-0AA1**

**6AV6676-6EA00-0AA2**

**Overview****Partner apps**

As a customer, you can find the right app for your application from partners and Siemens in the Industrial Edge Marketplace ([www.siemens.com/industrial-edge-marketplace](http://www.siemens.com/industrial-edge-marketplace)).

On the open Industrial Edge platform, app developers and partners can develop applications and sell them via the Industrial Edge Marketplace.


If you wish to publish applications yourself in the future, please contact us at:

[industrialedge.industry@siemens.com](mailto:industrialedge.industry@siemens.com)

# Industrial Edge

## Industrial Edge devices

### Overview

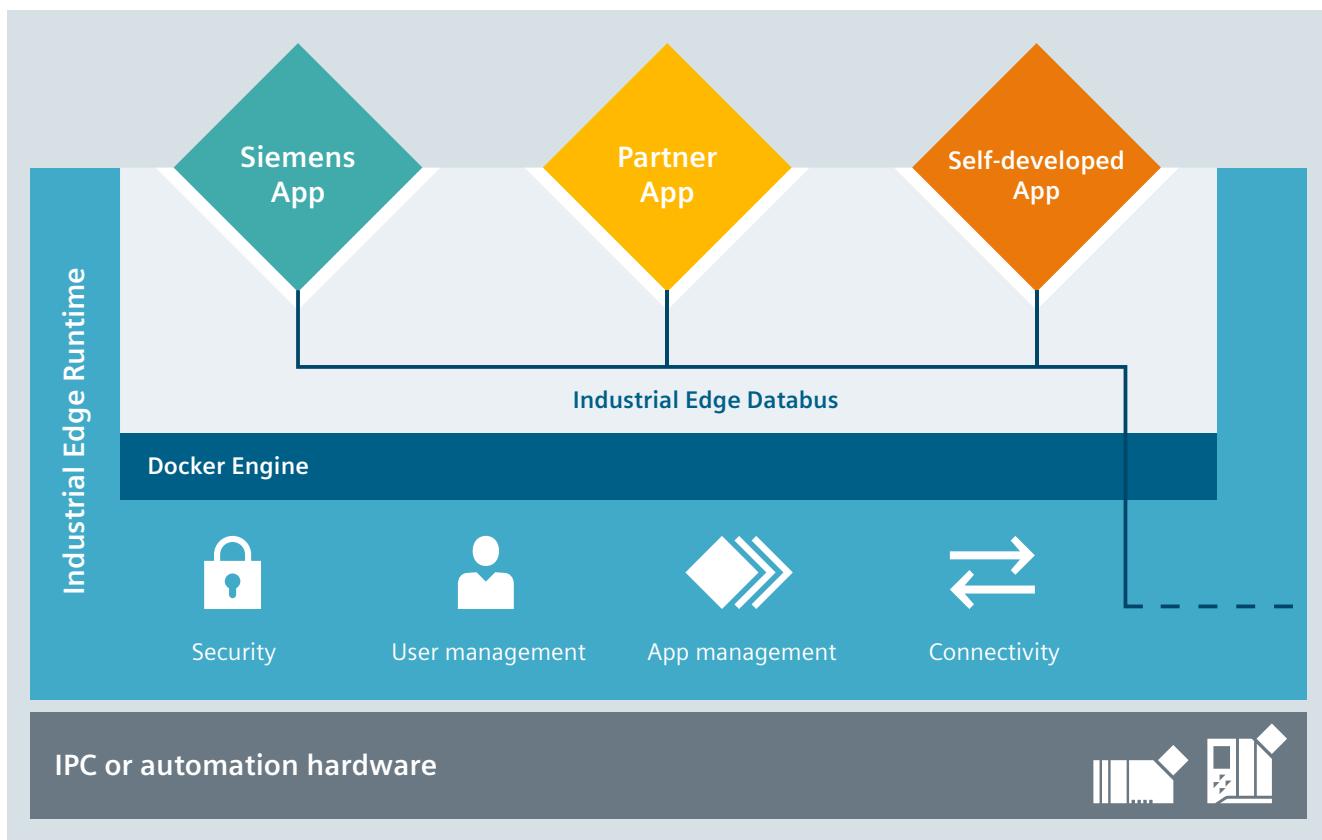

Industrial Edge Runtime

### Edge devices with Industrial Edge Runtime

Industrial Edge Runtime enables secure, local execution of any number of Edge applications on different Edge systems.

- Providing the integrated connectivity of Industrial Edge Runtime to systems at the field, control and IT/cloud level reduces the software implementation workload on the customer end as compared to conventional data processing solutions based on Linux and Windows.
- Based on the open container standard Docker, Edge applications can be scaled and run on a wide range of Edge devices after being programmed once. Furthermore, this allows software to be broken up into manageable units and these units to be updated, started and stopped in a dedicated manner – remotely for maximum convenience.
- An integrated databus on Industrial Edge Runtime based on MQTT enables secure and controlled app-to-app communication as well as data exchange between external systems and Edge apps. In this way, interface dependencies are elegantly resolved – after being programmed once, apps can be integrated in various domains and automation systems.
- The Edge devices are commissioned and configured via Industrial Edge Management.

### Dedicated Edge devices

Dedicated Edge devices with pre-installed Industrial Edge Runtime are supplied for the sole purpose of Edge-based data processing.

Industrial PCs of various performance classes are offered with pre-installed Edge Runtime:

- SIMATIC IPC227E (see chap. 5)
- SIMATIC IPC127E (in planning) (see chap. 5)
- SIMATIC IPC427E (in planning) (see chap. 5)

### Edge-enabled automation systems

These devices offer native support of Industrial Edge Runtime **in addition** to their technological function. This enables high-performance data processing with short latency times, as well as functional expansion through apps. By onboarding the devices to the central management system, any number of devices can be administered centrally.

The SIMATIC HMI Unified Comfort Panels are the first device family to be supplied "Edge-enabled" as standard.

### **Licenses:**

For centralized management of distributed Edge devices and the Edge applications, additional usage fees are incurred per connected device in connection with Industrial Edge Management.

You can find more information about products and solutions on the Internet at:

<http://www.siemens.com/industrial-edge>

## PC-based Automation



<b>5/3</b>	<b>Industrial PC</b>		
5/3	Introduction	5/182	Devices for hazardous areas
5/5	<u>Rack PC</u>	5/182	SIMATIC HMI Panel PC Ex NG
5/5	Introduction	5/185	SIMATIC HMI Panel PC Ex OG
5/14	SIMATIC IPC347G <b>NEW</b>	5/187	SIMATIC HMI Panel PC Ex
5/18	SIMATIC IPC547J <b>NEW</b>	5/190	SIMATIC HMI Thin Client Ex NG
5/22	SIMATIC IPC547G	5/193	SIMATIC HMI Thin Client Ex OG
5/28	SIMATIC IPC647E	5/195	SIMATIC HMI Thin Client Ex2
5/33	SIMATIC IPC847E	<u>5/198</u>	<u>IPC software</u>
5/38	SIMATIC IPC1047	5/199	SIMATIC IPC Image & Partition Creator
5/43	<u>Box PC</u>	5/200	SIMATIC IPC DiagMonitor
5/51	SIMATIC IPC127E	5/201	SIMATIC IPC Remote Manager
5/54	SIMATIC IPC227E	5/202	SIMATIC IPC FirmwareManager
5/58	SIMATIC IPC327E	5/203	SIMATIC Industrial OS
5/61	SIMATIC IPC427E	<u>5/204</u>	<u>Embedded bundles/software packages</u>
5/65	SIMATIC IPC527G	5/205	SIMATIC IPC227E bundles
5/68	SIMATIC IPC627E	5/207	SIMATIC IPC427E bundles and starter systems
5/72	<u>Panel PC</u>	5/210	SIMATIC IPC277E bundles
5/72	Introduction	5/211	SIMATIC IPC477E bundles and starter systems
5/77	SIMATIC IPC277E	5/213	SIMATIC IPC477E PRO bundles
5/80	SIMATIC IPC377E	5/215	Software packages for SIMATIC IPC
5/83	SIMATIC IPC477E	<b>5/217</b>	<b>Industrial IoT Gateway</b>
5/87	SIMATIC IPC677E	5/217	SIMATIC IOT2000
5/91	<u>Tablet PC</u>	5/218	SIMATIC IOT2050
5/92	SIMATIC Industrial Tablet PC	5/220	SIMATIC IOT2040
5/95	System components for Tablet PC	5/222	SIMATIC IOT2000 Input/Output Module
5/97	<u>Industrial monitors and Thin Clients</u>	5/224	SIMATIC IOT2000 Input Module Sink/Source
5/97	Flat Panels	<b>5/226</b>	<b>Software Controllers</b>
5/97	SIMATIC IFP Basic	5/226	<u>SIMATIC S7-1500 Software Controllers</u>
5/100	SIMATIC Industrial Flat Panel	5/227	CPU 1507S
5/116	<u>Thin Clients</u>	5/228	CPU 1508S
5/116	SIMATIC Industrial Thin Client	5/229	CPU 1507S F
5/121	<u>Devices for special requirements</u>	5/230	CPU 1508S F
5/121	Fully-enclosed IP65-protected devices	5/231	ODK 1500S
5/122	SIMATIC Industrial Flat Panel PRO	<b>5/232</b>	<b>PC-based Controllers</b>
5/141	SIMATIC Industrial Thin Client PRO	5/232	<u>SIMATIC ET 200SP Open Controllers</u>
5/148	SIMATIC IPC477E PRO	5/233	CPU 1515SP PC
5/152	System components for fully protected devices	5/234	CPU 1515SP PC2
5/153	Fixing elements	5/235	CPU 1515SP PC F
5/155	Extension Units and operator controls	5/236	CPU 1515SP PC2 F
5/173	Extension components	5/237	CPU 1515SP PC2 T
5/175	Devices with stainless steel front	5/238	CPU 1515SP PC2 TF
5/175	Industrial Thin Client INOX	5/239	<u>SIPLUS ET 200SP Open Controllers</u>
5/177	Ind. Flat Panel IFP1900 INOX PRO	5/240	SIPLUS CPU 1515SP PC2
5/180	Ind. Flat Panel IFP2200 INOX MT ETH	5/241	SIPLUS CPU 1515SP PC2 F

*Power supply and Communication see next page.*

**PC-based Automation**

<b>5/242</b>	<b>SITOP power supply</b>
5/242	<u>SITOP PSU6200</u>
5/243	1-phase, 24 V DC
5/245	3-phase, 24 V DC
5/247	<u>DC UPS with capacitors</u>
5/247	SITOP UPS500S, SITOP UPS501S
5/248	<u>DC UPS with battery modules</u>
5/248	SITOP UPS1600 DC UPS modules
5/249	SITOP UPS1100 battery modules

<b>5/250</b>	<b>Communication</b>
5/250	<u>Industrial Ethernet</u>
5/250	CP 1604
5/251	CP 1616
5/252	CP 1612 A2
5/253	CP 1623
5/254	CP 1625
5/255	HARDNET-IE S7-RECONNECT
5/256	SOFTNET for Industrial Ethernet
5/257	SNMP OPC server
5/258	SINEMA server
5/259	<u>PROFIBUS</u>
5/259	CP 5613 A3
5/260	CP 5614 A3
5/261	CP 5623
5/262	CP 5624
5/263	CP 5612
5/264	CP 5622
5/265	CP 5711
5/266	SOFTNET for PROFIBUS
5/268	OPC server for PROFIBUS
5/269	S7 OPC Redundancy for PROFIBUS
5/270	PC adapter USB A2

## Overview



### SIMATIC Industrial PC

Our reliable and innovative SIMATIC industrial PCs are the optimal PC hardware platform for PC-based Automation from Siemens.

#### Rack PC

Rack PCs are flexible, high-availability industrial PC systems for powerful yet compact applications using 19" technology.

#### Box PC

SIMATIC Box PCs provide mechanical engineers, plant engineers and control cabinet builders with particularly rugged industrial PC systems for use in powerful yet compact applications.

#### Panel PC

SIMATIC Panel PCs are suitable thanks to their high industrial compatibility for use in control cabinets, consoles and control panels, as well as directly on the machine. Typical areas of application can be found in both factory and process automation.

#### Tablet PC

The SIMATIC Industrial Tablet PC taps new application areas within the scope of Industrie 4.0. Designed for industrial use, the SIMATIC ITP1000 delivers convincing results with its many functions for day-to-day working. Typical applications are in maintenance/service, production and measuring and testing.

#### Industrial monitors and thin clients

Flexible operator input concepts can be implemented via Flat Panel monitors or thin clients. These are industry-standard LCD monitors with high-contrast displays that can be remotely located from the PC, or low-cost, rugged thin clients that offer HMI functionality over the network in larger plants spread over wide areas.

### Devices for special requirements

#### Fully-enclosed IP65-protected devices

The fully-enclosed SIMATIC devices (PRO devices) are ideal for industrial applications in harsh environments due to their extremely rugged design. They are, for example, specially designed for mounting on a support arm/pedestal.

<http://www.siemens.com/ip65-hmi-devices>

#### Devices with stainless steel fronts

SIMATIC HMI offers industry-specific versions for smooth use in accordance with regulations by modifying its standard devices. For the food and beverages industry, for example, we supply devices with stainless steel fronts, and for industries facing particularly harsh ambient conditions we offer fully-enclosed, dust and splash proof devices in a rugged aluminum enclosure with high IP65 degree of protection.

Panels and Panel PCs with touch screens and stainless steel fronts are designed for machine-level operator control and monitoring in the food and beverages industry.

<http://www.siemens.com/inox-hmi-devices>

#### Devices for hazardous areas

Intrinsically safe SIMATIC Panel PCs and thin clients specially designed for hazardous areas.

<http://www.siemens.com/simatic-hmi-ex>

#### IPC software

A graded concept is available for effective early detection of potential failures and minimization of actual downtimes. It consists of hardware and software expansion options specially developed for SIMATIC IPC, which can be used to increase availability on a system-specific basis, depending on safety requirements.

The following components are available:

- SIMATIC IPC Image & Partition Creator
- SIMATIC IPC DiagMonitor
- SIMATIC IPC Remote Manager
- SIMATIC IPC FirmwareManager
- SIMATIC Industrial OS

#### Embedded bundles and starter systems with industrial PCs

Embedded industrial PCs are available at attractive prices as ready-to-use SIMATIC embedded bundles complete with a Windows Embedded operating system and pre-installed and pre-configured SIMATIC visualization and control software. The starter systems are based on the Windows 10 operating system and also contain pre-installed and pre-configured SIMATIC visualization and control software.

They are efficient, cost-effective, ready-to-run overall packages that enable significantly faster commissioning.

<http://www.siemens.com/simatic-embedded-bundles>

#### Software packages for SIMATIC IPCs

Software packages are offered for all available SIMATIC IPCs that, when ordered, produce genuine price advantages. All you have to do is: Select your SIMATIC IPC, configure it, and order it together with the SIMATIC WinCC RT Advanced, WinCC RT Professional and WinCC V7 software and also the SIMATIC WinAC RTX (F) Software Controller.

<http://www.siemens.com/simatic-ipc-packages>

## PC-based Automation

### Industrial PC

#### Introduction

##### More information

###### **Notes on the scope of delivery**

Microsoft operating systems are pre-installed in an OEM version.

The scope of supply also includes:

- Recovery CD for simple reinstallation of the operating system (not for IPC547G, IPC647D and IPC847D)
- Restore USB flash drive or restore DVD (only for IPC547G, IPC647D and IPC847D) for fast and very easy restoration of the PC delivery status
- "SIMATIC IPC Documentation and Drivers" on USB flash drive or DVD (only for IPC547G, IPC647D and IPC847D)
- Compact Operating Instructions (German/English/French/Spanish/Italian/Chinese)
- Electronic manual on "IPC Documentation and Drivers" data storage medium

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-ipc>

**Overview**

Rack PCs are flexible, high-availability industrial PC systems for powerful yet compact applications using 19" technology.

Four device classes are available for different requirements:

**SIMATIC IPC347** – high performance at an optimized price

**SIMATIC IPC547** – latest technology and maximum performance

**SIMATIC IPC647** – maximum compactness combined with maximum industrial functionality

**SIMATIC IPC847** – maximum expandability and industrial functionality

**SIMATIC IPC1047** – maximum performance and expandability

Shared industrial functionality of the IPC series 547, 647 and 847

- Maximum system performance for complex automation tasks and computationally intensive PC tasks in the industrial environment through use of Intel Core processors
- Designed for continuous 24-hour operation
- Monitoring and diagnostics functions (e.g. temperature, fan, watchdog)
- Front LED concept for efficient self-diagnostics, e.g. monitoring of hard disks in RAID1 configurations, fans or the status display for Ethernet
- RAID1 configuration (mirror disks), optionally in Hot Swap removable trays
- Hard disks with capacities up to 2 TB for large volumes of data
- SSD (solid-state drive) SATA, also as RAID1 configuration, optional
- SSD (solid-state drive) M.2 NVMe
- Redundant AC power supply, optional
- Compact dimensions for installation in control cabinets only 500 mm deep
- Dust protection thanks to overpressure ventilation concept with fan on the front and dust filter
- Lockable front door
- Service-friendly equipment design due to prepared telescopic rail mounting
- Service-friendly device design due, for example, to the replacement of filters/fans from the front without the need for tools, or opening of the enclosure with just one screw.
- Universal implementation as an industrial workstation or server
- Operating system pre-installed and activated for fast commissioning
- Fast restoration of the delivery status of the HDD thanks to restore DVD or USB flash drive
- High flexibility and expandability of components
- PCI and PCI Express expansion slots
- Independent industrial product design

## PC-based Automation

### Industrial PC

#### Rack PC

##### Overview

###### **SIMATIC IPC347G – high performance at an optimized price**

- Intel Pentium and Intel Core i processors, 6th generation
- Lockable front flap
- Uninterrupted duty at 40 °C ambient temperature without power loss
- Dust protection thanks to overpressure ventilation concept with fan on the front and dust filter
- PCI and PCI Express expansion slots
- 7 configurations available ex stock at short notice
- Availability approx. 3 years
- Guaranteed spare parts availability for at least 3 years

###### **SIMATIC IPC547J – latest technology and maximum performance at an attractive price**

- Intel Core i processors 10th Generation and Xeon
- Maximum processor performance in maximum configuration without loss of power (throttling) at ambient temperatures of up to 40 °C
- Optional RAID5 configuration (striping with parity) in Hot Swap removable trays
- RAID1 and RAID5 configurations with additional Hot Spare hard disk, optional
- Low noise output thanks to controlled fans
- Availability approx. 3 years
- Guaranteed spare parts availability for at least 3 years

###### **SIMATIC IPC647E – maximum compactness combined with maximum industrial functionality**

- Maximum compactness due to 4 free PCI/PCI Express slots for installing long expansion cards
- Maximum thermal stability up to 50 °C ambient temperature, even at maximum processor performance
- High vibration/shock resistance thanks to special hard disk holders
- Intel Core i processors 8th Generation and Xeon
- ECC memory, optional
- High component/design continuity
- Motherboard developed and manufactured by Siemens
- Availability for at least 5 years
- Guaranteed spare parts availability for at least 5 years

###### **SIMATIC IPC847E – maximum expandability and industrial functionality**

- Maximum expandability due to 11 free PCI/PCI Express slots for installing long expansion cards
- Maximum thermal stability up to 50 °C ambient temperature, even at maximum processor performance
- High vibration/shock resistance thanks to special hard disk holders
- Intel Core i processors 8th Generation and Xeon
- Optional RAID5 configuration (striping with parity) in Hot Swap removable trays
- RAID1 and RAID5 configurations with additional Hot Spare hard disk or SSD SATA optional
- ECC memory, optional
- High component/design continuity
- Motherboard developed and manufactured by Siemens
- Availability for at least 5 years
- Guaranteed spare parts availability for at least 5 years

###### **SIMATIC IPC1047 – maximum performance and expandability**

- Maximum computing capacity due to two Intel® Xeon® CPUs
- Maximum graphic capacity
- Product design for industrial environment

**Technical specifications**

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19", 4U)	<b>6AG4104-5....-....</b> SIMATIC IPC547J	<b>6AG4104-4....-....</b> SIMATIC IPC547G	<b>6AG4112-3....-....</b> SIMATIC IPC647E (Rack PC)	<b>6AG4114-3....-....</b> SIMATIC IPC847E (Rack PC)
<b>Installation type/mounting</b>					
Mounting	For horizontal and vertical mounting	For horizontal and vertical installation; prepared for telescopic rails; 19" mounting bracket can be removed externally; tower kit (optional)	For horizontal and vertical installation; prepared for telescopic rails; 19" mounting bracket can be removed externally; tower kit (optional)	For horizontal installation; prepared for telescopic rails; 19" mounting bracket can be removed externally	For horizontal and vertical installation; prepared for telescopic rails; 19" mounting bracket can be removed externally; tower kit (optional)
Design	Rack PC, 19", 4U	Rack PC, 19", 4U	Rack PC, 19", 4U	Rack PC, 19", 2U	Rack PC, 19", 4U
<b>Supply voltage</b>					
Type of supply voltage	100 - 240 V AC	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC
<b>Line frequency</b>					
• Rated value 50 Hz	Yes	Yes	Yes	Yes	Yes
• Rated value 60 Hz	Yes	Yes	Yes	Yes	Yes
<b>Mains buffering</b>					
• Mains/voltage failure stored energy time		20 ms	20 ms	20 ms	20 ms
<b>Processor</b>					
Processor type	Intel Pentium G4400	Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB Cache); Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB Cache); Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB Cache); Pentium G4400 (2C/2T, 3.3 GHz, 3 MB Cache)	Intel Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB Cache, VT-x/-d-Technology)	Intel Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB Cache, VT-x/-d-Technology)	Intel Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB Cache, VT-x/-d-Technology)
Chipset	Intel H110		Intel C236 / Intel H110	Intel C246	Intel C246
<b>Graphic</b>					
Graphics controller		Onboard Intel HD graphics P530 / 530 integrated in processor; graphics card PCIe (x16) (dual head: 2x VGA or 2x DVI-D) (optional)	Onboard Intel UHD graphics P630/630 integrated in processor; graphics card NVIDIA Quadro P400 PCIe (x16) triple head (optional)	Onboard Intel UHD graphics P630/630 integrated in processor; graphics card NVIDIA Quadro P400 PCIe (x16) triple head (optional)	Onboard Intel UHD graphics P630/630 integrated in processor; graphics card NVIDIA Quadro P400 PCIe (x16) triple head (optional)

# PC-based Automation

## Industrial PC

### Rack PC

#### Technical specifications

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4104-5.....</b> SIMATIC IPC547J	<b>6AG4104-4.....</b> SIMATIC IPC547G	<b>6AG4112-3.....</b> SIMATIC IPC647E (Rack PC)	<b>6AG4114-3.....</b> SIMATIC IPC847E (Rack PC)
<b>Drives</b>					
Optical drives			DVD±R/RW (SlimLine)		
Hard disk	1 TB HDD		Internal installation: 1 TB HDD, 2x 1 TB HDD, RAID1 (2x 1 TB HDD), RAID1 (2x 1 TB HDD (Enterprise)); for front mounting in low-profile removable drive bay trays (hot-swap in RAID configuration): 1 TB HDD, 2x 1 TB HDD, RAID1 (2x 1 TB HDD), RAID1 (2x 1 TB HDD (Enterprise)), RAID1 (2x 2 TB HDD (Enterprise)), RAID1 (2x 2 TB HDD (Enterprise)) + 1x 2 TB HDD (Enterprise) as hot spare, RAID1 (2x 2 TB HDD (Enterprise)) + 1x 480 GB SSD, RAID5 (3x 2 TB HDD (Enterprise)), RAID5 (3x 2 TB HDD (Enterprise)) + 1x 2 TB HDD (Enterprise) as hot spare	1x 1 TB 3.5" SATA HDD, 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD (Enterprise), RAID1 2x 2 TB 3.5" SATA HDD (Enterprise), RAID1 x8 RAID controller incl. ZMCP module	1x 1 TB 3.5" SATA HDD, 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD (Enterprise), RAID1 2x 2 TB 3.5" SATA HDD (Enterprise) + 2 TB 3.5" SATA HDD (Enterprise) as hot spare, RAID5 3x 2 TB 3.5" SATA HDD (Enterprise), RAID5 3x 2 TB 3.5" SATA HDD (Enterprise) + 2 TB 3.5" SATA HDD (Enterprise) as hot spare, RAID1 2x 2 TB 3.5" SAS HDD (Enterprise) with PCIe x8 RAID controller incl. ZMCP module, RAID5 3x 2 TB 3.5" SAS HDD (Enterprise) with PCIe x8 RAID controller incl. ZMCP module
SSD		Yes	Yes; 1x 240 GB, 1x 480 GB SSD, 2x 480 GB SSD, RAID1 (2x 480 GB SSD)	Yes; 1x 480 GB 2.5" SATA SSD, 1x 960 GB 2.5" SATA SSD, 2x 480 GB 2.5" SATA SSD, RAID1 2x 480 GB 2.5" SATA SSD; 1x 512 GB M.2 NVMe SSD, 1x 1 024 GB M.2 NVMe SSD	Yes; 1x 480 GB 2.5" SATA SSD, 1x 960 GB 2.5" SATA SSD, 2x 480 GB 2.5" SATA SSD, RAID1 2x 480 GB 2.5" SATA SSD; 1x 512 GB M.2 NVMe SSD, 1x 1 024 GB M.2 NVMe SSD
Slot for drives		Mounting internally in vibration/shock- absorbing drive cage Type B or mounting on the front in removable trays (hot swap in RAID configurations) in drive cage Type A; mounting internally on the fixed drive cage optional	Mounted internally in vibration/shock- absorbing hard disk support, or mounted at the front in the low- profile removable drive bay (hot-swap in RAID configurations)	Mounted internally in vibration/shock- absorbing drive cage Type B or mounting on the front in removable trays (hot swap in RAID configurations) in drive cage Type A; mounting internally on the fixed drive cage optional	Mounted internally in vibration/shock- absorbing drive cage Type B or mounting on the front in removable trays (hot swap in RAID configurations) in drive cage Type A; mounting internally on the fixed drive cage optional
<b>Memory</b>					
Main memory	4 GB (pre-installed), support up to 32 GB		4 GB to 64 GB DDR4-2133 SDRAM	4 GB to 128 GB DDR4 2666 SDRAM DIMM, ECC optional	4 GB to 128 GB DDR4 2666 SDRAM DIMM, ECC optional

**Technical specifications**

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4104-5.....</b> SIMATIC IPC547J	<b>6AG4104-4.....</b> SIMATIC IPC547G	<b>6AG4112-3.....</b> SIMATIC IPC647E (Rack PC)	<b>6AG4114-3.....</b> SIMATIC IPC847E (Rack PC)
<b>Hardware configuration</b>					
<b>Slots</b>					
• free slots	3x PCI, 1x PCIe (x16), 1xPCIe (x4) (4 or 2 lanes), 2x PCIe (x4) (1 lane)		7 spare slots for expansions (all long); mainboard with H110 chipset: 1x PCIe (x16) Gen 3, 1x PCIe (x16) (1 lane) Gen 2, 1x PCIe (x8) (1 lane) Gen 2, 1x PCIe (x4) (1 lane) Gen 2, 1x PCIe (x4) (1 lane) Gen 2, 2x PCI; mainboard with C236 chipset: 1x PCIe (x16) Gen 3, 1x PCIe (x16) (4 lanes) Gen 3, 1x PCIe (x8) (1 lane) Gen 3, 1x PCIe (x4) (4 lane) Gen 3, 1x PCIe (x4) (1 lane) Gen 3, 2x PCI	2 slots: 1x PCI Express (x16) (16 lanes), 1x PCI Express (x16) (4 lanes) or 4 slots: 2x PCI, 2x PCI Express (x16) (8 lanes) or 4 slots; 2x PCI Express (x16) (8 lanes), 1x PCI Express (x16) (4 lanes), 1x PCI Express (x16) (1 lane); expansion modules up to 312 mm in length can be used	9 slots: 7x PCI, 2x PCI Express (x16) (8 lanes) or 11 slots: 3x PCI, 1x PCI Express (x16) (8 lanes), 5x PCI Express (x16) (4 lanes), 2x PCI Express (x4) (4 lanes) or 11 slots: 3x PCI, 1x PCI Express (x16) (16 lanes), 3x PCI Express (x16) (4 lanes), 2x PCI Express (x16) (1 lane), 2x PCI Express (x4) (4 lanes); expansion modules up to a length of 312 mm can be used
<b>Interfaces</b>					
Interfaces/bus type			Interfaces mainboard (H110 chipset): 2x Intel Gigabit Ethernet (RJ45, teaming-capable), 4x USB 3.0: 2x on rear, 2x on front, 4x USB 2.0: 4x on rear, 1x DisplayPort V1.2, 1x DVI-D, 2x PS/2, audio: Line in, line out, micro; interfaces mainboard (C236 chip set): 2x Intel Gigabit Ethernet (RJ45, teaming-capable), 6x USB 3.0: 4x on rear, 2x on front, 5x USB 2.0: 4x on rear, 1x internal e.g. for software dongle with optional interlock, 2x DisplayPort V1.2, 1x DVI-D, 1x COM1, 2x PS/2, audio: line in, line out, micro	1x COM1, 1x COM2 (optional), 2x DisplayPort, 1x DVI-D, audio (micro- phone in, line in, line out), 9x USB, 3x Gigabit Ethernet	1x COM1, 1x COM2 (optional), 2x DisplayPort, 1x DVI-D, audio (microphone in, line in, line out), 9x USB, 3x Gigabit Ethernet
PROFIBUS/MPI				can be implemented with plug-in card	can be implemented with plug-in card

# PC-based Automation

## Industrial PC

### Rack PC

#### Technical specifications

Article number	<b>6AG4012-2AA10-0AX0</b>	<b>6AG4104-5.....</b>	<b>6AG4104-4.....</b>	<b>6AG4112-3.....</b>	<b>6AG4114-3.....</b>
	SIMATIC IPC347G (Rack PC, 19, 4U)	SIMATIC IPC547J	SIMATIC IPC547G	SIMATIC IPC647E (Rack PC)	SIMATIC IPC847E (Rack PC)
USB port	4x USB 3.0 on rear panel, 2x USB 2.0 on front panel, 2x USB 2.0 internal and 2x pin header USB		Mainboard (H110 chipset): 4x USB 3.0: 2x on rear, 2x on front, 4x USB 2.0: 4x on rear; mainboard (C236 chipset): 6x USB 3.0: 4x on rear, 2x on front, 5x USB 2.0: 4x on rear, 1x internal e.g. for software dongle with optional interlock	4x USB 3.1 Gen. 2 Type A, 2x USB 3.1 Gen. 2 Type C on the rear; 1x USB 3.1 Gen. 2 Type A internally, e.g. for software dongle with optional interlock, 2x USB 3.1 Gen. 1 Type A on the front, can be used with door closed	4x USB 3.1 Gen. 2 Type A, 2x USB 3.1 Gen. 2 Type C on the rear; 1x USB 3.1 Gen. 2 Type A internally, e.g. for software dongle with optional interlock, 2x USB 3.1 Gen. 1 Type A on the front, can be used with door closed
Connection for keyboard/mouse	2x PS/2	USB	2x PS/2	USB	USB
serial interface	2x COM ports (RS 232, RS 422, RS 485) and 2x COM pin header		COM1: 1x RS 232, COM2 (optional): 1x RS 232	COM1: 1x RS 232, COM2 (optional): 1x RS 232	COM1: 1x RS 232, COM2 (optional): 1x RS 232
parallel interface			optional LPT1		
Multimedia					
• Audio In/Out	Yes	Yes	Yes	Yes	Yes
• Microphone In	Yes	Yes	Yes	Yes	Yes
<b>Video interfaces</b>					
• Graphics interface	1x DisplayPort, 1x VGA	2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Triple Head (3x mini DisplayPort, 2 GB graphics memory, 3x mini DisplayPort to DisplayPort adapter cable) (optional)	2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Dual Head (2x VGA or 2x DVI-D), 1 GB graphics memory (optional)	2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Triple Head (3x mini DisplayPort, 2 GB graphics memory, 3x mini DisplayPort to DisplayPort adapter cable) (optional)	2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Triple Head (3x mini DisplayPort, 2 GB graphics memory, 3x mini DisplayPort to DisplayPort adapter cable) (optional)
<b>Industrial Ethernet</b>					
• Industrial Ethernet interface			2x Ethernet (RJ45)	3x Gigabit Ethernet (IE/PN), RJ45	3x Gigabit Ethernet (IE/PN), RJ45
- 100 MBps	Yes	Yes	Yes	Yes	Yes
- 1000 MBps	Yes	Yes	Yes	Yes	Yes
<b>Integrated Functions</b>					
<b>Monitoring functions</b>					
• Temperature monitoring		Yes	Yes	Yes	Yes
• Watchdog		Yes	Yes	Yes	Yes
• Status LEDs	POWER, HDD	POWER, HDD, ETHERNET 1, ETHERNET 2, ETHERNET 3, WATCHDOG, TEMP, FAN, HDD3 ALARM, HDD2 ALARM, HDD1 ALARM, HDD0 ALARM	POWER, HDD, TEMP, FAN, HDD0 ALARM, HDD1 ALARM, HDD2 ALARM, HDD3 ALARM	Power, HDD, Ethernet 1, Ethernet 2, Ethernet 3, Watchdog, Temp, Fan, HDD1 alarm, HDD0 alarm	POWER, HDD, ETHERNET 1, ETHERNET 2, ETHERNET 3, WATCHDOG, TEMP, FAN, HDD3 ALARM, HDD2 ALARM, HDD1 ALARM, HDD0 ALARM
• Fan		Yes	Yes	Yes	Yes
• Monitoring function via network		Optional	Optional	Optional	Optional
<b>EMC</b>					
<b>Interference immunity against discharge of static electricity</b>					
• Interference immunity against discharge of static electricity	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2

**Technical specifications**

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4104-5.....</b> SIMATIC IPC547J	<b>6AG4104-4.....</b> SIMATIC IPC547G	<b>6AG4112-3.....</b> SIMATIC IPC647E (Rack PC)	<b>6AG4114-3.....</b> SIMATIC IPC847E (Rack PC)
<b>Interference immunity against high-frequency electro-magnetic fields</b>					
• Interference immunity against high frequency radiation	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6	10 V/m for 80 - 1 000 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 1 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>					
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric				
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-4, burst; length > 30 m; ±2 kV acc. to IEC 61000-4-5, surge; length > 30 m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4, Burst	±1 kV acc. to IEC 61000-4-4, Burst	±1 kV acc. to IEC 61000-4-4, Burst	±1 kV acc. to IEC 61000-4-4; burst, length < 3 m	±1 kV acc. to IEC 61000-4-4; burst, length < 3 m
<b>Interference immunity against voltage surge</b>					
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>					
• Interference immunity to magnetic fields at 50 Hz		30 A/m; to IEC 61000-4-8	30 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>					
• Interference emission via line/ AC current cables	IEC 61000-6-4, CISPR 22, FCC Class A	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3, FCC Class A, EN 61000-6-4, CISPR 22, EN 55022 Class B, EN 61000-3-2 Class D, EN 61000-3-3	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3
<b>Compliance with line harmonic distortion limits</b>					
• Compliance with line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3	Yes; EN 61000-3-2 Class D; EN 61000-3-3	Yes; EN 61000-3-2 Class D; EN 61000-3-3		Yes; EN 61000-3-2 Class D; EN 61000-3-3	Yes; EN 61000-3-2 Class D; EN 61000-3-3
<b>Degree and class of protection</b>					
IP (at the front)	20	IP30	IP30	IP41	IP41
IP (rear)	IP20	IP20	IP20	IP20	IP20

# PC-based Automation

## Industrial PC

### Rack PC

#### Technical specifications

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4104-5.....</b> SIMATIC IPC547J	<b>6AG4104-4.....</b> SIMATIC IPC547G	<b>6AG4112-3.....</b> SIMATIC IPC647E (Rack PC)	<b>6AG4114-3.....</b> SIMATIC IPC847E (Rack PC)
<b>Standards, approvals, certificates</b>					
CE mark	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)
CSA approval	Yes; CAN/CSA-C22.2 No. 61010-2-201 Second Edition				
UL approval	UL 61010-2-201 Second Edition, File E85972				
cULus	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes	Yes	Yes
EMC	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3; EN 61000-6-4; CISPR 22, EN 55022 Class B; FCC Class A; EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3
Dust protection	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered
<b>Marine approval</b>					
<ul style="list-style-type: none"> <li>• Germanischer Lloyd (GL)</li> <li>• American Bureau of Shipping (ABS)</li> </ul>					
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
<ul style="list-style-type: none"> <li>• Ambient temperature during operation</li> </ul>		+5 °C to +40 °C	0 °C to +40 °C in full configuration (no burner mode), at +5 °C to +35 °C without limitation	0 °C to +50 °C with full configuration	0 °C to +50 °C with full configuration
<b>Relative humidity</b>					
<ul style="list-style-type: none"> <li>• Relative humidity</li> </ul>					
Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)					
<b>Vibrations</b>					
<ul style="list-style-type: none"> <li>• Vibration resistance during operation acc. to IEC 60068-2-6</li> </ul>					
Tested according to IEC 60068-2-6, 10 cycles; 20 to 58 Hz: 0.015 mm; 58 to 200 Hz: 2 m/s <sup>2</sup> (0.2 g)					
Tested according to IEC 60068-2-6: 10 cycles, 10 Hz to 58 Hz: 0.0375 mm, 58 Hz to 500 Hz: 4.9 m/s <sup>2</sup> (0.5 g)					
<b>Shock testing</b>					
<ul style="list-style-type: none"> <li>• Shock load during operation</li> </ul>					
Tested according to IEC 60068-2-27; half-sine: 9.8 m/s <sup>2</sup> (1 g), 20 ms, 100 shocks per axis					
Tested according to DIN IEC 60068-2-7: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks					
Tested according to IEC 60068-2-29: half-sine: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks per axis					

**Technical specifications**

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4104-5.....</b> SIMATIC IPC547J	<b>6AG4104-4.....</b> SIMATIC IPC547G	<b>6AG4112-3.....</b> SIMATIC IPC647E (Rack PC)	<b>6AG4114-3.....</b> SIMATIC IPC847E (Rack PC)
<b>Operating systems</b>					
pre-installed operating system			Windows 7 Ultimate multi-language (32-bit / 64-bit); Windows 10 Enterprise 2015 LTSB, multi-language (64-bit); Windows 10 Enterprise 2016 LTSB, multi-language (64-bit); Windows 10 IoT Enterprise 2019 LTSC, multi-language (64-bit); Windows Server 2008 R2 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2012 R2 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2016 Standard Edition incl. 5 multi-language clients (64-bit)	Windows 10 Enterprise 2016 LTSB, multi-language (64-bit); Windows 10 IoT Enterprise 2019 LTSC, multi-language (64-bit); Windows Server 2016 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2019 Standard Edition incl. 5 multi-language clients (64-bit)	Windows 10 Enterprise 2016 LTSB, multi-language (64-bit); Windows 10 IoT Enterprise 2019 LTSC, multi-language (64-bit); Windows Server 2016 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2019 Standard Edition incl. 5 multi-language clients (64-bit)
Additional info on operating system		Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)
without operating system		Yes	Yes	Yes	Yes
<b>Software</b>					
SIMATIC Software		Optional package with SIMATIC WinCC	Optional package with SIMATIC WinCC	Optional package with SIMATIC WinCC	Optional package with SIMATIC WinCC
<b>Dimensions</b>					
Width	430 mm	430 mm	430 mm	430 mm	430 mm
Height	176 mm	177 mm; 4U	177 mm; 4U	88 mm; 2U	177 mm; 4U
Depth	465.8 mm	446 mm; Device with short enclosure: 356 mm	446 mm; Device with short enclosure: 356 mm	444 mm	444 mm

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC347G

### Overview



### SIMATIC IPC347G

SIMATIC IPC347G is an industrial PC in 19" rack design (4U).

It offers:

- Optimized price
- High performance
- 6th generation Intel Core i technology

### Ordering data

#### Article No.

#### Article No.

##### **SIMATIC IPC347G**

All-metal enclosure with high electromagnetic compatibility and mechanical ruggedness, dust protection through overpressure ventilation;  
Status LEDs: POWER, HDD; interfaces:  
4x USB 3.0 on rear,  
2x USB 2.0 on front,  
2x USB 2.0 internal and 2x USB male connector, 2 x Gb Ethernet, 1 x DVI-DP, 1 x VGA, 2 x COM, 2 x PS/2, audio;  
Slots: 3x PCI, 1x PCIe (x16), 1xPCIe (x4) (4 or 2 tracks), 2x PCIe (x4) (1 track)

##### Processors

- Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache)
- Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache)
- Core i7-6700 (4C/4T, 3.4 (4.0) GHz, 8 MB cache)

##### Drives (SATA)

- 1 x TB HDD
- 256 GB SSD
- 512 GB SSD

##### Memory configuration

- 4 GB DDR4 RAM
- 8 GB DDR4 RAM
- 16 GB DDR4 RAM
- 32 GB DDR4 RAM

##### Operating systems

- Without operating system; driver and documentation on USB flash drive
- Windows 10 IoT Enterprise Value (Pentium/i3/i5)
- Windows 10 IoT Enterprise High End (i7)

6AG4012- 2 0 - 0 X 0

A  
B  
C  
  
A  
B  
C  
  
1  
2  
3  
4  
  
X  
A  
B

*Preferred variants (available at short notice ex stock)*

##### **SIMATIC IPC347G**

##### Configuration 1

Pentium Dual Core G4400 (2C/2T, 3.3 GHz, 3 MB cache);  
2x Gb Ethernet, 1x DP, 1x VGA,  
2x USB on front,  
4x USB on rear, 2x USB internal,  
2x serial, 2x PS/2, audio;  
1x 1 TB HDD, internal;  
4 GB DDR4 (1x 4 GB),  
no DVD +/-RW;  
Windows 10 IOT Enterprise for Pentium/i3/i5;

100/240 V industrial power supply unit, without power supply cord

**6AG4012-2AA10-0AX0**

##### Configuration 2

Pentium Dual Core G4400 (2C/2T, 3.3 GHz, 3 MB cache);  
2x Gb Ethernet, 1x DP, 1x VGA,  
2x USB on front,  
4x USB on rear, 2x USB internal,  
2x serial, 2x PS/2, audio;  
1x 1 TB HDD, internal;  
4 GB DDR4 (1x 4 GB),  
no DVD +/-RW;  
without operating system;  
100/240 V industrial power supply unit, without power supply cord

**6AG4012-2AA10-0XX0**

##### Configuration 3

Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache);  
2x Gb Ethernet, 1x DP, 1x VGA,  
2x USB on front,  
4x USB on rear, 2x USB internal,  
2x serial, 2x PS/2, audio;  
1x 1 TB HDD, internal;  
4 GB DDR4 (1x 4 GB),  
no DVD +/-RW;  
Windows 10 IOT Enterprise for Pentium/i3/i5;

100/240 V industrial power supply unit, without power supply cord

**6AG4012-2BA10-0AX0**

##### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-Configurators>

Ordering data	Article No.	Article No.
<i>Preferred variants (available at short notice ex stock)</i>		
<b>SIMATIC IPC347G</b>		
<b>Configuration 4</b>	6AG4012-2BA20-0AX0	
<p>Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache);      2x Gb Ethernet, 1x DP, 1x VGA,      2x USB on front,      4x USB on rear, 2x USB internal,      2x serial, 2x PS/2, audio;      1x 1 TB HDD, internal;      8 GB DDR4 (1x 8 GB),      no DVD +/-RW;  <u>Windows 10 IoT Enterprise for Pentium/i3/i5;</u>      100/240 V industrial power supply unit, without power supply cord</p>		
<b>Configuration 5</b>	6AG4012-2CA20-0BX0	
<p>Core i7 6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache);      2x Gb Ethernet, 1x DP, 1x VGA,      2x USB on front, 4x USB on rear,      2x USB internal, 2x serial, 2x PS/2, audio;      1x 1 TB HDD, internal;      8 GB DDR4 (1x 8 GB),      no DVD +/-RW;  <u>Windows 10 IoT Enterprise for i7;</u>      100/240 V industrial power supply unit, without power supply cord</p>		
<b>Configuration 6</b>	6AG4012-2AA20-0XX0	
<ul style="list-style-type: none"> <li>Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache), 1 TB HDD, 8 GB DDR4 RAM, without operating system</li> </ul>		
<b>Configuration 7</b>	6AG4012-2AA20-0AX0	
<ul style="list-style-type: none"> <li>Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache), 1 TB HDD, 8 GB DDR4 RAM, Windows 10 IoT Enterprise Value (Pentium/i3/i5)</li> </ul>		

**PC-based Automation**

Industrial PC

Rack PC

**SIMATIC IPC347G****Technical specifications**

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2AA10-0XX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2BA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2BA20-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2CA20-0BX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)
<b>Installation type/mounting</b>					
Mounting	For horizontal and vertical mounting	For horizontal and vertical mounting	For horizontal and vertical mounting		For horizontal and vertical mounting
Design	Rack PC, 19", 4U	Rack PC, 19", 4U	Rack PC, 19", 4U		Rack PC, 19", 4U
<b>Supply voltage</b>					
Type of supply voltage	100 - 240 V AC	100 - 240 V AC	100 - 240 V AC		100 - 240 V AC
<b>Line frequency</b>					
• Rated value 50 Hz	Yes	Yes	Yes		Yes
• Rated value 60 Hz	Yes	Yes	Yes		Yes
<b>Processor</b>					
Processor type	Intel Pentium G4400	Intel Pentium G4400	Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB Cache)		Core i7-6700 (4C/4T, 3.6 (4.0) GHz, 8 MB Cache)
Chipset	Intel H110	Intel H110	Intel H110		Intel H110
<b>Drives</b>					
Hard disk	1 TB HDD	1 TB HDD	1 TB HDD		1 TB HDD
<b>Memory</b>					
Main memory	4 GB (pre-installed), support up to 32 GB	4 GB (pre-installed), support up to 32 GB			8 GB (pre-installed), support up to 32 GB
<b>Hardware configuration</b>					
<b>Slots</b>					
• free slots	3x PCI, 1x PCIe (x16), 1xPCIe (x4) (4 or 2 lanes), 2x PCIe (x4) (1 lane)	3x PCI, 1x PCIe (x16), 1xPCIe (x4) (4 or 2 lanes), 2x PCIe (x4) (1 lane)	3x PCI, 1x PCIe (x16), 1xPCIe (x4) (4 or 2 lanes), 2x PCIe (x4) (1 lane)		3x PCI, 1x PCIe (x16), 1xPCIe (x4) (4 or 2 lanes), 2x PCIe (x4) (1 lane)
<b>Interfaces</b>					
USB port	4x USB 3.0 on rear panel, 2x USB 2.0 on front panel, 2x USB 2.0 internal and 2x pin header USB	4x USB 3.0 on rear panel, 2x USB 2.0 on front panel, 2x USB 2.0 internal and 2x pin header USB	4x USB 3.0 on rear panel, 2x USB 2.0 on front panel, 2x USB 2.0 internal and 2x pin header USB		4x USB 3.0 on rear panel, 2x USB 2.0 on front panel, 2x USB 2.0 internal and 2x pin header USB
Connection for keyboard/mouse	2x PS/2	2x PS/2			2x PS/2
serial interface	2x COM ports (RS 232, RS 422, RS 485) and 2x COM pin header	2x COM ports (RS 232, RS 422, RS 485) and 2x COM pin header	2x COM ports (RS 232, RS 422, RS 485) and 2x COM pin header		2x COM ports (RS 232, RS 422, RS 485) and 2x COM pin header
Multimedia					
• Audio In/Out	Yes	Yes	Yes		Yes
• Microphone In	Yes	Yes	Yes		Yes
<b>Video interfaces</b>					
• Graphics interface	1x DisplayPort, 1x VGA	1x DisplayPort, 1x VGA	1x DisplayPort, 1x VGA		1x DisplayPort, 1x VGA
<b>Industrial Ethernet</b>					
• Industrial Ethernet interface					
- 100 Mbps	Yes	Yes	Yes		Yes
- 1000 Mbps	Yes	Yes	Yes		Yes
<b>Integrated Functions</b>					
<b>Monitoring functions</b>					
• Status LEDs	POWER, HDD	POWER, HDD	POWER, HDD		POWER, HDD
<b>EMC</b>					
<b>Interference immunity against discharge of static electricity</b>					
• Interference immunity against discharge of static electricity	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2		±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2

**Technical specifications**

Article number	<b>6AG4012-2AA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2AA10-0XX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2BA10-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2BA20-0AX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)	<b>6AG4012-2CA20-0BX0</b> SIMATIC IPC347G (Rack PC, 19, 4U)
<b>Interference immunity against high-frequency electromagnetic fields</b>					
• Interference immunity against high frequency radiation	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6		10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>					
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric		±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-4, burst; length > 30 m; ±2 kV acc. to IEC 61000-4-5, surge; length > 30 m	±2 kV acc. to IEC 61000-4-4, burst; length > 30 m; ±2 kV acc. to IEC 61000-4-5, surge; length > 30 m	±2 kV acc. to IEC 61000-4-4, burst; length > 30 m; ±2 kV acc. to IEC 61000-4-5, surge; length > 30 m		±2 kV acc. to IEC 61000-4-4, burst; length > 30 m; ±2 kV acc. to IEC 61000-4-5, surge; length > 30 m
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4, Burst	±1 kV acc. to IEC 61000-4-4, Burst	±1 kV acc. to IEC 61000-4-4, Burst		±1 kV acc. to IEC 61000-4-4, Burst
<b>Interference immunity against voltage surge</b>					
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric		±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric		±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Emission of conducted and non-conducted interference</b>					
• Interference emission via line/AC current cables	IEC 61000-6-4, CISPR 22, FCC Class A	IEC 61000-6-4, CISPR 22, FCC Class A	IEC 61000-6-4, CISPR 22, FCC Class A		IEC 61000-6-4, CISPR 22, FCC Class A
<b>Compliance with line harmonic distortion limits</b>					
• Compliance with line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3	Yes; EN 61000-3-2 Class D; EN 61000-3-3	Yes; EN 61000-3-2 Class D; EN 61000-3-3	Yes; EN 61000-3-2 Class D; EN 61000-3-3		Yes; EN 61000-3-2 Class D; EN 61000-3-3
<b>Degree and class of protection</b>					
IP (at the front)	20	20	20		20
IP (rear)	IP20	IP20	IP20		IP20
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• Ambient temperature during operation	+5 °C to +40 °C	+5 °C to +40 °C	+5 °C to +40 °C		+5 °C to +40 °C
<b>Operating systems</b>					
without operating system					No
<b>Dimensions</b>					
Width	430 mm	430 mm	430 mm		430 mm
Height	176 mm	176 mm	176 mm		176 mm
Depth	465.8 mm	465.8 mm	465.8 mm		465.8 mm

**More information**

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC547J

### Overview

#### SIMATIC IPC547J

A rugged industrial PC in 19" rack design (4U).

It offers:

- Maximum performance

- Attractive price
- 10th generation Intel Core iXeon technology

Ordering data	Article No.	Article No.
<b>SIMATIC IPC547J</b> Rack PC, 19", 4 U Interfaces: 2x USB 3.1 Gen.1 at front; COM1, audio at rear; slots: 5 x PCI Express, 2 x PCI; temperature and fan monitoring; watchdog; card retainer  <u>Processor / mainboard</u> • Core i3-10100E (4C/8T, 3.2 (3.8) GHz, 6 MB cache); MB (chip set H410, 2x Gb Ethernet, 1x DVI-D, 1x DisplayPort, 4x USB 2.0, 2x USB 3.1 Gen.1, 1x USB 2.0 internal) • Core i5-10500E (6C/12T, 3.1 (4.2) GHz, 12 MB cache); MB (chip set H410, 2x Gb Ethernet, 1x DVI-D, 1x DisplayPort, 4x USB 2.0, 2x USB 3.1 Gen.1, 1x USB 2.0 internal) • Core i7-10700E (8C/16T, 2.9 (4.5) GHz, 16 MB cache); MB (chip set H410, 2x Gb Ethernet, 1x DVI-D, 1x DisplayPort, 4x USB 2.0, 2x USB 3.1 Gen.1, 1x USB 2.0 internal) • Core i9-10900E (10C/20T, 2.8 (4.7) GHz, 20 MB cache); MB (chip set H410, 2x Gb Ethernet, 1x DVI-D, 1x DisplayPort, 4x USB 2.0, 2x USB 3.1 Gen.1, 1x USB 2.0 internal) • Core i3-10100E (4C/8T, 3.2 (3.8) GHz, 6 MB cache); MB (chip set W480E, 3x Gb Ethernet, 1x DVI-D, 2x DisplayPort, 6x USB 3.1 Gen.2, 2x USB 2.0 internal) • Core i5-10500E (6C/12T, 3.1 (4.2) GHz, 12 MB cache); MB (chip set W480E, 3x Gb Ethernet, 1x DVI-D, 2x DisplayPort, 6x USB 3.1 Gen.2, 2x USB 2.0 internal, AMT) • Core i7-10700E (8C/16T, 2.9 (4.5) GHz, 16 MB cache); MB (chip set W480E, 3x Gb Ethernet, 1x DVI-D, 2x DisplayPort, 6x USB 3.1 Gen.2, 2x USB 2.0 internal, AMT) • Core i9-10900E (10C/20T, 2.8 (4.7) GHz, 20 MB cache); MB (chip set W480E, 3x Gb Ethernet, 1x DVI-D, 2x DisplayPort, 6x USB 3.1 Gen.2, 2x USB 2.0 internal, AMT) • Xeon W-1270E (8C/16T, 3.4 (4.8) GHz, 16 MB cache); MB (chip set W480E, 3x Gb Ethernet, 1x DVI-D, 2x DisplayPort, 6x USB 3.1 Gen.2, 2x USB 2.0 internal, AMT)	6AG4104- 5 ■■■■■ - ■■■■■  <b>C</b>  <b>D</b>  <b>E</b>  <b>F</b>  <b>G</b>  <b>H</b>  <b>J</b>  <b>K</b>  <b>L</b>	<b>SIMATIC IPC547J</b>  <u>Drives</u> • 1 TB HDD 3.5" SATA • 1 TB HDD 3.5" SATA • 1 TB HDD 3.5" SATA + 960 GB SSD 2.5" SATA (for operating system if M.2 SSD not ordered) • 480 GB SSD 2.5" SATA • 2x 480 GB SSD 2.5" SATA • 960 GB SSD 2.5" SATA • RAID1, 2x 1 TB HDD 3.5" SATA • RAID1, 2x 480 GB SSD 2.5" SATA • RAID1, 2x 960 GB SSD 2.5" SATA • RAID1, 2x 1 TB HDD [Enterprise] 3.5" SATA • RAID1, 2x 2 TB HDD [Enterprise] 3.5" SATA as HotSpare • RAID1, 2x 2 TB HDD [Enterprise] 3.5" SATA + 960 GB SSD 2.5" SATA (for operating system, if M.2 SSD not ordered) • RAID5, 3x 2 TB HDD [Enterprise] 3.5" SATA • RAID5, 3x 2 TB HDD [Enterprise] 3.5" SATA + 2 TB HDD [Enterprise] 3.5" SATA as HotSpare • Without drives  <u>Enclosure type / drive cage</u> • Enclosure (short) with drive cage Type C (for installation internal / 0.2 g vibration, 2 g shock), blue-chromated • Enclosure with drive cage type B (for internal installation/0.2 g vibration, 2 g shock), blue chromated • Enclosure with drive cage type B (for internal installation/0.2 g vibration, 2 g shock); coated • Enclosure with drive cage type B (for internal installation/0.2 g vibration, 2 g shock); coated • Enclosure with drive cage type A (for removable trays on the front), coated
		6AG4104- 5 ■■■■■ - ■■■■■  <b>A</b>  <b>B</b>  <b>C</b>  <b>D</b>  <b>E</b>  <b>F</b>  <b>G</b>  <b>H</b>  <b>J</b>  <b>K</b>  <b>L</b>  <b>X</b>  <b>0</b>  <b>1</b>  <b>2</b>  <b>3</b>  <b>4</b>

Ordering data	Article No.	Article No.
<b>SIMATIC IPC547J</b>	<b>6AG4104- 5</b>	<b>6AG4104- 5</b>
Power supply unit, cable	0	
• 100/240 V AC industrial power supply; without power cable	1	
• 100/240 V AC industrial power supply; power cable for Europe	2	
• 100/240 V AC industrial power supply; power cable for USA	3	
• 100/240 V AC industrial power supply; power cable for China	4	
• 2 x 100/240 V AC redundant industrial power supply; without power cable	5	
• 2 x 100/240 V AC redundant industrial power supply; 2x power cable for Europe		
Memory configuration	0	
• 4 GB DDR4 SDRAM (1x 4 GB), single channel	1	
• 8 GB DDR4 SDRAM (2x 4 GB), dual channel	2	
• 16 GB DDR4 SDRAM (2x 8 GB), dual channel	3	
• 32 GB DDR4 SDRAM (2x 16 GB), dual channel	4	
• 32 GB DDR4 SDRAM (2x 16 GB), dual channel	5	
• 64 GB DDR4 SDRAM (2x 32 GB), dual channel		
Expansions / hardware	A	
• Without expansion	B	
• COM2 interface	C	
• 512 GB SSD M.2 NVMe (M.2 slot occupied) (for operating system) [only with W480E chip set]	D	
• 512 GB SSD M.2 NVMe (M.2 slot occupied) (for operating system) [only with W480E chip set]	J	
• PCIe x16 graphics card NVIDIA Quadro P400 (3x mDP; 3x adapter mDP on DP) (1 slot occupied)	K	
• PCIe x16 graphics card NVIDIA Quadro P2200 (4x DP; without adapter) (1 slot occupied) [only with W480E chip set / enclosure with drive cage Type A]		
<b>SIMATIC IPC547J</b>	<b>Operating system (pre-installed and activated)</b>	<b>6AG4104- 5</b>
	• Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, sp), 64-bit [for Core i3/i5]	A
	• Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, sp), 64-bit [for Core i7/i9/Xeon]	B
	• Windows Server 2019 Standard Edition incl. 5 clients, 64-bit, MUI (en, de, fr, it, es) [only with W480E chip set / Xeon]	N
	• Without operating system	X
<b>Software / adapter / security expansions</b>	<b>0</b>	<b>0</b>
• Without expansions	1	
• SIMATIC IPC DiagMonitor software included	2	
• SIMATIC IPC Image & Partition Creator software included	3	
• SIMATIC IPC DiagMonitor + Image & Partition Creator software included	4	
• Adapter cable DP to VGA for onboard graphics / graphics card	5	
• Adapter cable DP to DVI-D for onboard graphics / graphics card		
• TPM 2.0 <sup>1)</sup>	8	
<b>Accessories</b>		
<b>Memory expansions</b>		
• 4 GB DDR4 DIMM (1x 4)	6ES7648-2AL60-0QA0	
• 8 GB DDR4 DIMM (1x 8)	6ES7648-2AL70-0QA0	
• 16 GB DDR4 DIMM (1x 16)	6ES7648-2AL80-0QA0	
• 32 GB DDR4 DIMM (1x 32)	6ES7648-2AL81-0QA0	
<b>Removable tray</b>	6ES7648-0EH00-1BA0	
For 3.5" hard disk (SATA/SAS) or 2.5" SSD (SATA), without drive		
<b>Retainer</b>	6ES7648-1AA00-0XK0	
For interlocking the internal USB port		
<b>Mounting accessories</b>		
Tower Kit for converting the rack IPC into an industrial tower PC		
• For IPC547G/IPC547J	6ES7648-1AA01-0XC0	
• For IPC547G/IPC574J (device with short enclosure)	6ES7648-1AA01-0XE0	
<b>Adapter cable</b>		
• Adapter cable DisplayPort to DVI-D for onboard graphics	6ES7648-3AF00-0XA0	
• Adapter cable DisplayPort to VGA for onboard graphics	6ES7648-3AG00-0XA0	

<sup>1)</sup> TPM = Trusted Platform Module**Note:**

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mail in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC547J

### Technical specifications

Article number	<b>6AG4104-5....-....</b> SIMATIC IPC547J	Article number	<b>6AG4104-5....-....</b> SIMATIC IPC547J
<b>Installation type/mounting</b>	<b>EMC</b>		
Mounting	For horizontal and vertical installation; prepared for telescopic rails; 19" mounting bracket can be removed externally; tower kit (optional)		
Design	Rack PC, 19", 4U		
<b>Supply voltage</b>	<b>Interference immunity against discharge of static electricity</b>		
Type of supply voltage	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC		
<b>Line frequency</b>	<b>Interference immunity against high-frequency electromagnetic fields</b>		
<ul style="list-style-type: none"> <li>Rated value 50 Hz</li> <li>Rated value 60 Hz</li> </ul>	<ul style="list-style-type: none"> <li>Interference immunity against discharge of static electricity</li> <li>Interference immunity against high frequency radiation</li> </ul>		
<b>Mains buffering</b>	<b>Interference immunity to cable-borne interference</b>		
<ul style="list-style-type: none"> <li>Mains/voltage failure stored energy time</li> </ul>	<ul style="list-style-type: none"> <li>Interference immunity on supply cables</li> <li>Interference immunity on signal cables &gt;30m</li> <li>Interference immunity on signal cables &lt; 30m</li> </ul>		
<b>Drives</b>	<b>Interference immunity against voltage surge</b>		
SSD	<ul style="list-style-type: none"> <li>Interference immunity on supply cables</li> <li>Interference immunity on signal cables &gt;30m</li> <li>Interference immunity on signal cables &lt; 30m</li> </ul>		
Slot for drives	<ul style="list-style-type: none"> <li>±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric</li> <li>±2 kV acc. to IEC 61000-4-5, surge, length &gt; 30 m</li> <li>±1 kV acc. to IEC 61000-4-4, Burst</li> </ul>		
<b>Interfaces</b>	<b>Interference immunity to magnetic fields</b>		
Connection for keyboard/mouse	<ul style="list-style-type: none"> <li>asymmetric interference</li> <li>symmetric interference</li> </ul>		
Multimedia	<ul style="list-style-type: none"> <li>asymmetric interference</li> <li>symmetric interference</li> </ul>		
<ul style="list-style-type: none"> <li>Audio In/Out</li> <li>Microphone In</li> </ul>	<ul style="list-style-type: none"> <li>asymmetric interference</li> <li>symmetric interference</li> </ul>		
<b>Video interfaces</b>	<b>Emission of conducted and non-conducted interference</b>		
<ul style="list-style-type: none"> <li>Graphics interface</li> </ul>	<ul style="list-style-type: none"> <li>Interference immunity to magnetic fields at 50 Hz</li> <li>Interference emission via line/AC current cables</li> </ul>		
<b>Industrial Ethernet</b>	30 A/m; to IEC 61000-4-8		
<ul style="list-style-type: none"> <li>Industrial Ethernet interface           <ul style="list-style-type: none"> <li>- 100 Mbps</li> <li>- 1000 Mbps</li> </ul> </li> </ul>	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3		
<b>Integrated Functions</b>	<b>Compliance with line harmonic distortion limits</b>		
<b>Monitoring functions</b>	<ul style="list-style-type: none"> <li>Compliance with line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3</li> </ul>		
<ul style="list-style-type: none"> <li>Temperature monitoring</li> <li>Watchdog</li> <li>Status LEDs</li> </ul>	Yes; EN 61000-3-2 Class D; EN 61000-3-3		
<ul style="list-style-type: none"> <li>Fan</li> <li>Monitoring function via network</li> </ul>	Optional		

**Technical specifications**

Article number	<b>6AG4104-5....-</b> SIMATIC IPC547J
<b>Degree and class of protection</b>	
IP (at the front)	IP30
IP (rear)	IP20
<b>Standards, approvals, certificates</b>	
CE mark	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007+A1:2011, noise immunity: EN 61000-6-2:2005)
CSA approval	Yes; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
UL approval	UL 61010-2-201 Second Edition, File E85972
cULus	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
EMC	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3
Dust protection	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered

Article number	<b>6AG4104-5....-</b> SIMATIC IPC547J
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6, 10 cycles; 20 to 58 Hz: 0.015 mm; 58 to 200 Hz: 2 m/s <sup>2</sup> (0.2 g)
<b>Shock testing</b>	
• Shock load during operation	Tested according to IEC 60068-2-27; half-sine: 9.8 m/s <sup>2</sup> (1 g), 20 ms, 100 shocks per axis
<b>Operating systems</b>	
Additional info on operating system	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)
without operating system	Yes
<b>Software</b>	
SIMATIC Software	Optional package with SIMATIC WinCC
<b>Dimensions</b>	
Width	430 mm
Height	177 mm; 4U
Depth	446 mm; Device with short enclosure: 356 mm

More information is available on the Internet at:

<http://www.siemens.com/ipc547j>

## PC-based Automation

Industrial PC

Rack PC

### SIMATIC IPC547G

#### Overview



#### SIMATIC IPC547G

The SIMATIC IPC547G is a rugged industrial PC in 19" rack design (4U).

It offers:

- Maximum performance
- Attractive price
- Intel Core i/Xeon technology, 6th Generation

5

#### Ordering data

#### Article No.

##### SIMATIC IPC547G

Rack PC, 19", 4 U  
Interfaces:  
2 x USB 3.0 at the front,  
2 x GB Ethernet, 2 x PS/2, audio;  
slots: 5 x PCI Express, 2 x PCI;  
temperature and fan monitoring;  
watchdog; card retainer

6AG4104- 4 [REDACTED]

##### Processors and motherboards

- Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache); motherboard (chipset H110, 1 x DVI-D, 1 x DisplayPort V1.2, 2 x USB 3.0 & 4 x USB 2.0 at the rear)
- Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); motherboard (chipset H110, 1 x DVI-D, 1 x DisplayPort V1.2, 2 x USB 3.0 & 4 x USB 2.0 at the rear)
- Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); motherboard (chipset H110, 1 x DVI-D, 1 x DisplayPort V1.2, 2 x USB 3.0 & 4 x USB 2.0 at the rear)
- Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache); motherboard (chipset C236, 1 x DVI-D, 2 x DisplayPort V1.2, 4 x USB 3.0 & 4 x USB 2.0 at the rear, 1 x USB 2.0 internal, 1 x COM1; RAID onboard)
- Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache, iAMT); motherboard (chipset C236, 1 x DVI-D, 2 x DisplayPort V1.2, 4 x USB 3.0 & 4 x USB 2.0 at the rear, 1 x USB 2.0 internal, 1 x COM1; RAID onboard)
- Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache, iAMT); motherboard (chipset C236, 1 x DVI-D, 2 x DisplayPort V1.2, 4 x USB 3.0 & 4 x USB 2.0 at the rear, 1 x USB 2.0 internal, 1 x COM1; RAID onboard)
- Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB cache, iAMT); motherboard (chipset C236, 1 x DVI-D, 2 x DisplayPort V1.2, 4 x USB 3.0 & 4 x USB 2.0 at the rear, 1 x USB 2.0 internal, 1 x COM1; RAID onboard)

**Ordering data****Article No.****SIMATIC IPC547G**Drives (SATA)

- 1 x 1 TB HDD, internal  
(0.2 g vibration, 1 g shock)
- 2 x 1 TB HDD, internal  
(0.2 g vibration, 1 g shock)
- 1 x 240 GB SSD, internal
- 1 x 480 GB SSD, internal
- 2 x 480 GB SSD, internal
- RAID1, 1 TB (2 x 1 TB HDD),  
internal  
(0.2 g vibration, 1 g shock)<sup>1)</sup>
- RAID1, 1 TB (2 x 1 TB HDD  
[Enterprise]), internal  
(0.2 g vibration, 1 g shock)<sup>1)</sup>
- 1 x 1 TB HDD in removable drive  
bay, on the front<sup>2)</sup>
- 2 x 1 TB HDD in removable drive  
bay, on the front<sup>2)</sup>
- 1 x 480 GB SSD in removable  
drive bay, on the front<sup>2)</sup>
- 2 x 480 GB SSD in removable  
drive bay, on the front<sup>2)</sup>
- RAID1, 480 GB (2 x 480 GB SSD)  
in removable drive bay,  
hot-swappable, on the front<sup>1)2)</sup>
- RAID1, 1 TB (2 x 1 TB HDD)  
in removable drive bay,  
hot-swappable, on the front<sup>1)2)</sup>
- RAID1, 1 TB (2 x 1 TB HDD  
[Enterprise]) in removable drive  
bay, hot-swappable, on the front<sup>1)2)</sup>
- RAID1, 2 TB (2 x 2 TB HDD  
[Enterprise]) in removable drive  
bay, hot-swappable, on the front<sup>1)2)</sup>
- RAID1, 2 TB (2 x 2 TB HDD  
[Enterprise]) in removable drive  
bay, hot-swappable +  
1 x 2 TB HDD [Enterprise] as  
hot spare in removable drive bay,  
on the front<sup>1)2)</sup>
- RAID1, 2 TB (2 x 2 TB HDD  
[Enterprise]) in removable drive  
bay, hot-swappable + 1x 480 GB  
SSD in removable drive bay, on  
the front (operating system  
installed on SSD if configured)<sup>1)2)</sup>
- RAID5, 4 TB (3 x 2 TB HDD  
[Enterprise]) in removable drive  
bay, hot-swappable, on the front<sup>1)2)</sup>
- RAID5, 4 TB (3 x 2 TB HDD  
[Enterprise]) in removable drive  
bay, hot-swappable + 1 x 2 TB  
HDD [Enterprise] as hot spare in  
removable drive bay, on the front;  
(up to +35°C)<sup>1)2)</sup>

Memory configuration

- 4 GB DDR3 SDRAM (1 x 4 GB),  
single channel
- 8 GB DDR3 SDRAM (2 x 4 GB),  
dual channel
- 16 GB DDR3 SDRAM (2 x 8 GB),  
dual channel
- 32 GB DDR3 SDRAM (2 x 16 GB),  
dual channel
- 64 GB DDR3 SDRAM (4 x 16 GB),  
dual channel<sup>1)</sup>

6AG4104- 4

A

B

C

D

E

F

G

H

J

K

L

M

N

P

Q

R

S

T

U

**SIMATIC IPC547G**Type of enclosure / power supplies  
and removable data storage media

- Enclosure (short), blue-chromated, 100/240 V AC industrial power supply, without removable data storage media
- Enclosure, blue-chromated, 100/240 V AC industrial power supply, without removable data storage media
- Enclosure, blue-chromated, 100/240 V AC redundant industrial power supply, without removable data storage media
- Enclosure, blue-chromated, 2 x 100/240 V AC redundant industrial power supply, DVD±RW (slim)
- Enclosure, blue-chromated, 2 x 100/240 V AC redundant industrial power supply, DVD±RW (slim)
- Enamelled enclosure, 100/240 V AC industrial power supply, without removable data storage media
- Enamelled enclosure, 100/240 V AC industrial power supply, DVD±RW (slim)
- Enamelled enclosure, 2 x 100/240 V AC redundant industrial power supply, without removable data storage media
- Enamelled enclosure, 2 x 100/240 V AC redundant industrial power supply, DVD±RW (slim)

Expansions (hardware)

- Without expansions (hardware), onboard graphics
- Without expansions (hardware), onboard graphics; adapter cable DP to VGA for onboard graphics
- Without expansions (hardware), PCIe x16 graphics card (dual head: 2 x VGA or 2 x DVI-D), 1 GB
- Serial (COM2) + parallel (LPT); onboard graphics
- Serial (COM2) + parallel (LPT); onboard graphics; adapter cable DP to VGA for onboard graphics
- Serial (COM2) + parallel (LPT) + PCIe x16 graphics card (dual head: 2 x VGA or 2 x DVI-D), 1 GB

6AG4104- 4

0

1

2

3

4

5

6

7

8

0

1

2

3

4

5

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-configurators>

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC547G

Ordering data	Article No.	Article No.
<b>SIMATIC IPC547G</b>		
<u>Operating systems (pre-installed and activated)</u>	6AG4104- 4  - 	
<ul style="list-style-type: none"> <li>Windows 7 Ultimate, MUI (en, de, fr, it, es), 32-bit, SP1</li> <li>Windows 7 Ultimate, MUI (en, de, fr, it, es), 64-bit, SP1</li> <li>Windows 10 Enterprise 2015 LTSB, multi-language (en, de, fr, it, es), 64-bit</li> <li>Windows 10 Enterprise 2016 LTSB, multi-language (en, de, fr, it, es), 64-bit (for Pentium / Core i5)</li> <li>Windows 10 Enterprise 2016 LTSB, multi-language (en, de, fr, it, es), 64-bit (for Pentium Core i7 / Xeon)</li> <li>Windows Server 2008 R2 Standard Edition, 64-bit SP1 incl. 5 clients, multi-language (en, de, fr, it, es)</li> <li>Windows Server 2012 R2 Standard Edition incl. 5 clients, 64-bit, MUI (en, de, fr, it, es)</li> <li>Windows Server 2016 Standard Edition incl. 5 clients, multi-language (64-bit)</li> <li>Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, es), 64-bit (for Pentium / Core i5)</li> <li>Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, es), 64-bit (for Core i7 / Xeon)</li> <li>Without operating system</li> </ul>	 <b>A</b> <b>B</b> <b>C</b> <b>D</b> <b>E</b> <b>F</b> <b>G</b> <b>H</b> <b>J</b> <b>K</b> <b>X</b>  <b>A</b> <b>B</b> <b>C</b> <b>X</b> <b>Y</b>  <b>0</b> <b>1</b> <b>2</b> <b>3</b>	
<u>Expansions (software)</u>		
<ul style="list-style-type: none"> <li>SIMATIC IPC DiagMonitor software enclosed</li> <li>SIMATIC IPC Image &amp; Partition Creator software included</li> <li>SIMATIC IPC DiagMonitor + Image &amp; Partition Creator software enclosed</li> <li>Without expansions (software)</li> <li>Without expansions (software) / TPM 2.0<sup>3)</sup> (not for China)</li> </ul>		
<u>Country-specific versions</u>		
<ul style="list-style-type: none"> <li>Without power supply cord</li> <li>Power supply cord for Europe</li> <li>Power supply cord for USA</li> <li>Power supply cord for China</li> </ul>		
<p><sup>1)</sup> Only with motherboard with C236 chipset</p> <p><sup>2)</sup> Not for use with short enclosure</p> <p><sup>3)</sup> TPM = Trusted Platform Module</p>		
<u>Note:</u>		
Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.		
<a href="https://www.siemens.com/ipc-configurators">https://www.siemens.com/ipc-configurators</a>		
<u>Accessories</u>		
<b>Memory expansions</b>		
<ul style="list-style-type: none"> <li>4 GB DDR4-2133 SDRAM</li> <li>8 GB DDR4-2133 SDRAM</li> <li>16 GB, DDR4-2133 SDRAM</li> </ul>		<b>6ES7648-2AL60-0PA0</b> <b>6ES7648-2AL70-0PA0</b> <b>6ES7648-2AL80-0PA0</b>
<b>Removable drive bay</b>		<b>6ES7648-0EH00-1BA0</b>
for 3.5" hard disk or 2.5" solid-state drive, SATA (without hard disk drive/solid-state drive)		
<b>Tower Kit IPC547G</b>		
To convert the computer into an industrial tower PC		
<ul style="list-style-type: none"> <li>Standard enclosure version</li> <li>Short enclosure version</li> </ul>		<b>6ES7648-1AA01-0XC0</b> <b>6ES7648-1AA01-0XE0</b>
<b>Adapter cable</b>		
<ul style="list-style-type: none"> <li>DisplayPort to DVI-D for onboard graphics</li> <li>DisplayPort to VGA for onboard graphics</li> </ul>		<b>6ES7648-3AF00-0XA0</b> <b>6ES7648-3AG00-0XA0</b>
<b>Retainer</b>		<b>6ES7648-1AA00-0XK0</b>
For mechanically interlocking the internal USB port		

## Technical specifications

Article number	<b>6AG4104-4....-</b> SIMATIC IPC547G
<b>Installation type/mounting</b>	
Mounting	For horizontal and vertical installation; prepared for telescopic rails; 19" mounting bracket can be removed externally; tower kit (optional)
Design	Rack PC, 19", 4U
<b>Supply voltage</b>	
Type of supply voltage	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC
<b>Line frequency</b>	
• Rated value 50 Hz	Yes
• Rated value 60 Hz	Yes
<b>Mains buffering</b>	
• Mains/voltage failure stored energy time	20 ms
<b>Processor</b>	
Processor type	Xeon E3-1275 v5 (4C/8T, 3.6 (4.0) GHz, 8 MB Cache); Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB Cache); Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB Cache); Pentium G4400 (2C/2T, 3.3 GHz, 3 MB Cache)
Chipset	Intel C236 / Intel H110
<b>Graphic</b>	
Graphics controller	Onboard Intel HD graphics P530 / 530 /510 integrated in processor; graphics card PCIe (x16) (dual head: 2x VGA or 2x DVI-D) (optional)
<b>Drives</b>	
Optical drives	DVD±R/RW (SlimLine)
Hard disk	Internal installation: 1 TB HDD, 2x 1 TB HDD, RAID1 (2x 1 TB HDD), RAID1 (2x 1 TB HDD (Enterprise)); for front mounting in low-profile removable drive bay trays (hot-swap in RAID configuration): 1 TB HDD, 2x 1 TB HDD, RAID1 (2x 1 TB HDD), RAID1 (2x 1 TB HDD (Enterprise)), RAID1 (2x 2 TB HDD (Enterprise)), RAID1 (2x 2 TB HDD (Enterprise)) + 1x 2 TB HDD (Enterprise) as hot spare, RAID1 (2x 2 TB HDD (Enterprise)) + 1x 480 GB SSD, RAID5 (3x 2 TB HDD (Enterprise)), RAID5 (3x 2 TB HDD (Enterprise)) + 1x 2 TB HDD (Enterprise) as hot spare
SSD	Yes; 1x 240 GB, 1x 480 GB SSD, 2x 480 GB SSD, RAID1 (2x 480 GB SSD)
Slot for drives	Mounted internally in vibration/ shock-absorbing hard disk support, or mounted at the front in the low-profile removable drive bay (hot-swap in RAID configurations)
<b>Memory</b>	
Main memory	4 GB to 64 GB DDR4-2133 SDRAM

Article number	<b>6AG4104-4....-</b> SIMATIC IPC547G
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	7 spare slots for expansions (all long); mainboard with H110 chipset: 1x PCIe (x16) Gen 3, 1x PCIe (x16) (1 lane) Gen 2, 1x PCIe (x8) (1 lane) Gen 2, 1x PCIe (x4) (1 lane) Gen 2, 1x PCIe (x4) (1 lane) Gen 2, 2x PCI; mainboard with C236 chipset: 1x PCIe (x16) Gen 3, 1x PCIe (x16) (4 lanes) Gen 3, 1x PCIe (x8) (1 lane) Gen 3, 1x PCIe (x4) (4 lane) Gen 3, 1x PCIe (x4) (1 lane) Gen 3, 2x PCI
<b>Interfaces</b>	
Interfaces/bus type	Interfaces mainboard (H110 chipset): 2x Intel Gigabit Ethernet (RJ45, teaming-capable), 4x USB 3.0: 2x on rear, 2x on front, 4x USB 2.0: 4x on rear, 1x DisplayPort V1.2, 1x DVI-D, 2x PS/2, audio: Line in, line out, micro; interfaces mainboard (C236 chip set): 2x Intel Gigabit Ethernet (RJ45, teaming-capable), 6x USB 3.0: 4x on rear, 2x on front, 5x USB 2.0: 4x on rear, 1x internal e.g. for software dongle with optional interlock, 2x DisplayPort V1.2, 1x DVI-D, 1x COM1, 2x PS/2, audio: line in, line out, micro
USB port	Mainboard (H110 chipset): 4x USB 3.0: 2x on rear, 2x on front, 4x USB 2.0: 4x on rear; mainboard (C236 chipset): 6x USB 3.0: 4x on rear, 2x on front, 5x USB 2.0: 4x on rear, 1x internal e.g. for software dongle with optional interlock
Connection for keyboard/mouse serial interface	2x PS/2 COM1: 1x RS 232, COM2 (optional): 1x RS 232
parallel interface	optional LPT1
Multimedia	
• Audio In/Out	Yes
• Microphone In	Yes
<b>Video interfaces</b>	
• Graphics interface	2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Dual Head (2x VGA or 2x DVI-D), 1 GB graphics memory (optional)
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	2x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC547G

### Technical specifications

Article number	<b>6AG4104-4....-</b> SIMATIC IPC547G	Article number	<b>6AG4104-4....-</b> SIMATIC IPC547G
<b>Integrated Functions</b>			
<b>Monitoring functions</b>			
• Temperature monitoring	Yes	IP (at the front)	IP30
• Watchdog	Yes	IP (rear)	IP20
• Status LEDs	POWER, HDD, TEMP, FAN, HDD0 ALARM, HDD1 ALARM, HDD2 ALARM, HDD3 ALARM	<b>Standards, approvals, certificates</b>	
• Fan	Yes	CE mark	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)
• Monitoring function via network	Optional	CSA approval	Yes; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
<b>EMC</b>		UL approval	Yes; UL 61010-2-201 Second Edition, File E85972
<b>Interference immunity against discharge of static electricity</b>		cULus	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
• Interference immunity against discharge of static electricity	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	RCM (formerly C-TICK)	Yes
<b>Interference immunity against high-frequency electromagnetic fields</b>		KC approval	Yes
• Interference immunity against high frequency radiation	10 V/m for 80 - 1 000 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 1 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 150 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6	EAC (formerly Gost-R)	Yes
<b>Interference immunity to cable-borne interference</b>		EMC	EN 61000-6-3; EN 61000-6-4; CISPR 22, EN 55022 Class B; FCC Class A; EN 61000-3-2 Class D; EN 61000-3-3
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	Dust protection	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge	<b>Ambient conditions</b>	
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4, Burst	<b>Ambient temperature during operation</b>	
<b>Interference immunity against voltage surge</b>		• Ambient temperature during operation	0 °C to +40 °C in full configuration (no burner mode), at +5 °C to +35 °C without limitation
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric	<b>Relative humidity</b>	
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric	• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Interference immunity to magnetic fields</b>		<b>Vibrations</b>	
• Interference immunity to magnetic fields at 50 Hz	30 A/m; to IEC 61000-4-8	• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6, 10 cycles; 20 to 58 Hz: 0.015 mm; 58 to 200 Hz: 2 m/s² (0.2 g)
<b>Emission of conducted and non-conducted interference</b>		<b>Shock testing</b>	
• Interference emission via line/AC current cables	EN 61000-6-3, FCC Class A, EN 61000-6-4, CISPR 22, EN 55022 Class B, EN 61000-3-2 Class D, EN 61000-3-3	• Shock load during operation	Tested according to IEC 60068-2-27; half-sine: 9.8 m/s² (1 g), 20 ms, 100 shocks per axis

**Technical specifications**

Article number	<b>6AG4104-4....-</b> SIMATIC IPC547G
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate multi-language (32-bit / 64-bit); Windows 10 Enterprise 2015 LTSB, multi-language (64-bit); Windows 10 Enterprise 2016 LTSB, multi-language (64-bit); Windows 10 IoT Enterprise 2019 LTSC, multi-language (64-bit); Windows Server 2008 R2 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2012 R2 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2016 Standard Edition incl. 5 multi-language clients (64-bit)
Additional info on operating system	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)
without operating system	
<b>Software</b>	
SIMATIC Software	Optional package with SIMATIC WinCC
<b>Dimensions</b>	
Width	430 mm
Height	177 mm; 4U
Depth	446 mm; Device with short enclosure: 356 mm

**More information**

More information is available on the Internet at:

<http://www.siemens.com/ipc547g>

## PC-based Automation

Industrial PC

Rack PC

### SIMATIC IPC647E

#### Overview



#### SIMATIC IPC647E

The SIMATIC IPC647E is a very rugged, high-performance industrial PC in 19" rack design (2 U) with excellent industrial functionality.

It offers:

- Extreme compactness
- Extreme ruggedness
- Intel® Core® i / Xeon technology 8th/9th Generation

5

#### Ordering data

#### Article No.

##### SIMATIC IPC647E

Rack PC, 19", 2 U  
Interfaces:  
3x Gbit Ethernet (IE/PN), RJ45;  
1x DVI-D; 2x DisplayPort; 1x COM1;  
audio; 4x USB 3.1, 2x USB 3.1  
(type C) on the rear;  
2x USB 3.0 on the front;  
1x USB 3.1 internal.  
1x M.2 slot internal;  
Temperature and fan monitoring,  
watchdog, card retainer

##### Processor / motherboard

- Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Board 2 slots: 1x PCIe x16 (16 L), 1x PCIe x16 (4 L)
- Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Board 4 slots: 2x PCI, 2x PCIe x16 (8 L)
- Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Board 4 slots: 2x PCIe x16 (8 L), 1x PCIe x16 (4 L), 1x PCIe x16 (1 L)
- Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB cache, TB, VT-d, AMT); Board 2 slots: 1x PCIe x16 (16 L), 1x PCIe x16 (4 L)
- Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCI, 2x PCIe x16 (8 L)
- Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCIe x16 (8 L), 1x PCIe x16 (4 L), 1x PCIe x16 (1 L)
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, TB, VT-d, AMT); Board 2 slots: 1x PCIe x16 (16 L), 1x PCIe x16 (4 L)
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCI, 2x PCIe x16 (8 L)
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCIe x16 (8 L), 1x PCIe x16 (4 L), 1x PCIe x16 (1 L)
- Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB cache, TB, VT-d, AMT); Board 2 slots: 1x PCIe x16 (16 L), 1x PCIe x16 (4 L)
- Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCI, 2x PCIe x16 (8 L)
- Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB cache, TB, VT-d, AMT) Board 4 slots: 2x PCIe x16 (8 L), 1x PCIe x16 (4 L), 1x PCIe x16 (1 L)
- Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB cache, TB, VT-d, AMT); Board 2 slots: 1x PCIe x16 (16 L), 1x PCIe x16 (4 L)
- Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCI, 2x PCIe x16 (8 L)
- Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB cache, TB, VT-d, AMT); Board 4 slots: 2x PCIe x16 (8 L), 1x PCIe x16 (4 L), 1x PCIe x16 (1 L)

**Ordering data****Article No.****Article No.****SIMATIC IPC647E**Drives

- 1 TB HDD 3.5" SATA
- 2x 1 TB HDD 3.5" SATA
- RAID1, 2x 1 TB HDD 3.5" SATA
- RAID1, 2x 1 TB HDD [Enterprise] 3.5" SATA
- RAID1, 2x 2 TB HDD [Enterprise] 3.5" SATA
- RAID1, 2x 2 TB HDD [Enterprise] 3.5" SAS; PCIe x8 RAID controller incl. ZMCP module (1 slot occupied)
- RAID1, 2x 2 TB HDD [Enterprise] 3.5" SAS; PCIe x8 RAID controller incl. ZMCP module (1 slot occupied) + 480 GB SSD 2.5" SATA internal
- 1 TB HDD 3.5" SATA + 480 GB SSD 2.5" SATA (for operating system if M.2 SSD not ordered)
- 480 GB SSD 2.5" SATA
- 960 GB SSD 2.5" SATA
- 2x 480 GB SSD 2.5" SATA
- RAID1, 2x 480 GB SSD 2.5" SATA
- Without drives

6AG4112- 3 ■■■■■ - ■■■■■

A  
B  
C  
D  
E  
K  
L  
P  
Q  
R  
S  
T  
XType of enclosure/power supplies

- Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock); 100/240 V AC industrial power supply
- Enclosure with drive cage type A (for removable trays on the front); 100/240 V AC industrial power supply
- Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock); 2x 100/240 V AC redundant industrial power supply
- Enclosure with drive cage type A (for removable frames on the front); 2x 100/240 V AC redundant industrial power supply
- Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock) + COM2 port; 100/240 V AC industrial power supply
- Enclosure with drive cage type A (for removable trays on the front) + COM2 interface; 100/240 V AC industrial power supply
- Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock) + COM2 port; 2x 100/240 V AC redundant industrial power supply
- Enclosure with drive cage type A (for removable frames on the front) + COM2 port; 2x 100/240 V AC redundant industrial power supply

0  
1  
2  
3  
4  
5  
6  
7**SIMATIC IPC647E**Memory configuration

- 4 GB DDR4 SDRAM (1x 4 GB), single channel
- 8 GB DDR4 SDRAM (2x 4 GB), dual channel
- 16 GB DDR4 SDRAM (2x 8 GB), dual channel
- 32 GB DDR4 SDRAM (2x 16 GB), dual channel
- 64 GB DDR4 SDRAM (4x 16 GB), dual channel
- 128 GB DDR4 SDRAM (4x 32 GB), dual channel
- 16 GB DDR4 SDRAM (2x 8 GB), ECC, dual channel (only with Core i3/Xeon)
- 32 GB DDR4 SDRAM (2x 16 GB), ECC, dual channel (only with Core i3/Xeon)
- 64 GB DDR4 SDRAM (4x 16 GB), ECC, dual channel (only with Core i3/Xeon)

6AG4112- 3 ■■■■■ - ■■■■■

0  
1  
2  
3  
4  
5  
6  
7  
8Expansion hardware

- Without expansions
- PCIe x16 graphics card (3x mDP; 3x adapter mDP on DP) (1 slot occupied)
- 512 GB SSD M.2 NVMe (M.2 slot occupied) (for operating system)
- 512 GB SSD M.2 NVMe (M.2 slot occupied) (for operating system) + PCIe x16 graphics card (3x mDP; 3x adapter mDP on DP) (1 slot occupied)
- 1 024 GB SSD M.2 NVMe (M.2 slot occupied) (for operating system)

0  
2  
4  
5  
6Operating system (pre-installed and activated)

- Windows 10 Enterprise 2016 LTSB, multi-language (en, de, fr, it, sp), 64-bit [for Core i3/i5]
- Windows 10 Enterprise 2016 LTSB, multi-language (en, de, fr, it, sp), 64-bit, for Pentium Core i7/Xeon
- Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, sp), 64-bit [for Core i3/i5]
- Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, sp), 64-bit, for Core i7/Xeon
- Windows Server 2016 Standard Edition incl. 5 clients, 64-bit, MUI (en, de, fr, it, sp)
- Windows Server 2019 Standard Edition incl. 5 clients, 64-bit, MUI (en, de, fr, it, sp)
- Without operating system

A  
B  
C  
D  
H  
J  
XNote:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-Configurators>

**PC-based Automation**

Industrial PC

Rack PC

**SIMATIC IPC647E**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>SIMATIC IPC647E</b>	<b>6AG4112- 3 ■■■■ - ■■■</b>	
<u>Software / adapters / security expansions</u>		
<ul style="list-style-type: none"> <li>• SIMATIC IPC DiagMonitor software enclosed</li> <li>• SIMATIC IPC Image &amp; Partition Creator software included</li> <li>• SIMATIC IPC DiagMonitor + Image &amp; Partition Creator software enclosed</li> <li>• Adapter cable DP to VGA for onboard graphics</li> <li>• Adapter cable DP to DVI-D for onboard graphics</li> <li>• Without expansions</li> <li>• TPM<sup>1)</sup> 2.0 (not for China)</li> </ul>	<b>A</b> <b>B</b> <b>C</b> <b>H</b> <b>J</b> <b>X</b> <b>Y</b>	<b>Accessories</b> <b>Memory expansions</b> <ul style="list-style-type: none"> <li>• 4 GB DDR4 2666 SDRAM, DIMM</li> <li>• 8 GB DDR4 2666 SDRAM, DIMM</li> <li>• 16 GB DDR4 2666 SDRAM, DIMM</li> <li>• 32 GB DDR4 2666 SDRAM, DIMM</li> </ul> <b>Removable drive bay</b> For 3.5" hard disk or 2.5" solid-state drive, SATA (without hard disk drive/solid-state drive)
<u>Cables, country-specific versions</u>	<b>0</b> <b>1</b> <b>2</b> <b>3</b>	<b>Retainer</b> For mechanically interlocking the internal USB port <b>Adapter cable</b> <ul style="list-style-type: none"> <li>• DisplayPort to DVI-D for onboard graphics</li> <li>• DisplayPort to VGA for onboard graphics</li> <li>• Mini-DisplayPort to VGA for graphics card</li> <li>• Mini-display port to DVI-D for graphics card</li> <li>• Mini-DisplayPort to DVI-D for graphics card (3 units per pack)</li> <li>• Mini-DisplayPort to DisplayPort for graphics card</li> <li>• Mini-DisplayPort to DisplayPort for graphics card (3 units per pack)</li> </ul>

<sup>1)</sup> TPM = Trusted Platform Module

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

**Technical specifications**

Article number	<b>6AG4112-3....-....</b> SIMATIC IPC647E (Rack PC)	Article number	<b>6AG4112-3....-....</b> SIMATIC IPC647E (Rack PC)
<b>Installation type/mounting</b>		<b>Memory</b>	
Mounting	For horizontal installation; prepared for telescopic rails; 19" mounting bracket can be removed externally	Main memory	4 GB to 128 GB DDR4 2666 SDRAM DIMM, ECC optional
<b>Design</b>			<b>Hardware configuration</b>
Design	Rack PC, 19", 2U	Slots	<ul style="list-style-type: none"> <li>• free slots</li> </ul> <p>2 slots: 1x PCI Express (x16) (16 lanes), 1x PCI Express (x16) (4 lanes) or 4 slots: 2x PCI, 2x PCI Express (x16) (8 lanes) or 4 slots: 2x PCI Express (x16) (8 lanes), 1x PCI Express (x16) (4 lanes), 1x PCI Express (x16) (1 lane); expansion modules up to 312 mm in length can be used</p>
<b>Supply voltage</b>		<b>Interfaces</b>	
Type of supply voltage	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC	Interfaces/bus type	1x COM1, 1x COM2 (optional), 2x DisplayPort, 1x DVI-D, audio (microphone in, line in, line out), 9x USB, 3x Gigabit Ethernet can be implemented with plug-in card
<b>Line frequency</b>		PROFIBUS/MPI	
• Rated value 50 Hz	Yes	USB port	4x USB 3.1 Gen. 2 Type A, 2x USB 3.1 Gen. 2 Type C on the rear; 1x USB 3.1 Gen. 2 Type A internally, e.g. for software dongle with optional interlock, 2x USB 3.1 Gen. 1 Type A on the front, can be used with door closed
• Rated value 60 Hz	Yes	Connection for keyboard/mouse serial interface	USB COM1: 1x RS 232, COM2 (optional): 1x RS 232
<b>Mains buffering</b>		Multimedia	<ul style="list-style-type: none"> <li>• Audio In/Out</li> <li>• Microphone In</li> </ul>
• Mains/voltage failure stored energy time	20 ms	Video interfaces	<ul style="list-style-type: none"> <li>• Graphics interface</li> </ul> <p>2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Triple Head (3x mini DisplayPort, 2 GB graphics memory, 3x mini DisplayPort to DisplayPort adapter cable) (optional)</p>
<b>Processor</b>		<b>Industrial Ethernet</b>	
Processor type	Intel Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB Cache, Turbo Boost 2.0, VT-x/d-Technology, iAMT); Intel Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/d-Technology, iAMT); Intel Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/d-Technology, iAMT); Intel Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB Cache, Turbo Boost 2.0, VT-x/d-Technology, iAMT); Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB Cache, VT-x/d-Technology)	• Industrial Ethernet interface	3x Gigabit Ethernet (IE/PN), RJ45
Chipset	Intel C246	- 100 Mbps	Yes
<b>Graphic</b>		- 1000 Mbps	Yes
Graphics controller	Onboard Intel UHD graphics P630/630 integrated in processor; graphics card NVIDIA Quadro P400 PCIe (x16) triple head (optional)		
<b>Drives</b>		<b>Integrated Functions</b>	
Hard disk	1x 1 TB 3.5" SATA HDD, 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD (Enterprise), RAID1 2x 2 TB 3.5" SATA HDD (Enterprise), RAID1 2x 2 TB 3.5" SATA HDD (Enterprise), RAID1 2x 2 TB 3.5" SAS HDD (Enterprise) with PCIe x8 RAID controller incl. ZMCP module	<b>Monitoring functions</b>	
SSD	Yes; 1x 480 GB 2.5" SATA SSD, 1x 960 GB 2.5" SATA SSD, 2x 480 GB 2.5" SATA SSD, RAID1 2x 480 GB 2.5" SATA SSD; 1x 512 GB M.2 NVMe SSD, 1x 1 024 GB M.2 NVMe SSD	• Temperature monitoring	Yes
Slot for drives	Mounting internally in vibration/shock-absorbing drive cage Type B or mounting on the front in removable trays (hot swap in RAID configurations) in drive cage Type A; mounting internally on the fixed drive cage optional	• Watchdog	Yes
		• Status LEDs	Power, HDD, Ethernet 1, Ethernet 2, Ethernet 3, Watchdog, Temp, Fan, HDD1 alarm, HDD0 alarm
		• Fan	Yes
		• Monitoring function via network	Optional

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC647E

### Technical specifications

Article number	<b>6AG4112-3....-</b> SIMATIC IPC647E (Rack PC)	Article number	<b>6AG4112-3....-</b> SIMATIC IPC647E (Rack PC)
<b>EMC</b>		Dust protection	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered
<b>Interference immunity against discharge of static electricity</b>	<ul style="list-style-type: none"> <li>• Interference immunity against discharge of static electricity</li> </ul> <p>±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2</p>	<b>Marine approval</b>	<ul style="list-style-type: none"> <li>• Germanischer Lloyd (GL)</li> <li>• American Bureau of Shipping (ABS)</li> </ul> <p>Yes; Only with SSD Yes; Only with SSD</p>
<b>Interference immunity against high-frequency electromagnetic fields</b>	<ul style="list-style-type: none"> <li>• Interference immunity against high frequency radiation</li> </ul> <p>10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6</p>	<b>Ambient conditions</b>	
<b>Interference immunity to cable-borne interference</b>	<ul style="list-style-type: none"> <li>• Interference immunity on supply cables</li> <li>• Interference immunity on signal cables &gt;30m</li> <li>• Interference immunity on signal cables &lt; 30m</li> </ul> <p>±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric ±2 kV acc. to IEC 61000-4-5, surge, length &gt; 30 m ±1 kV acc. to IEC 61000-4-4; burst, length &lt; 3 m</p>	<b>Ambient temperature during operation</b>	0 °C to +50 °C with full configuration
<b>Interference immunity against voltage surge</b>	<ul style="list-style-type: none"> <li>• asymmetric interference</li> <li>• symmetric interference</li> </ul> <p>±2 kV acc. to IEC 61000-4-5, surge asymmetric ±1 kV acc. to IEC 61000-4-5, surge symmetric</p>	<b>Relative humidity</b>	<ul style="list-style-type: none"> <li>• Relative humidity</li> </ul> <p>Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)</p>
<b>Emission of conducted and non-conducted interference</b>	<ul style="list-style-type: none"> <li>• Interference emission via line/ AC current cables</li> </ul> <p>EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3</p>	<b>Vibrations</b>	<ul style="list-style-type: none"> <li>• Vibration resistance during operation acc. to IEC 60068-2-6</li> </ul> <p>Tested according to IEC 60068-2-6: 10 cycles, 10 Hz to 58 Hz: 0.0375 mm, 58 Hz to 500 Hz: 4.9 m/s<sup>2</sup> (0.5 g)</p>
<b>Compliance with line harmonic distortion limits</b>	<ul style="list-style-type: none"> <li>• Compliance with line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3</li> </ul> <p>Yes; EN 61000-3-2 Class D; EN 61000-3-3</p>	<b>Shock testing</b>	<ul style="list-style-type: none"> <li>• Shock load during operation</li> </ul> <p>Tested according to DIN IEC 60068-2-7: 50 m/s<sup>2</sup> (5 g), 30 ms, 100 shocks</p>
<b>Degree and class of protection</b>	<p>IP (at the front) IP (rear)</p> <p>IP41 IP20</p>	<b>Operating systems</b>	<p>pre-installed operating system</p> <p>Windows 10 Enterprise 2016 LTSB, multi-language (64-bit); Windows 10 IoT Enterprise 2019 LTSC, multi-language (64-bit); Windows Server 2016 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2019 Standard Edition incl. 5 multi-language clients (64-bit)</p> <p>Additional info on operating system</p> <p>Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)</p> <p>without operating system</p> <p>Yes</p>
<b>Standards, approvals, certificates</b>	<p>CE mark</p> <p>Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)</p> <p>CSA approval</p> <p>Yes; CAN/CSA-C22.2 No. 61010-2-201 Second Edition</p> <p>UL approval</p> <p>Yes; UL 61010-2-201 Second Edition, File E85972</p> <p>cULus</p> <p>Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition</p> <p>RCM (formerly C-TICK)</p> <p>Yes</p> <p>KC approval</p> <p>Yes</p> <p>EAC (formerly Gost-R)</p> <p>Yes</p> <p>EMC</p> <p>EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3</p>	<b>Software</b>	<p>SIMATIC Software</p> <p>Optional package with SIMATIC WinCC</p>
		<b>Dimensions</b>	<p>Width 430 mm Height 88 mm; 2U Depth 444 mm</p>

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

## Overview



### SIMATIC IPC847E

SIMATIC IPC847E is a very robust, high-performance industrial PC in 19" rack design (4 U) with excellent industrial functionality.

It offers:

- Maximum expandability
- Extreme ruggedness
- Intel® Core® i / Xeon technology 8th/9th generation

## Ordering data

### Article No.

#### **SIMATIC IPC847E**

Rack PC, 19", 4 U

Interfaces:

3x Gbit Ethernet (IE/PN), RJ45;  
1x DVI-D; 2x DisplayPort;  
1x COM1; audio; 4x USB 3.1,  
2x USB 3.1 (type C) on the rear;  
2x USB 3.0 on the front, 1x USB 3.1  
internal.

Temperature and fan monitoring,  
watchdog, card retainer

#### Processors / Boards

- Core i3-8100  
(4C/4T, 3.6 GHz, 6 MB cache,  
VT-d). Board 9 slots: 7x PCI, 2x  
PCIe x16 (8 L)
- Core i3-8100  
(4C/4T, 3.6 GHz, 6 MB cache,  
VT-d). Board 11 slots: 3x PCI,  
1x PCIe x16 (8 L), 5x PCIe x16  
(4 L), 2x PCIe x4 (4 L)
- Core i3-8100  
(4C/4T, 3.6 GHz, 6 MB cache,  
VT-d). Board 11 slots: 3x PCI,  
1x PCIe x16 (16 L), 3x PCIe x16  
(4 L), 2x PCIe x16 (1 L), 2x PCIe x4  
(4 L)
- Core i5-8500  
(6C/6T, 3.0 (4.1) GHz, 9 MB  
cache, TB, VT-d, AMT) Board  
9 slots: 7x PCI, 2x PCIe x16 (8 L)
- Core i5-8500  
(6C/6T, 3.0 (4.1) GHz, 9 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16 (8 L),  
5x PCIe x16 (4 L), 2x PCIe x4 (4 L)
- Core i5-8500  
(6C/6T, 3.0 (4.1) GHz, 9 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16  
(16 L), 3x PCIe x16 (4 L), 2x PCIe  
x16 (1 L), 2x PCIe x4 (4 L)
- Core i7-8700  
(6C/12T, 3.2 (4.6) GHz, 12 MB  
cache, TB, VT-d, AMT) Board  
9 slots: 7x PCI, 2x PCIe x16 (8 L)

### Article No.

#### **6AG4114-**

**A**  
**B**  
**C**  
**D**  
**E**  
**F**  
**G**

## Article No.

#### **SIMATIC IPC847E**

#### Processors / Boards

- Core i7-8700  
(6C/12T, 3.2 (4.6) GHz, 12 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16 (8 L),  
5x PCIe x16 (4 L), 2x PCIe x4 (4 L)
- Core i7-8700  
(6C/12T, 3.2 (4.6) GHz, 12 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16 (16 L),  
3x PCIe x16 (4 L), 2x PCIe x16  
(1 L), 2x PCIe x4 (4 L)
- Xeon E-2176G  
(6C/12T, 3.7 (4.7) GHz, 12 MB  
cache, TB, VT-d, AMT) Board  
9 slots: 7x PCI, 2x PCIe x16 (8 L)
- Xeon E-2176G  
(6C/12T, 3.7 (4.7) GHz, 12 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16 (8 L),  
5x PCIe x16 (4 L), 2x PCIe x4 (4 L)
- Xeon E-2176G  
(6C/12T, 3.7 (4.7) GHz, 12 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16 (16 L),  
3x PCIe x16 (4 L), 2x PCIe x16  
(1 L), 2x PCIe x4 (4 L)
- Xeon E-2278GE  
(8C/16T, 3.3 (4.7) GHz, 16 MB  
cache, TB, VT-d, AMT) Board  
9 slots: 7x PCI, 2x PCIe x16 (8 L)
- Xeon E-2278GE  
(8C/16T, 3.3 (4.7) GHz, 16 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16 (8 L),  
5x PCIe x16 (4 L), 2x PCIe x4 (4 L)
- Xeon E-2278GE  
(8C/16T, 3.3 (4.7) GHz, 16 MB  
cache, TB, VT-d, AMT) Board  
11 slots: 3x PCI, 1x PCIe x16  
(16 L), 3x PCIe x16 (4 L), 2x PCIe  
x16 (1 L), 2x PCIe x4 (4 L)

### Article No.

#### **6AG4114-**

**H**  
**J**  
**K**  
**L**  
**M**  
**N**  
**Q**  
**R**

**PC-based Automation**

Industrial PC

Rack PC

**SIMATIC IPC847E**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>SIMATIC IPC847E</b>	<b>6AG4114-</b>	<b>6AG4114-</b>
<u>Drives</u>		
• 1 TB HDD 3.5" SATA	A	0
• 2x 1 TB HDD 3.5" SATA	B	1
• RAID1, 2x 1 TB HDD 3.5" SATA	C	2
• RAID1, 2x 1 TB HDD [Enterprise] 3.5" SATA	D	3
• RAID1, 2x 2 TB HDD [Enterprise] 3.5" SATA	E	4
• RAID1, 2x 2 TB HDD [Enterprise] 3.5" SATA + 2 TB HDD [Enterprise] 3.5" SATA as HotSpare	F	5
• RAID1, 2x 2 TB HDD [Enterprise] 3.5" SATA + 480 GB 2.5" SSD SATA (for operating system if M.2 SSD not ordered)	G	6
• RAID5, 3x 2 TB HDD [Enterprise] 3.5" SATA	H	7
• RAID5, 3x 2 TB HDD [Enterprise] 3.5" SATA + 2 TB HDD [Enterprise] 3.5" SATA as HotSpare	J	0
• RAID1, 2x 2 TB HDD [Enterprise] 3.5" SAS; PCIe x8 RAID controller incl. ZMCP module (1 slot occupied)	K	1
• RAID1, 2x 2 TB HDD [Enterprise] 3.5" SAS; PCIe x8 RAID controller incl. ZMCP module (1 slot occupied) + 480 GB SSD 2.5" SATA	L	2
• RAID5, 3x 2 TB HDD [Enterprise] 3.5" SAS; PCIe x8 RAID controller incl. ZMCP module (1 slot occupied)	M	3
• RAID5, 3x 2 TB HDD [Enterprise] 3.5" SAS + 2 TB HDD [Enterprise] 3.5" SAS as hot spare; PCIe x8 RAID controller incl. ZMCP module (1 slot occupied)	N	4
• 1 TB HDD 3.5" SATA + 480 GB SSD 2.5" SATA (for operating system if M.2 SSD not ordered)	P	5
• 480 GB SSD 2.5" SATA	Q	6
• 960 GB SSD 2.5" SATA	R	7
• 2x 480 GB SSD 2.5" SATA	S	8
• RAID1, 2x 480 GB SSD 2.5" SATA	T	
• Without drives	X	
<u>Type of enclosure/power supplies</u>		
• Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock); 100/240 V AC industrial power supply		
• Enclosure with drive cage type A (for removable trays on the front); 100/240 V AC industrial power supply		
• Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock); 2x 100/240 V AC redundant industrial power supply		
• Enclosure with drive cage type A (for removable trays on the front); 2x 100/240 V AC redundant industrial power supply		
• Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock) + COM2 port; 100/240 V AC industrial power supply		
• Enclosure with drive cage type A (for removable trays on the front) + COM2 interface; 100/240 V AC industrial power supply		
• Enclosure with drive cage type B (for internal installation/0.5 g vibration, 5 g shock) + COM2 port; 2x 100/240 V AC redundant industrial power supply		
• Enclosure with drive cage Type A (for removable trays on the front) + COM2 port; 2x 100/240 V AC redundant industrial power supply		
<u>Memory configuration</u>		
• 4 GB DDR4 SDRAM (1x 4 GB), single channel		0
• 8 GB DDR4 SDRAM (2x 4 GB), dual channel		1
• 16 GB DDR4 SDRAM (2x 8 GB), dual channel		2
• 32 GB DDR4 SDRAM (2x 16 GB), dual channel		3
• 64 GB DDR4 SDRAM (4x 16 GB), dual channel		4
• 128 GB DDR4 SDRAM (4x 32 GB), dual channel		5
• 16 GB DDR4 SDRAM (2x 8 GB), ECC, dual channel (only with Core i3/Xeon)		6
• 32 GB DDR4 SDRAM (2x 16 GB), ECC, dual channel (only with Core i3/Xeon)		7
• 64 GB DDR4 SDRAM (4x 16 GB), ECC, dual channel (only with Core i3/Xeon)		8

Ordering data	Article No.	Article No.
<b>SIMATIC IPC847E</b>	6AG4114- 	
Expansion hardware		
• Without expansion	0	
• PCIe x4 adapter card for M.2 NVMe module without SSD (1 slot occupied)	1	
• PCIe x16 graphics card (3x mDP; 3x adapter mDP on DP) (1 slot occupied)	2	
• PCIe x4 adapter card for M.2 NVMe module without SSD (1 slot occupied) + PCIe x16 graphics card (3x mDP; 3x adapter mDP on DP) (1 slot occupied)	3	
• 512 GB SSD M.2 NVMe on PCIe x4 adapter card (1 slot occupied) (for operating system)	4	
• 512 GB SSD M.2 NVMe on PCIe x4 adapter card (1 slot occupied) (for operating system) + PCIe x16 graphics card (3x mDP; 3x adapter mDP on DP) (1 slot occupied)	5	
• 1 024 GB SSD M.2 NVMe on PCIe x4 adapter card (1 slot occupied) (for operating system)	6	
Operating system (pre-installed and activated)		
• Windows 10 Enterprise 2016 LTSB, multi-language (en, de, fr, it, es), 64-bit (for Core i3/i5)	A	
• Windows 10 Enterprise 2016 LTSB, multi-language (en, de, fr, it, es), 64-bit (for Core i7/Xeon)	B	
• Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, sp), 64-bit (for Core i3/i5)	C	
• Windows 10 IoT Enterprise 2019 LTSC, multi-language (en, de, fr, it, sp), 64-bit, (for Core i7/Xeon)	D	
• Windows Server 2016 Standard Edition incl. 5 clients, 64-bit, MUI (en, de, fr, it, es)	H	
• Windows Server 2019 Standard Edition incl. 5 clients, 64-bit, MUI (en, de, fr, it, es)	J	
• Without operating system	X	
Software / adapters / security expansions		
• SIMATIC IPC DiagMonitor software enclosed	A	
• SIMATIC IPC Image & Partition Creator software included	B	
• SIMATIC IPC DiagMonitor + Image & Partition Creator software enclosed	C	
• Adapter cable DP to VGA for onboard graphics	H	
• Adapter cable DP to DVI-D for onboard graphics	J	
• Without expansions	X	
• TPM <sup>1)</sup> 2.0 (not for China)	Y	
Cables, country-specific versions		
• Without power supply cord	0	
• Power supply cord for Europe	1	
• Power supply cord for USA	2	
• Power supply cord for China	3	

**Accessories****Memory expansions**

- 4 GB DDR4 2666 SDRAM, DIMM
- 8 GB DDR4 2666 SDRAM, DIMM
- 16 GB DDR4 2666 SDRAM, DIMM
- 32 GB DDR4 2666 SDRAM, DIMM

6ES7648-2AL60-0QA0

6ES7648-2AL70-0QA0

6ES7648-2AL80-0QA0

6ES7648-2AL81-0QA0

**Removable drive bay**

For 3.5" hard disk or 2.5" solid-state drive, SATA (without hard disk drive/solid-state drive)

6ES7648-0EH00-1BA0

**Tower Kit**

To convert the computer into an industrial tower PC

6ES7648-1AA01-0XC0

**Retainer**

For mechanically interlocking the internal USB port

6ES7648-1AA00-0XK0

**Adapter cable**

- DisplayPort to DVI-D for onboard graphics
- DisplayPort to VGA for onboard graphics
- Mini-DisplayPort to VGA for graphics card
- Mini-DisplayPort to DVI-D for graphics card
- Mini-DisplayPort to DVI-D for graphics card (3 units per pack)
- Mini-DisplayPort to DisplayPort for graphics card
- Mini-DisplayPort to DisplayPort for graphics card (3 units per pack)

6ES7648-3AF00-0XA0

6ES7648-3AG00-0XA0

6ES7648-3AL00-0XA0

6ES7648-3AK00-0XA0

6ES7648-3AK00-1XA0

6ES7648-3AJ00-0XA0

6ES7648-3AJ00-1XA0

<sup>1)</sup> TPM = Trusted Platform Module

**Note:**

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-Configurators>

**PC-based Automation**

Industrial PC

Rack PC

**SIMATIC IPC847E****Technical specifications**

Article number	<b>6AG4114-3....-....</b> SIMATIC IPC847E (Rack PC)	Article number	<b>6AG4114-3....-....</b> SIMATIC IPC847E (Rack PC)
<b>Installation type/mounting</b>		<b>Memory</b>	
Mounting	For horizontal and vertical installation; prepared for telescopic rails; 19" mounting bracket can be removed externally; tower kit (optional)	Main memory	4 GB to 128 GB DDR4 2666 SDRAM DIMM, ECC optional
Design	Rack PC, 19", 4U	<b>Hardware configuration</b>	
<b>Supply voltage</b>			<b>Slots</b>
Type of supply voltage	100/240 V AC (autorange) 50 / 60 Hz; optional redundant 100/240 V AC	• free slots	9 slots: 7x PCI, 2x PCI Express (x16) (8 lanes) or 11 slots: 3x PCI, 1x PCI Express (x16) (8 lanes), 5x PCI Express (x16) (4 lanes), 2x PCI Express (x4) (4 lanes) or 11 slots: 3x PCI, 1x PCI Express (x16) (16 lanes), 3x PCI Express (x16) (4 lanes), 2x PCI Express (x16) (1 lane), 2x PCI Express (x4) (4 lanes); expansion modules up to a length of 312 mm can be used
<b>Line frequency</b>		<b>Interfaces</b>	
• Rated value 50 Hz	Yes	Interfaces/bus type	1x COM1, 1x COM2 (optional), 2x DisplayPort, 1x DVI-D, audio (microphone in, line in, line out), 9x USB, 3x Gigabit Ethernet
• Rated value 60 Hz	Yes	PROFIBUS/MPI	can be implemented with plug-in card
<b>Mains buffering</b>		USB port	4x USB 3.1 Gen. 2 Type A, 2x USB 3.1 Gen. 2 Type C on the rear; 1x USB 3.1 Gen. 2 Type A internally, e.g. for software dongle with optional interlock, 2x USB 3.1 Gen. 1 Type A on the front, can be used with door closed
• Mains/voltage failure stored energy time	20 ms	Connection for keyboard/mouse serial interface	USB COM1: 1x RS 232, COM2 (optional): 1x RS 232
<b>Processor</b>		Multimedia	• Audio In/Out Yes • Microphone In Yes
Processor type	Intel Xeon E-2278GE (8C/16T, 3.3 (4.7) GHz, 16 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Xeon E-2176G (6C/12T, 3.7 (4.7) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i5-8500 (6C/6T, 3.0 (4.1) GHz, 9 MB Cache, Turbo Boost 2.0, VT-x/-d-Technology, iAMT); Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB Cache, VT-x/-d-Technology)	Video interfaces	• Graphics interface 2x DisplayPort and 1x DVI-D onboard; 1x VGA via DP-VGA adapter cable (optional); graphics card PCIe (x16), Triple Head (3x mini DisplayPort, 2 GB graphics memory, 3x mini DisplayPort to DisplayPort adapter cable) (optional)
Chipset	Intel C246	Industrial Ethernet	• Industrial Ethernet interface 3x Gigabit Ethernet (IE/PN), RJ45 - 100 Mbps Yes - 1000 Mbps Yes
<b>Graphic</b>		<b>Integrated Functions</b>	
Graphics controller	Onboard Intel UHD graphics P630/630 integrated in processor; graphics card NVIDIA Quadro P400 PCIe (x16) triple head (optional)	<b>Monitoring functions</b>	
<b>Drives</b>		• Temperature monitoring Yes • Watchdog Yes • Status LEDs POWER, HDD, ETHERNET 1, ETHERNET 2, ETHERNET 3, WATCHDOG, TEMP, FAN, HDD3 ALARM, HDD2 ALARM, HDD1 ALARM, HDD0 ALARM	
Hard disk	1x 1 TB 3.5" SATA HDD, 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA HDD, RAID1 2x 1 TB 3.5" SATA (Enterprise), RAID1 2x 2 TB 3.5" SATA HDD (Enterprise), RAID1 2x 2 TB 3.5" SATA HDD (Enterprise), RAID1 + 2 TB 3.5" SATA HDD (Enterprise) as hot spare, RAID5 3x 2 TB 3.5" SATA HDD (Enterprise), RAID5 3x 2 TB 3.5" SATA HDD (Enterprise) as hot spare, RAID1 2x 2 TB 3.5" SAS HDD (Enterprise) with PCIe x8 RAID controller incl. ZMCP module, RAID5 3x 2 TB 3.5" SAS HDD (Enterprise) with PCIe x8 RAID controller incl. ZMCP module	• Fan Yes	
SSD	Yes; 1x 480 GB 2.5" SATA SSD, 1x 960 GB 2.5" SATA SSD, 2x 480 GB 2.5" SATA SSD, RAID1 2x 480 GB 2.5" SATA SSD; 1x 512 GB M.2 NVMe SSD, 1x 1 024 GB M.2 NVMe SSD	• Monitoring function via network Optional	
Slot for drives	Mounting internally in vibration/shock-absorbing drive cage Type B or mounting on the front in removable trays (hot swap in RAID configurations) in drive cage Type A; mounting internally on the fixed drive cage optional		

**Technical specifications**

Article number	<b>6AG4114-3....-</b> SIMATIC IPC847E (Rack PC)
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	• Interference immunity against discharge of static electricity  ±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>	• Interference immunity against high frequency radiation  10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>	• Interference immunity on supply cables  • Interference immunity on signal cables >30m • Interference immunity on signal cables < 30m  ±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric ±2 kV acc. to IEC 61000-4-5, surge, length > 30 m ±1 kV acc. to IEC 61000-4-4; burst, length < 3 m
<b>Interference immunity against voltage surge</b>	• asymmetric interference • symmetric interference  ±2 kV acc. to IEC 61000-4-5, surge asymmetric ±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	• Interference immunity to magnetic fields at 50 Hz  100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>	• Interference emission via line/AC current cables  EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3
<b>Compliance with line harmonic distortion limits</b>	• Compliance with line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3  Yes; EN 61000-3-2 Class D; EN 61000-3-3
<b>Degree and class of protection</b>	IP (at the front) IP (rear)  IP41 IP20
<b>Standards, approvals, certificates</b>	
CE mark	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)
CSA approval	Yes; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
UL approval	Yes; UL 61010-2-201 Second Edition, File E85972
cULus	Yes; UL 61010-2-201 Second Edition; CAN/CSA-C22.2 No. 61010-2-201 Second Edition
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
EMC	EN 61000-6-3; EN 61000-6-4, CAN/CSA CISPR 22 Class B, EN 55032 Class B; FCC Class A; KN32 Class B, EN 61000-3-2 Class D; EN 61000-3-3

Article number	<b>6AG4114-3....-</b> SIMATIC IPC847E (Rack PC)
Dust protection	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	0 °C to +50 °C with full configuration
<b>Relative humidity</b>	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>	Tested according to IEC 60068-2-6: 10 cycles, 10 Hz to 58 Hz: 0.0375 mm, 58 Hz to 500 Hz: 4.9 m/s <sup>2</sup> (0.5 g)
<b>Shock testing</b>	Tested according to IEC 60068-2-27, IEC 60068-2-29: half-sine: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks per axis
<b>Operating systems</b>	
pre-installed operating system	Windows 10 Enterprise 2016 LTSB, multi-language (64-bit); Windows 10 IoT Enterprise 2019 LTS, multi-language (64-bit); Windows Server 2016 Standard Edition incl. 5 multi-language clients (64-bit); Windows Server 2019 Standard Edition incl. 5 multi-language clients (64-bit)
Additional info on operating system	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)
without operating system	Yes
<b>Software</b>	Optional package with SIMATIC WinCC
<b>Dimensions</b>	
Width	430 mm
Height	177 mm; 4U
Depth	444 mm

**More information**

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC1047

### Overview



### SIMATIC IPC1047

SIMATIC IPC1047 is an industrial PC for maximum computing and graphic capacity requirements with expansive expandability in 19" installation design (4 U).

It offers:

- Maximum CPU performance due to two Intel® Xeon® CPUs
- Maximum GPU performance with up to two NVIDIA® Quadro® P5000 graphics cards
- High degree of expandability thanks to 6 PCIe slots
- Product design for industrial environment

### Ordering data

#### Article No.

<b>SIMATIC IPC1047</b>	6BK1800-	1	-	
Rack PC, 19", 4 U; 572 mm; 2x 1 GB LAN (RJ45); COM1; IPMI; 6 PCIe slots (3x PCIe x8 + 3x PCIe x16)				
<b>Processor</b>				
• 2x Xeon E56-2609v4, 1.7 GHz, 8C		A		
• 2x Xeon E56-2620v4, 2.1 GHz, 8C		B		
• 2x Xeon E56-2640v4, 2.4 GHz, 10C		D		
• 2x Xeon E56-2643v4, 3.4 GHz, 6C		E		
• 2x Xeon E56-2658v4, 2.3 GHz, 14C		F		
<b>Drives/ mass storage</b>		A		
• 1x SSD 480 GB 2.5" SATA (without HW RAID)		B		
• 1x SSD 960 GB 2.5" SATA (without HW RAID)		C		
• 1x SSD 1.9 TB 2.5" SATA (without HW RAID)		D		
• 1x SSD 480 GB (operating system) + 4x SSD 1.9 TB 2.5" SATA (HW-RAID 5 + hot spare - internal)		E		
• 1x SSD 1.9 TB 2.5" (OS) + 2x SSD 1.9 TB 2.5" SATA (HW-RAID 1)		F		
• 1x SSD 1.9 TB 2.5" (OS) + 3x SSD 1.9 TB 2.5" SATA (HW-RAID 5)		G		
• 1x HDD 2 TB 3.5" SATA (without HW RAID)		H		
• 4x HDD 2 TB 3.5" SATA (without HW RAID)		J		
• 1x HDD 4 TB 3.5" SATA (without HW RAID)		K		
• 4x HDD 4 TB 3.5" SATA (without HW RAID)		L		
• 1x SSD 480 GB 2.5" + 1x HDD 2 TB 3.5" SATA (without HW RAID)		M		
• 1x SSD 480 GB 2.5" + 1x HDD 2 TB 3.5" SATA (without HW RAID)		Y		
• No drives				

#### Article No.

<b>SIMATIC IPC1047</b>	6BK1800-	1	-	
<b>Memory configuration</b>				
• 32 GB 2 400 MHz DDR4		0		
• 64 GB 2 400 MHz DDR4		1		
• 128 GB 2 400 MHz DDR4		2		
• 192 GB 2 400 MHz DDR4		3		
• 256 GB 2 400 MHz DDR4		4		
• 384 GB 2 400 MHz DDR4		5		
• 512 GB 2 400 MHz DDR4		6		
<b>Graphics cards</b>				
• Without graphics card (onboard VGA)		0		
• 1x Nvidia Quadro P400 (1x PCIe x16 occupied)		1		
• 1x Nvidia Quadro P1000 (1x PCIe x16 occupied)		2		
• 1x Nvidia Quadro P4000 (1x PCIe x16 occupied) - only with 860 W power supply		3		
• 1x Nvidia Quadro P5000 (1x PCIe x16 + 1x PCIe x8 occupied) - only with 860 W power supply		4		
<b>Further plug-in cards</b>				
• Without plug-in cards		0		
• Adaptec RAID ASR8405 (4-port) - only with drive var. D, E, F		1		
• Adaptec RAID ASR8805 (8-port) - only with drive var. D, E, F		2		
• Intel I350-T2 (2x 1 GB LAN)		4		
• Intel I350-T4 (4x 1 GB LAN)		5		
• Intel X540-T2 (2x 10 GB LAN)		6		

Ordering data	Article No.	Article No.
<b>SIMATIC IPC1047</b>	6BK1800- 1 ■■■■■ - ■■■■■	
Operating system <u>(pre-installed and activated)</u>		
• Without operating system	A	
• Windows 10 Enterprise LTSB 2016 only with installed HDDs/ SSDs	B	
• Windows Server 2016, basic license 16 C (only license + driver) for CPU E5-2609/ 2620/ 2643	C	
• Windows Server 2016, basic license 16 C + additional license 4 C (only license + driver) for CPU E5-2640	D	
• Windows Server 2016, basic license 24 C + additional license 4 C (only license + driver) for CPU E5-2658	E	
Power supply		
• 860 W without power supply cable	A	
• 860 W power supply cable for Europe	B	
• 860 W power supply cable US	C	
• 860 W power supply cable China	D	
• 700 W, redundant, without power supply cable	E	
• 700 W, redundant, power supply cable for Europe	F	
• 700 W power supply cable US	G	
• 700 W power supply cable China	H	
Enclosure variant	0	
• Holder for 4x 3.5" or 8x 2.5" SSD/ HDD internal drives	1	
• Holder for 4x 3.5" or 4x 2.5" SSD/ HDD removable drive bay		

**Preferred versions****SIMATIC IPC1047 CPU**

- 2x Intel Xeon E5-2620v4; 32 GB DDR4 ECC SDRAM;
- 1x system-SSD 480 GB; 2x Gbit Ethernet, IPMI, RJ45
- 1x VGA, 1x COM 1, TPM1.2
- 2x USB 3.0, 2x USB rear; 2x USB 3.0 front
- WIN 7 Professional x64bit
- ATX power supply 860 W; temp. and fan monitoring
- SW RAID onboard

**SIMATIC IPC1047 GPU**

- 2x Intel Xeon E5-2620v4; 32 GB DDR4 ECC SDRAM;
- 1x system-SSD 480 GB; 1x GPU NVIDIA P5000;
- 2x Gbit Ethernet, IPMI, RJ45; 1x VGA, 1x COM 1, TPM1.2;
- 2x USB 3.0, 2x USB rear; 2x USB 3.0 front
- WIN 7 Professional x64bit
- ATX power supply 860 W; temp. and fan monitoring
- SW RAID onboard

**SIMATIC IPC1047 Virtualize**

- 2x Intel Xeon E5-2658v4; 128 GB DDR4 ECC SDRAM
- 1x system-SSD 480 GB; 4x DATA-SSD 1.9TB
- 2x Gbit Ethernet, IPMI, RJ45; 1x VGA, 1x COM 1, TPM1.2;
- 2x USB 3.0, 2x USB rear; 2x USB 3.0 front
- Windows Server 2012 R2
- 700 W redundant power supply; temp. and fan monitoring
- HW RAID controller

Note:

For customer-specific configurations, please contact your Siemens sales specialist.

**PC-based Automation**

Industrial PC

Rack PC

**SIMATIC IPC1047****Technical specifications**

Article number	<b>6BK1800-1HA01-0AA0</b> SIMATIC IPC1047 - CPU (Rack PC)	<b>6BK1800-1HA02-0AA0</b> SIMATIC IPC1047 - GPU (Rack PC)	<b>6BK1800-1HA03-0AA0</b> SIMATIC IPC1047 - Virtualize (Rack PC)
<b>Installation type/mounting</b>			
Mounting	For horizontal rack mounting	For horizontal rack mounting	For horizontal rack mounting
Design	Rack PC, 19", 4U	Rack PC, 19", 4U	Rack PC, 19", 4U
<b>Supply voltage</b>			
Type of supply voltage	100/240V AC (autorange) 50/60 Hz	100/240V AC (autorange) 50/60 Hz	AC redundant 100/240 V (autorange) 50 Hz/60 Hz
<b>Line frequency</b>			
• Rated value 50 Hz	Yes	Yes	Yes
• Rated value 60 Hz	Yes	Yes	Yes
<b>Mains buffering</b>			
• Mains/voltage failure stored energy time	20 ms	20 ms	20 ms
<b>Processor</b>			
Processor type	Xeon E5-2620 v4 (8C/16T, 2.1 (3.0) GHz, 20 MB cache)	Xeon E5-2620 v4 (8C/16T, 2.1 (3.0) GHz, 20 MB cache)	Xeon E5-2658 v4 (14C/28T, 2.3 (2.8) GHz, 35 MB cache)
Chipset	Intel PCH C612	Intel PCH C612	Intel PCH C612
<b>Graphic</b>			
Graphics controller	Onboard VGA / 2D controller 1 920 x 1 200 @ 60 Hz 32 bpp	NVIDIA Quadro P5000, 2 560 cores, 16 GB DDR5	Onboard VGA / 2D controller 1 920 x 1 200 @ 60 Hz 32 bpp
<b>Drives</b>			
Hard disk	1x 480 GB SSD	1x 480 GB SSD	1x 480 GB SSD, 4x 1.9 TB SSD
SSD	Yes	Yes	Yes
<b>Memory</b>			
Type of memory	DDR4-SDRAM DIMM	DDR4-SDRAM DIMM	DDR4-SDRAM DIMM
Main memory	32 GB, 2 400 MHz	32 GB, 2 400 MHz	128 GB, 2 400 MHz
<b>Hardware configuration</b>			
<b>Slots</b>			
• free slots	6 slots: 3x PCIe (x16), 3x PCIe (x8)	6 slots: 3x PCIe (x16), 3x PCIe (x8)	6 slots: 3x PCIe (x16), 3x PCIe (x8)
<b>Interfaces</b>			
USB port	4x USB 3.0: 2x on rear, 2x on front; 2x USB 2.0: 2x on rear	4x USB 3.0: 2x on rear, 2x on front; 2x USB 2.0: 2x on rear	4x USB 3.0: 2x on rear, 2x on front; 2x USB 2.0: 2x on rear
<b>Integrated Functions</b>			
<b>Monitoring functions</b>			
• Temperature monitoring	Yes	Yes	Yes
• Status LEDs	POWER, HDD, FAN Fail	POWER, HDD, FAN Fail	POWER, HDD, FAN Fail
• Fan	Yes	Yes	Yes
• Monitoring function via network	Yes (per IPMI)	Yes (per IPMI)	Yes (per IPMI)

**Technical specifications**

Article number	<b>6BK1800-1HA01-0AA0</b> SIMATIC IPC1047 - CPU (Rack PC)	<b>6BK1800-1HA02-0AA0</b> SIMATIC IPC1047 - GPU (Rack PC)	<b>6BK1800-1HA03-0AA0</b> SIMATIC IPC1047 - Virtualize (Rack PC)
<b>EMC</b>			
<b>Interference immunity against discharge of static electricity</b>	• Interference immunity against discharge of static electricity	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>			
• Interference immunity against high frequency radiation	10 V/m for 80 - 1 000 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 1 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 150 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity to cable-borne interference</b>	• Interference immunity on supply cables  • Interference immunity on signal cables >30m  • Interference immunity on signal cables < 30m	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge
<b>Interference immunity against voltage surge</b>	• asymmetric interference  • symmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric  ±1 kV acc. to IEC 61000-4-5, surge symmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric  ±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>			
• Interference emission via line/ AC current cables	EN 61000-6-3, FCC Class A, EN 61000-6-4, CISPR 22, EN 55022 Class B, EN 61000-3-2 Class D, EN 61000-3-3		
<b>Degree and class of protection</b>			
IP (at the front)	IP30	IP30	IP30
IP (rear)	IP20	IP20	IP20
<b>Standards, approvals, certificates</b>			
CE mark	Yes; For use in industrial areas as well as domestic, business and commercial environments (emitted interference: EN 61000-6-3:2007 +A1:2011, noise immunity: EN 61000-6-2:2005)		
CSA approval	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FCC	Yes	Yes	Yes
EMC	CE, EN 61000-6-3:2007 +A1:2011, EN 61000-6-2:2005	CE, EN 61000-6-3:2007 +A1:2011, EN 61000-6-2:2005	CE, EN 61000-6-3:2007 +A1:2011, EN 61000-6-2:2005
Dust protection	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered	With front door closed: G2 EN 779, 99% of particles > 0.5 mm are filtered

# PC-based Automation

Industrial PC

Rack PC

## SIMATIC IPC1047

### Technical specifications

Article number	<b>6BK1800-1HA01-0AA0</b> SIMATIC IPC1047 - CPU (Rack PC)	<b>6BK1800-1HA02-0AA0</b> SIMATIC IPC1047 - GPU (Rack PC)	<b>6BK1800-1HA03-0AA0</b> SIMATIC IPC1047 - Virtualize (Rack PC)
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• Ambient temperature during operation	0 °C to +50 °C in basic configuration; 0 °C to +40 °C in maximum configuration	0 to +40 °C	0 to +40 °C
<b>Relative humidity</b>			
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>			
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6, 10 cycles; 20 to 58 Hz: 0.015 mm; 58 to 200 Hz: 2 m/s <sup>2</sup> (0.2 g)	Tested according to IEC 60068-2-6, 10 cycles; 20 to 58 Hz: 0.015 mm; 58 to 200 Hz: 2 m/s <sup>2</sup> (0.2 g)	Tested according to IEC 60068-2-6, 10 cycles; 20 to 58 Hz: 0.015 mm; 58 to 200 Hz: 2 m/s <sup>2</sup> (0.2 g)
<b>Shock testing</b>			
• Shock load during operation	Tested according to IEC 60068-2-27; half-sine: 9.8 m/s <sup>2</sup> (1 g), 20 ms, 100 shocks per axis	Tested according to IEC 60068-2-27; half-sine: 9.8 m/s <sup>2</sup> (1 g), 20 ms, 100 shocks per axis	Tested according to IEC 60068-2-27; half-sine: 9.8 m/s <sup>2</sup> (1 g), 20 ms, 100 shocks per axis
<b>Operating systems</b>			
pre-installed operating system	Windows 7 Professional x64 bit	Windows 7 Professional x64 bit	Windows Server 2012 R2
<b>Dimensions</b>			
Width	430 mm	430 mm	430 mm
Height	176.6 mm; 4U	176.6 mm; 4U	176.6 mm; 4U
Depth	572 mm	572 mm	572 mm

### More information

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

## Overview



### SIMATIC Box PCs

SIMATIC Box PCs provide mechanical engineers, plant engineers and control cabinet builders with particularly rugged industrial PC systems for use in powerful yet compact applications.

The following device classes are available for various requirements:

- SIMATIC IPC127E: The ultra-compact, flexible, rugged industrial PC and IoT gateway in one
- SIMATIC IPC227 (Nanobox PC): The Box PC with optimized performance in compact design – maintenance-free and rugged
- SIMATIC IPC327: Fanless Basic Box PC at an appealing price
- SIMATIC IPC427 (Microbox PC): The powerful embedded IPC – maintenance-free with versatile configuration
- SIMATIC IPC527: The powerful Box PC at an appealing price
- SIMATIC IPC627/IPC827 (Box PC): The high-end IPC – with maximum performance, functionality, and expansion capability

#### Shared industrial functionality:

- Extreme compactness
- Certification for global marketing
- System-tested with SIMATIC components
- High vibration/shock load during operation
- Wide operational temperature range
- Robust data storage with CompactFlash/CFast or solid-state drive (SSD)
- Varied mounting possibilities for flexibility with installation
- Designed for continuous 24-hour operation
- Integrated parameterizable monitoring functions (temperature, fan, watchdog)
- High service friendliness
- Operating system pre-installed and activated for fast commissioning
- Motherboard developed and manufactured by Siemens
- Availability for 3 to 6 years
- Repairs and spare parts service for 5 years
- High component/design continuity
- Long-term availability of PC components from the Intel embedded line

#### ***SIMATIC IPC127 (Nanobox PC): Ultra-compact IoT gateway for data collection, pre-processing, and forwarding of data***

- High-performance gateway: IoT gateway for the acquisition/collection/processing/transmission of data / integration of machinery in Cloud/Edge solutions
- For retrofitting and new systems: Networking/retrofitting of digitizing tasks in brownfield and greenfield plants due to ultra-compact design
- Optimized price/performance ratio; ideal for high quantities

#### ***SIMATIC IPC227 (Nanobox PC): The Box PC with optimized performance in compact design – maintenance-free and rugged***

- Maximum compactness with approx. 1 liter enclosure volume with integrated industrial power supply for minimum space requirements in the control cabinet
- Maximum flexibility thanks to several mounting options and interfaces on one side suitable for every installation situation
- Optimum variety of interfaces due to a large number of integrated interfaces such as a selectable serial connection and 2x teaming-capable Gigabit-Ethernet
- Maximum industrial functionality due to closed enclosure for optimum dust protection and non-volatile retentive memory
- Optimum adaptation to the application with additional PCIe slot or M.2 module slots

## PC-based Automation

### Industrial PC

#### Box PC

##### Overview

###### **SIMATIC IPC327: Fanless Basic Box PC at an appealing price**

- Low-cost platform for the industrial and industry-oriented field
- Flexible installation on the DIN rail or wall mounting, as well as simple connection of I/O devices due to a large number of interfaces
- Fanless industrial design
- Fast availability directly ex stock due to preferred versions

###### **SIMATIC IPC427 (Microbox PC): The powerful embedded IPC – maintenance-free with versatile configuration**

- Fan-free operation
- High performance with maximum compactness and ruggedness for direct installation in the machine
- Optimized for embedded applications
- Flexibility expandable using one or two PCIe I/O cards (optional)
- Flexible installation options including DIN rail/wall/front upright mounting, even outside control cabinets
- NVRAM for retentive data storage (optional)

###### **SIMATIC IPC527: The powerful Box PC at an appealing price**

- High system performance for computation-intensive applications with compact dimensions
- High flexibility due to expansion options
- High degree of investment protection thanks to support of existing systems
- Industrial quality at an attractive price
- Fast availability directly ex stock due to preferred versions

###### **SIMATIC IPC627/IPC827 (Box PC): The high-end IPC – with maximum performance, functionality, and expansion capability**

- Maximum system performance for complex measuring, control and visualization tasks
- High flexibility with expansion slots and integral interfaces
- Flexible, space-saving installation with mounting brackets or portrait assembly kits
- Very rugged design for direct installation in the machine
- RAID1 controller onboard
- Maximum processor performance up to an ambient temperature of 55 °C
- High system availability
- Battery-backed SRAM as memory for WinAC data
- 4 signaling LEDs

**Technical specifications**

Article number	6AG4021-0A.1...A0 SIMATIC IPC127E	6ES7647-8B... SIMATIC IPC227E (Nanobox PC)	6AG4022-0A... SIMATIC IPC327E	6AG4141-..... SIMATIC IPC427E (MicroBOX PC)	6AG4025-0...0...0 SIMATIC IPC527G (Box PC)	6AG4131-3..... SIMATIC IPC627E (Box PC)
<b>General information</b>						
Product type designation	IPC127E		IPC327E	IPC427E		
<b>Installation type/mounting</b>						
Mounting	DIN rail, wall mounting, portrait mounting	DIN rail, wall mounting, portrait mounting	Standard mounting rail, wall mounting (horizontal and vertical)	DIN rail, wall mounting, portrait mounting	Wall mounting, portrait mounting, desktop mounting	Wall mounting, portrait mounting
Design	Box PC, built-in unit	Box PC, built-in unit	Box PC, built-in unit	Box PC, built-in unit	Box PC, built-in unit	Box PC, built-in unit
<b>Supply voltage</b>						
Type of supply voltage	24 V DC	24 V DC	24 V DC	24 V DC	100/240V AC (autorange) 50/60 Hz	100/240 V AC (autorange); 24 V DC
<b>Line frequency</b>						
• Rated value 50 Hz					Yes	Yes
• Rated value 60 Hz					Yes	Yes
<b>Mains buffering</b>						
• Mains/voltage failure stored energy time	5 ms	20 ms	10 ms	20 ms		20 ms
<b>Processor</b>						
Processor type	Intel Atom E3930 / E3940	Intel Celeron N2807 / N2930, Intel Atom E3845	Intel Celeron N3160	Celeron G3902 (2C/2T, 1.6 GHz, 2 MB Cache); Core i3-6102E (2C/4T, 1.9 GHz, 3 MB Cache); Core i5-6442EQ (4C/4T, 1.9 (2.7) GHz, 6 MB Cache, iAMT); Xeon E3-1505L v5 (4C/8T, 2.0 (2.8) GHz, 8 MB Cache, iAMT)	Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache)	Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d); Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT)
Chipset	SoC	SoC	SoC	Intel C236 / Intel H110	Intel H110	Intel C246
<b>Graphic</b>						
Graphics controller	Integrated	Integrated	Integrated	Intel HD graphics controller	Onboard Intel HD graphics 530/510 integrated in processor	Intel UHD Graphics 630 (Core i); Intel UHD Graphics 610 (Celeron)

**PC-based Automation**

## Industrial PC

**Box PC****Technical specifications**

Article number	<b>6AG4021-0A.1...A0</b> SIMATIC IPC127E	<b>6ES7647-8B...-....</b> SIMATIC IPC227E (Nanobox PC)	<b>6AG4022-0A...-....</b> SIMATIC IPC327E	<b>6AG4141-.....-....</b> SIMATIC IPC427E (MicroBOX PC)	<b>6AG4025-0...0-0</b> SIMATIC IPC527G (Box PC)	<b>6AG4131-3....-....</b> SIMATIC IPC627E (Box PC)
<b>Drives</b>						
Optical drives						
Hard disk		2.5" SATA ≥ 320 GB	1 TB HDD	2.5" SATA ≥ 320 GB	1 TB HDD	2.5" SATA ≥ 320 GB
SSD	Yes; 32 / 64 / 128 GB	Yes; 256 Eco / 240 / 480 GB	Yes; 256 GB SSD	Yes; 128 / 240 / 480 GB	Yes; Optional	Yes; SSD M.2 NVMe 512 GB; SSD 2.5" SATA 480 / 960 GB; RAID1 2x SSD 2.5" SATA 480 / 960 GB in removable drive bay
<b>Memory</b>						
Type of memory	DDR4 onboard	DDR3L SO-DIMM	DDR3L	DDR4-2400 SO-DIMM	DDR4-2133 SO-DIMM	DDR4-2666 DIMM
Main memory	2 / 4 GB RAM	2 / 4 / 8 GB	4 GB, 8 GB	4 / 8 / 16 GB, ECC optional	4 / 8 / 16 GB, supports up to 32 GB	4 / 8 / 16 / 32 / 64 GB
<b>Data areas and their retentivity</b>						
Retentive data area (incl. timers, counters, flags), max.		512 kbyte; 128 KB can be stored in the buffer time; optional		512 kbyte; 128 KB can be stored in the buffer time; optional		512 kbyte; 128 KB can be stored in the buffer time
<b>Hardware configuration</b>						
<b>Slots</b>						
• free slots		1x PCIe (x1) (optional)	1x mPCIe (half-size), 1x mSATA (full-size)	2x PCIe; optional: 1x PCIe (x4); 2x PCIe (x1, x4), with card retainer	1x PCIe (x16), optional 1x PCIe (x1), 2x PCI additionally	2x PCI; optional: 1x PCI & 1x PCIe (x16); 2x PCIe (x4, x16); 3x PCI & 2x PCIe (x16, x4); 5x PCIe (1x16, 2x4, 2x1); with card retainer

**Technical specifications**

Article number	6AG4021-0A.1...A0	6ES7647-8B...-....	6AG4022-0A...-....	6AG4141-.....	6AG4025-0...0-0	6AG4131-3....-....
	SIMATIC IPC127E	SIMATIC IPC227E (Nanobox PC)	SIMATIC IPC327E	SIMATIC IPC427E (MicroBOX PC)	SIMATIC IPC527G (Box PC)	SIMATIC IPC627E (Box PC)
<b>Interfaces</b>						
PROFIBUS/MPI						
Number of industrial Ethernet interfaces	3; Ethernet (2x RJ45, optional 3x RJ45)	2; 2x Ethernet (RJ45)	2; 2x Ethernet (RJ45)	3; Ethernet (2x RJ45, optional 3x RJ45)	3; 3x Gigabit Ethernet (IE/PN), RJ45 optional; 2x Gigabit Ethernet (IE/PN), RJ45 basic configuration	3; 3x Ethernet (RJ45)
Number of PROFINET interfaces					3; 2 ports base configuration, 3 ports optional	
USB port	2x USB 3.0 / 4x USB 3.0	1x USB 3.0 / 3x USB 2.0	4x USB 2.0, 2x USB 3.0 (high current)	4x USB 3.0	4x USB 3.0, 1x USB 2.0 internal, 2x USB 2.0 optional	6x USB 3.1 Gen. 2 (2x type C)
Connection for keyboard/mouse serial interface	USB / USB	USB / USB Without / 2x COM (RS 232 / 422 / 485), selectable in the BIOS	USB / USB 6x COM (4x RS 232, 2x RS 232 / 422 / 485 switchable)	USB / USB Without / 2x COM (RS 232 / 485 / 422 combined, 2x RS 232 optional)	USB / USB 2x RS 232 / 485 / 422 combined, 2x RS 232 optional	USB / USB 1x COM
parallel interface						
Multimedia					Yes	
• Audio In/Out					Yes	
• Microphone In					Yes	
<b>Video interfaces</b>						
• Graphics interface	1x DisplayPort	1x DisplayPort	1x DisplayPort, 1x VGA	2x DisplayPort	1x DisplayPort, 1x VGA	2x DisplayPort; 1x DVI-D
<b>Industrial Ethernet</b>						
• Industrial Ethernet interface	2x / 3x Ethernet (RJ45)	2x Ethernet (RJ45)	2x Ethernet (RJ45)	3x Ethernet (RJ45)	2x Ethernet (RJ45), 1x Ethernet (RJ45) additional option	3x Ethernet (RJ45)
- 100 Mbps	Yes	Yes	Yes	Yes	Yes	Yes
- 1000 Mbps	Yes	Yes	Yes	Yes	Yes	Yes
<b>Integrated Functions</b>						
<b>Monitoring functions</b>						
• Temperature monitoring	Yes	Yes	Yes	Yes		Yes
• Watchdog	Yes	Yes	Yes	Yes		Yes
• Status LEDs	1x power, 3x user	1x power, 3x user	POWER, HDD	1x power, 3x user	POWER, HDD	1x power, 3x user
• Fan	No	No	No	No	No	Yes
• Monitoring function via network	Optional	Optional		Optional		Optional

# PC-based Automation

## Industrial PC

### Box PC

#### Technical specifications

Article number	6AG4021-0A.1...A0	6ES7647-8B...-	6AG4022-0A...-	6AG4141-.....	6AG4025-0...0-0	6AG4131-3....-
	SIMATIC IPC127E	SIMATIC IPC227E (Nanobox PC)	SIMATIC IPC327E	SIMATIC IPC427E (MicroBOX PC)	SIMATIC IPC527G (Box PC)	SIMATIC IPC627E (Box PC)
<b>EMC</b>						
<b>Interference immunity against discharge of static electricity</b>						
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact; ±8 kV air (to IEC 1000-4-2; ESD)	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>						
• Interference immunity against high frequency radiation	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6	10 V/m for 80 - 1 000 MHz and 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6	10 V/m for 80 ... 1 000 MHz, 80 % AM according to IEC 61000-4-3; 3 V/m for 1.4 ... 6 GHz, 80 % AM according to IEC 61000-4-3	10 V/m for 80 - 1 000 MHz and 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>						
• Interference immunity on supply cables	±2 kV (according to IEC 61000-4-4; burst); ±0.5 kV (according to IEC 61000-4-5; surge pulse/line to line); ±1 kV (according to IEC 61000-4-5; surge pulse/line to ground)	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV (according to IEC 61000-4-4, burst); ±1 kV (according to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge pulse/line to line); ±2 kV (according to IEC 61000-4-5, surge pulse/line to ground)	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	±1 kV acc. to IEC 61000-4-4; Burst	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m
<b>Interference immunity against voltage surge</b>						
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>						
• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>						
• Interference emission via line/AC current cables	EN 61000-6-4:2007 +A1:2011 (industrial environments), EN 61000-6-3:2007 +A1:2011 (residential environments), CISPR 22 Class B, FCC Class A	EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A		EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A		EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A

**Technical specifications**

Article number	6AG4021-0A.1...A0	6ES7647-8B...-....	6AG4022-0A...-....	6AG4141-.....	6AG4025-0...0-...0	6AG4131-3....-....
	SIMATIC IPC127E	SIMATIC IPC227E (Nanobox PC)	SIMATIC IPC327E	SIMATIC IPC427E (MicroBOX PC)	SIMATIC IPC527G (Box PC)	SIMATIC IPC627E (Box PC)
<b>Degree and class of protection</b>					IP20 IP20	
IP (at the front) IP (rear)						
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
CSA approval					Yes; No. 61010-1-12, No. 61010-2-201	
UL approval	Yes	Yes	Yes	Yes	Yes	Yes
• UL 508		Yes		Yes		
cULus		Yes	Yes	Yes	Yes; UL 61010-1, UL 61010-2-201	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
KC approval		Yes		Yes	Yes	Yes
EAC (formerly Gost-R)	Yes		Yes	Yes	Yes	Yes
FCC	Yes	Yes	Yes	Yes	Yes	Yes
EMC	CE, EN 61000-6-4:2007, EN 61000-6-2:2005	CE, EN 61000-6-4:2007, EN 61000-6-2:2005		CE, EN 55022A, EN 61000-6-4, EN 61000-6-2		CE, EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005
Dust protection	Protection against foreign bodies > 1 mm	Protection against foreign bodies > 1 mm	Protection against foreign bodies > 1 mm			
<b>Use in hazardous areas</b>						
• ATEX Zone 2		Yes; Optional		Yes; Optional		
• IECEx Zone 2		Yes; Optional		Yes; Optional		
• cULus Class I Zone 2, Division 2		Yes; Optional		Yes; Optional		
<b>Marine approval</b>						
• Germanischer Lloyd (GL)		Yes		Yes		
• American Bureau of Shipping (ABS)		Yes		Yes		Yes
• Bureau Veritas (BV)		Yes		Yes		
• Det Norske Veritas (DNV)		Yes		Yes		Yes
• Korean Register of Shipping (KRS)		Yes		Yes		
• Lloyds Register of Shipping (LRS)		Yes		Yes		
• Nippon Kaiji Kyokai (Class NK)		Yes		Yes		
• Chinese Classification Society (CCS)		Yes				Yes

# PC-based Automation

## Industrial PC

### Box PC

#### Technical specifications

Article number	<b>6AG4021-0A.1...A0</b>	<b>6ES7647-8B...-</b>	<b>6AG4022-0A...-</b>	<b>6AG4141-.....</b>	<b>6AG4025-0...0...0</b>	<b>6AG4131-3....-</b>
	SIMATIC IPC127E	SIMATIC IPC227E (Nanobox PC)	SIMATIC IPC327E	SIMATIC IPC427E (MicroBOX PC)	SIMATIC IPC527G (Box PC)	SIMATIC IPC627E (Box PC)
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>	0 °C to 55 °C	0 °C up to 60 °C (-20 °C as option)	0 °C to 50 °C	0 °C to 55 °C	0 to +45°C	+5 °C up to 55 °C
<b>Relative humidity</b>						
• Relative humidity	5 ... 85 % at 30 °C, no condensation	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 80% at 25 °C (no condensation), Storage: 5% to 95% at 25 °C (no condensation)	8 ... 85 % at 30 °C, no condensation	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5% to 80% at 25 °C (no condensation), Storage: 5% to 95% at 25 °C (no condensation)
<b>Vibrations</b>						
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6: 5 Hz to 9 Hz: 3.5 mm, 9 Hz to 500 Hz: 9.8 m/s <sup>2</sup>	tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s <sup>2</sup> (1 g)	tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s <sup>2</sup> (1 g)	tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s <sup>2</sup> (1 g)	Tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.0375 mm, 58 Hz to 200 Hz: 4.9 m/s <sup>2</sup> (1 g)	Tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm; 58 Hz to 500 Hz 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>						
• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms	Tested in accordance with IEC 60068-2-27: With SSD: 150 m/s <sup>2</sup> , 11 ms; with HDD: 9.8 m/s <sup>2</sup> , 20 ms	Tested to DIN IEC 60068-2-29: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks	Tested in accordance with IEC 60068-2-27: With SSD: 150 m/s <sup>2</sup> , 11 ms; with HDD: 9.8 m/s <sup>2</sup> , 20 ms	Tested to DIN IEC 60068-2-29: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks
<b>Operating systems</b>						
pre-installed operating system	Windows 10 Enterprise 2016 LTSB or 2019 LTSC 64-bit, MUI	Windows 7 Ultimate 32-bit / 64-bit, MUI; Windows Embedded Standard 7 E/P, 32-bit / 64-bit	Windows 7 Ultimate (Multi-Language), 64 bit; Windows 10 Enterprise 2016 LTSB, 64 bit	Windows 7 Ultimate (Multi-Language) 64-bit, Windows Embedded Standard 7 E/P 32-bit / 64-bit, Windows 10	Windows 7 Ultimate (Multi-Language) 32-bit / 64-bit; Windows 10 Enterprise 2016 LTSB	Windows 10 Enterprise 2016 LTSB or 2019 LTSC 64-bit, MUI
Additional info on operating system		optional: SIMATIC Industrial OS			Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)	
without operating system	Yes; Optional	Yes; Optional	Yes; Optional	Yes; Optional	Yes	Yes; Optional
<b>Software</b>						
SIMATIC Software		Optionally with pre-installed SIMATIC WinCC RT Advanced / Software Controller CPU 1500S software bundle		Optionally with pre-installed SIMATIC WinCC RT Advanced / Software Controller CPU 1500S software bundle		Optional package with SIMATIC WinCC
<b>Dimensions</b>						
Width	85 mm	191 mm	254 mm	262 mm	260 mm	314 mm
Height	85 mm	100 mm	140 mm	139.7 mm	135 mm	93 mm; For variant 5x PCI(e): 155 mm
Depth	41 mm	60 mm	75 mm	55.5 mm	225 mm	301 mm; incl. mounting rail

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

**Overview****SIMATIC IPC127E:**

**Ultra-compact IoT gateway for data collection, pre-processing, and forwarding of data**

Thanks to the ultra-compact enclosure, which has a volume of just 0.3 liters, the SIMATIC IPC127E can be easily – even subsequently – integrated into the control cabinet or directly on the machine with minimal space requirements.

The enclosed all-metal enclosure enables the new industrial PC to be used flexibly and maintenance-free even under harsh conditions. Thus the SIMATIC IPC127E makes it possible to reliably record / collect / process / transfer data directly in the production environment and can be flexibly used as an IoT gateway between the cloud or the corporate IT level and production. Thanks to pre-configured versions, the right product is available to users in a very short time.

**Ordering data****Article No.**

<b>SIMATIC IPC127E</b>	<b>6AG4021-</b>	<b>0 A</b>	<b>1</b>	<b>-</b>	<b>A 0</b>
Processor / RAM / TPM					
• Atom E3930 (2C/2T) / 2 GB RAM		<b>A</b>			
• Atom E3940 (4C/4T) / 4 GB RAM		<b>B</b>			
• Atom E3930 (2C/2T) / 2 GB RAM / TPM		<b>C</b>			
• Atom E3940 (4C/4T) / 4 GB RAM / TPM		<b>D</b>			
Box type					
• Basic version; 2x Ethernet RJ45, 2x USB 3.0		<b>1</b>			
• Extended version; 3x Ethernet RJ45, 4x USB 3.0		<b>2</b>			
Operating system					
• Without		<b>0</b>			
• Windows 10 Enterprise LTSB 2016, 64-bit, MUI (de, en, es, fr, it)		<b>1</b>			
• Windows 10 Enterprise LTSC 2019, 64-bit, MUI (de, en, fr, it, es)		<b>2</b>			
Drives					
• 32 GB SSD		<b>A</b>			
• 64 GB SSD		<b>B</b>			
• 128 GB SSD		<b>C</b>			
<b>SIMATIC IPC127E</b>					
<b>Configuration 1</b>	<b>6AG4021-0AA11-0AA0</b>				
• Processor / RAM: 2 core / 2 GB RAM					
• Box type: Base					
• Operating system: Without					
• Drive: 32 GB SSD					
<b>Configuration 2</b>	<b>6AG4021-0AA12-0BA0</b>				
• Processor / RAM: 2 core / 2 GB RAM					
• Box type: Extended					
• Operating system: Without					
• Drive: 64 GB SSD					
<b>Configuration 3</b>	<b>6AG4021-0AB11-0BA0</b>				
• Processor / RAM: 4 core / 4 GB RAM					
• Box type: Base					
• Operating system: Without					
• Drive: 64 GB SSD					
<b>Configuration 4</b>	<b>6AG4021-0AB12-0CA0</b>				
• Processor / RAM: 4 core / 4 GB RAM					
• Box type: Extended					
• Operating system: Without					
• Drive: 128 GB SSD					

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

## PC-based Automation

Industrial PC

Box PC

### SIMATIC IPC127E

Ordering data	Article No.	Article No.
<b>SIMATIC IPC127E</b>		
<b>Configuration 5</b>	<b>6AG4021-0AA11-1BA0</b>	<i>Mounting accessories</i>
<ul style="list-style-type: none"> <li>Processor / RAM: 2 core / 2 GB RAM</li> <li>Box type: Base</li> <li>Operating system: Windows 10 Enterprise 2016 LTSB, 64-bit, MUI</li> <li>Drive: 64 GB SSD</li> </ul>		<b>DIN rail</b> <b>6AG4021-0AA20-0AA1</b>
<b>Configuration 6</b>	<b>6AG4021-0AB11-1BA0</b>	<b>Wall-mount</b> <b>6AG4021-0AA20-0AA2</b>
<ul style="list-style-type: none"> <li>Processor / RAM: 4 core / 4 GB RAM</li> <li>Box type: Base</li> <li>Operating system: Windows 10 Enterprise 2016 LTSB, 64-bit, MUI</li> <li>Drive: 64 GB SSD</li> </ul>		<b>Book-mount Base</b> <b>6AG4021-0AA20-0AA3</b>
<b>Configuration 7</b>	<b>6AG4021-0AB11-1CA0</b>	<b>Book-mount Extended</b> <b>6AG4021-0AA20-0AA4</b>
<ul style="list-style-type: none"> <li>Processor / RAM: 4 core / 4 GB RAM</li> <li>Box type: Base</li> <li>Operating system: Windows 10 Enterprise 2016 LTSB, 64-bit, MUI</li> <li>Drive: 128 GB SSD</li> </ul>		<b>Book-mount DIN-Rail</b> <b>6AG4021-0AA20-0AA5</b>
<b>Configuration 8</b>	<b>6AG4021-0AB12-1BA0</b>	
<ul style="list-style-type: none"> <li>Processor / RAM: 4 core / 4 GB RAM</li> <li>Box type: Extended</li> <li>Operating system: Windows 10 Enterprise 2016 LTSB, 64-bit, MUI</li> <li>Drive: 64 GB SSD</li> </ul>		
<b>Configuration 9</b>	<b>6AG4021-0AB12-1CA0</b>	
<ul style="list-style-type: none"> <li>Processor / RAM: 4 core / 4 GB RAM</li> <li>Box type: Extended</li> <li>Operating system: Windows 10 Enterprise 2016 LTSB, 64-bit, MUI</li> <li>Drive: 128 GB SSD</li> </ul>		

Note:

All configurations of the SIMATIC IPC127E do not include any mounting accessories. They must be ordered separately.

**Technical specifications**

Article number	<b>6AG4021-0A.1..A0</b> SIMATIC IPC127E	Article number	<b>6AG4021-0A.1..A0</b> SIMATIC IPC127E
<b>General information</b>			
Product type designation	IPC127E	Interference immunity to cable-borne interference	
<b>Installation type/mounting</b>			
Mounting	DIN rail, wall mounting, portrait mounting	• Interference immunity on supply cables	±2 kV (according to IEC 61000-4-4; burst); ±0,5 kV (according to IEC 61000-4-5; surge pulse/line to line); ±1 kV (according to IEC 61000-4-5; surge pulse/line to ground)
Design	Box PC, built-in unit	• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
<b>Supply voltage</b>			
Type of supply voltage	24 V DC	• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m
<b>Mains buffering</b>			
• Mains/voltage failure stored energy time	5 ms	<b>Interference immunity against voltage surge</b>	
<b>Processor</b>			
Processor type	Intel Atom E3930 / E3940	• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric
Chipset	SoC	• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Graphic</b>			
Graphics controller	Integrated	<b>Interference immunity to magnetic fields</b>	
<b>Drives</b>			
SSD	Yes; 32 / 64 / 128 GB	• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
<b>Memory</b>			
Type of memory	DDR4 onboard	<b>Emission of conducted and non-conducted interference</b>	
Main memory	2 / 4 GB RAM	• Interference emission via line/AC current cables	EN 61000-6-4:2007 +A1:2011 (industrial environments), EN 61000-6-3:2007 +A1:2011 (residential environments), CISPR 22 Class B, FCC Class A
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	3; Ethernet (2x RJ45, optional 3x RJ45)	<b>Standards, approvals, certificates</b>	
USB port	2x USB 3.0 / 4x USB 3.0	CE mark	Yes
Connection for keyboard/mouse	USB / USB	UL approval	Yes
<b>Video interfaces</b>		RCM (formerly C-TICK)	Yes
• Graphics interface	1x DisplayPort	EAC (formerly Gost-R)	Yes
<b>Industrial Ethernet</b>		FCC	Yes
• Industrial Ethernet interface	2x / 3x Ethernet (RJ45)	EMC	CE, EN 61000-6-4:2007, EN 61000-6-2:2005
- 100 Mbps	Yes	Dust protection	Protection against foreign bodies > 1 mm
- 1000 Mbps	Yes	<b>Ambient conditions</b>	
<b>Integrated Functions</b>		<b>Ambient temperature during operation</b>	
<b>Monitoring functions</b>			
• Temperature monitoring	Yes	• Ambient temperature during operation	0 °C to 55 °C
• Watchdog	Yes	<b>Relative humidity</b>	
• Status LEDs	1x power, 3x user	• Relative humidity	5 ... 85 % at 30 °C, no condensation
• Fan	No	<b>Vibrations</b>	
• Monitoring function via network	Optional	• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 6068-2-6; 5 Hz to 9 Hz: 3.5 mm, 9 Hz to 500 Hz: 9,8 m/s <sup>2</sup>
<b>EMC</b>		<b>Shock testing</b>	
<b>Interference immunity against discharge of static electricity</b>			
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms
<b>Interference immunity against high-frequency electromagnetic fields</b>		<b>Operating systems</b>	
• Interference immunity against high frequency radiation	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6	pre-installed operating system	Windows 10 Enterprise 2016 LTSB or 2019 LTSC 64-bit, MUI
<b>Dimensions</b>		without operating system	Yes; Optional
Width	85 mm		
Height	85 mm		
Depth	41 mm		

**More information**

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-ipc>


## PC-based Automation

Industrial PC

Box PC

### SIMATIC IPC227E

#### Overview

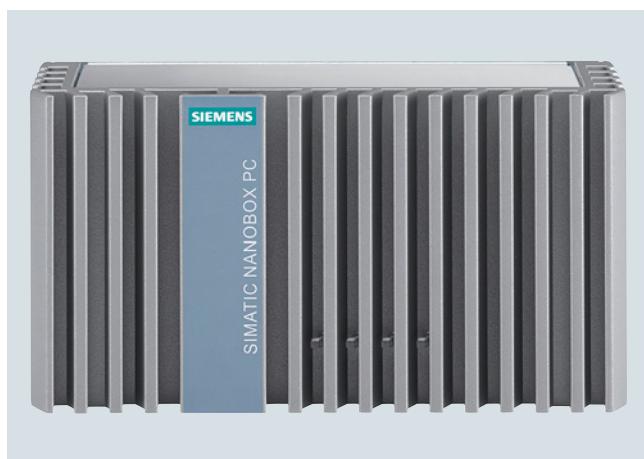

#### **SIMATIC IPC227E (Nanobox PC): The Box PC with optimized performance in compact design – maintenance-free and rugged**

The SIMATIC IPC227E Nanobox PC is an extremely compact and flexible embedded industrial PC.

Thanks to its closed, dust-protected all-metal enclosure, the IPC227E offers maximum industrial functionality for flexible use under harsh conditions – while remaining maintenance-free.

Modern interfaces and the option for expansion via a PCIe slot mean this Box PC can be easily integrated into the automation system.

In the version with pre-installed Industrial Edge Runtime, it also supports modern Edge architectures. In the version with pre-installed Industrial Edge Runtime, it also supports modern Edge architectures. The latest Intel Dual-Core and Quad-Core processors ensure excellent performance here in an ultra-compact design.

#### Ordering data

#### Article No.

<b>SIMATIC IPC227E</b>	6ES7647- 8 B	A	-	E
<u>Processor</u>				
• Celeron N2807 (2C/2T)		1		
• Celeron N2930 (4C/4T)		2		
• Celeron N2807 (2C/2T)/TPM		3		
• Celeron N2930 (4C/4T)/TPM		4		
• Celeron E3845 ET (4C/4T) / TPM		5		
<u>Work memory/NVRAM</u>		6		
• 2 GB		7		
• 4 GB				
• 8 GB				
• 2 GB/NVRAM				
• 4 GB/NVRAM				
• 8 GB/NVRAM				
• 4 GB RAM ET / NVRAM				
<u>Device version/interface</u>		1		
• Basis without COM		2		
• Basis with COM1/2		3		
• PCIe without COM		4		
• PCIe with COM1/2				

#### Article No.

<b>SIMATIC IPC227E</b>	6ES7647- 8 B	-	E
<u>Operating system</u>			
• Without operating system		0	
• Windows Embedded Standard 7 E SP1, English, 32-bit		1	
• Windows Embedded Standard 7 E SP1, English, 64-bit		2	
• Windows Embedded Standard 7 P SP1, English, 32-bit		3	
• Windows Embedded Standard 7 P SP1, English, 64-bit		4	
• Windows 7 Ultimate SP1, 32-bit, MUI (en, de, fr, it, es)		5	
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)		6	
• Windows 10 Enterprise 2016 LTSB, 64-bit, MUI (de, en, es, fr, it)		7	
• Windows 10 IoT Enterprise 2019 LTSC, 64-bit, MUI (de, en, es, fr, it)		8	

**Ordering data****Article No.****SIMATIC IPC227E**Mass storage

- Without
- 256 GB Eco SSD
- 240 GB SSD
- 480 GB SSD
- 60 GB SSD ET
- 4 GB CFast
- 8 GB CFast
- 16 GB CFast
- 128 GB CFast
- 320 GB HDD

6ES7647- 8 B  - A  
E  
C  
D  
H  
K  
L  
M  
N  
RSoftware

- Without SIMATIC software
- CPU 1507S V20.8
- WinCC RT Advanced V16 Update 1, 128 PT
- WinCC RT Advanced V16 Update 1, 512 PT
- WinCC RT Advanced V16 Update 1, 2 048 PT
- WinCC RT Advanced V16 Update 1, 4 096 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 128 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 512 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 2 048 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 4 096 PT
- SIMATIC Industrial OS V2
- Starter system, with CPU1507S and WinCC RT Advanced, without licenses
- Industrial Edge Sinumerik

A  
B  
D  
E  
F  
G  
J  
K  
L  
M  
N  
S  
V**Article No.****SIMATIC IPC227E**Mounting accessories

- Top hat DIN rail
- Wall mounting
- Portrait mounting
- DIN rail mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2
- Wall mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2
- Portrait mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2

6ES7647- 8 B  - 1  
2  
3  
4  
5  
6

5

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

**SIMATIC IPC227E (Nanobox PC) with pre-installed Industrial Edge Runtime**

1 x DisplayPort;  
 2x 10/100/1000 Mbps Ethernet RJ45;  
 1 x USB 3.0, 3 x USB 2.0;  
 CFast slot;  
 24 V DC industrial power supply Industrial Edge (SIMATIC)

6ES7647-8BD31-0CW1

# PC-based Automation

Industrial PC

Box PC

## SIMATIC IPC227E

### Technical specifications

Article number	<b>6ES7647-8B...-....</b> SIMATIC IPC227E (Nanobox PC)	Article number	<b>6ES7647-8B...-....</b> SIMATIC IPC227E (Nanobox PC)
<b>Installation type/mounting</b>			
Mounting	DIN rail, wall mounting, portrait mounting		
Design	Box PC, built-in unit		
<b>Supply voltage</b>			
Type of supply voltage	24 V DC		
<b>Mains buffering</b>			
• Mains/voltage failure stored energy time	20 ms		
<b>Processor</b>			
Processor type	Intel Celeron N2807 / N2930, Intel Atom E3845		
Chipset	SoC		
<b>Graphic</b>			
Graphics controller	Integrated		
<b>Drives</b>			
Hard disk	2.5" SATA ≥ 320 GB		
SSD	Yes; 256 Eco / 240 / 480 GB		
<b>Memory</b>			
Type of memory	DDR3L SO-DIMM		
Main memory	2 / 4 / 8 GB		
<b>Data areas and their retentivity</b>			
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time; optional		
<b>Hardware configuration</b>			
<b>Slots</b>			
• free slots	1x PCIe (x1) (optional)		
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2x Ethernet (RJ45)		
USB port	1x USB 3.0 / 3x USB 2.0		
Connection for keyboard/mouse	USB / USB		
serial interface	Without / 2x COM (RS 232 / 422 / 485), selectable in the BIOS		
<b>Video interfaces</b>			
• Graphics interface	1x DisplayPort		
<b>Industrial Ethernet</b>			
• Industrial Ethernet interface	2x Ethernet (RJ45)		
- 100 Mbps	Yes		
- 1000 Mbps	Yes		
<b>Integrated Functions</b>			
<b>Monitoring functions</b>			
• Temperature monitoring	Yes		
• Watchdog	Yes		
• Status LEDs	1x power, 3x user		
• Fan	No		
• Monitoring function via network	Optional		
<b>EMC</b>			
<b>Interference immunity against discharge of static electricity</b>			
• Interference immunity against discharge of static electricity		±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	
<b>Interference immunity against high-frequency electromagnetic fields</b>			
• Interference immunity against high frequency radiation		10 V/m for 80 - 1 000 MHz and 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6	
<b>Interference immunity to cable-borne interference</b>			
• Interference immunity on supply cables		±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	
• Interference immunity on signal cables >30m		±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	
• Interference immunity on signal cables < 30m		±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	
<b>Interference immunity against voltage surge</b>			
• asymmetric interference		±2 kV acc. to IEC 61000-4-5, surge asymmetric	
• symmetric interference		±1 kV acc. to IEC 61000-4-5, surge symmetric	
<b>Interference immunity to magnetic fields</b>			
• Interference immunity to magnetic fields at 50 Hz		100 A/m; to IEC 61000-4-8	
<b>Emission of conducted and non-conducted interference</b>			
• Interference emission via line/ AC current cables		EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A	

## Technical specifications

Article number	<b>6ES7647-8B...-....</b> SIMATIC IPC227E (Nanobox PC)
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
• UL 508	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
FCC	Yes
EMC	CE, EN 61000-6-4:2007, EN 61000-6-2:2005
Dust protection	Protection against foreign bodies > 1 mm
<b>Use in hazardous areas</b>	
• ATEX Zone 2	Yes; Optional
• IECEx Zone 2	Yes; Optional
• cULus Class I Zone 2, Division 2	Yes; Optional
<b>Marine approval</b>	
• Germanischer Lloyd (GL)	Yes
• American Bureau of Shipping (ABS)	Yes
• Bureau Veritas (BV)	Yes
• Det Norske Veritas (DNV)	Yes
• Korean Register of Shipping (KRS)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes
• Chinese Classification Society (CCS)	Yes

Article number	<b>6ES7647-8B...-....</b> SIMATIC IPC227E (Nanobox PC)
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	0 °C up to 60 °C (-20 °C as option)
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz; 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>	
• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate 32-bit / 64-bit, MUI; Windows Embedded Standard 7 E/P, 32-bit / 64-bit
Additional info on operating system without operating system	optional: SIMATIC Industrial OS Yes; Optional
<b>Software</b>	
SIMATIC Software	Optionally with pre-installed SIMATIC WinCC RT Advanced / Software Controller CPU 1500S software bundle
<b>Dimensions</b>	
Width	191 mm
Height	100 mm
Depth	60 mm

### More information

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-ipc>

### **PC-based Automation**

Industrial PC

## Box PC

SIMATIC IPC327E

## Overview



**SIMATIC IPC327E**

Based on Intel Celeron process technology, the SIMATIC IPC327E Box PC represents a new IPC platform which has been specifically developed for cost-optimized, PC-based applications in industrial and industry-oriented environments.

It is above all distinguished by a large number of interfaces for easy connection to existing and new systems, fast availability from stock as well as a fanless industrial design.

## Ordering data

Article No.

<b>SIMATIC IPC327E</b>	<b>6AG4022 - 0 A</b>	-
1 x display port graphic		
1 x VGA port graphic		
2x 10/100/1 000 Mbps		
Ethernet RJ45		
2 x USB 3.0; 4 x USB 2.0;		
6 x serial ports (COM)		
<b>Processor</b>		
• Celeron N3160 (4C/4T)	A	
<b>Work memory</b>		
• 4 GB RAM	2	
• 8 GB RAM	3	
<b>Expansions/interfaces</b>		
• 1x mPCIe / 1x mSata	1	
<b>Operating system</b>		
• Without operating system	0	
• Windows Ultimate SP1, 64-bit MUI (en, de, fr, it, es)	1	
<b>Drives</b>		
• Without	A	
• 500 GB HDD	B	
• 256 GB SSD	C	
<b>Power supply</b>		
• 24 V DC	A	
<b>Mounting accessories</b>		
• Installation, VESA installation	1	

**Note:**

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configuration>

**Selection and ordering data**

**Preferred variants  
(available ex stock)**

**SIMATIC IPC327E****Configuration 1**

Intel Celeron Quad Core N3160 (1.6 GHz)  
500 GB HDD SATA, internal  
4 GB RAM (1 x 4 GB)  
Without operating system  
24 V DC; interfaces:  
2 x Gbit Ethernet (RJ45),  
6 x USB 2.0; 2 x USB 3.0;  
6 x serial, 1 x Display Port,  
1 x VGA, audio

**6AG4022-0AA21-0BA1****Configuration 2**

Intel Celeron Quad Core N3160 (1.6 GHz)  
500 GB HDD SATA, internal  
4 GB RAM (1 x 4 GB)  
Windows 7 Ultimate 64-bit  
24 V DC  
Interfaces: 2 x Gbit Ethernet (RJ45),  
6 x USB 2.0; 2 x USB 3.0; 6 x serial,  
1 x display port, 1 x VGA, audio

**6AG4022-0AA21-1BA1****Configuration 3**

Intel Celeron Quad Core N3160 (1.6 GHz)  
256 GB SSD, internal  
4 GB RAM (1 x 4 GB)  
Without operating system  
24 V DC  
Interfaces: 2 x Gbit Ethernet (RJ45),  
6 x USB 2.0; 2 x USB 3.0; 6 x serial,  
1 x display port, 1 x VGA, audio

**6AG4022-0AA21-0CA1****Configuration 4**

Intel Celeron Quad Core N3160 (1.6 GHz)  
256 GB SSD, internal  
4 GB RAM (1 x 4 GB)  
Windows 7 Ultimate 64-bit  
24 V DC  
Interfaces: 2 x Gbit Ethernet (RJ45),  
6 x USB 2.0; 2 x USB 3.0; 6 x serial,  
1 x display port, 1 x VGA, audio

**6AG4022-0AA21-1CA1****Configuration 5**

Intel Celeron Quad Core N3160 (1.6 GHz)  
256 GB SSD, internal  
4 GB RAM (1 x 4 GB)  
Windows 10 Enterprise 2016 LTSB,  
64-bit, MUI  
24 V DC  
Interfaces: 2 x Gbit Ethernet (RJ45),  
6 x USB 2.0; 2 x USB 3.0; 6 x serial,  
1 x display port, 1 x VGA, audio

**6AG4022-0AA21-2CA1****Technical specifications**

Article number	<b>6AG4022-0A...-....</b> SIMATIC IPC327E
<b>General information</b>	
Product type designation	IPC327E
<b>Installation type/mounting</b>	
Mounting	Standard mounting rail, wall mounting (horizontal and vertical)
Design	Box PC, built-in unit
<b>Supply voltage</b>	
Type of supply voltage	24 V DC
<b>Mains buffering</b>	
• Mains/voltage failure stored energy time	10 ms
<b>Processor</b>	
Processor type	Intel Celeron N3160
Chipset	SoC
<b>Graphic</b>	
Graphics controller	Integrated
<b>Drives</b>	
Hard disk	1 TB HDD
SSD	Yes; 256 GB SSD
<b>Memory</b>	
Type of memory	DDR3L
Main memory	4 GB, 8 GB
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	1x mPCIe (half-size), 1x mSATA (full-size)
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	2; 2x Ethernet (RJ45)
USB port	4x USB 2.0, 2x USB 3.0 (high current)
Connection for keyboard/mouse serial interface	USB / USB 6x COM (4x RS 232, 2x RS 232 / 422 / 485 switchable)
<b>Video interfaces</b>	
• Graphics interface	1x DisplayPort, 1x VGA
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	2x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes
<b>Integrated Functions</b>	
<b>Monitoring functions</b>	
• Temperature monitoring	Yes
• Watchdog	Yes
• Status LEDs	POWER, HDD
• Fan	No

# PC-based Automation

Industrial PC

Box PC

## SIMATIC IPC327E

### Technical specifications

Article number	<b>6AG4022-0A....</b> SIMATIC IPC327E	Article number	<b>6AG4022-0A....</b> SIMATIC IPC327E
<b>EMC</b>			
<b>Interference immunity against discharge of static electricity</b>		<b>Ambient conditions</b> <b>Ambient temperature during operation</b> <ul style="list-style-type: none"> <li>Ambient temperature during operation</li> </ul>	
<ul style="list-style-type: none"> <li>Interference immunity against discharge of static electricity</li> </ul>		<ul style="list-style-type: none"> <li>Ambient temperature during operation</li> </ul>	
<b>Interference immunity against high-frequency electromagnetic fields</b>		<ul style="list-style-type: none"> <li>0 °C to 50 °C</li> </ul>	
<ul style="list-style-type: none"> <li>Interference immunity against high frequency radiation</li> </ul>		<b>Relative humidity</b>	
<ul style="list-style-type: none"> <li>Interference immunity against high frequency radiation</li> </ul>		<ul style="list-style-type: none"> <li>Relative humidity</li> </ul>	
<b>Interference immunity to cable-borne interference</b>		<ul style="list-style-type: none"> <li>Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)</li> </ul>	
<ul style="list-style-type: none"> <li>Interference immunity on supply cables</li> </ul>		<b>Vibrations</b>	
<ul style="list-style-type: none"> <li>Interference immunity on signal cables &gt;30m</li> </ul>		<ul style="list-style-type: none"> <li>Vibration resistance during operation acc. to IEC 60068-2-6</li> </ul>	
<ul style="list-style-type: none"> <li>Interference immunity on signal cables &lt; 30m</li> </ul>		<ul style="list-style-type: none"> <li>tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s<sup>2</sup> (1 g)</li> </ul>	
<b>Interference immunity against voltage surge</b>		<b>Shock testing</b>	
<ul style="list-style-type: none"> <li>asymmetric interference</li> </ul>		<ul style="list-style-type: none"> <li>Shock load during operation</li> </ul>	
<ul style="list-style-type: none"> <li>symmetric interference</li> </ul>		<ul style="list-style-type: none"> <li>Tested in accordance with IEC 60068-2-27: With SSD: 150 m/s<sup>2</sup>, 11 ms; with HDD: 9.8 m/s<sup>2</sup>, 20 ms</li> </ul>	
<b>Interference immunity to magnetic fields</b>		<b>Operating systems</b>	
<ul style="list-style-type: none"> <li>Interference immunity to magnetic fields at 50 Hz</li> </ul>		<ul style="list-style-type: none"> <li>pre-installed operating system</li> </ul>	
100 A/m; to IEC 61000-4-8		<ul style="list-style-type: none"> <li>Windows 7 Ultimate (Multi-Language), 64 bit; Windows 10 Enterprise 2016 LTSB, 64 bit</li> </ul>	
<b>Standards, approvals, certificates</b>		<ul style="list-style-type: none"> <li>without operating system</li> </ul>	
CE mark	Yes	<ul style="list-style-type: none"> <li>Yes; Optional</li> </ul>	
UL approval	Yes		
cULus	Yes		
RCM (formerly C-TICK)	Yes		
EAC (formerly Gost-R)	Yes		
FCC	Yes		
Dust protection	Protection against foreign bodies > 1 mm		

### More information

Further information can be found on the Internet at:

<http://www.siemens.com/simatic-pc>

## Overview



### **SIMATIC IPC427E (Microbox PC): The powerful embedded IPC – maintenance-free with versatile configuration**

Ready-to-run, complete solution:

- Ultra-compact
- Maintenance-free
- 6th Generation Intel Core i technology

## Ordering data

### Article No.

SIMATIC IPC427E (Box PC) <sup>1)</sup>	6AG4141-	■ ■ ■ - ■ ■ ■ ■
<u>Processor and fieldbus</u>		
• Celeron G3902E; 2 x Gigabit Ethernet (IE/PN)	0	
• Celeron G3902E; 3 x Gigabit Ethernet (IE/PN)	1	
• Core i3-6102E; 3 x Gigabit Ethernet (IE/PN)	3	
• Core i5-6442EQ; 3 x Gigabit Ethernet (IE/PN)	5	
• Xeon E3-1505L; 3 x Gigabit Ethernet (IE/PN)	7	
<u>Mounting accessories/ATEX</u>		
• DIN rail mounting	B	
• Wall mounting	C	
• Portrait mounting	D	
• DIN rail mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	F	
• Wall mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	G	
• Portrait mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	H	
<u>Work memory/NVRAM/ECC</u>	A	
• 4 GB	A	
• 8 GB	B	
• 16 GB	C	
• 8 GB with ECC	D	
• 16 GB with ECC	E	
• 4 GB and NVRAM	F	
• 8 GB and NVRAM	G	
• 16 GB and NVRAM	H	
• 8 GB with ECC and NVRAM	J	
• 16 GB with ECC and NVRAM	K	

### Article No.

SIMATIC IPC427E (Box PC) <sup>1)</sup>	6AG4141-	■ ■ ■ - ■ ■ ■ ■
<u>Expansions/interfaces</u>		
• No RS232/RS485, without PCIe	0	
• No RS232/RS485 and one PCIe	1	
• No RS232/RS485 and two PCIe	2	
• Two RS232/RS485, without PCIe	3	
• Two RS232/RS485 and one PCIe	4	
• Two RS232/RS485 and two PCIe	5	
<u>Operating system</u>		
• Without operating system	0	
• Windows Embedded Standard 7 SP1, English, 32-bit	1	
• Windows Embedded Standard 7 SP1, English, 64-bit	2	
• Windows Embedded Standard 7 SP1, English, 64-bit, multi-touch	3	
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	4	
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for the Celeron, Core i3 and Core i5 processors	5	
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for Xeon processor	6	
• Windows 10 Enterprise 2016 LTSB (64-bit) for Celeron, Core i3 and Core i5 processors	7	
• Windows 10 Enterprise 2016 LTSB (64-bit) for Xeon processors	8	

**PC-based Automation**

Industrial PC

Box PC

**SIMATIC IPC427E**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>SIMATIC IPC427E (Box PC)<sup>1)</sup></b>	<b>6AG4141-</b>  - 	<b>SIMATIC IPC427E (Box PC)<sup>1)</sup></b>
<u>Mass storage, externally accessible</u>		<u>SIMATIC Software (bundles/starter system)</u>
<ul style="list-style-type: none"> <li>Without external mass storage</li> <li>CFast 2 GB without operating system</li> <li>CFast 4 GB without operating system</li> <li>CFast 8 GB (only optionally with operating system/software if no internal mass storage or HDD)</li> <li>CFast 16 GB (only optionally with operating system/software if no internal mass storage or HDD)</li> <li>CFast 128 GB (only optionally with operating system/software if no internal mass storage or HDD)</li> </ul>	0 1 2 3 4 5	<ul style="list-style-type: none"> <li>Without SIMATIC software</li> <li>CPU 1507S</li> <li>WinCC RT Advanced V16 Update 1           <ul style="list-style-type: none"> <li>- 128 PT</li> <li>- 512 PT</li> <li>- 2 048 PT</li> <li>- 4 096 PT</li> <li>- 8 192 PT</li> </ul> </li> </ul>
<u>Mass storage, internal</u>	<b>A</b> <b>D</b> <b>F</b> <b>G</b> <b>J</b>	<u>CPU 1507S / WinCC RT Advanced V16 Update 1</u> <ul style="list-style-type: none"> <li>- 128 PT</li> <li>- 512 PT</li> <li>- 2 048 PT</li> <li>- 4 096 PT</li> <li>- 8 192 PT</li> </ul>
		<ul style="list-style-type: none"> <li>IPC starter system with CPU 1507S and WinCC RT Advanced, without licenses</li> </ul>
		<u>Power supply</u>
		<ul style="list-style-type: none"> <li>24 V DC industrial power supply</li> <li>24 V DC and TPM<sup>2)</sup></li> </ul>
		0 8

<sup>1)</sup> For an up-to-date overview, see the SIMATIC PC Online Configurator: <http://www.siemens.com/ipc-configurators>

<sup>2)</sup> TPM = Trusted Platform Module

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

**Technical specifications**

Article number	<b>6AG4141-.....</b> SIMATIC IPC427E (MicroBOX PC)
<b>General information</b>	
Product type designation	IPC427E
<b>Installation type/mounting</b>	
Mounting	DIN rail, wall mounting, portrait mounting
Design	Box PC, built-in unit
<b>Supply voltage</b>	
Type of supply voltage	24 V DC
<b>Mains buffering</b>	
• Mains/voltage failure stored energy time	20 ms
<b>Processor</b>	
Processor type	Celeron G3902 (2C/2T, 1.6 GHz, 2 MB Cache); Core i3-6102E (2C/4T, 1.9 GHz, 3 MB Cache); Core i5-6442EQ (4C/4T, 1.9 (2.7) GHz, 6 MB Cache, iAMT); Xeon E3-1505L v5 (4C/8T, 2.0 (2.8) GHz, 8 MB Cache, iAMT)
Chipset	Intel C236 / Intel H110
<b>Graphic</b>	
Graphics controller	Intel HD graphics controller
<b>Drives</b>	
Hard disk	2.5" SATA ≥ 320 GB
SSD	Yes; 128 / 240 / 480 GB
<b>Memory</b>	
Type of memory	DDR4-2400 SO-DIMM
Main memory	4 / 8 / 16 GB, ECC optional
<b>Data areas and their retentivity</b>	
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time; optional
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	2x PCIe; optional: 1x PCIe (x4); 2x PCIe (x1, x4), with card retainer
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	3; Ethernet (2x RJ45, optional 3x RJ45)
USB port	4x USB 3.0
Connection for keyboard/mouse	USB / USB
serial interface	Without / 2x COM (RS 232 / 485 / 422; switchable)
<b>Video interfaces</b>	
• Graphics interface	2x DisplayPort
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	3x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes

Article number	<b>6AG4141-.....</b> SIMATIC IPC427E (MicroBOX PC)
<b>Integrated Functions</b>	
<b>Monitoring functions</b>	
• Temperature monitoring	Yes
• Watchdog	Yes
• Status LEDs	1x power, 3x user
• Fan	No
• Monitoring function via network	Optional
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>	
• Interference immunity against high frequency radiation	10 V/m for 80 - 1 000 MHz and 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>	
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m
<b>Interference immunity against voltage surge</b>	
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	
• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>	
• Interference emission via line/ AC current cables	EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A

# PC-based Automation

Industrial PC

Box PC

## SIMATIC IPC427E

### Technical specifications

Article number	<b>6AG4141-.....-</b> SIMATIC IPC427E (MicroBOX PC)
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
• UL 508	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
FCC	Yes
EMC	CE, EN 55022A, EN 61000-6-4, EN 61000-6-2
<b>Use in hazardous areas</b>	
• ATEX Zone 2	Yes; Optional
• IECEx Zone 2	Yes; Optional
• cULus Class I Zone 2, Division 2	Yes; Optional
<b>Marine approval</b>	
• Germanischer Lloyd (GL)	Yes
• American Bureau of Shipping (ABS)	Yes
• Bureau Veritas (BV)	Yes
• Det Norske Veritas (DNV)	Yes
• Korean Register of Shipping (KRS)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• Ambient temperature during operation	0 °C to 55 °C
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5% to 80% at 25 °C (no condensation), Storage: 5% to 95% at 25 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>	
• Shock load during operation	Tested to DIN IEC 60068-2-29: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate (Multi-Language) 64-bit, Windows Embedded Standard 7 E/P 32-bit / 64-bit, Windows 10
without operating system	Yes; Optional
<b>Software</b>	
SIMATIC Software	Optionally with pre-installed SIMATIC WinCC RT Advanced / Software Controller CPU 1500S software bundle
<b>Dimensions</b>	
Width	262 mm
Height	139.7 mm
Depth	55.5 mm

**Overview**

The SIMATIC IPC527G box PC is a new product in the SIMATIC Industrial PC portfolio, which is characterized by high performance and flexibility at an extremely attractive price.

Powerful processors (Intel Core i Desktop CPUs), numerous interfaces, and the support of existing systems make the SIMATIC IPC527G a robust and low-cost platform for a wide range of industrial applications.

**Ordering data****Article No.****SIMATIC IPC527G**

All-metal enclosure for high EMC and mechanical ruggedness, flexible installation: Desktop, wall, portrait and tower mounting, opening of the enclosure cover for expansion and replacement of PC components (e.g. PC cards or HDD) without a tool, dust protection through overpressure ventilation, front LEDs: POWER, HDD

Processor

- Pentium G4400 ((2C/2T)  
3.3 GHz, 3 MB cache)
- Core i5-6500 ((4C/4T)  
3.2 (3.6) GHz, 6 MB cache)
- Core i7-6700 ((4C/4T)  
3.4 (4.0) GHz, 8 MB cache)

Drives

- 1 TB HDD
- 256 GB SSD
- 512 GB SSD
- Without drive, prepared for 1x 2.5" SATA

Work memory

- 4 GB DDR4 RAM
- 8 GB DDR4 RAM
- 16 GB DDR4 RAM

**Article No.****6AG4025- 0 ■■■ 0 - ■■■ 0****A****C****D****B****E****F****L****1****2****3****Article No.****6AG4025- 0 ■■■ 0 - ■■■ 0****0****1****2****3****4****5****6****A****B****C****A****B****C****D****SIMATIC IPC527G**Operating system

- Without operating system
- Windows Ultimate SP1, 32-bit MUI (en, de, fr, es, it)
- Windows Ultimate SP1, 64-bit MUI (en, de, fr, es, it)
- Windows 10 Enterprise LTSB 2016, 64-bit MUI (en, de, fr, es, it) for Pentium, Core i5
- Windows 10 Enterprise LTSB 2016, 64-bit MUI (en, de, fr, es, it) for Pentium Core i7
- Windows 10 Enterprise LTSC 2019, 64-bit MUI (de, en, fr, sp, it) for Pentium, Core i5
- Windows 10 Enterprise LTSC 2019, 64-bit, MUI (de, en, fr, it, es) for Core i7

Expansion

- 1x PCIe x16
- 1x PCIe x16; 1x PCIe x1; 2x PCI
- 1x PCIe x 16; 1x PCIe x4, 2x PCIe x1

Specific expansions:

- Without
- 2x RS232, 2x USB2.0 additionally
- 1x Gbit LAN additionally (1 PCIe slot occupied)
- 1 x Gbit LAN (1x PCIe slot occupied) and 2x RS232; 2x USB2.0 additionally

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-Configurators>

# PC-based Automation

Industrial PC

Box PC

## SIMATIC IPC527G

Ordering data	Article No.
<p><i>Preferred variants</i> <b>SIMATIC IPC527G</b></p> <p>All-metal enclosure for high EMC and mechanical ruggedness, flexible installation: Desktop, wall, portrait and tower mounting, opening of the enclosure cover for expansion and replacement of PC components (e.g. PC cards or HDD) without a tool, dust protection through overpressure ventilation, front LEDs: POWER, HDD; slots: 1 x PCIe x16, 1 x PCIe x1, 2 x PCI or 1 x PCIe x16, 1 x PCIe x4, 2 x PCIe x1 interfaces: 4 x USB 3.0, 3 x USB 2.0 (2 x front, 1 x internal), 2 x GB Ethernet, 2x RS232/485/422 selectable, 2x RS232, 1x 8-bit DIO, 1x DP, 1x VGA, audio</p> <ul style="list-style-type: none"> <li>• Intel Pentium G4400, 4 GB RAM, 1 TB HDD mass storage</li> <li>• Intel Core i5-6500, 8 GB RAM, 1 TB HDD mass storage</li> <li>• Intel Core i5-6500, 8 GB RAM, 1 TB HDD mass storage, Windows 7 Ultimate</li> <li>• Intel Core i5-6500, 8 GB RAM, 256 GB SSD mass storage, Windows 7 Ultimate</li> <li>• Intel Core i5-6500, 8 GB RAM, 256 GB SSD mass storage, Windows 10 Enterprise LTSB 2016</li> <li>• Intel Core i7-6700, 8 GB RAM, 512 GB SSD mass storage, Windows 7 Ultimate</li> <li>• Intel Core i7-6700, 8 GB RAM, 512 GB SSD mass storage, Windows 10 Enterprise LTSB 2016</li> <li>• Intel Core i5-6500, 8 GB RAM, 256 GB SSD mass storage, Windows 10 Enterprise LTSB 2019</li> <li>• Intel Core i7-6700, 8 GB RAM, 256 GB SSD mass storage, Windows 10 Enterprise LTSB 2019</li> </ul>	<b>6AG4025-0AB10-0BB0</b>

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

**Technical specifications**

Article number	<b>6AG4025-0...0-...</b> SIMATIC IPC527G (Box PC)
<b>Installation type/mounting</b>	
Mounting	Wall mounting, portrait mounting, desktop mounting
Design	Box PC, built-in unit
<b>Supply voltage</b>	
Type of supply voltage	100/240V AC (autorange) 50/60 Hz
<b>Line frequency</b>	
• Rated value 50 Hz	Yes
• Rated value 60 Hz	Yes
<b>Processor</b>	
Processor type	Core i7-6700 (4C/8T, 3.4 (4.0) GHz, 8 MB cache); Core i5-6500 (4C/4T, 3.2 (3.6) GHz, 6 MB cache); Pentium G4400 (2C/2T, 3.3 GHz, 3 MB cache)
Chipset	Intel H110
<b>Graphic</b>	
Graphics controller	Onboard Intel HD graphics 530/510 integrated in processor
<b>Drives</b>	
Hard disk	1 TB HDD
SSD	Yes; Optional
<b>Memory</b>	
Type of memory	DDR4-2133 SO-DIMM
Main memory	4 / 8 / 16 GB, supports up to 32 GB
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	1x PCIe (x16), optional 1x PCIe (x1), 2x PCI additionally
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	3; 3x Gigabit Ethernet (IE/PN), RJ45 optional; 2x Gigabit Ethernet (IE/PN), RJ45 basic configuration
Number of PROFINET interfaces	3; 2 ports base configuration, 3 ports optional
USB port	4x USB 3.0, 1x USB 2.0 internal, 2x USB 2.0 optional
Connection for keyboard/mouse serial interface	USB / USB 2x RS 232 / 485 / 422 combined, 2x RS 232 optional
Multimedia	
• Audio In/Out	Yes
• Microphone In	Yes
<b>Video interfaces</b>	
• Graphics interface	1x DisplayPort, 1x VGA
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	2x Ethernet (RJ45), 1x Ethernet (RJ45) additional option
- 100 Mbps	Yes
- 1000 Mbps	Yes

Article number	<b>6AG4025-0...0-...</b> SIMATIC IPC527G (Box PC)
<b>Integrated Functions</b>	
<b>Monitoring functions</b>	
• Status LEDs	POWER, HDD
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Degree and class of protection</b>	
IP (at the front)	IP20
IP (rear)	IP20
<b>Standards, approvals, certificates</b>	
CE mark	Yes
CSA approval	Yes; No. 61010-1-12, No. 61010-2-201
UL approval	Yes
cULus	Yes; UL 61010-1, UL 61010-2-201
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
FCC	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• Ambient temperature during operation	0 to +45°C
<b>Relative humidity</b>	
• Relative humidity	8 ... 85 % at 30 °C, no condensation
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.0375 mm, 58 Hz to 200 Hz: 4.9 m/s <sup>2</sup>
<b>Shock testing</b>	
• Shock load during operation	Tested in accordance with IEC 60068-2-27: With SSD: 150 m/s <sup>2</sup> , 11 ms; with HDD: 9.8 m/s <sup>2</sup> , 20 ms
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate (Multi-Language) 32-bit / 64-bit; Windows 10 Enterprise 2016 LTSB
Additional info on operating system	Multi-Language User Interface (MUI): 5 languages (English, German, French, Spanish, Italian)
without operating system	Yes
<b>Dimensions</b>	
Width	260 mm
Height	135 mm
Depth	225 mm

# PC-based Automation

Industrial PC

Box PC

## SIMATIC IPC627E

### Overview



### **SIMATIC IPC627E (Box PC): The high-end IPC with maximum performance, functional scope, and expansion capability**

It offers:

- Maximum performance in the smallest space
- Intel Core i technology
- Removable hard disks (RAID1)

### Ordering data

#### Article No.

##### **SIMATIC IPC627E (Box PC)<sup>1)</sup>**

UHD graphics onboard; 2x DP;  
1x DVI-D;  
3x Gigabit Ethernet (IE/PN) RJ45;  
6x USB 3.1 Gen. 2;  
1x serial (COM1);  
RAID controller onboard;  
watchdog, temperature/fan monitoring

Processor:

- Intel Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d)
- Intel Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d); NVRAM
- Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d)
- Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); NVRAM
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT)
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT); NVRAM

Drives:

- HDD 2.5" SATA 320 GB internal
- SSD 2.5" SATA 480 GB internal
- SSD 2.5" SATA 960 GB internal
- RAID1 2x SSD 2.5" SATA 480 GB internal
- RAID1 2x SSD 2.5" SATA 480 GB in removable drive bay
- RAID1 2x SSD 2.5" SATA 960 GB in removable drive bay
- M.2 SSD NVMe 512 GB
- M.2 SSD NVMe 512 GB; HDD 2.5" SATA 320 GB internal
- M.2 SSD NVMe 512 GB; SSD 2.5" SATA 480 GB internal
- M.2 SSD NVMe 512 GB; SSD 2.5" SATA 960 GB internal
- M.2 SSD NVMe 512 GB; RAID1 2x SSD 2.5" SATA 480 GB in removable drive bay
- M.2 SSD NVMe 512 GB; 2 removable drive bays without media

A

B

C

D

G

H

A

C

D

E

G

H

J

K

L

M

Q

S

#### Article No.

##### **SIMATIC IPC627E (Box PC)<sup>1)</sup>**

Memory configuration:

- 4 GB DDR4-2666 (1x 4 GB)
- 8 GB DDR4-2666 (2x 4 GB)
- 16 GB DDR4-2666 (2x 8 GB)
- 32 GB DDR4-2666 (2x 16 GB)
- 64 GB DDR4-2666 (4x 16 GB)

0

1

2

3

4

Power supply:

- 24 V DC industrial power supply
- 110/230 V AC industrial power supply with NAMUR; without power cable
- 110/230 V AC industrial power supply unit with NAMUR; power supply cord Europe
- 110/230 V AC industrial power supply unit with NAMUR; power supply cord USA
- 110/230 V AC industrial power supply unit with NAMUR; power supply cord China

0

1

2

3

4

Operating system:

- Windows 10 Enterprise 2016 LTSB, 64-bit, MUI (en, de, fr, it, es); for Celeron and i3
- Windows 10 Enterprise 2016 LTSB, 64-bit, MUI (en, de, fr, it, es), for Core i7
- Windows 10 IoT Enterprise 2019 LTSC, 64-bit, MUI (en, de, fr, it, es); for Celeron and i3
- Windows 10 IoT Enterprise 2019 LTSC, 64-bit, MUI (en, de, fr, it, sp), for Core i7
- Without operating system

0

1

2

3

8

Ordering data	Article No.	Article No.
<b>SIMATIC IPC627E (Box PC)<sup>1)</sup></b>	6AG4131- 3  -	
Expansion (SW):		
<ul style="list-style-type: none"> <li>Without expansion</li> <li>SIMATIC IPC DiagMonitor included</li> <li>SIMATIC IPC Image &amp; Partition Creator included</li> <li>SIMATIC IPC DiagMonitor, Image &amp; Partition Creator included</li> <li>TPM<sup>2)</sup> (not for Russia)</li> </ul>	A B C D X	
Expansion (HW):		
<ul style="list-style-type: none"> <li>Without expansion (HW)</li> <li>2 x USB in addition (1 slot occupied)</li> <li>Device without CMOS battery (CR2450N)</li> </ul>	A B C	
2nd expansion (HW):		
<ul style="list-style-type: none"> <li>2 x PCI</li> <li>1 x PCIe (x16); 1 x PCI</li> <li>1 x PCIe (x16); 1 x PCIe (x4)</li> <li>3 x PCI, 2 x PCIe (x16, x4)</li> <li>5 x PCIe (1 x16, 1 x4, 3 x1)</li> <li>2 x PCI; enclosure painted</li> <li>1 x PCIe (x16), 1 x PCI; enclosure painted</li> <li>2 x PCIe (x16, x4); enclosure painted</li> </ul>	0 1 2 3 4 5 6 7	
<b>Accessories</b>		
<b>Memory expansion</b>		
<ul style="list-style-type: none"> <li>4 GB DDR4 2666 SDRAM, DIMM</li> <li>8 GB DDR4 2666 SDRAM, DIMM</li> <li>16 GB DDR4 2666 SDRAM, DIMM</li> </ul>		
6ES7648-2AL60-0QA0 6ES7648-2AL70-0QA0 6ES7648-2AL80-0QA0		
<b>Assembly kit for portrait mounting</b>		
<ul style="list-style-type: none"> <li>Upward or downward interface outlet (2-slot design)</li> <li>Interface outlet on front (2-slot design)</li> <li>Upward or downward interface outlet (5-slot design)</li> <li>Interface outlet on front (5-slot design)</li> </ul>		
6ES7648-1AA10-2YA0 6ES7648-1AA10-2YB0 6ES7648-1AA30-2YA0 6ES7648-1AA30-2YB0		
<b>SIMATIC PC power cable</b>		
For Box PC and Panel PC, 230 V AC, angled, 3 m		
<ul style="list-style-type: none"> <li>For Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria, Finland</li> <li>For United Kingdom</li> <li>For Switzerland</li> <li>For the USA</li> <li>For Italy</li> <li>For China</li> </ul>		
6ES7900-1AA00-0XA0 6ES7900-1BA00-0XA0 6ES7900-1CA00-0XA0 6ES7900-1DA00-0XA0 6ES7900-1EA00-0XA0 6ES7900-1FA00-0XA0		

<sup>1)</sup> For an up-to-date overview, see the SIMATIC PC Online Configurator:  
<https://www.siemens.com/ipc-configurators>

<sup>2)</sup> TPM = Trusted Platform Module

#### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

# PC-based Automation

Industrial PC

Box PC

## SIMATIC IPC627E

### Technical specifications

Article number	<b>6AG4131-3....-....</b> SIMATIC IPC627E (Box PC)	Article number	<b>6AG4131-3....-....</b> SIMATIC IPC627E (Box PC)		
<b>Installation type/mounting</b>					
Mounting	Wall mounting, portrait mounting	Monitoring functions			
Design	Box PC, built-in unit	<ul style="list-style-type: none"> <li>Temperature monitoring</li> <li>Watchdog</li> <li>Status LEDs</li> <li>Fan</li> <li>Monitoring function via network</li> </ul>	Yes Yes 1x power, 3x user Yes Optional		
<b>Supply voltage</b>					
Type of supply voltage	100/240 V AC (autorange); 24 V DC				
<b>Line frequency</b>					
<ul style="list-style-type: none"> <li>Rated value 50 Hz</li> <li>Rated value 60 Hz</li> </ul>	Yes Yes				
<b>Mains buffering</b>					
• Mains/voltage failure stored energy time	20 ms				
<b>Processor</b>					
Processor type	Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d); Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT)				
Chipset	Intel C246				
<b>Graphic</b>					
Graphics controller	Intel UHD Graphics 630 (Core i); Intel UHD Graphics 610 (Celeron)				
<b>Drives</b>					
Hard disk	2.5" SATA ≥ 320 GB				
SSD	Yes; SSD M.2 NVMe 512 GB; SSD 2.5" SATA 480 / 960 GB; RAID1 2x SSD 2.5" SATA 480 / 960 GB in removable drive bay				
<b>Memory</b>					
Type of memory	DDR4-2666 DIMM				
Main memory	4 / 8 / 16 / 32 / 64 GB				
<b>Data areas and their retentivity</b>					
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time				
<b>Hardware configuration</b>					
<b>Slots</b>					
<ul style="list-style-type: none"> <li>free slots</li> </ul>	2x PCI; optional: 1x PCI & 1x PCIe (x16); 2x PCIe (x4, x16); 3x PCI & 2x PCIe (x16, x4); 5x PCIe (1x16, 2x4, 2x1); with card retainer				
<b>Interfaces</b>					
Number of industrial Ethernet interfaces	3; 3x Ethernet (RJ45)				
USB port	6x USB 3.1 Gen. 2 (2x type C)				
Connection for keyboard/mouse	USB / USB				
serial interface	1x COM				
<b>Video interfaces</b>					
<ul style="list-style-type: none"> <li>Graphics interface</li> </ul>	2x DisplayPort; 1x DVI-D				
<b>Industrial Ethernet</b>					
<ul style="list-style-type: none"> <li>Industrial Ethernet interface           <ul style="list-style-type: none"> <li>- 100 Mbps</li> <li>- 1000 Mbps</li> </ul> </li> </ul>	3x Ethernet (RJ45) Yes Yes				
<b>Integrated Functions</b>					
<b>Monitoring functions</b>					
<b>EMC</b>					
<b>Interference immunity against discharge of static electricity</b>					
<ul style="list-style-type: none"> <li>Interference immunity against discharge of static electricity</li> </ul>					
<b>Interference immunity against high-frequency electromagnetic fields</b>					
<ul style="list-style-type: none"> <li>Interference immunity against high frequency radiation</li> </ul>					
<b>Interference immunity to cable-borne interference</b>					
<ul style="list-style-type: none"> <li>Interference immunity on supply cables</li> </ul>					
<ul style="list-style-type: none"> <li>Interference immunity on signal cables &gt;30m</li> </ul>					
<ul style="list-style-type: none"> <li>Interference immunity on signal cables &lt; 30m</li> </ul>					
<b>Interference immunity against voltage surge</b>					
<ul style="list-style-type: none"> <li>asymmetric interference</li> </ul>					
<ul style="list-style-type: none"> <li>symmetric interference</li> </ul>					
<b>Interference immunity to magnetic fields</b>					
<ul style="list-style-type: none"> <li>Interference immunity to magnetic fields at 50 Hz</li> </ul>					
<b>Emission of conducted and non-conducted interference</b>					
<ul style="list-style-type: none"> <li>Interference emission via line/AC current cables</li> </ul>					

## Technical specifications

Article number	<b>6AG4131-3....-....</b> SIMATIC IPC627E (Box PC)
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
FCC	Yes
EMC	CE, EN 61000-6-3:2007 +A1:2011, EN 61000-6-2:2005
<b>Marine approval</b>	
• American Bureau of Shipping (ABS)	Yes
• Det Norske Veritas (DNV)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• Ambient temperature during operation	+5 °C up to 55 °C
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5% to 80% at 25 °C (no condensation), Storage: 5% to 95% at 25 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm; 58 Hz to 500 Hz 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>	
• Shock load during operation	Tested to DIN IEC 60068-2-29: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks
<b>Operating systems</b>	
pre-installed operating system	Windows 10 Enterprise 2016 LTSB or 2019 LTSC 64-bit, MUI
without operating system	Yes; Optional
<b>Software</b>	
SIMATIC Software	Optional package with SIMATIC WinCC
<b>Dimensions</b>	
Width	314 mm
Height	93 mm; For variant 5x PCI(e): 155 mm
Depth	301 mm; incl. mounting rail

More information is available on the Internet at:

<http://www.siemens.com/simatic-pc>

## PC-based Automation

### Industrial PC

#### Panel PC

##### Overview



SIMATIC Panel PCs are suitable thanks to their high industrial compatibility for use in control cabinets, consoles and control panels, as well as directly on the machine. Typical areas of application can be found in both factory and process automation.

There is a broad range of robust, high-performance SIMATIC Panel PCs available for different requirements.

##### **Shared industrial functionality**

- High-quality components and modules with a high MTBF (mean time between failure), which also ensure 24-hour operation in the extended temperature range
- High swing/shock capacity of the devices through special hard-disk suspensions, locked connectors and card retainers
- Rugged housing model with high electromagnetic compatibility (EMC) and integrated industrial power supplies (also in accordance with NAMUR)
- Service-friendly device design
- Bright, brilliant displays in different sizes from 7" to 22"
- Rugged fronts protected from dust, humidity and chemical substances (front-side IP65 degree of protection)

5

##### ***SIMATIC IPC277: The Panel PC with optimized performance – maintenance-free and compact with displays from 7"***

- High degree of flexibility for selecting rugged widescreen fronts from 7" to 19" for a more freely configurable display area
- High resolution, large viewing angle, and up to 100% dimmable backlighting for a brilliant display with optimized power consumption
- Absolutely maintenance-free due to the use of CompactFlash/CFast or SSD as mass storage and fanless operation up to 50 °C ambient temperature
- Maximum industrial functionality due to non-volatile retentive memory (option)
- Ready-to-use embedded bundles with visualization and/or control software

##### ***SIMATIC IPC377: the industrial Basic Panel PC at an appealing price***

- Low-cost platform for visualization in the industrial and industry-oriented field
- Flexible installation in the control cabinet or via VESA, as well as simple connection of I/O devices due to a large number of interfaces
- Fanless industrial design
- Available directly ex stock

##### ***SIMATIC IPC477: The powerful embedded Panel PC – maintenance-free with versatile configuration***

- Compact design
- High performance with highly compact design and ruggedness
- Flexible expansion using a PCIe I/O card (optional)
- No rotating parts (without fan and hard disk)
- High security due to use of the operating system
- Windows Embedded Standard 7
- Ready-to-use devices with optionally pre-installed software
- HMI: Innovative HMI software WinCC RT Advanced (inc. logging and recipes)
- Software Controller: with real-time capable software PLC
- Retentive memory onboard (NV-RAM, can be used with software controller)
- Available as PRO version (fully-enclosed IP65 degree of protection) with multi-touch

##### ***SIMATIC IPC677: The high-end Panel PC – with maximum performance, functional scope and expansion capability***

- Rugged, expandable industrial PC with choice of front panels
- Rugged design for industrial use
- Complete PC openness
- Optional PROFIBUS or PROFINET onboard
- All processors with Dual-Core

**Technical specifications**

Article number	<b>6AV7882-0...0-...0</b> SIMATIC IPC277E	<b>6AV7230-0....-....</b> SIMATIC IPC377E	<b>6AV7241-.....-....</b> SIMATIC IPC 477E	<b>6AV7261-.....-....</b> SIMATIC IPC677E (Panel PC)
<b>General information</b>				
Product type designation	IPC277E	IPC377E	IPC477E	
<b>Installation type/mounting</b>				
Mounting		Panel mount and VESA, horizontal and vertical	For horizontal and vertical mounting	For horizontal and vertical mounting
Design maximum permissible installation angle +/-	Panel PC, built-in unit 45°	Panel PC, built-in unit	Panel PC, built-in unit	Panel PC, built-in unit
<b>Supply voltage</b>				
Type of supply voltage	24 V DC	24 V DC	100/240 V AC (autorange) 50/60 Hz; optional 24 V DC	100/240 V AC (autorange); 24 V DC
<b>Line frequency</b>				
• Rated value 50 Hz			Yes	Yes
• Rated value 60 Hz			Yes	Yes
<b>Mains buffering</b>				
• Mains/voltage failure stored energy time	20 ms	10 ms	20 ms	10 ms
<b>Processor</b>				
Processor type	Intel Celeron N2807 / N2930	Intel Celeron N3160	Celeron G3902 (2C/2T, 1.6 GHz, 2 MB Cache); Core i3-6102E (2C/4T, 1.9 GHz, 3 MB Cache); Core i5-6442EQ (4C/4T, 1.9 (2.7) GHz, 6 MB Cache, iAMT); Xeon E3-1505L v5 (4C/8T, 2.0 (2.8) GHz, 8 MB Cache, iAMT)	Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d); Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT)
Chipset	SoC		Intel C236 / Intel H110	Intel C246
<b>Graphic</b>				
Graphics controller	Integrated		Intel HD graphics controller	Intel UHD Graphics 630 (Core i); Intel UHD Graphics 610 (Celeron)
<b>Drives</b>				
Hard disk		1 TB HDD	2.5" SATA ≥ 320 GB	2.5" SATA ≥ 320 GB
SSD	Yes; 256 Eco / 240 / 480 GB	Yes; 256 GB SSD	Yes; 128 / 240 / 480 GB	Yes; SSD M.2 NVMe 512 GB; SSD 2.5" SATA 480 / 960 GB; RAID1 2x SSD 2.5" SATA 480 / 960 GB in removable drive bay
<b>Memory</b>				
Type of memory	DDR3L SO-DIMM 2 / 4 / 8 GB	DDR3L 4 GB, 8 GB	DDR4-2400 SO-DIMM 4 / 8 / 16 GB, ECC optional	DDR4-2666 DIMM 4 / 8 / 16 / 32 / 64 GB
<b>Data areas and their retentivity</b>				
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time; optional		512 kbyte; 128 KB can be stored in the buffer time; optional	512 kbyte; 128 KB can be stored in the buffer time
<b>Hardware configuration</b>				
<b>Slots</b>				
• free slots		1x mPCIe (half-size), 1x mSATA (full-size)	1x PCIe (slot with card retainer), 1x slot for CFAST card	2x PCI; optional: 1x PCI & 1x PCIe (x16); 2x PCIe (x4, x16); with card retainer

# PC-based Automation

## Industrial PC

### Panel PC

#### Technical specifications

Article number	<b>6AV7882-0...0...0</b> SIMATIC IPC277E	<b>6AV7230-0....-....</b> SIMATIC IPC377E	<b>6AV7241-.....-....</b> SIMATIC IPC 477E	<b>6AV7261-.....-....</b> SIMATIC IPC677E (Panel PC)
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	2; 2x Ethernet (RJ45)	2; 2x RJ45 (independent)	3; 3x Ethernet (RJ45)	3; 3x Ethernet (RJ45)
USB port	1x USB 3.0 / 3x USB 2.0 (7" / 9": 2x USB 2.0)	2x USB 2.0, 2x USB 3.0 (high current)	4x USB 3.0	6x USB 3.1 Gen. 2 (2x type C)
Connection for keyboard/mouse serial interface	USB / USB 1x COM (1x RS 232 / 422 / 485), selectable in the BIOS		USB / USB Without / 2x COM (RS 232 / 422 / 485), selectable in the BIOS	USB / USB 1x COM
<b>Video interfaces</b>				
• Graphics interface	1x DisplayPort	1x DisplayPort, 1x VGA	2x DisplayPort	2x DisplayPort; 1x DVI-D
<b>Industrial Ethernet</b>				
• Industrial Ethernet interface	2x Ethernet (RJ45)	2x Ethernet (RJ45)	3x Ethernet (RJ45)	3x Ethernet (RJ45)
- 100 Mbps	Yes	Yes	Yes	Yes
- 1000 Mbps	Yes	Yes	Yes	Yes
<b>Protocols</b>				
<b>Protocols (Ethernet)</b>				
• TCP/IP		Yes		
<b>Integrated Functions</b>				
<b>Monitoring functions</b>				
• Temperature monitoring	Yes	Yes	Yes	Yes
• Watchdog	Yes	Yes	Yes	Yes
• Status LEDs	No	POWER, HDD		1x power, 3x user
• Fan	No	No	No	Yes
• Monitoring function via network	Optional		Optional	Optional
<b>EMC</b>				
<b>Interference immunity against discharge of static electricity</b>				
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact; ±8 kV air (to IEC 1000-4-2; ESD)	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>				
• Interference immunity against high-frequency radiation	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6	10 V/m for 80 ... 1 000 MHz, 80 % AM according to IEC 61000-4-3; 3 V/m for 1.4 ... 6 GHz, 80 % AM according to IEC 61000-4-3	10 V/m, 80 ... 2 000 MHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 ... 2.7 GHz; 10 V, 10 kHz ... 80 MHz acc. to IEC 61000-4-6	10 V/m for 80 ... 2 700 MHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>				
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV (according to IEC 61000-4-4, burst); ±1 kV (according to IEC 61000-4-5, surge pulse/line to line); ±2 kV (according to IEC 61000-4-5, surge pulse/line to ground)	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	±1 kV acc. to IEC 61000-4-4, Burst	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m

**Technical specifications**

Article number	<b>6AV7882-0...0...0</b> SIMATIC IPC277E	<b>6AV7230-0....-....</b> SIMATIC IPC377E	<b>6AV7241-.....-....</b> SIMATIC IPC 477E	<b>6AV7261-.....-....</b> SIMATIC IPC677E (Panel PC)
<b>Interference immunity against voltage surge</b>				
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>				
• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>				
• Interference emission via line/AC current cables	Noise emission: EN 61000-6-4:2007 +A1:2011 (industrial environments), CISPR 22 Class B, FCC Class A		EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A	EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A
<b>Degree and class of protection</b>				
IP (at the front)	IP65	IP65	IP65	IP65
IP (rear)	IP20	IP40	IP20	IP20
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
CSA approval				Yes
UL approval	Yes	Yes	Yes	Yes
• UL 508	Yes		Yes	
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
KC approval	Yes		Yes	Yes
EAC (formerly Gost-R)		Yes	Yes	Yes
FCC	Yes	Yes	Yes	Yes
EMC	CE, EN 61000-6-4:2007 +A1:2011, EN 61000-6-2:2005		CE, EN 61000-6-4; CISPR 22:2004 Class A; FCC Class A	CE, EN 61000-6-3:2007 +A1:2011, EN 61000-6-2:2005
Dust protection		Protection against foreign bodies > 1 mm		
<b>Use in hazardous areas</b>				
• ATEX Zone 2			Yes; Optional, only with Multitouch	
• IECEx Zone 2			Yes; Optional, only with Multitouch	
• cULus Class I Zone 2, Division 2			Yes; Optional, only with Multitouch	
<b>Marine approval</b>				
• Germanischer Lloyd (GL)	Yes; 7", 9", 12" single-touch		Yes	
• American Bureau of Shipping (ABS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT		Yes	Yes
• Bureau Veritas (BV)	Yes; 7", 9", 12" ST; 12", 15", 19" MT		Yes	
• Det Norske Veritas (DNV)	Yes; 7", 9", 12" ST; 12", 15", 19" MT		Yes	Yes
• Korean Register of Shipping (KRS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT		Yes	
• Lloyds Register of Shipping (LRS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT		Yes	
• Nippon Kaiji Kyokai (Class NK)	Yes; 7", 9", 12" ST; 12", 15", 19" MT		Yes	Yes
• Chinese Classification Society (CCS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT			

**PC-based Automation**

## Industrial PC

**Panel PC****Technical specifications**

Article number	<b>6AV7882-0...0...0</b> SIMATIC IPC277E	<b>6AV7230-0....-....</b> SIMATIC IPC377E	<b>6AV7241-.....-....</b> SIMATIC IPC 477E	<b>6AV7261-.....-....</b> SIMATIC IPC677E (Panel PC)
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• Ambient temperature during operation	0 °C to 50 °C	0 to +45°C	0 °C to 45 °C	+5 °C to +45 °C with full configuration
<b>Relative humidity</b>				
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: 5% to 80% at 25 °C (no condensation)	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5% to 80% at 25 °C (no condensation), Storage: 5% to 95% at 25 °C (no condensation)
<b>Vibrations</b>				
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6: 5 Hz to 8.4 Hz: 3.5 mm, 8.4 Hz to 500 Hz: 9.8 m/s <sup>2</sup>	tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm; 58 Hz to 500 Hz 9.8 m/s <sup>2</sup> (1 g)	IEC 60068-2-6; 5 Hz to 9 Hz: 3.5 mm; 9 Hz to 500 Hz: 9.8 m/s <sup>2</sup> (with SSD or CFast); 10 Hz to 58 Hz: 0.0375 mm; 58 Hz to 200 Hz: 4.9 m/s <sup>2</sup> (hard disk)	tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm; 58 Hz to 500 Hz 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>				
• Shock load during operation	Tested according to IEC 60068-2-27: 50 m/s <sup>2</sup> , 30 ms	Tested in accordance with IEC 60068-2-27: With SSD: 150 m/s <sup>2</sup> , 11 ms; with HDD: 9.8 m/s <sup>2</sup> , 20 ms	IEC 60068-2-27; 150 m/s <sup>2</sup> , 11 ms (without hard disk); 50 m/s <sup>2</sup> , 30 ms (with hard disk)	Tested to DIN IEC 60068-2-29: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks
<b>Operating systems</b>				
pre-installed operating system	Windows 7 Ultimate 32-bit / 64-bit, MUI; Windows Embedded Standard 7 E/P, 32-bit / 64-bit	Windows 7 Ultimate (Multi-Language), 64 bit; Windows 10 Enterprise 2016 LTSB, 64 bit	Windows 7 Ultimate (Multi-Language) 64-bit, Windows Embedded Standard 7 E/P 32-bit / 64-bit, Windows 10	Windows 10 Enterprise 2016 LTSB or 2019 LTSC 64-bit, MUI
Additional info on operating system	optional: SIMATIC Industrial OS			
without operating system	Yes; Optional	Yes	Yes; Optional	Yes; Optional
<b>Software</b>				
SIMATIC Software	Optional package with SIMATIC WinCC or WinAC RTX		Optionally with pre-installed SIMATIC WinCC RT Advanced / Software Controller CPU 1500S software bundle	Optional package with SIMATIC WinCC

More information is available on the Internet at:

<http://www.siemens.com/simatic-panel-pc>

## Overview



### SIMATIC IPC277E: The Panel PC with optimized performance – maintenance-free and compact with displays from 7"

The SIMATIC IPC277E Nanopanel PC is a flexible embedded industrial PC with rugged and durable displays.

Technologically it is based on the IPC227E Nanobox PC and thus offers maximum industrial functionality for flexible use even under harsh conditions – all without the need for maintenance.

The Panel PC is characterized by modern interfaces and a high degree of flexibility in the selection of the display. The latest Intel Dual-Core and Quad-Core processors ensure excellent performance here for visualization and control tasks.

## Ordering data

### Article No.

#### SIMATIC IPC277E (Nanopanel PC)

6AV7882- 0 ■■■ 0 - ■■■ 0

##### Operating unit

- 7" touch
- 9" touch
- 12" touch
- 15" touch front USB
- 19" touch front USB
- 12" multi-touch (with WES7-E only single-touch mode)
- 15" multi-touch (with WES7-E only single-touch mode)
- 19" multi-touch (with WES7-E only single-touch mode)
- 15" multi-touch (1 366 x 768; ATEX/IECEx/UL HazLoc; with WES7-E only single-touch mode)
- 19" multi-touch (1 366 x 768; ATEX/IECEx/UL HazLoc; with WES7-E only single-touch mode)




##### Processor

- Celeron N2807 (2C/2T)
- Celeron N2930 (4C/4T)
- Celeron N2807 (2C/2T)/TPM
- Celeron N2930 (4C/4T)/TPM




##### Work memory/NVRAM

- 2 GB
- 4 GB
- 8 GB
- 2 GB/NVRAM
- 4 GB/NVRAM
- 8 GB/NVRAM



##### Operating system

- Without operating system
- Windows Embedded Standard 7 E SP1, English, 32-bit
- Windows Embedded Standard 7 E SP1, English, 64-bit
- Windows Embedded Standard 7 P SP1, English, 32-bit
- Windows Embedded Standard 7 P SP1, English, 64-bit
- Windows 7 Ultimate SP1, 32-bit, MUI (en, de, fr, it, es)
- Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)
- Windows 10 Enterprise 2016 LTSB
- Windows 10 IoT Enterprise 2019 LTSC

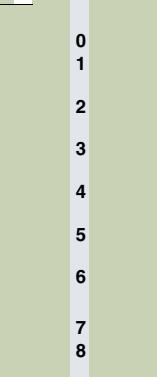


### Article No.

#### SIMATIC IPC277E (Nanopanel PC)

6AV7882- 0 ■■■ 0 - ■■■ 0

##### Mass storage

- Without
- 256 GB Eco SSD
- 240 GB SSD
- 480 GB SSD
- 4 GB CFast
- 8 GB CFast
- 16 GB CFast
- 128 GB CFast



##### Software

- Without SIMATIC software
- CPU 1507S V20.8
- WinCC RT Advanced V16 Update 1, 128 PT
- WinCC RT Advanced V16 Update 1, 512 PT
- WinCC RT Advanced V16 Update 1, 2 048 PT
- WinCC RT Advanced V16 Update 1, 4 096 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 128 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 512 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 2 048 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 4 096 PT
- Starter system, with CPU1507S and WinCC RT Advanced, without licenses



##### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-Configurators>

# PC-based Automation

Industrial PC

Panel PC

## SIMATIC IPC277E

### Technical specifications

Article number	<b>6AV7882-0...0-...0</b> SIMATIC IPC277E	Article number	<b>6AV7882-0...0-...0</b> SIMATIC IPC277E
<b>General information</b>			
Product type designation	IPC277E	EMC	
<b>Installation type/mounting</b>			
Design	Panel PC, built-in unit	<b>Interference immunity against discharge of static electricity</b>	
maximum permissible installation angle +/-	45°	• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Supply voltage</b>			
Type of supply voltage	24 V DC	<b>Interference immunity against high-frequency electromagnetic fields</b>	
<b>Mains buffering</b>			
• Mains/voltage failure stored energy time	20 ms	• Interference immunity against high frequency radiation	10 V/m, 80 MHz to 2 GHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 GHz to 2.7 GHz, 80 % AM acc. to IEC 61000-4-3; 10 V, 10 kHz to 80 MHz, 80 % AM acc. to IEC 61000-4-6
<b>Processor</b>			
Processor type	Intel Celeron N2807 / N2930	<b>Interference immunity to cable-borne interference</b>	
Chipset	SoC	• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
<b>Graphic</b>			
Graphics controller	Integrated	• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
<b>Drives</b>			
SSD	Yes; 256 Eco / 240 / 480 GB	• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m
<b>Memory</b>			
Type of memory	DDR3L SO-DIMM	<b>Interference immunity against voltage surge</b>	
Main memory	2 / 4 / 8 GB	• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric
<b>Data areas and their retentivity</b>			
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time; optional	• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2x Ethernet (RJ45)	<b>Interference immunity to magnetic fields</b>	
USB port	1x USB 3.0 / 3x USB 2.0 (7" / 9": 2x USB 2.0)	• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
Connection for keyboard/mouse serial interface	USB / USB	<b>Emission of conducted and non-conducted interference</b>	
	1x COM (1x RS 232 / 422 / 485), selectable in the BIOS	• Interference emission via line/AC current cables	Noise emission: EN 61000-6-4:2007 +A1:2011 (industrial environments), CISPR 22 Class B, FCC Class A
<b>Video interfaces</b>			
• Graphics interface	1x DisplayPort	<b>Degree and class of protection</b>	
<b>Industrial Ethernet</b>			
• Industrial Ethernet interface	2x Ethernet (RJ45)	IP (at the front)	IP65
- 100 Mbps	Yes	IP (rear)	IP20
- 1000 Mbps	Yes		
<b>Integrated Functions</b>			
<b>Monitoring functions</b>			
• Temperature monitoring	Yes		
• Watchdog	Yes		
• Status LEDs	No		
• Fan	No		
• Monitoring function via network	Optional		

**Technical specifications**

Article number	<b>6AV7882-0...0...0</b> SIMATIC IPC277E
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
• UL 508	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
FCC	Yes
EMC	CE, EN 61000-6-4:2007 +A1:2011, EN 61000-6-2:2005
<b>Marine approval</b>	
• Germanischer Lloyd (GL)	Yes; 7", 9", 12" single-touch
• American Bureau of Shipping (ABS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
• Bureau Veritas (BV)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
• Det Norske Veritas (DNV)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
• Korean Register of Shipping (KRS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
• Lloyds Register of Shipping (LRS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
• Nippon Kaiji Kyokai (Class NK)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
• Chinese Classification Society (CCS)	Yes; 7", 9", 12" ST; 12", 15", 19" MT
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• Ambient temperature during operation	0 °C to 50 °C
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6: 5 Hz to 8.4 Hz: 3.5 mm, 8.4 Hz to 500 Hz: 9.8 m/s <sup>2</sup>
<b>Shock testing</b>	
• Shock load during operation	Tested according to IEC 60068-2-27: 50 m/s <sup>2</sup> , 30 ms
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate 32-bit / 64-bit, MUI; Windows Embedded Standard 7 E/P, 32-bit / 64-bit
Additional info on operating system without operating system	optional: SIMATIC Industrial OS Yes; Optional
<b>Software</b>	
SIMATIC Software	Optional package with SIMATIC WinCC or WinAC RTX

**More information**

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-panel-pc>

# PC-based Automation

Industrial PC

Panel PC

## SIMATIC IPC377E

### Overview



### SIMATIC IPC377E

Based on Intel Celeron process technology, the SIMATIC IPC377E Panel PC represents a new IPC platform which has been specifically developed for cost-optimized, PC-based applications in industrial and industry-oriented environments.

The SIMATIC IPC377E Panel PC is characterized by industrial touch displays in the sizes 12", 15" and 19" as well as a variety of interfaces. Fast availability ex stock as well as the fanless industrial design complete the concept.

Ordering data	Article No.	Article No.
<b>SIMATIC IPC377E</b>	<b>6AV7230-</b> 0	
1 x display port graphic 1 x VGA port graphic 2x 10/100/1 000 Mbps Ethernet RJ45 2 x USB 3.0; 2 x USB 2.0; 4 x serial ports (COM)	C D E	
<u>Operating unit</u> • 12" touch (1 280 x 800) • 15" touch (1 366 x 768) • 19" touch (1 366 x 768)	A	
<u>Processor</u> • Celeron N3160 (4C/4T)	2 3	
<u>Work memory</u> • 4 GB RAM • 8 GB RAM	0	
<u>Expansions/interfaces</u> • 1x mPCIe / 1x mSata	0	
<u>Operating system</u> • Without operating system • Windows Ultimate SP1, 64-bit MUI (en, de, fr, es, it)	0 1	
<u>Drives</u> • None • 500 GB HDD • 256 GB SSD	A B C	
<u>Power supply</u> • 24 V DC	A	
<u>Mounting accessories</u> • Installation, VESA installation	0	
		<i>Preferred variants (available directly ex stock)</i>
		<b>SIMATIC IPC377E</b>
		<b>12" Configuration 1</b> 12" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 500 GB HDD SATA, internal; 4 GB RAM (1 x 4 GB); without operating system; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio
		<b>6AV7230-0CA20-0BA0</b>
		<b>12" Configuration 2</b> 12" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 500 GB HDD SATA, internal; 4 GB RAM (1 x 4 GB); Windows 7 Ultimate 64-bit, SP1; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio
		<b>6AV7230-0CA20-1BA0</b>
		<b>12" Configuration 3</b> 12" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 256 GB SSD, internal; 4 GB RAM (1 x 4 GB); without operating system; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio
		<b>6AV7230-0CA20-0CA0</b>

### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

Ordering data	Article No.	Article No.
<b>12" Configuration 4</b>	6AV7230-0CA20-1CA0	6AV7230-0EA20-0BA0
12" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 256 GB SSD, internal; 4 GB RAM (1 x 4 GB); Windows 7 Ultim. 64-bit, SP1; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		
<b>12" Configuration 5</b>	6AV7230-0CA20-2CA0	6AV7230-0EA20-1BA0
12" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 256 GB SSD, internal; 4 GB RAM (1 x 4 GB); Windows 10 Enterprise 2016 LTSB; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		
<b>15" Configuration 1</b>	6AV7230-0DA20-0BA0	6AV7230-0EA20-0CA0
15" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 500 GB HDD SATA, internal; 4 GB RAM (1 x 4 GB); without operating system; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		
<b>15" Configuration 2</b>	6AV7230-0DA20-1BA0	6AV7230-0EA20-1CA0
15" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 500 GB HDD SATA, internal; 4 GB RAM (1 x 4 GB); Windows 7 Ultimate 64-bit, SP1; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		
<b>15" Configuration 3</b>	6AV7230-0DA20-0CA0	6AV7230-0EA20-2CA0
15" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 256 GB SSD, internal; 4 GB RAM (1 x 4 GB); without operating system; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		
<b>15" Configuration 4</b>	6AV7230-0DA20-1CA0	
15" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 256 GB SSD, internal; 4 GB RAM (1 x 4 GB); Windows 7 Ultim. 64-bit, SP1; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		
<b>15" Configuration 5</b>	6AV7230-0DA20-2CA0	
15" touch (analog resistive); Intel Celeron Quad Core N3160 (1.6 GHz); 256 GB SSD, internal; 4 GB RAM (1 x 4 GB); Windows 10 Enterprise 2016 LTSB; 24 V DC; interfaces: 2 x Gbit Ethernet (RJ45), 2 x USB 2.0; 2 x USB 3.0; 4 x serial; 1 x Display Port, 1 x VGA, audio		

## Note:

The SIMATIC IPC377E has a different front panel and is not directly installation-compatible with previous SIMATIC HMI devices.

# PC-based Automation

Industrial PC

Panel PC

## SIMATIC IPC377E

### Technical specifications

Article number	<b>6AV7230-0....-....</b> SIMATIC IPC377E	Article number	<b>6AV7230-0....-....</b> SIMATIC IPC377E
<b>General information</b>			<b>Interference immunity to cable-borne interference</b>
Product type designation			<ul style="list-style-type: none"> <li>• Interference immunity on supply cables</li> </ul>
<b>Installation type/mounting</b>			<ul style="list-style-type: none"> <li>• Interference immunity on signal cables &gt;30m</li> <li>• Interference immunity on signal cables &lt; 30m</li> </ul>
Mounting			±2 kV (according to IEC 61000-4-4, burst); ±1 kV (according to IEC 61000-4-5, surge pulse/line to line); ±2 kV (according to IEC 61000-4-5, surge pulse/line to ground)
Design			±2 kV acc. to IEC 61000-4-4, burst; ±2 kV acc. to IEC 61000-4-5, surge
<b>Supply voltage</b>			±1 kV acc. to IEC 61000-4-4, Burst
Type of supply voltage	24 V DC		
<b>Mains buffering</b>			
<ul style="list-style-type: none"> <li>• Mains/voltage failure stored energy time</li> </ul>			10 ms
<b>Processor</b>			
Processor type	Intel Celeron N3160		
<b>Drives</b>			
Hard disk	1 TB HDD		
SSD	Yes; 256 GB SSD		
<b>Memory</b>			
Type of memory	DDR3L		
Main memory	4 GB, 8 GB		
<b>Hardware configuration</b>			
<b>Slots</b>			
<ul style="list-style-type: none"> <li>• free slots</li> </ul>			1x mPCIe (half-size), 1x mSATA (full-size)
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2x RJ45 (independent)		
USB port	2x USB 2.0, 2x USB 3.0 (high current)		
<b>Video interfaces</b>			
<ul style="list-style-type: none"> <li>• Graphics interface</li> </ul>			1x DisplayPort, 1x VGA
<b>Industrial Ethernet</b>			
<ul style="list-style-type: none"> <li>• Industrial Ethernet interface           <ul style="list-style-type: none"> <li>- 100 Mbps</li> <li>- 1000 Mbps</li> </ul> </li> </ul>			2x Ethernet (RJ45) Yes Yes
<b>Protocols</b>			
<b>Protocols (Ethernet)</b>			
<ul style="list-style-type: none"> <li>• TCP/IP</li> </ul>			Yes
<b>Integrated Functions</b>			
<b>Monitoring functions</b>			
<ul style="list-style-type: none"> <li>• Temperature monitoring</li> <li>• Watchdog</li> <li>• Status LEDs</li> <li>• Fan</li> </ul>			Yes Yes POWER, HDD No
<b>EMC</b>			
<b>Interference immunity against discharge of static electricity</b>			
<ul style="list-style-type: none"> <li>• Interference immunity against discharge of static electricity</li> </ul>			±6 kV contact; ±8 kV air (to IEC 1000-4-2; ESD)
<b>Interference immunity against high-frequency electromagnetic fields</b>			
<ul style="list-style-type: none"> <li>• Interference immunity against high frequency radiation</li> </ul>			10 V/m for 80 ... 1 000 MHz, 80 % AM according to IEC 61000-4-3; 3 V/m for 1.4 ... 6 GHz, 80 % AM according to IEC 61000-4-3
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
<ul style="list-style-type: none"> <li>• Ambient temperature during operation</li> </ul>			0 to +45°C
<b>Relative humidity</b>			
<ul style="list-style-type: none"> <li>• Relative humidity</li> </ul>			Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>			
<ul style="list-style-type: none"> <li>• Vibration resistance during operation acc. to IEC 60068-2-6</li> </ul>			tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm; 58 Hz to 500 Hz 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>			
<ul style="list-style-type: none"> <li>• Shock load during operation</li> </ul>			Tested in accordance with IEC 60068-2-27: With SSD: 150 m/s <sup>2</sup> , 11 ms; with HDD: 9.8 m/s <sup>2</sup> , 20 ms
<b>Operating systems</b>			
pre-installed operating system			Windows 7 Ultimate (Multi-Language), 64 bit; Windows 10 Enterprise 2016 LTSB, 64 bit
without operating system			Yes

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-panel-pc>

**Overview****SIMATIC IPC477E: The powerful embedded Panel PC – maintenance-free with versatile configuration**

- Embedded PC platform with extremely high industrial compatibility for demanding tasks in the field of PC-based automation
- Maintenance-free (no rotating components such as fan and hard disk)
- Rugged construction: The PC is resistant to even the harshest mechanical stress and extremely reliable in operation
- Compact design
- Battery-independent retentive memory onboard
- High degree of investment security
- Fast integration capability
- Built-in versions
  - 15" TFT touch
  - 19" TFT touch
  - 22" TFT touch
  - 15" TFT multi-touch
  - 19" TFT multi-touch
  - 22" TFT multi-touch
  - 24" TFT multi-touch

**Ordering data****Article No.****SIMATIC IPC477E<sup>1)</sup>**

## Processor and fieldbus

- Celeron G3902E; 3 x Gigabit Ethernet (IE/PN) **1**
- Core i3-6102E; 3 x Gigabit Ethernet (IE/PN) **3**
- Core i5-6442EQ; 3 x Gigabit Ethernet (IE/PN) **5**
- Xeon E3-1505L; 3 x Gigabit Ethernet (IE/PN) **7**

## Operating unit

- 15" single-touch (1 280 x 800) with front USB **B**
- 19" single-touch (1 366 x 768) with front USB **D**
- 22" single-touch (1 920 x 1 080) with front USB **E**
- 15" multi-touch (1 366 x 768), single-touch mode only with WES7-E **J**
- 19" multi-touch (1 366 x 768), single-touch mode only with WES7-E **K**
- 19" multi-touch (1 920 x 1 080), single-touch mode only with WES7-E **G**
- 22" multi-touch (1 920 x 1 080), single-touch mode only with WES7-E **L**
- 24" multi-touch (1 920 x 1 080), single-touch mode only with WES7-E **R**

## Work memory/NVRAM

- 4 GB **A**
- 8 GB **B**
- 16 GB **C**
- 8 GB with ECC **D**
- 16 GB with ECC **E**
- 4 GB and NVRAM **F**
- 8 GB and NVRAM **G**
- 16 GB and NVRAM **H**
- 8 GB with ECC and NVRAM **J**
- 16 GB with ECC and NVRAM **K**

**PC-based Automation**

Industrial PC

Panel PC

**SIMATIC IPC477E**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>SIMATIC IPC477E<sup>1)</sup></b>	<b>6AV7241-</b>	<b>6AV7241-</b>
<u>Expansions/interfaces</u>		
• No RS232/RS485, without PCIe	0	A
• No RS232/RS485 and one PCIe	1	D
• Second RS232/RS485, without PCIe	3	F
• Second RS232/RS485 and one PCIe	4	G
• No RS232, without PCIe with ATEX/IECEx Cat 3G Zone 2	5	J
• No RS232 and one PCIe with ATEX/IECEx Cat 3G Zone 2	6	
• Two RS232 without PCIe with ATEX/IECEx Cat 3G Zone 2	7	
• Two RS232 and one PCIe with ATEX/IECEx Cat 3G Zone 2	8	
<u>Operating system</u>		
• Without operating system	0	A
• Windows Embedded Standard 7 SP1, English, 32-bit	1	B
• Windows Embedded Standard 7 SP1, English, 64-bit	2	C
• Windows Embedded Standard 7 P SP1, English, 64-bit, multi-touch	3	D
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	4	E
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for the Celeron, Core i3 and Core i5 processors	5	F
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for Xeon processor	6	G
• Windows 10 Enterprise 2016 LTSB (64-bit) for Celeron, Core i3 and Core i5 processors	7	H
• Windows 10 Enterprise 2016 LTSB (64-bit) for Xeon processors	8	J
<u>Mass storage, externally accessible</u>		
• Without external mass storage	0	K
• CFast 2 GB, without operating system	1	L
• CFast 4 GB, without operating system	2	M
• CFast 8 GB (only optionally with operating system/software if no internal mass storage or HDD)	3	N
• CFast 16 GB (only optionally with operating system/software if no internal mass storage or HDD)	4	O
• CFast 128 GB (only optionally with operating system/software if no internal mass storage or HDD)	5	P
<u>Power supply:</u>		
• 24 V DC industrial power supply	0	
• 110/230 V AC industrial power supply with NAMUR; European power supply cord	1	
• 110/230 V AC industrial power supply with TPM <sup>2)</sup> (not for China or Russia) NAMUR, European power supply cord	7	
• 24 V DC industrial power supply and TPM <sup>2)</sup>	8	

<sup>1)</sup> For an up-to-date overview, see the SIMATIC PC Online Configurator: <http://www.siemens.com/IPC-Configurators>

<sup>2)</sup> TPM = Trusted Platform Module

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/IPC-Configurators>

**Technical specifications**

Article number	<b>6AV7241-.....</b> SIMATIC IPC 477E
<b>General information</b>	
Product type designation	IPC477E
<b>Installation type/mounting</b>	
Mounting	For horizontal and vertical mounting
Design	Panel PC, built-in unit
<b>Supply voltage</b>	
Type of supply voltage	100/240 V AC (autorange) 50/60 Hz; optional 24 V DC
<b>Line frequency</b>	
• Rated value 50 Hz	Yes
• Rated value 60 Hz	Yes
<b>Mains buffering</b>	
• Mains/voltage failure stored energy time	20 ms
<b>Processor</b>	
Processor type	Celeron G3902 (2C/2T, 1.6 GHz, 2 MB Cache); Core i3-6102E (2C/4T, 1.9 GHz, 3 MB Cache); Core i5-6442EQ (4C/4T, 1.9 (2.7) GHz, 6 MB Cache, iAMT); Xeon E3-1505L v5 (4C/8T, 2.0 (2.8) GHz, 8 MB Cache, iAMT)
Chipset	Intel C236 / Intel H110
<b>Graphic</b>	
Graphics controller	Intel HD graphics controller
<b>Drives</b>	
Hard disk	2.5" SATA ≥ 320 GB
SSD	Yes; 128 / 240 / 480 GB
<b>Memory</b>	
Type of memory	DDR4-2400 SO-DIMM
Main memory	4 / 8 / 16 GB, ECC optional
<b>Data areas and their retentivity</b>	
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time; optional
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	1x PCIe (slot with card retainer), 1x slot for CFAST card
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	3; 3x Ethernet (RJ45)
USB port	4x USB 3.0
Connection for keyboard/mouse	USB / USB
serial interface	Without / 2x COM (RS 232 / 422 / 485), selectable in the BIOS
<b>Video interfaces</b>	
• Graphics interface	2x DisplayPort
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	3x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes

Article number	<b>6AV7241-.....</b> SIMATIC IPC 477E
<b>Integrated Functions</b>	
<b>Monitoring functions</b>	
• Temperature monitoring	Yes
• Watchdog	Yes
• Fan	No
• Monitoring function via network	Optional
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>	
• Interference immunity against high frequency radiation	10 V/m, 80 ... 2 000 MHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 ... 2.7 GHz; 10 V, 10 kHz ... 80 MHz acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>	
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
• Interference immunity on signal cables <30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m
<b>Interference immunity against voltage surge</b>	
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	
• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>	
• Interference emission via line/AC current cables	EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A
<b>Degree and class of protection</b>	
IP (at the front)	IP65
IP (rear)	IP20

**PC-based Automation**

Industrial PC


Panel PC

**SIMATIC IPC477E****Technical specifications**

Article number	<b>6AV7241-.....</b> SIMATIC IPC 477E
<b>Standards, approvals, certificates</b>	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
• UL 508	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
FCC	Yes
EMC	CE, EN 61000-6-4; CISPR 22:2004 Class A; FCC Class A
<b>Use in hazardous areas</b>	
• ATEX Zone 2	Yes; Optional, only with Multitouch
• IECEx Zone 2	Yes; Optional, only with Multitouch
• cULus Class I Zone 2, Division 2	Yes; Optional, only with Multitouch
<b>Marine approval</b>	
• Germanischer Lloyd (GL)	Yes
• American Bureau of Shipping (ABS)	Yes
• Bureau Veritas (BV)	Yes
• Det Norske Veritas (DNV)	Yes
• Korean Register of Shipping (KRS)	Yes
• Lloyds Register of Shipping (LRS)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes

Article number	<b>6AV7241-.....</b> SIMATIC IPC 477E
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	0 °C to 45 °C
• Ambient temperature during operation	
<b>Relative humidity</b>	Tested according to IEC 60068-2-78, IEC 60068-2-30: 5% to 80% at 25 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	IEC 60068-2-6; 5 Hz to 9 Hz: 3.5 mm; 9 Hz to 500 Hz: 9.8 m/s <sup>2</sup> (with SSD or CFast); 10 Hz to 58 Hz: 0.0375 mm; 58 Hz to 200 Hz: 4.9 m/s <sup>2</sup> (hard disk)
<b>Shock testing</b>	
• Shock load during operation	IEC 60068-2-27; 150 m/s <sup>2</sup> , 11 ms (without hard disk); 50 m/s <sup>2</sup> , 30 ms (with hard disk)
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate (Multi-Language) 64-bit, Windows Embedded Standard 7 E/P 32-bit / 64-bit, Windows 10
without operating system	Yes; Optional
<b>Software</b>	
SIMATIC Software	Optionally with pre-installed SIMATIC WinCC RT Advanced / Software Controller CPU 1500S software bundle

## Overview

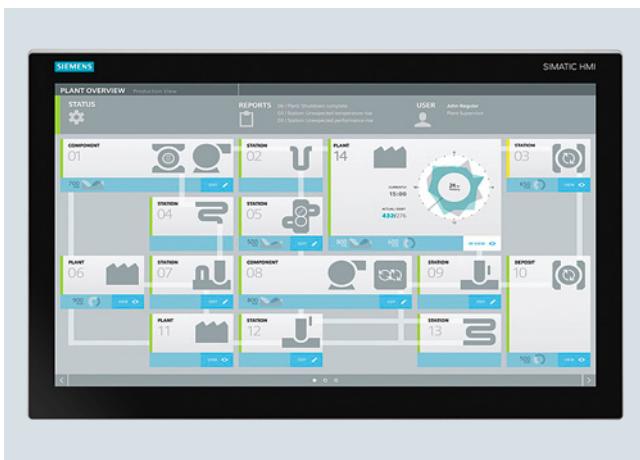

### **SIMATIC IPC677E: The high-end Panel PC – with maximum performance, functional scope and expansion capability**

Industrial PC platform with extremely high industrial compatibility for demanding tasks in the field of PC-based automation.

Rugged construction: The IPC is resistant to even the harshest mechanical stress and extremely reliable in operation.

- Compact design
- High degree of investment security
- High degree of expandability

The following widescreen front variants are available:

- 19", 22" or 24" capacitive multi-touch color display

## Ordering data

## Article No.

### **SIMATIC IPC677E<sup>1)</sup>**

UHD graphics onboard; 2x DP;  
1x DVI-D;  
3x Gigabit Ethernet (IE/PN) RJ45;  
6x USB 3.1 Gen. 2;  
1x serial (COM1);  
RAID controller onboard;  
watchdog, temperature/  
fan monitoring

#### Operating unit

- 19" multi-touch (1920 x 1080)
- 22" multi-touch (1920 x 1080)
- 24" multi-touch (1920 x 1080)

6AV7261-

- ■ ■ ■ ■ ■ - ■ ■ ■ ■ ■

0

1

2

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

Q

R

S

#### Processor

- Intel Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d);
- Intel Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d); NVRAM
- Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d)
- Intel Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); NVRAM
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT)
- Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT); NVRAM

#### Drives

- HDD 2.5" SATA 320 GB internal
- SSD 2.5" SATA 480 GB internal
- SSD 2.5" SATA 960 GB internal
- RAID1 2x SSD 2.5" SATA 480 GB internal
- RAID1 2x SSD 2.5" SATA 480 GB in removable drive bay
- RAID1 2x SSD 2.5" SATA 960 GB in removable drive bay
- M.2 SSD NVMe 512 GB
- M.2 SSD NVMe 512 GB; HDD 2.5" SATA 320 GB internal
- M.2 SSD NVMe 512 GB; SSD 2.5" SATA 480 GB internal
- M.2 SSD NVMe 512 GB; SSD 2.5" SATA 960 GB internal
- M.2 SSD NVMe 512 GB; RAID1 2x SSD 2.5" SATA 480 GB in removable drive bay
- M.2 SSD NVMe 512 GB; 2 removable drive bays without media

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

Q

R

S

#### Memory configuration

- 4 GB DDR4-2666 (1x 4 GB)
- 8 GB DDR4-2666 (2x 4 GB)
- 16 GB DDR4-2666 (2x 8 GB)
- 32 GB DDR4-2666 (2x 16 GB)
- 64 GB DDR4-2666 (4x 16 GB)

0

1

2

3

4

# PC-based Automation

Industrial PC

Panel PC

## SIMATIC IPC677E

Ordering data	Article No.	Article No.
<b>SIMATIC IPC677E<sup>1)</sup></b>	6AV7261-	
Power supply		
• 24 V DC industrial power supply	0	
• 110/230 V AC industrial power supply with NAMUR; without power cable	1	
• 110/230 V AC industrial power supply unit with NAMUR; power supply cord Europe	2	
• 110/230 V AC industrial power supply unit with NAMUR; power supply cord USA	3	
• 110/230 V AC industrial power supply unit with NAMUR; power supply cord China	4	
Operating system	0	
• Windows 10 Enterprise 2016 LTSB, 64-bit, MUI (en, de, fr, it, es); for Celeron and i3	1	
• Windows 10 Enterprise 2016 LTSB, 64-bit, MUI (en, de, fr, it, es), for Core i7	2	
• Windows 10 IoT Enterprise 2019 LTSC, 64-bit, MUI (en, de, fr, it, es); for Celeron and i3	3	
• Windows 10 IoT Enterprise 2019 LTSC, 64-bit, MUI (en, de, fr, it, sp), for Core i7	4	
• Without operating system	8	
Expansion (SW)	A B C D X	
• Without expansion	A	
• SIMATIC IPC DiagMonitor included	B	
• SIMATIC IPC Image & Partition Creator included	C	
• SIMATIC IPC DiagMonitor, Image & Partition Creator included	D	
• TPM <sup>2)</sup>	X	
Expansion 1 (HW)	A B C	
• Without expansion (HW)	A	
• 2x USB 2.0 (1 slot occupied)	B	
• Device without CMOS battery (CR2450N)	C	
Expansion 2 (HW)	0 1 2	
• 2 x PCI	0	
• 1 x PCIe (x16); 1 x PCI	1	
• 1 x PCIe (x16); 1 x PCIe (x4)	2	

<sup>1)</sup> Production and delivery as per order

<sup>2)</sup> TPM = Trusted Platform Module

### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

**Technical specifications**

Article number	<b>6AV7261-.....</b> SIMATIC IPC677E (Panel PC)
<b>Installation type/mounting</b>	
Mounting	For horizontal and vertical mounting
Design	Panel PC, built-in unit
<b>Supply voltage</b>	
Type of supply voltage	100/240 V AC (autorange); 24 V DC
<b>Line frequency</b>	
• Rated value 50 Hz	Yes
• Rated value 60 Hz	Yes
<b>Mains buffering</b>	
• Mains/voltage failure stored energy time	10 ms
<b>Processor</b>	
Processor type	Celeron G4900 (2C/2T, 3.1 GHz, 2 MB cache; VT-d); Core i3-8100 (4C/4T, 3.6 GHz, 6 MB cache, VT-d); Core i7-8700 (6C/12T, 3.2 (4.6) GHz, 12 MB cache, VT-d, AMT)
Chipset	Intel C246
<b>Graphic</b>	
Graphics controller	Intel UHD Graphics 630 (Core i); Intel UHD Graphics 610 (Celeron)
<b>Drives</b>	
Hard disk	2.5" SATA ≥ 320 GB
SSD	Yes; SSD M.2 NVMe 512 GB; SSD 2.5" SATA 480 / 960 GB; RAID1 2x SSD 2.5" SATA 480 / 960 GB in removable drive bay
<b>Memory</b>	
Type of memory	DDR4-2666 DIMM
Main memory	4 / 8 / 16 / 32 / 64 GB
<b>Data areas and their retentivity</b>	
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	2x PCI; optional: 1x PCI & 1x PCIe (x16); 2x PCIe (x4, x16); with card retainer
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	3; 3x Ethernet (RJ45)
USB port	6x USB 3.1 Gen. 2 (2x type C)
Connection for keyboard/mouse serial interface	USB / USB 1x COM
<b>Video interfaces</b>	
• Graphics interface	2x DisplayPort; 1x DVI-D
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	3x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes

Article number	<b>6AV7261-.....</b> SIMATIC IPC677E (Panel PC)
<b>Integrated Functions</b>	
<b>Monitoring functions</b>	
• Temperature monitoring	Yes
• Watchdog	Yes
• Status LEDs	1x power, 3x user
• Fan	Yes
• Monitoring function via network	Optional
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	
• Interference immunity against discharge of static electricity	±6 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>	
• Interference immunity against high frequency radiation	10 V/m for 80 ... 2 700 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 2.7 to 6 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 10 kHz to 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>	
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m
• Interference immunity on signal cables < 30m	±1 kV acc. to IEC 61000-4-4; burst; length < 3 m; ±2 kV acc. to IEC 61000-4-4; burst; length > 3 m
<b>Interference immunity against voltage surge</b>	
• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	
• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>	
• Interference emission via line/ AC current cables	EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A

**PC-based Automation**

Industrial PC

Panel PC

**SIMATIC IPC677E****Technical specifications**

Article number	<b>6AV7261-.....</b> SIMATIC IPC677E (Panel PC)
<b>Degree and class of protection</b>	
IP (at the front)	IP65
IP (rear)	IP20
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
FCC	Yes
EMC	CE, EN 61000-6-3:2007 +A1:2011, EN 61000-6-2:2005
<b>Marine approval</b>	
• American Bureau of Shipping (ABS)	Yes
• Det Norske Veritas (DNV)	Yes
• Nippon Kaiji Kyokai (Class NK)	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• Ambient temperature during operation	+5 °C to +45 °C with full configuration
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5% to 80% at 25 °C (no condensation), Storage: 5% to 95% at 25 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	tested according to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm; 58 Hz to 500 Hz 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>	
• Shock load during operation	Tested to DIN IEC 60068-2-29: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks
<b>Operating systems</b>	
pre-installed operating system	Windows 10 Enterprise 2016 LTSB or 2019 LTSC 64-bit, MUI
without operating system	Yes; Optional
<b>Software</b>	
SIMATIC Software	Optional package with SIMATIC WinCC

**Overview**

The SIMATIC Industrial Tablet PC taps new application areas within the scope of Industry 4.0.

Designed for industrial use, the multiple functions of the SIMATIC ITP1000 deliver convincing results for day-to-day working.

Typical applications are in maintenance/service, production and measuring and testing.

# PC-based Automation

Industrial PC

Tablet PC

## SIMATIC Industrial Tablet PC

### Overview



### SIMATIC Industrial Tablet PC

The SIMATIC Industrial Tablet PC takes the performance of SIMATIC industry PCs to the tablet format.

With a large number of functional expansions such as a 1D/2D bar code reader or user identification by RFID, it taps diverse possibilities of use.

#### SIMATIC ITP1000: Industrial rugged PC

- High-quality components and modules with a high MTBF (mean time between failure), which also ensure 24-hour operation in the extended temperature range up to +45 °C
- Rugged enclosure designs with high electromagnetic compatibility (EMC)
- Hardware available in the long term

#### Powerful and many functions on board

- High-performance Intel Core i5-6442EQ or Intel Celeron G3902E notebook CPU
- Many interfaces on board: LAN, SD card reader, USB interfaces, RS232, audio
- WLAN and Bluetooth integrated
- RFID, bar code reader (1D/2D) and camera for a highly diverse range of mobile applications
- Windows 7 Ultimate 64-bit / Windows 10 IoT Enterprise 2016 LTSB (64-bit)

### Ordering data

### Article No.

<b>SIMATIC ITP1000</b>	<b>6AV7880-</b>	<b>2</b>
<u>Operating unit</u>		
• 10" multi-touch (1 280 x 800) with 8 function keys	<b>0</b>	
• 10" multi-touch (1 920 x 1 200) with 8 function keys	<b>2</b>	
<u>Extras</u>		
• None	<b>A</b>	
• Rear camera, 5 megapixels	<b>B</b>	
• RFID reader	<b>C</b>	
• Bar code reader (1D/2D)	<b>D</b>	
• Camera and RFID	<b>E</b>	
• Bar code reader and camera	<b>F</b>	
• RFID and bar code reader	<b>G</b>	
• Camera, RFID and bar code reader	<b>H</b>	
<u>Mass storage</u>		
• 256 GB SSD	<b>A</b>	
• 512 GB SSD	<b>B</b>	
<u>Operating system</u>		
• None	<b>0</b>	
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	<b>1</b>	
• Windows 10 IoT Enterprise 2016 LTSB, (64-bit) for Celeron i3 and i5 processors	<b>2</b>	
<u>CPU</u>		
• Celeron G390 2E (2 MB cache, 1.60 GHz)	<b>1</b>	
• Core i5-6442EQ (6 MB cache, up to 2.70 GHz)	<b>2</b>	
<u>RAM</u>		
• 4 GB	<b>0</b>	
• 8 GB	<b>1</b>	
• 16 GB	<b>2</b>	
<u>Power supply</u>		
• 110/230 V power supply unit, power cable for Europe	<b>A</b>	
• 110/230 V power supply unit, power cable for UK	<b>B</b>	
• 110/230 V power supply unit, power cable for CH	<b>C</b>	
• 110/230 V power supply unit, power cable for the USA	<b>D</b>	
• 110/230 V power supply unit, power cable for Italy	<b>E</b>	
• 110/230 V power supply unit, power cable for China	<b>F</b>	
<u>Spare software (included)</u>		
• None	<b>A</b>	
<u>Rechargeable battery</u>		
• High-capacity lithium ion battery	<b>2</b>	

#### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure suitability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

**Technical specifications**

Article number	<b>6AV7880-.....-...2</b> SIMATIC ITP1000
<b>General information</b>	
Design of the programming device	Tablet PC
<b>Display</b>	
Design of display	10" multi-touch
<b>Resolution (pixels)</b>	
• Horizontal image resolution	1 280 pixel; 1 920 pixels
• Vertical image resolution	800 pixel
<b>General features</b>	
• Luminance	220 cd/m <sup>2</sup>
<b>Backlighting</b>	
• Type of backlighting	LED
<b>Control elements</b>	
<b>Keyboard fonts</b>	
• Design	Touch
<b>Touch operation</b>	
• Integrated touch pad	No
<b>Supply voltage</b>	
Design of the power supply	External wide-range power supply; 3-pole
<b>Line frequency</b>	
• permissible range, lower limit	47 Hz
• permissible range, upper limit	63 Hz
<b>Processor</b>	
Processor type	Celeron G3902 (2C/2T, 1.6 GHz, 2 MB cache); Intel Core i5-6442EQ (6 MB cache, up to 2.70 GHz, iAMT)
Hyper-threading	No
Turbo Boost Technology 2.0	Yes
<b>Graphic</b>	
Graphics controller	Intel® HD graphics 530
<b>Drives</b>	
SSD	Yes
• Memory capacity	256 Gbyte; Up to 512 GB SSD
TPM Security Chip	Yes
<b>Memory</b>	
Type of memory	DDR4-SDRAM SO-DIMM
<b>Work memory</b>	
• integrated	4 Gbyte; 8 GB or 16 GB
<b>Accumulator</b>	
Replaceable	Yes; Lithium-ion battery
Capacity	5 900 mA·h
Battery runtime, min.	6 h; According to MobileMark 2014

Article number	<b>6AV7880-.....-...2</b> SIMATIC ITP1000
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	1
Number of RS 232 interfaces	1
Number of USB interfaces	3; USB 3.0
• Type A	2
• Type C	1
Bluetooth radio standard	Yes; V4.0
Multimedia card/SD card slot	2 in 1 (SDHC UHS-II, MMC)
Universal Audio Jack	Yes; Audio socket for 3.5 mm jack
<b>Video interfaces</b>	
• DisplayPort	Yes; DP 1.2 (Mini DisplayPort)
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	1x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	Yes
• iAMT (Intel Active Management Technology)	Yes
<b>WLAN</b>	
• Type	IEEE 802.11 a/b/g/n and ac
<b>Wireless transmission</b>	
• Operating frequency (rated value)	13.56 MHz
• Range, max.	30 mm
<b>Interrupts/diagnostics/status information</b>	
LED status display	Battery charge level, device status, access to drive, WLAN active, SD card, application LED
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	
• Interference immunity against discharge of static electricity acc. to IEC 61000-4-2	Yes; ±4 kV contact discharge (to IEC 801-2/IEC 1000-4-2; ESD), ±8 kV air discharge (to IEC 801-2/IEC 1000-4-2; ESD)
<b>Interference immunity to cable-borne interference</b>	
• Interference immunity on supply cables	±2 kV (according to IEC 61000-4-4, burst); ±1 kV (according to IEC 61000-4-5, surge pulse/line to line); ±2 kV (according to IEC 61000-4-5, surge pulse/line to ground)
• Interference immunity on signal cables	±1 kV (according to IEC 61000-4-4, burst, length < 30 m); ±2 kV (according to IEC 61000-4-4, burst, length > 30 m); ±2 kV (according to IEC 61000-4-5, surge sym./line to ground, length > 30 m)

## PC-based Automation

Industrial PC

Tablet PC

### SIMATIC Industrial Tablet PC

#### Technical specifications

Article number	<b>6AV7880-.....-2</b> SIMATIC ITP1000
<b>Degree and class of protection</b>	
IP degree of protection	IP40
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
Conforms to MIL-STD-810G	Yes
DIN/ISO 9001	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	5 °C; Max. 10 °C/h (no condensation)
• max.	45 °C; Max. 10 °C/h (no condensation)
<b>Operating systems</b>	
Local language of operating system	Multi-Language User Interface (MUI): 6 languages (English, German, French, Spanish, Italian, Chinese)
<b>pre-installed operating system</b>	
• Windows 7	Yes; Ultimate 64 bit, SP1
• Windows 10	Yes; Windows 10 Enterprise 2016 LTSB, 64 bit, MUI
<b>Software</b>	
<b>Preinstalled</b>	
• STEP 7 Professional 2010	No
• STEP 7 Professional (TIA Portal)	No
• STEP 7	No
• WinCC flexible Advanced 2008	No
• WinCC Advanced (TIA Portal)	No
• STEP 5	No
<b>Mechanics/material</b>	
Material of housing	metal
• Magnesium alloy	Yes
Socket for Kensington lock	Yes
rubber corner guards	Yes
<b>Dimensions</b>	
Width	330 mm
Height	32 mm
Depth	214 mm
<b>Weights</b>	
Weight, approx.	1.6 kg; incl. rechargeable battery
<b>Scope of supply</b>	
Accumulator	Yes
Power supply	Yes
Recovery media	Yes; Restore & Recovery

#### More information

Additional information is available on the Internet at:

<http://www.siemens.com/itp1000>

Accessories can be found under SIMATIC HMI accessories:

<https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10144445?tree=CatalogTree>

Automation technology -> Operator control and monitoring systems SIMATIC HMI -> Accessories

**System components for Tablet PC****Overview****Ordering data****Article No.**

*System components for  
Tablet PC*

Docking station for  
SIMATIC ITP1000

6AV7676-1AB00-0AA0

**Docking station**

A docking station is available for the SIMATIC Industrial Tablet PC.

In addition to being able to charge the device, the docking station also features one Ethernet, one DisplayPort and two USB ports.

With its external monitor, mouse and keyboard, the SIMATIC ITP1000 is upgraded into the equivalent of a full-scale office workplace.

The docking station is designed for users in industry. One-hand docking makes it quick and easy to insert and remove the SIMATIC ITP1000.

## PC-based Automation

Industrial PC

Tablet PC

### System components for Tablet PC

#### Technical specifications

Article number	<b>6AV7676-1AB00-0AA0</b> ITP1000 Docking Station
<b>General information</b>	
Product type designation	Docking station for ITP1000
<b>Connection type</b>	
• USB	Yes; USB 3.0 type A
<b>Supply voltage</b>	
Type of supply voltage	100 - 240 V AC
Rated value (DC)	19 V
<b>Interfaces</b>	
Interfaces/bus type	1x Ethernet (RJ45)
Number of USB interfaces	2
HMI-side interface	1x DisplayPort
<b>Standards, approvals, certificates</b>	
CE mark	Yes
<b>Ambient conditions</b>	
Suited for indoor use	Yes
Suited for outdoor use	No
<b>Mechanics/material</b>	
Material	
• Plastic	Yes
<b>Weights</b>	
Weight, approx.	2.8 kg
<b>Scope of supply</b>	
Delivery quantity in pieces	1; Quantity
<b>Other</b>	
Target devices	SIMATIC ITP1000

#### More information

Additional information is available on the Internet at:

<http://www.siemens.com/itp1000>

You can find additional accessories at:

<https://mall.industry.siemens.com/mall/ww/en/Catalog/Products/10144445?tree=CatalogTree>

Catalog -> Automation technology -> Operator control and monitoring systems SIMATIC HMI -> Accessories

**Overview****SIMATIC IFP Basic**

With the SIMATIC IFP Basic product series, the range of industrial touch monitors in the SIMATIC IFP product family has been extended by cost-effective versions.

SIMATIC IFP Basic devices feature touch operation and are available in 4 display sizes: 12", 15", 19" and 22".

**Ordering data****Article No.****SIMATIC IFP Basic****SIMATIC IFP1200 Basic**

Flat Panel with 12" display (16:10);  
Touch, 1 280 x 800 pixels  
Standard up to 5 m; for 24 V DC;  
DisplayPort / VGA interface

**6AV7862-2BC00-0AA0****SIMATIC IFP1500 Basic**

Flat Panel with 15" display (16:9);  
Touch, 1 366 x 768 pixels  
Standard up to 5 m; for 24 V DC;  
DisplayPort / VGA interface

**6AV7862-2BD00-0AA0****SIMATIC IFP1900 Basic**

Flat Panel with 19" display (16:9);  
Touch, 1 366 x 768 pixels  
Standard up to 5 m; for 24 V DC;  
DisplayPort / VGA interface

**6AV7862-2BE00-0AA0****SIMATIC IFP2200 Basic**

Flat Panel with 22" display (16:9);  
Touch, 1 920 x 1080 pixels  
Standard up to 5 m; for 24 V DC;  
DisplayPort / VGA interface

**6AV7862-2BF00-0AA0**

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC IPF Basic****Technical specifications**

Article number	<b>6AV7862-2BC00-0AA0</b> SIMATIC IPF1200 Basic	<b>6AV7862-2BD00-0AA0</b> SIMATIC IPF1500 Basic	<b>6AV7862-2BE00-0AA0</b> SIMATIC IPF1900 Basic	<b>6AV7862-2BF00-0AA0</b> SIMATIC IPF2200 Basic
<b>General information</b>				
Product type designation	IPF1200 Basic	IPF1500 Basic	IPF1900 Basic	IPF2200 Basic
Short designation	Basic Flat Panel 12" Touch	Basic Flat Panel 15" Touch	Basic Flat Panel 19" Touch	Basic Flat Panel 22" Touch
<b>Display</b>				
Design of display	TFT widescreen display, LED backlighting	TFT display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	12.1 in; 12"	15.6 in; 15"	18.5 in; 19"	21.5 in; 22"
On Screen Display (OSD) configuration	No	No	No	No
Number of colors	16 000 000; 16 million			
<b>Resolution (pixels)</b>				
• Image resolution	1 280 x 800	1 366 x 768	1 366 x 768	1 920 x 1 080
<b>General features</b>				
• Detachable from computer unit	5 m	5 m	5 m	5 m
<b>Backlighting</b>				
• Type of backlighting	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h	50 000 h	30 000 h
<b>Control elements</b>				
Control elements	single-touch screen	single-touch screen	single-touch screen	single-touch screen
<b>Touch operation</b>				
• Design as touch screen	Yes; Analog-resistive	Yes; Analog-resistive	Yes; Analog-resistive	Yes; Analog-resistive
<b>Installation type/mounting</b>				
Design	Built-in unit	Built-in unit	Built-in unit	Built-in unit
Mounting in portrait format possible	Yes	Yes	Yes	Yes
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Interfaces</b>				
Number of USB interfaces	2; USB 2.0 (downstream)			
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
<b>Video interfaces</b>				
• analog video signal (VGA)	Yes	Yes	Yes	Yes
• DisplayPort	Yes	Yes	Yes	Yes
<b>Touch interfaces</b>				
• USB	Yes; USB Type A			
<b>Degree and class of protection</b>				
IP (at the front)	IP65	IP65	IP65	IP65
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes; UL 61010-1, UL 61010-2-201			
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes	Yes
FCC	Yes	Yes	Yes	Yes

**Technical specifications**

Article number	6AV7862-2BC00-0AA0 SIMATIC IFP1200 Basic	6AV7862-2BD00-0AA0 SIMATIC IFP1500 Basic	6AV7862-2BE00-0AA0 SIMATIC IFP1900 Basic	6AV7862-2BF00-0AA0 SIMATIC IFP2200 Basic
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	45 °C	45 °C	45 °C	40 °C
<b>Relative humidity</b>				
• Operation, max.	85 %	85 %	85 %	85 %
<b>Vibrations</b>				
• Vibration load in operation	5 m/s <sup>2</sup>	5 m/s <sup>2</sup>	5 m/s <sup>2</sup>	5 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>				
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	250 m/s <sup>2</sup>	250 m/s <sup>2</sup>	250 m/s <sup>2</sup>
<b>Mechanics/material</b>				
Enclosure material (front)				
• Aluminum	Yes	Yes	Yes	Yes
<b>Dimensions</b>				
Width of the housing front	320 mm	406 mm	473 mm	540 mm
Height of housing front	226 mm	258 mm	297 mm	334 mm
Mounting cutout, width	302 mm	388 mm	455 mm	522 mm
Mounting cutout, height	208 mm	241 mm	279 mm	317 mm
<b>Weights</b>				
Weight (without packaging)	2.7 kg	4.1 kg	5.1 kg	6.5 kg

# PC-based Automation

Industrial PC

Industrial monitors and Thin Clients

## SIMATIC Industrial Flat Panel

### Overview



Industrial Flat Panels are rugged industrial monitors.

The devices are suitable as built-in devices and, in the PRO variant, for direct mounting on a support arm/pedestal.

Various display sizes of 12", 15", 19", 22" and 24" are available.

Depending on requirements, the monitors can be installed up to 100 m away from the IPC.

Convenient operation of modern user interfaces is possible thanks to multi-touch.

### Ordering data

#### Article No.

#### Article No.

##### Industrial Flat Panel monitors

###### **SIMATIC IFP1200 V2**

12" multi-touch, 1 280 x 800, standard design

without touch screen, display only, 1 280 x 800 pixels, for 24 V DC

- Standard up to 5 m, incl. DVI cable 1.8 m
- Extended version up to 30 m, incl. DVI/USB cable 1.8 m

with touch screen and pushbuttons, 1 280 x 800 pixels, for 24 V DC and 100-240 V AC

- Extended version up to 30 m, incl. DVI/USB cable 1.8 m

Multi-touch, 1 366 x 768 pixels, for 24 V DC

- Standard up to 5 m, incl. DVI/USB cable 1.8 m
- Standard up to 5 m, marine approval, incl. DVI/USB cable 1.8 m

Multi-touch, 1 366 x 768 pixels, for 24 V DC and 100-240 V AC

- Extended version up to 30 m, incl. DVI/USB cable 1.8 m
- Extended version up to 30 m, marine approval, incl. DVI/USB cable 1.8 m

Touch, 1 280 x 800 pixels, for 24 V DC

- Standard up to 5 m, incl. DP/USB cable 1.8 m

Touch, 1 280 x 800 pixels, for 24 V DC and 100-240 V AC

- Extended version up to 30 m, incl. DVI/USB cable 1.8 m

###### **SIMATIC IFP1500 V2**

15" multi-touch, 1 920 x 1 080 pixels

- Standard up to 5 m, incl. DP/USB cable 1.8 m

- Extended version HdBaseT up to 100 m

**6AV7863-2AA00-0AA0**

**6AV7863-2AB10-0AA0**

**6AV7863-2BB10-0AA0**

**6AV7863-2MA00-0AA0**

**6AV7863-2MA00-0SA0**

**6AV7863-2MB10-0AA0**

**6AV7863-2MB10-0SA0**

**6AV7863-2TA00-0AA0**

**6AV7863-2TB10-0AA0**

**6AV7863-5MA00-2AA0**

**6AV7863-5MA10-2AA0**

##### **SIMATIC IFP1900 V2**

19" multi-touch, 1 920 x 1 080 pixels

- Standard up to 5 m, incl. DP/USB cable 1.8 m
- Extended version HdBaseT up to 100 m

##### **SIMATIC IFP2200 V2**

22" multi-touch, 1 920 x 1 080 pixels

- Extended version up to 30 m, incl. DVI/USB cable 1.8 m
- Extended version up to 30 m, marine approval, incl. DVI/USB cable 1.8 m

Touch, 1 920 x 1 080 pixels, for 24 V DC

- Standard up to 5 m, incl. DVI cable 1.8 m

Touch, 1 920 x 1 080 pixels, for 24 V DC and 100-240 V AC

- Extended version up to 30 m, incl. DVI/USB cable 1.8 m

##### **SIMATIC IFP2400 V2**

24" multi-touch, 1 920 x 1 080 pixels

- Standard up to 5 m, incl. DP/USB cable 1.8 m
- Extended version HdBaseT up to 100 m

##### **SIMATIC IFP2200 with narrow border**

Multi-touch, 1 920 x 1 080 pixels, for 24 V DC

- Extended version up to 30 m, incl. DVI/USB cable 1.8 m
- Standard up to 5 m, incl. DP/USB cable 1.8 m
- Extended version HdBaseT up to 100 m

**6AV7863-6MA00-2AA0**

**6AV7863-6MA10-2AA0**

**6AV7863-4MB10-0AA0**

**6AV7863-4MB10-0SA0**

**6AV7863-4TA00-0AA0**

**6AV7863-4TB10-0AA0**

**6AV7863-7MA00-2AA0**

**6AV7863-7MA10-2AA0**

**6AV7466-8MA10-0AX0**

**6AV7863-4MA00-2AA0**

**6AV7863-4MA10-2AA0**

Ordering data	Article No.	Article No.
<i>Accessories</i>		
<b>Set with steel mounting clips</b>	<b>6AV6671-8XK00-0AX3</b>	
<b>DisplayPort cable (industrial quality)</b>		<b>Accessories for HDBaseT variants</b>
• 3 m	<b>6AV7860-0DH30-0AA0</b>	<b>Cable set, consisting of:</b>
• 5 m	<b>6AV7860-0DH50-0AA0</b>	Transceiver Unit with
		• Two ferrites
<b>DVI-D cable (industrial quality)</b>	<b>6AV7860-0BH30-0AA0</b>	• USB cable, length 0.5 m
• 3 m	<b>6AV7860-0BH50-0AA0</b>	• Connector type A
• 5 m		• Connector type B
<b>USB cable (industrial quality)</b>	<b>6AV7860-0CH30-0AA0</b>	DisplayPort cable, length 0.5 m
• 3 m	<b>6AV7860-0CH50-0AA0</b>	• Cat. 6A Ethernet cable, length see "Specification"
• 5 m		• 10 m
		• 15 m
		• 20 m
		• 30 m
		<b>6AV7860-1EX21-0AB1</b>
		<b>6AV7860-1EX21-5AB1</b>
		<b>6AV7860-1EX22-0AB1</b>
		<b>6AV7860-1EX23-0AB1</b>
		<b>Cat. 6A Ethernet cable</b>
		• 10 m
		<b>6AV7860-0EH01-0AA0</b>
		• 15 m
		<b>6AV7860-0EH01-5AA0</b>
		• 20 m
		<b>6AV7860-0EH02-0AA0</b>
		• 30 m
		<b>6AV7860-0EH03-0AA0</b>

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Flat Panel****Technical specifications**

Article number	<b>6AV7863-2AA00-0AA0</b> SIMATIC Flat Panel 15" Display only	<b>6AV7863-2AB10-0AA0</b> SIMATIC Flat Panel 15" Display only Ext	<b>6AV7863-2BB10-0AA0</b> SIMATIC Flat Panel 15" Touch/Key	<b>6AV7863-2MA00-0AA0</b> SIMATIC Flat Panel 15" Multitouch	<b>6AV7863-2MA00-0SA0</b> SIMATIC Flat Panel 15" Multitouch
<b>General information</b>					
Product type designation	IFP1500	IFP1500	IFP1500	IFP1500	IFP1500
Short designation	Flat Panel 15" display	Flat Panel 15" display ext.	Flat Panel 15" touch/keys	Flat Panel 15" multi-touch	Flat Panel 15" multi-touch ext. marine
<b>Display</b>					
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.4 in; 15"	15.4 in; 15"	15.4 in; 15"	15.6 in; 15"	15.6 in; 15"
Screen diagonal [cm]	40 cm	40 cm	40 cm	40 cm	40 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216
Viewing angle	170° x 170°	170° x 170°	170° x 170°	160° x 160°	160° x 160°
<b>Resolution (pixels)</b>					
• Image resolution	1 280 x 800	1 280 x 800	1 280 x 800	1 366 x 768	1 366 x 768
<b>General features</b>					
• Brightness/contrast	400 cd/m² / 1 000:1	400 cd/m² / 1 000:1	400 cd/m² / 1 000:1	400 cd/m² / 900:1	400 cd/m² / 900:1
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes		
• Detachable from computer unit	5 m	30 m	5 m	5 m	5 m
<b>Backlighting</b>					
• Type of backlighting	LED	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C	70 000 h; At 25°C	70 000 h; At 25°C
<b>Control elements</b>					
Control elements	none	none	keys and touch screen	multi-touch screen	multi-touch screen
<b>Input device</b>					
• Integrated mouse cursor control	No	No	No	No	No
<b>Touch operation</b>					
• Design as touch screen	No	No	Yes; Analog-resistive	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard			Yes	Yes	Yes
<b>Installation type/mounting</b>					
Design	Built-in unit	Built-in unit	Built-in unit	Built-in unit	Built-in unit
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
Rated value (AC)		100 V; Up to 240V, 50/60 Hz	100 V; Up to 240V, 50/60 Hz		
<b>Interfaces</b>					
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 1x onboard		
USB at the front			Yes		
Connection for keyboard/mouse		USB	USB		
<b>Video interfaces</b>					
• analog video signal (VGA)	No	No	No	No	No
• DVI-D	Yes	Yes	Yes	Yes	Yes
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>					
• USB	No	No	Yes	Yes	Yes

**Technical specifications**

Article number	<b>6AV7863-2AA00-0AA0</b>	<b>6AV7863-2AB10-0AA0</b>	<b>6AV7863-2BB10-0AA0</b>	<b>6AV7863-2MA00-0AA0</b>	<b>6AV7863-2MA00-OSA0</b>
	SIMATIC Flat Panel 15" Display only	SIMATIC Flat Panel 15" Display only Ext	SIMATIC Flat Panel 15" Touch/Key	SIMATIC Flat Panel 15" Multitouch	SIMATIC Flat Panel 15" Multitouch
<b>Degree and class of protection</b>					
IP (at the front)	IP65		IP65	IP65	IP65
NEMA (front)				Yes	Yes
• Enclosure Type 4x at the front				Yes	Yes
• Enclosure Type 12 at the front				Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark	Yes	Yes	Yes	Yes	Yes
cULus	Yes; Corresponds to UL 508				
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)				Yes	Yes
<b>Use in hazardous areas</b>					
• ATEX Zone 2				Yes	Yes
• ATEX Zone 22				Yes	Yes
• FM Class I Division 2	Yes	No	No	Yes	Yes
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• min.	0 °C				
• max.	50 °C; Vertical installation (horizontal)				
<b>Relative humidity</b>					
• Operation, max.	95 %; no condensation				
<b>Vibrations</b>					
• Vibration load in operation	10 m/s <sup>2</sup>				
• Vibration load during transport/storage	10 m/s <sup>2</sup>				
<b>Shock testing</b>					
• Shock load during operation	150 m/s <sup>2</sup>				
• shock acceleration during storage/ transport	150 m/s <sup>2</sup>				
<b>Mechanics/material</b>					
Enclosure material (front)					
• Aluminum	Yes	Yes	Yes		
• Glass				Yes	
<b>Dimensions</b>					
Width of the housing front	415 mm	415 mm	483 mm	416.5 mm	416.5 mm
Height of housing front	310 mm	310 mm	310 mm	298 mm	298 mm
Mounting cutout, width	396 mm; Tolerance: +1 mm	396 mm; Tolerance: +1 mm	450 mm; Tolerance: +1 mm	398 mm; Tolerance: +1 mm	398 mm; Tolerance: +1 mm
Mounting cutout, height	291 mm; Tolerance: +1 mm	291 mm; Tolerance: +1 mm	291 mm; Tolerance: +1 mm	279 mm; Tolerance: +1 mm	279 mm; Tolerance: +1 mm
Overall depth	62.5 mm				
<b>Weights</b>					
Weight (without packaging)	3.9 kg	3.9 kg	4.3 kg	4.2 kg	4.2 kg

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Flat Panel****Technical specifications**

Article number	<b>6AV7863-2MB10-0AA0</b> SIMATIC Flat Panel 15" Multitouch Ext	<b>6AV7863-2MB10-0SA0</b> SIMATIC Flat Panel 15" Multitouch Ext	<b>6AV7863-2TA00-0AA0</b> SIMATIC Flat Panel 15" Touch	<b>6AV7863-2TB10-0AA0</b> SIMATIC Flat Panel 15" Touch Ext
<b>General information</b>				
Product type designation	IFP1500	IFP1500	IFP1500	IFP1500
Short designation	Flat Panel 15" multi-touch ext.	Flat Panel 15" multi-touch ext. marine	Flat Panel 15" touch	Flat Panel 15" touch ext.
<b>Display</b>				
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.6 in; 15"	15.6 in; 15"	15.4 in; 15"	15.4 in; 15"
Screen diagonal [cm]	40 cm	40 cm	40 cm	40 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle	160° x 160°	160° x 160°	170° x 170°	170° x 170°
<b>Resolution (pixels)</b>				
• Image resolution	1 366 x 768	1 366 x 768	1 280 x 800	1 280 x 800
<b>General features</b>				
• Brightness/contrast	400 cd/m² / 900:1	400 cd/m² / 900:1	400 cd/m² / 1 000:1	400 cd/m² / 1 000:1
• Detachable from computer unit	30 m	30 m	5 m	5 m
<b>Backlighting</b>				
• Type of backlighting	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	70 000 h; At 25°C	70 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>				
Control elements	multi-touch screen	multi-touch screen	single-touch screen	single-touch screen
<b>Input device</b>				
• Integrated mouse cursor control	No	No	No	No
<b>Touch operation</b>				
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Analog-resistive	Yes; Analog-resistive
• Monitor keyboard	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>				
Design	Built-in unit	Built-in unit	Built-in unit	Built-in unit
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
Rated value (AC)		100 V; Up to 240V, 50/60 Hz		
<b>Interfaces</b>				
USB on the rear	Yes; 2x onboard	Yes; 2x onboard		Yes; 2x onboard
Connection for keyboard/mouse	USB	USB		USB
<b>Video interfaces</b>				
• analog video signal (VGA)	No	No	No	No
• DVI-D	Yes	Yes	Yes	Yes
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>				
• USB	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>				
IP (at the front)	IP65	IP65	IP65	IP65
NEMA (front)				
• Enclosure Type 4x at the front	Yes	Yes		
• Enclosure Type 12 at the front	Yes	Yes		

**Technical specifications**

Article number	<b>6AV7863-2MB10-0AA0</b> SIMATIC Flat Panel 15" Multitouch Ext	<b>6AV7863-2MB10-0SA0</b> SIMATIC Flat Panel 15" Multitouch Ext	<b>6AV7863-2TA00-0AA0</b> SIMATIC Flat Panel 15" Touch	<b>6AV7863-2TB10-0AA0</b> SIMATIC Flat Panel 15" Touch Ext
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes; Corresponds to UL 508	Yes; Corresponds to UL 508	Yes; Corresponds to UL 508	Yes; Corresponds to UL 508
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes		
<b>Use in hazardous areas</b>				
• ATEX Zone 2	No	No		
• ATEX Zone 22	No	No		
• FM Class I Division 2	No	No	Yes	No
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C; Vertical installation (horizontal)	50 °C; Vertical installation (horizontal)	50 °C; Vertical installation (horizontal)	50 °C; Vertical installation (horizontal)
<b>Relative humidity</b>				
• Operation, max.	95 %; no condensation	95 %; no condensation	95 %; no condensation	95 %; no condensation
<b>Vibrations</b>				
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>				
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Mechanics/material</b>				
Enclosure material (front)				
• Aluminum			Yes	Yes
• Glass	Yes			
<b>Dimensions</b>				
Width of the housing front	416.5 mm	416.5 mm	415 mm	415 mm
Height of housing front	298 mm	298 mm	310 mm	310 mm
Mounting cutout, width	398 mm; Tolerance: +1 mm	398 mm; Tolerance: +1 mm	396 mm; Tolerance: +1 mm	396 mm; Tolerance: +1 mm
Mounting cutout, height	279 mm; Tolerance: +1 mm	279 mm; Tolerance: +1 mm	291 mm; Tolerance: +1 mm	291 mm; Tolerance: +1 mm
Overall depth	62.5 mm	62.5 mm	62.5 mm	62.5 mm
<b>Weights</b>				
Weight (without packaging)	4.2 kg	4.2 kg	3.9 kg	3.9 kg

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Flat Panel****Technical specifications**

Article number	<b>6AV7863-5MA00-2AA0</b> SIMATIC Flat Panel 15" MT V2	<b>6AV7863-5MA10-2AA0</b> SIMATIC Flat Panel 15 MT V2 Extended
<b>General information</b>		
Product type designation	IFP1500	IFP1500
Short designation	SIMATIC IFP1500 V2	SIMATIC IFP1500 V2
<b>Display</b>		
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.6 in; 15"	15.6 in; 15"
Screen diagonal [cm]	40 cm	40 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle	178° x 178°	178° x 178°
<b>Resolution (pixels)</b>		
• Image resolution	1 920 x 1 080	1 920 x 1 080
<b>General features</b>		
• Brightness/contrast	400 cd/m² / 700:1	400 cd/m² / 700:1
• non-reflective and tempered mineral glass screen	Yes	Yes
• Detachable from computer unit	5 m	100 m; HDBaseT V2.0
<b>Backlighting</b>		
• Type of backlighting	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>		
Control elements	multi-touch screen	multi-touch screen
<b>Touch operation</b>		
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes; If supported by operating system	Yes; If supported by operating system
<b>Installation type/mounting</b>		
Design	Built-in unit	Built-in unit
Mounting in portrait format possible	Yes	Yes
<b>Supply voltage</b>		
Rated value (DC)	24 V; PELV / SELV floating	24 V; PELV / SELV floating
<b>Input current</b>		
Current consumption (rated value)	1 A	1 A
Current consumption, max.	1.3 A	1.3 A
<b>Interfaces</b>		
Number of USB interfaces	2; USB 2.0 type A	2; USB 2.0 type A
USB on the rear	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB
<b>Video interfaces</b>		
• analog video signal (VGA)	No	No
• DVI-D	Yes	Yes
• DisplayPort	Yes; Display port V1.2	Yes; Display port V1.2
<b>Touch interfaces</b>		
• USB	Yes	Yes
<b>Degree and class of protection</b>		
IP (at the front)	IP65	IP65
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes

**Technical specifications**

Article number	<b>6AV7863-5MA00-2AA0</b> SIMATIC Flat Panel 15" MT V2	<b>6AV7863-5MA10-2AA0</b> SIMATIC Flat Panel 15 MT V2 Extended
<b>Standards, approvals, certificates</b>		
Certificate of suitability	hazardous zone 2/22; shipbuilding	hazardous zone 2/22; shipbuilding
CE mark	Yes	Yes
UL approval	Yes; cULus, cUL	Yes; cULus, cUL
cULus	Yes	Yes
FM approval	Yes; Class I Div. 2	Yes; Class I Div. 2
RCM (formerly C-TICK)	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2	CE, EN 55011, EN 61000-6-4, EN 61000-6-2
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes; Available soon	Yes; Available soon
• ATEX Zone 22	Yes; Available soon	Yes; Available soon
• IECEx Zone 2	Yes; Available soon	Yes; Available soon
• IECEx Zone 22	Yes; Available soon	Yes; Available soon
• FM Class I Division 2	Yes; Available soon	Yes; Available soon
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	3 500 m	3 500 m
<b>Relative humidity</b>		
• Operation, max.	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>		
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>		
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	250 m/s <sup>2</sup>	250 m/s <sup>2</sup>
<b>Mechanics/material</b>		
Enclosure material (front)		
• Aluminum	Yes	Yes
• Aluminum casting	Yes	Yes
• Glass	Yes; at front	Yes; at front
Enclosure material (rear)	aluminum	aluminum
<b>Dimensions</b>		
Width of the housing front	398 mm	398 mm
Height of housing front	257 mm	257 mm
Mounting cutout, width	382 mm; Tolerance: +1 mm	382 mm; Tolerance: +1 mm
Mounting cutout, height	241 mm; Tolerance: +1 mm	241 mm; Tolerance: +1 mm
Overall depth	63.4 mm	63.4 mm
<b>Weights</b>		
Weight (without packaging)	4 kg	4 kg

# PC-based Automation

Industrial PC

Industrial monitors and Thin Clients

## SIMATIC Industrial Flat Panel

### Technical specifications

Article number	<b>6AV7863-6MA00-2AA0</b> SIMATIC Flat Panel 19" MT V2	<b>6AV7863-6MA10-2AA0</b> SIMATIC Flat Panel 19 MT V2 Extended
<b>General information</b>		
Product type designation	IFP1900	IFP1900
Short designation	SIMATIC IFP1900 V2	SIMATIC IFP1900 V2
<b>Display</b>		
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	18.5 in; 19"	18.5 in; 19"
Screen diagonal [cm]	47 cm	47 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle	178° x 178°	178° x 178°
<b>Resolution (pixels)</b>		
• Image resolution	1 920 x 1 080	1 920 x 1 080
<b>General features</b>		
• Brightness/contrast	350 cd/m² / 1 000:1	350 cd/m² / 1 000:1
• non-reflective and tempered mineral glass screen	Yes	Yes
• Detachable from computer unit	5 m	100 m; HDBaseT V2.0
<b>Backlighting</b>		
• Type of backlighting	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>		
Control elements	multi-touch screen	multi-touch screen
<b>Touch operation</b>		
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes; If supported by operating system	Yes; If supported by operating system
<b>Installation type/mounting</b>		
Design	Built-in unit	Built-in unit
Mounting in portrait format possible	Yes	Yes
<b>Supply voltage</b>		
Rated value (DC)	24 V; PELV / SELV floating	24 V; PELV / SELV floating
<b>Input current</b>		
Current consumption (rated value)	1.2 A	1.2 A
Current consumption, max.	1.5 A	1.5 A
<b>Interfaces</b>		
Number of USB interfaces	2; USB 2.0 type A	2; USB 2.0 type A
USB on the rear	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB
<b>Video interfaces</b>		
• analog video signal (VGA)	No	No
• DVI-D	Yes	
• DisplayPort	Yes; Display port V1.2	Yes; Display port V1.2
<b>Touch interfaces</b>		
• USB	Yes	Yes
<b>Degree and class of protection</b>		
IP (at the front)	IP65	IP65
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes

**Technical specifications**

Article number	<b>6AV7863-6MA00-2AA0</b> SIMATIC Flat Panel 19" MT V2	<b>6AV7863-6MA10-2AA0</b> SIMATIC Flat Panel 19 MT V2 Extended
<b>Standards, approvals, certificates</b>		
Certificate of suitability	hazardous zone 2/22; shipbuilding	hazardous zone 2/22; shipbuilding
CE mark	Yes	Yes
UL approval	Yes; cULus, cUL	Yes; cULus, cUL
cULus	Yes	Yes
FM approval	Yes; Class I Div. 2	Yes; Class I Div. 2
RCM (formerly C-TICK)	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2	CE, EN 55011, EN 61000-6-4, EN 61000-6-2
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes; Available soon	Yes; Available soon
• ATEX Zone 22	Yes; Available soon	Yes; Available soon
• IECEx Zone 2	Yes; Available soon	Yes; Available soon
• IECEx Zone 22	Yes; Available soon	Yes; Available soon
• FM Class I Division 2	Yes; Available soon	Yes; Available soon
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	3 500 m	3 500 m
<b>Relative humidity</b>		
• Operation, max.	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>		
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>		
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	250 m/s <sup>2</sup>	250 m/s <sup>2</sup>
<b>Mechanics/material</b>		
Enclosure material (front)		
• Aluminum	Yes	Yes
• Aluminum casting	Yes	Yes
• Glass	Yes; at front	Yes; at front
Enclosure material (rear)	aluminum	aluminum
<b>Dimensions</b>		
Width of the housing front	464 mm	464 mm
Height of housing front	294 mm	294 mm
Mounting cutout, width	448 mm; Tolerance: +1 mm	448 mm; Tolerance: +1 mm
Mounting cutout, height	278 mm; Tolerance: +1 mm	278 mm; Tolerance: +1 mm
Overall depth	63.4 mm	63.4 mm
<b>Weights</b>		
Weight (without packaging)	5 kg	5 kg

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Flat Panel****Technical specifications**

Article number	<b>6AV7863-4MB10-0AA0</b> SIMATIC Flat Panel 22" Multitouch Ext	<b>6AV7863-4TA00-0AA0</b> SIMATIC Flat Panel 22" Touch	<b>6AV7863-4TB10-0AA0</b> SIMATIC Flat Panel 22" Touch Ext
<b>General information</b>			
Product type designation	IFP2200	IFP2200	IFP2200
Short designation	Flat Panel 22" multi-touch ext.	Flat Panel 22" touch	Flat Panel 22" touch ext.
<b>Display</b>			
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	21.5 in; 22"	21.5 in; 22"	21.5 in; 22"
Screen diagonal [cm]	56 cm	56 cm	56 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle	170° x 170°	170° x 170°	170° x 170°
<b>Resolution (pixels)</b>			
• Image resolution	1 920 x 1 080	1 920 x 1 080	1 920 x 1 080
<b>General features</b>			
• Brightness/contrast	250 cd/m² / 1 000:1	250 cd/m² / 1 000:1	250 cd/m² / 1 000:1
• non-reflective and tempered mineral glass screen	Yes		
• Detachable from computer unit	30 m	5 m	30 m
<b>Backlighting</b>			
• Type of backlighting	LED	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>			
Control elements	multi-touch screen	single-touch screen	single-touch screen
<b>Input device</b>			
• Integrated mouse cursor control	Yes; Also externally via USB	No	No
<b>Touch operation</b>			
• Design as touch screen	Yes; Projective-capacitive	Yes; Analog-resistive	Yes; Analog-resistive
• Monitor keyboard	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Design	Built-in unit	Built-in unit	Built-in unit
<b>Supply voltage</b>			
Rated value (DC)	24 V; PELV	24 V	24 V
Rated value (AC)	100 V; Up to 240V, 50/60 Hz		100 V; Up to 240V, 50/60 Hz
<b>Interfaces</b>			
USB on the rear	Yes; 2x onboard		Yes; 2x onboard
Connection for keyboard/mouse	USB		USB
<b>Video interfaces</b>			
• analog video signal (VGA)	No	No	No
• DVI-D	Yes	Yes	Yes
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>			
• USB	Yes	Yes	Yes
<b>Degree and class of protection</b>			
IP (at the front)	IP65	IP65	IP65
NEMA (front)			
• Enclosure Type 4x at the front	Yes		
• Enclosure Type 12 at the front	Yes		

**Technical specifications**

Article number	<b>6AV7863-4MB10-0AA0</b> SIMATIC Flat Panel 22" Multitouch Ext	<b>6AV7863-4TA00-0AA0</b> SIMATIC Flat Panel 22" Touch	<b>6AV7863-4TB10-0AA0</b> SIMATIC Flat Panel 22" Touch Ext
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes; Corresponds to UL 508	Yes; Corresponds to UL 508	Yes; Corresponds to UL 508
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	Yes; Available soon		
• ATEX Zone 22	Yes; Available soon		
• FM Class I Division 2	No	Yes	No
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	45 °C; Vertical installation (horizontal)	45 °C; Vertical installation (horizontal)	45 °C; Vertical installation (horizontal)
<b>Relative humidity</b>			
• Operation, max.	95 %; no condensation	95 %; no condensation	95 %; no condensation
<b>Vibrations</b>			
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>			
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Mechanics/material</b>			
Enclosure material (front)			
• Aluminum		Yes	
• Glass	Yes		Yes
<b>Dimensions</b>			
Width of the housing front	560 mm	560 mm	560 mm
Height of housing front	380 mm	380 mm	380 mm
Mounting cutout, width	542 mm; Tolerance: +1 mm	542 mm; Tolerance: +1 mm	542 mm; Tolerance: +1 mm
Mounting cutout, height	362 mm; Tolerance: +1 mm	362 mm; Tolerance: +1 mm	362 mm; Tolerance: +1 mm
Overall depth	62.5 mm	62.5 mm	62.5 mm
<b>Weights</b>			
Weight (without packaging)	6.5 kg	6.5 kg	6.5 kg

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Flat Panel****Technical specifications**

Article number	<b>6AV7863-7MA00-2AA0</b> SIMATIC Flat Panel 24" MT V2	<b>6AV7863-7MA10-2AA0</b> SIMATIC Flat Panel 24 MT V2 Extended
<b>General information</b>		
Product type designation	IFP2400	IFP2400
Short designation	SIMATIC IFP2400 V2	SIMATIC IFP2400 V2
<b>Display</b>		
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	23.8 in; 24"	23.8 in; 24"
Screen diagonal [cm]	60.47 cm	60.47 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle	178° x 178°	178° x 178°
<b>Resolution (pixels)</b>		
• Image resolution	1 920 x 1 080	1 920 x 1 080
<b>General features</b>		
• Brightness/contrast	250 cd/m² / 1 000:1	250 cd/m² / 1 000:1
• non-reflective and tempered mineral glass screen	Yes	
• Detachable from computer unit	5 m	100 m; HDBaseT V2.0
<b>Backlighting</b>		
• Type of backlighting	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>		
Control elements	multi-touch screen	multi-touch screen
<b>Touch operation</b>		
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes; If supported by operating system	Yes; If supported by operating system
<b>Installation type/mounting</b>		
Design	Built-in unit	Built-in unit
Mounting in portrait format possible	Yes	Yes
<b>Supply voltage</b>		
Rated value (DC)	24 V; PELV / SELV floating	24 V
<b>Input current</b>		
Current consumption (rated value)	1.5 A	1.5 A
Current consumption, max.	1.9 A	1.9 A
<b>Interfaces</b>		
Number of USB interfaces	2; USB 2.0 type A	2; USB 2.0 type A
USB on the rear	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	
<b>Video interfaces</b>		
• analog video signal (VGA)	No	No
• DVI-D	Yes	
• DisplayPort	Yes; Display port V1.2	Yes; Display port V1.2
<b>Touch interfaces</b>		
• USB	Yes	Yes
<b>Degree and class of protection</b>		
IP (at the front)	IP65	IP65
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes

**Technical specifications**

Article number	<b>6AV7863-7MA00-2AA0</b> SIMATIC Flat Panel 24" MT V2	<b>6AV7863-7MA10-2AA0</b> SIMATIC Flat Panel 24 MT V2 Extended
<b>Standards, approvals, certificates</b>		
Certificate of suitability	hazardous zone 2/22; shipbuilding	hazardous zone 2/22; shipbuilding
CE mark	Yes	Yes
UL approval	Yes; cULus, cUL	Yes; cULus, cUL
cULus	Yes	Yes
FM approval	Yes; Class I Div. 2	Yes; Class I Div. 2
RCM (formerly C-TICK)	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2	CE, EN 55011, EN 61000-6-4, EN 61000-6-2
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes; Available soon	Yes; Available soon
• ATEX Zone 22	Yes; Available soon	Yes; Available soon
• IECEx Zone 2	Yes; Available soon	Yes; Available soon
• IECEx Zone 22	Yes; Available soon	Yes; Available soon
• FM Class I Division 2	Yes; Available soon	Yes; Available soon
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	45 °C	45 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	3 500 m	3 500 m
<b>Relative humidity</b>		
• Operation, max.	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>		
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>		
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	250 m/s <sup>2</sup>	250 m/s <sup>2</sup>
<b>Mechanics/material</b>		
Enclosure material (front)		
• Aluminum	Yes	Yes
• Aluminum casting	Yes	Yes
• Glass	Yes; at front	Yes; at front
Enclosure material (rear)	aluminum	aluminum
<b>Dimensions</b>		
Width of the housing front	585 mm	585 mm
Height of housing front	363 mm	363 mm
Mounting cutout, width	569 mm; Tolerance: +1 mm	569 mm; Tolerance: +1 mm
Mounting cutout, height	347 mm; Tolerance: +1 mm	347 mm; Tolerance: +1 mm
Overall depth	63.4 mm	63.4 mm
<b>Weights</b>		
Weight (without packaging)	7.9 kg	7.9 kg

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Flat Panel****Technical specifications**

Article number	<b>6AV7466-8MA10-0AA0</b> SIMATIC Flat Panel 22" Multitouch Ext
<b>General information</b>	
Product type designation	IFP2200
Short designation	Flat Panel 22" multi-touch ext.
<b>Display</b>	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	21.5 in
Screen diagonal [cm]	56 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit
<b>General features</b>	
• Brightness/contrast	250 cd/m <sup>2</sup> / 1 000:1
• non-reflective and tempered mineral glass screen	Yes
• Detachable from computer unit	30 m
<b>Backlighting</b>	
• Type of backlighting	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C
<b>Touch operation</b>	
• Design as touch screen	Yes; Projective-capacitive
• Monitor keyboard	Yes
<b>Installation type/mounting</b>	
Design	Built-in unit
<b>Supply voltage</b>	
Rated value (DC)	24 V; PELV / SELV floating
<b>Interfaces</b>	
USB on the rear	Yes; 2x onboard
Connection for keyboard/mouse	USB
<b>Video interfaces</b>	
• analog video signal (VGA)	No
• DVI-D	Yes
• DisplayPort	Yes; DisplayPort V1.1
<b>Touch interfaces</b>	
• USB	Yes

**Technical specifications**

Article number	<b>6AV7466-8MA10-0AA0</b> SIMATIC Flat Panel 22" Multitouch Ext
<b>Degree and class of protection</b>	
NEMA (front)	Yes
• Enclosure Type 4x at the front	Yes
• Enclosure Type 12 at the front	Yes
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes; cULus, cUL
cULus	Yes; Corresponds to UL 508
RCM (formerly C-TICK)	Yes
KC approval	Yes
<b>Use in hazardous areas</b>	
• ATEX Zone 2	No; Available soon
• ATEX Zone 22	No; Available soon
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	45 °C; Vertical installation (horizontal)
<b>Relative humidity</b>	
• Operation, max.	95 %; no condensation
<b>Vibrations</b>	
• Vibration load in operation	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>
<b>Shock testing</b>	
• Shock load during operation	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>
<b>Mechanics/material</b>	
Enclosure material (front)	
• Glass	Yes
<b>Dimensions</b>	
Width of the housing front	529 mm
Height of housing front	331 mm
Mounting cutout, width	513 mm; Tolerance: +1 mm
Mounting cutout, height	315 mm; Tolerance: +1 mm
Overall depth	72 mm
<b>Weights</b>	
Weight (without packaging)	6.7 kg

## PC-based Automation

Industrial PC

Industrial monitors and Thin Clients

### SIMATIC Industrial Thin Client

#### Overview



SIMATIC ITC Industrial Thin Clients are powerful operating units for flexible use in distributed visualization applications. All devices are equipped with high-resolution, brilliant widescreen displays, and due to the diverse communication protocols they can be used both for challenging machine-level operator control & monitoring and for the connection to control systems, e.g. in the SCADA environment. They can be used as (additional) operator panels on a SIMATIC Industrial PC, Panel PC, or server, and on a SIMATIC Panel or SINUMERIK.

SIMATIC Industrial Thin Clients are also available as glass-front, capacitive multi-touch devices in display sizes 15", 19" and 22".

- SIMATIC ITC1500 V3 – 15" multi-touch 1 366 x 768
- SIMATIC ITC1900 V3 – 19" multi-touch 1 366 x 768
- SIMATIC ITC2200 V3 – 22" multi-touch 1 920 x 1 080

The following installation versions are still available with resistive single-touch:

- SIMATIC ITC1200 – 12" touch
- SIMATIC ITC1500 – 15" touch
- SIMATIC ITC1900 – 19" touch
- SIMATIC ITC2200 – 22" touch

The SIMATIC HMI Thin Client Ex is available for hazardous areas (Zone 1/11). This device differs technically from the devices mentioned above. For more details, refer to the SIMATIC Thin Client EX chapter.

#### Ordering data

#### Article No.

##### *Industrial Thin Client with multi-touch*

##### **SIMATIC Industrial Thin Client V3**

Capacitive touch sensor  
Protocols supported: RDP, VNC, SMARTSERVER HTML5, etc., standard design, built-in unit

- SIMATIC ITC1500 V3  
15" widescreen TFT display
- SIMATIC ITC1900 V3  
19" widescreen TFT display
- SIMATIC ITC2200 V3  
22" widescreen TFT display

**6AV6646-1BA15-0AA0**

**6AV6646-1BA18-0AA0**

**6AV6646-1BA22-1AA0**

##### *Industrial Thin Client*

##### **Industrial Thin client V2**

Touch operation  
Protocols supported: RDP, VNC, SMARTSERVER, Web

- SIMATIC ITC1200  
12" widescreen TFT display
- SIMATIC ITC1500  
15" widescreen TFT display
- SIMATIC ITC1900  
19" widescreen TFT display
- SIMATIC ITC2200  
22" widescreen TFT display

**6AV6646-1AA22-0AX0**

**6AV6646-1AB22-0AX0**

**6AV6646-1AC22-0AX0**

**6AV6646-1AD22-0AX0**

##### *Accessories*

**See Accessories chapter 6**

**Technical specifications**

Article number	<b>6AV6646-1BA15-0AA0</b> SIMATIC ITC1500 V3	<b>6AV6646-1BA18-0AA0</b> SIMATIC ITC1900 V3	<b>6AV6646-1BA22-1AA0</b> SIMATIC ITC2200 V3
<b>General information</b>			
Product type designation	ITC1500 V3	ITC1900 V3	ITC2200 V3
<b>Display</b>			
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.6 in; 15"	18.5 in; 19"	21.5 in; 22"
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Image resolution	1 366 x 768	1 366 x 768	1 920 x 1 080
<b>General features</b>			
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes
• Detachable from computer unit	100 m	100 m	100 m
<b>Backlighting</b>			
• Type of backlighting	LED, dimmable	LED, dimmable	LED, dimmable
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	30 000 h; At 25°C
<b>Control elements</b>			
Control elements	multi-touch screen	multi-touch screen	multi-touch screen
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Design	Built-in unit	Built-in unit	Built-in unit
<b>Supply voltage</b>			
Type of supply voltage	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch)	2; 2 ports (switch)	2; 2 ports (switch)
Number of USB interfaces	4; on rear	4; on rear	4; on rear
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB	USB
<b>Industrial Ethernet</b>			
• Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s
<b>Degree and class of protection</b>			
NEMA (front)		NEMA 4x (when installed)	
• Enclosure Type 4x at the front	Yes	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	Yes	Yes	Yes
• ATEX Zone 22	Yes	Yes	Yes
• IECEx Zone 2	Yes	Yes	Yes
• IECEx Zone 22	Yes	Yes	Yes
• cULus Class I Zone 2, Division 2	Yes	Yes	Yes
• FM Class I Division 2	Yes	Yes	Yes

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Thin Client****Technical specifications**

Article number	<b>6AV6646-1BA15-0AA0</b> SIMATIC ITC1500 V3	<b>6AV6646-1BA18-0AA0</b> SIMATIC ITC1900 V3	<b>6AV6646-1BA22-1AA0</b> SIMATIC ITC2200 V3
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	50 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>			
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>			
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Software</b>			
Web browser	Yes	Yes	Yes
PDF reader	Yes	Yes	Yes
<b>Configuration</b>			
<b>Configuration</b>			
• Local	Yes	Yes	Yes
• Remote	Yes; Via web page	Yes; Via web page	Yes; Via web page
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	3; german / english	2; german / english	3; german / english
<b>Peripherals/Options</b>			
USB memory	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected
<b>Mechanics/material</b>			
Enclosure material (front)			
• Aluminum	Yes	Yes	Yes
<b>Dimensions</b>			
Width of the housing front	398 mm	464 mm	529 mm
Height of housing front	257 mm	294 mm	331 mm
Mounting cutout, width	382 mm	448 mm	513 mm
Mounting cutout, height	241 mm	278 mm	315 mm
Overall depth	73 mm	73 mm	73 mm
<b>Weights</b>			
Weight (without packaging)	5 kg	6.1 kg	7.2 kg

**Technical specifications**

Article number	<b>6AV6646-1AA22-0AX0</b> SIMATIC ITC1200	<b>6AV6646-1AB22-0AX0</b> SIMATIC ITC1500	<b>6AV6646-1AC22-0AX0</b> SIMATIC ITC1900	<b>6AV6646-1AD22-0AX0</b> SIMATIC ITC2200
<b>General information</b>				
Product type designation	ITC1200	ITC1500	ITC1900	ITC2200
<b>Display</b>				
Design of display	TFT widescreen display, LED backlighting			
Screen diagonal	12.1 in; 12"	15.4 in; 15"	18.5 in; 19"	21.5 in; 22"
Number of colors	16 777 216	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>				
• Image resolution	1 280 x 800	1 280 x 800	1 366 x 768	1 920 x 1 080
<b>General features</b>				
• Detachable from computer unit	100 m	100 m	100 m	100 m
<b>Backlighting</b>				
• Type of backlighting	LED, dimmable	LED, dimmable	LED, dimmable	LED, dimmable
• MTBF backlighting (at 25 °C)				30 000 h; At 25°C
<b>Control elements</b>				
Control elements	single-touch screen	single-touch screen	single-touch screen	single-touch screen
<b>Touch operation</b>				
• Design as touch screen	Yes	Yes	Yes	Yes
• Monitor keyboard	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>				
Design	Built-in unit	Built-in unit	Built-in unit	Built-in unit
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	1	1	1	1
Number of USB interfaces	2; on rear	2; on rear	2; on rear	2; on rear
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB	USB	USB
<b>Industrial Ethernet</b>				
• Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
KC approval	Yes	Yes	Yes	Yes
<b>Use in hazardous areas</b>				
• ATEX Zone 2	Yes			
• ATEX Zone 22	Yes			
• cULus Class I Zone 2, Division 2	Yes	Yes; Available soon	Yes; Available soon	Yes; Available soon
• FM Class I Division 2	Yes	Yes; Available soon	Yes; Available soon	Yes; Available soon
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	45 °C	45 °C
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	90 %	90 %

**PC-based Automation**

Industrial PC

Industrial monitors and Thin Clients

**SIMATIC Industrial Thin Client****Technical specifications**

Article number	<b>6AV6646-1AA22-0AX0</b> SIMATIC ITC1200	<b>6AV6646-1AB22-0AX0</b> SIMATIC ITC1500	<b>6AV6646-1AC22-0AX0</b> SIMATIC ITC1900	<b>6AV6646-1AD22-0AX0</b> SIMATIC ITC2200
<b>Software</b>				
Web browser	Yes	Yes	Yes	Yes
PDF reader	Yes	Yes	Yes	Yes
<b>Configuration</b>				
<b>Configuration</b>				
• Local	Yes	Yes	Yes	Yes
• Remote	Yes; With Remote Configuration Center (RCC) as of V2.0	Yes; With Remote Configuration Center (RCC) as of V2.0	Yes; With Remote Configuration Center (RCC) as of V2.0	Yes; With Remote Configuration Center (RCC) as of V2.0
<b>Languages</b>				
<b>Online languages</b>				
• Number of online/runtime languages	2; german / english	2; german / english	2; german / english	3; DE, EN, HU
<b>Peripherals/Options</b>				
USB memory	Yes; USB storage medium can be connected			
<b>Mechanics/material</b>				
Enclosure material (front)				
• Aluminum	Yes	Yes	Yes	Yes
<b>Dimensions</b>				
Width of the housing front	330 mm	415 mm	483 mm	560 mm
Height of housing front	241 mm	310 mm	337 mm	380 mm
Mounting cutout, width	310 mm	396 mm	465 mm	542 mm
Mounting cutout, height	221 mm	291 mm	319 mm	362 mm
Overall depth	82 mm	75 mm	75 mm	75 mm
<b>Weights</b>				
Weight (without packaging)	3.4 kg	5.2 kg	6.5 kg	7.1 kg

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-itc>

## Overview

### Fully-enclosed IP65-protected devices

The SIMATIC fully-enclosed IP65-protected devices (SIMATIC Industrial Flat Panel PRO, SIMATIC Flat Panel PRO, SIMATIC Thin Client PRO and SIMATIC IPC477D PRO) are specially designed for mounting on a support arm/pedestal. Thanks to their extremely rugged design, the devices are ideal for industrial applications in harsh environments.

#### Portfolio:

- Comfort Panels PRO
- SIMATIC Industrial Flat Panel PRO
- SIMATIC Flat Panel PRO
- SIMATIC Industrial Thin Client PRO
- SIMATIC Thin Client PRO
- SIMATIC IPC477E PRO (15", 19", 22" display size)
- SIMATIC IPC477D PRO (15", 19", 22" display size)
- System components for fully-enclosed IP65-protected devices:
  - Fixing elements
  - Extension Units and operator controls
  - Extension components

### Devices with stainless steel front

SIMATIC devices with stainless steel fronts (SIMATIC Industrial Thin Client INOX) are designed for use in the food and beverage, pharmaceutical and fine chemicals industries and other hygienic applications for machine-level operator control and monitoring.

The fully-enclosed SIMATIC devices with stainless steel fronts (SIMATIC IPC277E 19" INOX PRO, SIMATIC IFP1900 INOX PRO) are specially designed for mounting on a support arm/pedestal. Thanks to their slim design, the devices are ideally suited to space-saving use on food and beverage machinery and packaging machinery.

#### Portfolio:

- SIMATIC Industrial Thin Client INOX
- SIMATIC Industrial Flat Panel IFP1900 INOX PRO
- SIMATIC Industrial Flat Panel IFP2200 INOX MT ETH
- SIMATIC IPC277E 19" INOX PRO

### Devices for hazardous areas

The SIMATIC HMI Ex devices are intrinsically safe Panel PCs and thin clients that have been specially designed for "Zone 1" and "Zone 2" hazardous areas.

#### Portfolio:

- SIMATIC HMI Panel PC Ex NG
- SIMATIC HMI Panel PC Ex OG
- SIMATIC HMI Panel PC Ex
- SIMATIC HMI Thin Client Ex NG
- SIMATIC HMI Thin Client Ex OG
- SIMATIC HMI Thin Client Ex2

## PC-based Automation

Industrial PC

Devices for special requirements

### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

#### Overview



**SIMATIC IFP PRO and SIMATIC IFP PRO ETH:**  
**The new Industrial Flat Panels with fully-enclosed IP65 protection – the industrial widescreen monitors for harsh ambient conditions that can be installed directly on the machine**

#### SIMATIC IFP1200 PRO

The **SIMATIC IFP1200 PRO** supplements the current product range of the new Industrial Flat Panels. Equipped with innovative, projected capacitive touchscreen technology for the detection of multi-touch gestures with up to ten fingers and with a brilliant widescreen display and glass front.

The devices are connected to PCs, especially SIMATIC IPCs, via the DisplayPort interface or, over greater distances, via HDBaseT and USB.

The rugged aluminum housing of the monitor enables it to be used directly at the machine and ensures durability, even in harsh and extreme operating environments.

- IP65 degree of protection – fully-enclosed
- Can be located up to 100 m from the computer unit (IFP Extended version)
- Rugged, industrial 12", 15", 19", 22" and 24" widescreen displays (multi-touch)
- Slim, modern design
- Can be adapted to support arm system of various manufacturers
- Fast integration capability
- Low energy requirement
- Small footprint and low weight
- Low wiring overhead and short maintenance times thanks to use of standard connecting cables
- Integration of operator controls in the new Extension Units
- Also available in neutral design

#### SIMATIC IFP PRO ETH

IFP1500 PRO ETH, IFP1900 PRO ETH and IFP2200 PRO ETH supplement the current product range of new Industrial Flat Panels with their full HD resolution (1 920 x 1 080 pixels) and neutral design fronts. Equipped with innovative, projected capacitive touchscreen technology for the detection of multi-touch gestures with up to ten fingers and with a brilliant widescreen display and glass front. The devices are connected by means of a DisplayPort or Ethernet and USB to PCs, in particular SIMATIC IPCs. The rugged aluminum housing of the monitor enables it to be used directly at the machine and ensures durability, even in harsh and extreme operating environments.

#### Ordering data

#### Article No.

##### **SIMATIC IFP1200 V2 PRO**

12" (16:10) Flat Panel, multi-touch, extended version up to 100 m via HDBaseT,  
 1 280 x 800 pixels,  
 for 24 V DC DisplayPort  
 fully-enclosed IP65 protection

- Prepared for pedestal and extension components
- Prepared for support arm without extension components
- Prepared for support arm and extension components

##### Neutral design:

- Prepared for pedestal and extension components
- Prepared for support arm without extension components
- Prepared for support arm and extension components

**6AV7863-1MA14-2AA0**

**6AV7863-1MA15-2AA0**

**6AV7863-1MA16-2AA0**

**6AV7863-1MA14-2NA0**

**6AV7863-1MA15-2NA0**

**6AV7863-1MA16-2NA0**

##### **SIMATIC IFP1500 V2 PRO**

15" (16:9) Flat Panel, multi-touch, extended version up to 100 m via HDBaseT,  
 1 920 x 1 080 pixels,  
 for 24 V DC DisplayPort  
 fully-enclosed IP65 protection

- Prepared for pedestal and extension components
- Prepared for support arm without extension components
- Prepared for support arm and extension components

**6AV7863-5MA14-2AA0**

**6AV7863-5MA15-2AA0**

**6AV7863-5MA16-2AA0**

##### Neutral design:

- Prepared for pedestal and extension components
- Prepared for support arm without extension components
- Prepared for support arm and extension components

**6AV7863-5MA14-2NA0**

**6AV7863-5MA15-2NA0**

**6AV7863-5MA16-2NA0**

##### **SIMATIC IFP1900 V2 PRO**

19" (16:9) Flat Panel, multi-touch, extended version up to 100 m via HDBaseT,  
 1 920 x 1 080 pixels,  
 for 24 V DC DisplayPort,  
 fully-enclosed IP65 protection

- Prepared for pedestal and extension components
- Prepared for support arm without extension components
- Prepared for support arm and extension components

**6AV7863-6MA14-2AA0**

**6AV7863-6MA15-2AA0**

**6AV7863-6MA16-2AA0**

##### Neutral design:

- Prepared for pedestal and extension components
- Prepared for support arm without extension components
- Prepared for support arm and extension components

**6AV7863-6MA14-2NA0**

**6AV7863-6MA15-2NA0**

**6AV7863-6MA16-2NA0**

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

Ordering data	Article No.	Article No.
<b>SIMATIC IFP2200 V2 PRO</b>		
22" (16:9) Flat Panel, multi-touch, extended version up to 100 m via HDBaseT, 1 920 x 1 080 pixels, for 24 V DC DisplayPort, fully-enclosed IP65 protection		
• Prepared for pedestal and extension components	<b>6AV7863-4MA14-2AA0</b>	
• Prepared for support arm without extension components	<b>6AV7863-4MA15-2AA0</b>	<b>6AV7466-5MA01-0AA0</b>
• Prepared for support arm and extension components	<b>6AV7863-4MA16-2AA0</b>	<b>6AV7466-5MA02-0AA0</b>
<u>Neutral design:</u>		
• Prepared for pedestal and extension components	<b>6AV7863-4MA14-2NA0</b>	
• Prepared for support arm without extension components	<b>6AV7863-4MA15-2NA0</b>	
• Prepared for support arm and extension components	<b>6AV7863-4MA16-2NA0</b>	
<b>SIMATIC IFP2400 V2 PRO</b>		
24" (16:9) Flat Panel, multi-touch, extended version up to 100 m via HDBaseT, 1 920 x 1 080 pixels, for 24 V DC DisplayPort, fully-enclosed IP65 protection		
• Prepared for pedestal and extension components	<b>6AV7863-7MA14-2AA0</b>	<b>6AV7466-6MA01-0AA0</b>
• Prepared for support arm without extension components	<b>6AV7863-7MA15-2AA0</b>	<b>6AV7466-6MA02-0AA0</b>
• Prepared for support arm and extension components	<b>6AV7863-7MA16-2AA0</b>	
<u>Portrait</u>		
• Prepared for support arm and extension components	<b>6AV7863-7MA17-2AA0</b>	
<u>Neutral design:</u>		
• Prepared for pedestal and extension components	<b>6AV7863-7MA14-2NA0</b>	
• Prepared for support arm without extension components	<b>6AV7863-7MA15-2NA0</b>	
• Prepared for support arm and extension components	<b>6AV7863-7MA16-2NA0</b>	
<u>Portrait</u>		
• Prepared for support arm and extension components	<b>6AV7863-7MA17-2NA0</b>	
<b>SIMATIC IFP1500 PRO HD ETH</b>		
15" (16:9) Flat Panel, multi-touch, Ethernet up to 100 m, 1 920 x 1 080 pixels, for 24 V DC DisplayPort/Ethernet interface, fully-enclosed IP65 protection, neutral design		
• Prepared for pedestal and extension components	<b>6AV7466-5MA01-0AA0</b>	
• Prepared for support arm and extension components	<b>6AV7466-5MA02-0AA0</b>	
<b>SIMATIC IFP1900 PRO HD ETH</b>		
19" (16:9) Flat Panel, multi-touch, Ethernet up to 100 m, 1 920 x 1 080 pixels, for 24 V DC DisplayPort/Ethernet interface, fully-enclosed IP65 protection, neutral design		
• Prepared for pedestal and extension components	<b>6AV7466-6MA01-0AA0</b>	
• Prepared for support arm and extension components	<b>6AV7466-6MA02-0AA0</b>	
<b>SIMATIC IFP2200 PRO HD ETH</b>		
22" (16:9) Flat Panel, multi-touch, Ethernet up to 100 m, 1 920 x 1 080 pixels, for 24 V DC DisplayPort/Ethernet interface, fully-enclosed IP65 protection, neutral design		
• Prepared for pedestal and extension components	<b>6AV7466-8MA01-0AA0</b>	
• Prepared for support arm and extension components	<b>6AV7466-8MA02-0AA0</b>	

Note:

As in the case of the Flat Panel PRO, adaptation to support arm/pedestal systems is possible using the basic adapter. This is included in the scope of supply (only in the case of the "prepared for support arm and extension components" version is the basic adapter not included, as the connection is made via a round tube).

For the version "prepared for support arm and extension components", installation can alternatively take place with the Siemens round tube adapter or with a standard 48 mm diameter round tube.

The round tube adapter enables the transition from a round tube connection to the familiar mechanical interface of the basic adapter. This means you can combine different versions of the PRO devices with the same support arm or pedestal system.

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	6AV7863-1MA14-2AA0	6AV7863-1MA16-2AA0	6AV7863-1MA15-2AA0	6AV7863-1MA14-2NA0	6AV7863-1MA15-2NA0	6AV7863-1MA16-2NA0
	SIMATIC Flat Panel 12" MT V2 PRO					
<b>General information</b>						
Short designation	Flat Panel 12" multi-touch ext.					
<b>Display</b>						
Design of display	TFT widescreen display, LED backlighting					
Screen diagonal	12.1 in					
Screen diagonal [cm]	30.7 cm					
On Screen Display (OSD) configuration	No	No	No	No	No	No
Number of colors	16 777 216; 24 bit					
Viewing angle	176° x 176°					
<b>Resolution (pixels)</b>						
• Image resolution	1 280 x 800					
<b>General features</b>						
• Brightness/contrast	400 cd/m² / 800:1					
• Detachable from computer unit	100 m; HDBaseT V2.0					
<b>Backlighting</b>						
• Type of backlighting	LED	LED	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	70 000 h; At 25°C					
<b>Control elements</b>						
<b>Input device</b>						
• Integrated mouse cursor control	Yes; Also externally via USB					
<b>Touch operation</b>						
• Design as multi-touch screen	Yes; Projective-capacitive					
• Monitor keyboard	Yes	Yes	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>						
Design	Pedestal mounting	Support arm mounting	Support arm mounting	Pedestal mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>						
Rated value (DC)	24 V; PELV / SELV floating					
<b>Input current</b>						
Current consumption (rated value)	0.65 A					
Current consumption, max.	1 A	1 A	1 A	1 A	1 A	1 A
<b>Interfaces</b>						
Number of USB interfaces	2; USB 2.0 type A					
USB on the rear	Yes; 2x onboard					
Connection for keyboard/mouse	USB	USB	USB	USB	USB	USB
<b>Video interfaces</b>						
• DisplayPort	Yes; Display port V1.2					
<b>Touch interfaces</b>						
• USB	Yes	Yes	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>						
NEMA (front)						
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes	Yes	Yes	Yes	Yes

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

**Technical specifications**

Article number	6AV7863-1MA14-2AA0	6AV7863-1MA16-2AA0	6AV7863-1MA15-2AA0	6AV7863-1MA14-2NA0	6AV7863-1MA15-2NA0	6AV7863-1MA16-2NA0
	SIMATIC Flat Panel 12" MT V2 PRO					
<b>Standards, approvals, certificates</b>						
Certificate of suitability	hazardous zone 2/22; shipbuilding					
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
UL approval	Yes; cULus, cUL					
cULus	Yes; Corresponds to UL 508					
FM approval	Yes; Available soon					
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes	Yes	Yes	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2					
<b>Use in hazardous areas</b>						
• ATEX Zone 2	Yes; Available soon					
• ATEX Zone 22	Yes; Available soon					
• IECEx Zone 2	Yes; Available soon					
• IECEx Zone 22	Yes; Available soon					
• FM Class I Division 2	Yes; Available soon					
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	0 °C					
• max.	45 °C					
<b>Altitude during operation relating to sea level</b>						
• Installation altitude above sea level, max.	3 500 m					
<b>Relative humidity</b>						
• Operation, max.	95 %; no condensation					
<b>Vibrations</b>						
• Vibration load in operation	1 gn					
• Vibration load during transport/storage	1 gn					
<b>Shock testing</b>						
• Shock load during operation	15 gn					
• shock acceleration during storage/transport	15 gn					
<b>Mechanics/material</b>						
Enclosure material (front)	In standard design	In standard design	In standard design	With neutral design	With neutral design	With neutral design
• Aluminum	Yes	Yes	Yes	Yes	Yes	Yes
• Aluminum casting	Yes	Yes	Yes	Yes	Yes	Yes
• Glass	Yes; at front					
Enclosure material (rear)	aluminum	aluminum	aluminum	aluminum	aluminum	aluminum
<b>Dimensions</b>						
Width	313 mm					
Height	225 mm; Without basic adapter					
Depth	100.7 mm	162.8 mm	100.7 mm	100.7 mm	100.7 mm	162.8 mm
Width of the housing front	313 mm					
Height of housing front	225 mm					
<b>Weights</b>						
Weight (without packaging)	4 kg	4.4 kg	4 kg	4 kg	4 kg	4.4 kg

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	<b>6AV7466-5MA01-0AA0</b>	<b>6AV7466-5MA02-0AA0</b>	<b>6AV7466-6MA01-0AA0</b>	<b>6AV7466-6MA02-0AA0</b>	<b>6AV7466-8MA01-0AA0</b>	<b>6AV7466-8MA02-0AA0</b>
	SIMATIC IFP1500 PRO OEM ETH pedestal	SIMATIC IFP1500 PRO HD OEM ETH sup. arm	SIMATIC IFP1900 PRO HD OEM ETH pedestal	SIMATIC IFP1900 PRO HD OEM ETH sup. arm	SIMATIC IFP2200 PRO OEM ETH pedestal	SIMATIC IFP2200 PRO OEM ETH support arm
<b>General information</b>						
Product type designation	IFP1500 PRO HD	IFP1500 PRO HD	IFP1900 PRO HD	IFP1900 PRO HD	IFP2200 PRO	IFP2200 PRO
Short designation	Flat Panel 15" PRO Full HD multi-touch Ethernet monitor	Flat Panel 15" PRO Full HD multi-touch Ethernet monitor	Flat Panel 19" PRO Full HD ETH multi-touch ext.	Flat Panel 19" PRO Full HD ETH multi-touch ext.	Flat Panel 22" PRO ETH multi-touch ext.	Flat Panel 22" PRO ETH multi-touch ext.
<b>Display</b>						
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.6 in	15.6 in	18.5 in	18.5 in	22 in	22 in
Screen diagonal [cm]	40 cm	40 cm	47 cm	47 cm	56 cm	56 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle			178° x 178°	178° x 178°		
<b>General features</b>						
• Brightness/contrast	400 cd/m² / 700:1	400 cd/m² / 700:1	350 cd/m² / 1 000:1	350 cd/m² / 1 000:1	300 cd/m² / 1 000:1	300 cd/m² / 1 000:1
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes	Yes	Yes	Yes
• Detachable from computer unit	100 m; Ethernet	100 m; Ethernet	100 m; Ethernet	100 m; Ethernet	100 m; Ethernet	100 m; Ethernet
<b>Backlighting</b>						
• Type of backlighting	LED	LED	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>						
<b>Input device</b>						
• Integrated mouse cursor control	Yes; Also externally via USB	Yes; Also externally via USB	Yes; Also externally via USB	Yes; Also externally via USB	Yes; Also externally via USB	Yes; Also externally via USB
<b>Touch operation</b>						
• Design as touch screen	Yes	Yes	Yes	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes	Yes	Yes	Yes
• Monitor keyboard	Yes	Yes	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>						
Design	Pedestal mounting	Support arm mounting	Pedestal mounting	Support arm mounting	Pedestal mounting	Support arm mounting
<b>Supply voltage</b>						
Rated value (DC)	24 V; PELV / SELV floating	24 V; PELV / SELV floating	24 V; PELV / SELV floating	24 V; PELV / SELV floating	24 V; PELV / SELV floating	24 V; PELV / SELV floating
<b>Interfaces</b>						
Number of industrial Ethernet interfaces	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB	USB	USB	USB	USB
<b>Video interfaces</b>						
• analog video signal (VGA)	No	No	No	No	No	No
• DVI-D	No	No	No	No	No	No
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>						
• USB	Yes	Yes	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>						
NEMA (front)						
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes	Yes

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

**Technical specifications**

Article number	6AV7466-5MA01-0AA0	6AV7466-5MA02-0AA0	6AV7466-6MA01-0AA0	6AV7466-6MA02-0AA0	6AV7466-8MA01-0AA0	6AV7466-8MA02-0AA0
	SIMATIC IFP1500 PRO OEM ETH pedestal	SIMATIC IFP1500 PRO HD OEM ETH sup. arm	SIMATIC IFP1900 PRO HD OEM ETH pedestal	SIMATIC IFP1900 PRO HD OEM ETH sup. arm	SIMATIC IFP2200 PRO OEM ETH pedestal	SIMATIC IFP2200 PRO OEM ETH support arm
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
UL approval	Yes; In application process					
cULus	Yes; In application process					
RCM (formerly C-TICK)	Yes; In application process					
KC approval	No	No	No	No	No	No
EAC (formerly Gost-R)	Yes; In application process					
<b>Use in hazardous areas</b>						
• ATEX Zone 2	No	No	No	No	No	No
• ATEX Zone 22	No	No	No	No	No	No
• FM Class I Division 2	No	No	No	No	No	No
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	0 °C					
• max.	50 °C; Vertical installation (horizontal)	45 °C; Vertical installation (horizontal)	45 °C; Vertical installation (horizontal)			
<b>Relative humidity</b>						
• Operation, max.	95 %	95 %	95 %; no condensation			
<b>Vibrations</b>						
• Vibration load in operation	10 m/s <sup>2</sup>					
• Vibration load during transport/storage	10 m/s <sup>2</sup>					
<b>Shock testing</b>						
• Shock load during operation	150 m/s <sup>2</sup>					
• shock acceleration during storage/transport	150 m/s <sup>2</sup>					
<b>Mechanics/material</b>						
Enclosure material (front)						
• Glass	Yes; at front					
Enclosure material (rear)						
<b>Dimensions</b>						
Width	396 mm	396 mm	462 mm	462 mm	527 mm	527 mm
Height	255 mm; Without basic adapter	255 mm	292 mm; Without basic adapter	292 mm	329 mm; Without basic adapter	329 mm
Depth	101 mm; Without basic adapter	163 mm	94 mm; Without basic adapter	163 mm	94 mm; Without basic adapter	163 mm
<b>Weights</b>						
Weight (without packaging)	4 kg	4 kg	5.7 kg	5.7 kg	6.7 kg	6.7 kg

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	6AV7863-6MA14-2AA0	6AV7863-6MA15-2AA0	6AV7863-6MA16-2AA0	6AV7863-6MA14-2NA0	6AV7863-6MA15-2NA0	6AV7863-6MA16-2NA0
	SIMATIC Flat Panel 19 MT V2 PRO					
<b>General information</b>						
Product type designation	IFP1900 PRO					
Short designation	Flat Panel 19" PRO multi-touch ext.					
<b>Display</b>						
Design of display	TFT widescreen display, LED backlighting					
Screen diagonal	18.5 in; 19"					
Screen diagonal [cm]	47 cm					
On Screen Display (OSD) configuration	No; Adjustable by means of software					
Number of colors	16 777 216; 24 bit					
Viewing angle	178° x 178°					
<b>Resolution (pixels)</b>						
• Image resolution	1 920 x 1 080					
<b>General features</b>						
• Brightness/contrast	350 cd/m² / 1 000:1					
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes	Yes	Yes	Yes
• Detachable from computer unit	100 m; HDBaseT V2.0					
<b>Backlighting</b>						
• Type of backlighting	LED	LED	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C					
<b>Control elements</b>						
Control elements	multi-touch screen					
<b>Input device</b>						
• Integrated mouse cursor control	Yes; Also externally via USB					
<b>Touch operation</b>						
• Design as multi-touch screen	Yes; Projective- capacitive					
• Monitor keyboard	Yes	Yes	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>						
Design	Pedestal mounting	Support arm mounting	Support arm mounting	Pedestal mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>						
Rated value (DC)	24 V; PELV / SELV floating					
<b>Input current</b>						
Current consumption (rated value)	1.2 A					
Current consumption, max.	1.5 A					
<b>Interfaces</b>						
Number of USB interfaces	2; USB 2.0 type A					
USB on the rear	Yes; 2x onboard USB					
Connection for keyboard/mouse						
<b>Video interfaces</b>						
• analog video signal (VGA)	No	No	No	No	No	No
• DisplayPort	Yes; Display port V1.2					
<b>Touch interfaces</b>						
• USB	Yes	Yes	Yes	Yes	Yes	Yes

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

**Technical specifications**

Article number	6AV7863-6MA14-2AA0	6AV7863-6MA15-2AA0	6AV7863-6MA16-2AA0	6AV7863-6MA14-2NA0	6AV7863-6MA15-2NA0	6AV7863-6MA16-2NA0
	SIMATIC Flat Panel 19 MT V2 PRO					
<b>Degree and class of protection</b>						
IP (at the front)	IP65	IP65	IP65	IP65	IP65	IP65
IP (rear)	IP65	IP65	IP65	IP65	IP65	IP65
NEMA (front)						
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>						
Certificate of suitability	hazardous zone 2/22; shipbuilding					
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
UL approval	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes; Corresponds to UL 508					
FM approval	Available soon					
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes	Yes	Yes	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2					
<b>Use in hazardous areas</b>						
• ATEX Zone 2	Available soon					
• ATEX Zone 22	Available soon					
• IECEx Zone 2	Available soon					
• IECEx Zone 22	Available soon					
• cULus Class I Zone 2, Division 2	Available soon					
• FM Class I Division 2	Available soon					
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	0 °C					
• max.	45 °C					
<b>Relative humidity</b>						
• Operation, max.	95 %; no condensation					
<b>Vibrations</b>						
• Vibration load in operation	1 gn					
• Vibration load during transport/storage	1 gn					
<b>Shock testing</b>						
• Shock load during operation	15 gn					
• shock acceleration during storage/transport	15 gn					
<b>Mechanics/material</b>						
Enclosure material (front)	In standard design	In standard design	In standard design	With neutral design	With neutral design	With neutral design
• Aluminum	Yes	Yes	Yes	Yes	Yes	Yes
• Aluminum casting	Yes	Yes	Yes	Yes	Yes	Yes
• Glass	Yes; at front aluminum					
Enclosure material (rear)						
<b>Dimensions</b>						
Width	462 mm					
Height	296 mm; Without basic adapter					
Depth	93.7 mm; Without basic adapter	93.7 mm; Without basic adapter	163 mm; Without basic adapter	93.7 mm; Without basic adapter	93.7 mm; Without basic adapter	163 mm; Without basic adapter
<b>Weights</b>						
Weight (without packaging)	6.3 kg	6.3 kg	6.9 kg	6.3 kg	6.3 kg	6.9 kg

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	6AV7863-4MA14-2AA0	6AV7863-4MA15-2AA0	6AV7863-4MA16-2AA0	6AV7863-4MA14-2NA0	6AV7863-4MA15-2NA0	6AV7863-4MA16-2NA0
	SIMATIC Flat Panel 22 MT V2 PRO					
<b>General information</b>						
Product type designation	IFP2200 PRO					
Short designation	Flat Panel 22" PRO multi-touch ext.					
<b>Display</b>						
Design of display	TFT widescreen display, LED backlighting					
Screen diagonal	21.5 in; 22"					
Screen diagonal [cm]	54.6 cm					
On Screen Display (OSD) configuration	No; Adjustable by means of software					
Number of colors	16 777 216; 24 bit					
Viewing angle	178° x 178°					
<b>Resolution (pixels)</b>						
• Image resolution	1 920 x 1 080					
<b>General features</b>						
• Brightness/contrast	250 cd/m² / 1 000:1					
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes	Yes	Yes	Yes
• Detachable from computer unit	100 m; HDBaseT V2.0					
<b>Backlighting</b>						
• Type of backlighting	LED	LED	LED	LED	LED	LED
• MTBF backlighting (at 25 °C)	30 000 h; At 25°C					
<b>Control elements</b>						
Control elements	multi-touch screen					
<b>Input device</b>						
• Integrated mouse cursor control	Yes; Also externally via USB					
<b>Touch operation</b>						
• Design as multi-touch screen	Yes; Projective-capacitive					
• Monitor keyboard	Yes	Yes	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>						
Design	Pedestal mounting	Support arm mounting	Support arm mounting	Pedestal mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>						
Rated value (DC)	24 V; PELV / SELV floating					
<b>Input current</b>						
Current consumption (rated value)	1 A	1 A	1 A	1 A	1 A	1 A
Current consumption, max.	1.3 A					
<b>Interfaces</b>						
Number of USB interfaces	2; USB 2.0 type A					
USB on the rear	Yes; 2x onboard					
Connection for keyboard/mouse	USB	USB	USB	USB	USB	USB
<b>Video interfaces</b>						
• analog video signal (VGA)	No	No	No	No	No	No
• DisplayPort	Yes; Display port V1.2					
<b>Touch interfaces</b>						
• USB	Yes	Yes	Yes	Yes	Yes	Yes

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

**Technical specifications**

Article number	6AV7863-4MA14-2AA0	6AV7863-4MA15-2AA0	6AV7863-4MA16-2AA0	6AV7863-4MA14-2NA0	6AV7863-4MA15-2NA0	6AV7863-4MA16-2NA0
	SIMATIC Flat Panel 22 MT V2 PRO					
<b>Degree and class of protection</b>						
IP (at the front)	IP65	IP65	IP65	IP65	IP65	IP65
IP (rear)	IP65	IP65	IP65	IP65	IP65	IP65
NEMA (front)						
• Enclosure Type 4x at the front	Yes	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>						
Certificate of suitability	hazardous zone 2/22; shipbuilding					
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
UL approval	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes; Corresponds to UL 508					
FM approval	Available soon					
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes	Yes	Yes	Yes
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2					
<b>Use in hazardous areas</b>						
• ATEX Zone 2	Available soon					
• ATEX Zone 22	Available soon					
• IECEx Zone 2	Available soon					
• IECEx Zone 22	Available soon					
• cULus Class I Zone 2, Division 2	Available soon					
• FM Class I Division 2	Available soon					
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	0 °C					
• max.	45 °C					
<b>Altitude during operation relating to sea level</b>						
• Installation altitude above sea level, max.	3 500 m					
<b>Relative humidity</b>						
• Operation, max.	95 %; no condensation					
<b>Vibrations</b>						
• Vibration load in operation	1 gn					
• Vibration load during transport/storage	1 gn					
<b>Shock testing</b>						
• Shock load during operation	15 gn					
• shock acceleration during storage/transport	15 gn					
<b>Mechanics/material</b>						
Enclosure material (front)	In standard design	In standard design	In standard design	With neutral design	With neutral design	With neutral design
• Aluminum	Yes	Yes	Yes	Yes	Yes	Yes
• Aluminum casting	Yes	Yes	Yes	Yes	Yes	Yes
• Glass	Yes; at front					
Enclosure material (rear)	aluminum	aluminum	aluminum	aluminum	aluminum	aluminum
<b>Dimensions</b>						
Width	527 mm					
Height	329 mm; Without basic adapter					
Depth	93.7 mm; Without basic adapter	93.7 mm; Without basic adapter	162.8 mm; Without basic adapter	93.7 mm; Without basic adapter	93.7 mm; Without basic adapter	162.8 mm; Without basic adapter
Width of the housing front	527 mm					
Height of housing front	329 mm					
<b>Weights</b>						
Weight (without packaging)	7.6 kg	7.6 kg	8.2 kg	7.6 kg	7.6 kg	8.2 kg

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	6AV7863-7MA14-2AA0	6AV7863-7MA15-2AA0	6AV7863-7MA16-2AA0	6AV7863-7MA17-2AA0	6AV7863-7MA14-2NA0	6AV7863-7MA15-2NA0	6AV7863-7MA16-2NA0	6AV7863-7MA17-2NA0
	SIMATIC Flat Panel 24 MT V2 PRO							
<b>General information</b>								
Product type designation	IPF2400 PRO							
Short designation	Flat Panel 24" PRO multi-touch ext.							
<b>Display</b>								
Design of display	TFT wide-screen display, LED backlighting							
Screen diagonal	23.8 in							
Screen diagonal [cm]	60.47 cm							
On Screen Display (OSD) configuration	No; Adjustable by means of software							
Number of colors	16 777 216; 24 bit							
Viewing angle	178° x 178°							
<b>Resolution (pixels)</b>								
• Image resolution	1 920 x 1 080	1 920 x 1 080	1 920 x 1 080	1 080 x 1 920	1 920 x 1 080	1 920 x 1 080	1 920 x 1 080	1 080 x 1 920
<b>General features</b>								
• Brightness/contrast	250 cd/m² / 1 000:1							
• Detachable from computer unit	100 m; HDBaseT V2.0							
<b>Backlighting</b>								
• Type of backlighting	LED							
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C							
<b>Control elements</b>								
Control elements	multi-touch screen							
<b>Touch operation</b>								
• Design as multi-touch screen	Yes; Projective-capacitive							
• Monitor keyboard	Yes							
<b>Installation type/mounting</b>								
Design	Pedestal mounting	Support arm mounting	Support arm mounting	Support arm mounting	Pedestal mounting	Support arm mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>								
Rated value (DC)	24 V; PELV / SELV floating							
<b>Input current</b>								
Current consumption (rated value)	1.5 A							
Current consumption, max.	1.9 A							
<b>Interfaces</b>								
Number of USB interfaces	2; USB 2.0 type A							
USB on the rear	Yes; 2x onboard							
Connection for keyboard/mouse	USB							
<b>Video interfaces</b>								
• DisplayPort	Yes; Display port V1.2							
<b>Touch interfaces</b>								
• USB	Yes							

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

**Technical specifications**

Article number	6AV7863-7MA14-2AA0	6AV7863-7MA15-2AA0	6AV7863-7MA16-2AA0	6AV7863-7MA17-2AA0	6AV7863-7MA14-2NA0	6AV7863-7MA15-2NA0	6AV7863-7MA16-2NA0	6AV7863-7MA17-2NA0
	SIMATIC Flat Panel 24 MT V2 PRO							
<b>Degree and class of protection</b>								
IP (at the front)	IP65							
IP (rear)	IP65							
NEMA (front)								
• Enclosure Type 4x at the front	Yes							
<b>Standards, approvals, certificates</b>								
Certificate of suitability	hazardous zone 2/22; shipbuilding							
CE mark	Yes							
UL approval	Yes; cULus, cUL							
cULus	Yes							
FM approval	Available soon							
RCM (formerly C-TICK)	Yes							
EAC (formerly Gost-R)	Yes							
EMC	CE, EN 55011, EN 61000-6-4, EN 61000-6-2							
Marine approval	Available soon							
<b>Use in hazardous areas</b>								
• ATEX Zone 2	Yes; Available soon							
• ATEX Zone 22	Yes; Available soon							
• IECEx Zone 2	Yes; Available soon							
• IECEx Zone 22	Yes; Available soon							
• cULus Class I Zone 2, Division 2	Yes; Available soon							
• FM Class I Division 2	Yes; Available soon							

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	6AV7863-7MA14-2AA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA15-2AA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA16-2AA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA17-2AA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA14-2NA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA15-2NA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA16-2NA0 SIMATIC Flat Panel 24 MT V2 PRO	6AV7863-7MA17-2NA0 SIMATIC Flat Panel 24 MT V2 PRO
<b>Ambient conditions</b>								
<b>Ambient temperature during operation</b>								
• min.	0 °C							
• max.	45 °C							
<b>Altitude during operation relating to sea level</b>								
• Installation altitude above sea level, max.	3 500 m							
<b>Relative humidity</b>								
• Operation, max.	95 %; no condensation							
<b>Vibrations</b>								
• Vibration load in operation	1 gn							
• Vibration load during transport/storage	1 gn							
<b>Shock testing</b>								
• Shock load during operation	15 gn							
• shock acceleration during storage/transport	15 gn							
<b>Mechanics/material</b>								
Enclosure material (front)	In standard design	In standard design	In standard design	In standard design	With neutral design	With neutral design	With neutral design	With neutral design
• Aluminum	Yes							
• Aluminum casting	Yes							
• Glass	Yes; at front aluminum							
Enclosure material (rear)								
<b>Dimensions</b>								
Width	583 mm	583 mm	583 mm	361 mm	583 mm	583 mm	583 mm	361 mm
Height	361 mm; Without basic adapter	361 mm; Without basic adapter	361 mm; Without basic adapter	583 mm; Without basic adapter	361 mm; Without basic adapter	361 mm; Without basic adapter	361 mm; Without basic adapter	583 mm; Without basic adapter
Depth	93.7 mm; Without basic adapter	93.7 mm; Without basic adapter	162.8 mm; Without basic adapter	162.8 mm; Without basic adapter	93.7 mm; Without basic adapter	93.7 mm; Without basic adapter	162.8 mm; Without basic adapter	162.8 mm; Without basic adapter
<b>Weights</b>								
Weight (without packaging)	9.2 kg	9.2 kg	9.9 kg	9.2 kg	9.2 kg	9.2 kg	9.9 kg	9.2 kg

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

### Technical specifications

Article number	<b>6AV7466-5MA01-0AA0</b> SIMATIC IFP1500 PRO OEM ETH pedestal	<b>6AV7466-5MA02-0AA0</b> SIMATIC IFP1500 PRO HD OEM ETH sup. arm
<b>General information</b>		
Product type designation	IFP1500 PRO HD	IFP1500 PRO HD
Short designation	Flat Panel 15" PRO Full HD multi-touch Ethernet monitor	Flat Panel 15" PRO Full HD multi-touch Ethernet monitor
<b>Display</b>		
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.6 in	15.6 in
Screen diagonal [cm]	40 cm	40 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit
<b>General features</b>		
• Brightness/contrast	400 cd/m <sup>2</sup> / 700:1	400 cd/m <sup>2</sup> / 700:1
• non-reflective and tempered mineral glass screen	Yes	Yes
• Detachable from computer unit	100 m; Ethernet	100 m; Ethernet
<b>Backlighting</b>		
• Type of backlighting	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>		
<b>Input device</b>		
• Integrated mouse cursor control	Yes; Also externally via USB	Yes; Also externally via USB
<b>Touch operation</b>		
• Design as touch screen	Yes	Yes
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes
<b>Installation type/mounting</b>		
Design	Pedestal mounting	Support arm mounting
<b>Supply voltage</b>		
Rated value (DC)	24 V; PELV / SELV floating	24 V; PELV / SELV floating
<b>Interfaces</b>		
Number of industrial Ethernet interfaces	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45
USB on the rear	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB
<b>Video interfaces</b>		
• analog video signal (VGA)	No	No
• DVI-D	No	No
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>		
• USB	Yes	Yes
<b>Degree and class of protection</b>		
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	<b>6AV7466-5MA01-0AA0</b> SIMATIC IFP1500 PRO OEM ETH pedestal	<b>6AV7466-5MA02-0AA0</b> SIMATIC IFP1500 PRO HD OEM ETH sup. arm
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
UL approval	Yes; In application process	Yes; In application process
cULus	Yes; In application process	Yes; In application process
RCM (formerly C-TICK)	Yes; In application process	Yes; In application process
KC approval	No	No
EAC (formerly Gost-R)	Yes; In application process	Yes; In application process
<b>Use in hazardous areas</b>		
• ATEX Zone 2	No	No
• ATEX Zone 22	No	No
• FM Class I Division 2	No	No
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	50 °C; Vertical installation (horizontal)	50 °C; Vertical installation (horizontal)
<b>Relative humidity</b>		
• Operation, max.	95 %	95 %
<b>Vibrations</b>		
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>		
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Mechanics/material</b>		
Enclosure material (front)		
• Glass	Yes; at front	Yes; at front
Enclosure material (rear)		aluminum
<b>Dimensions</b>		
Width	396 mm	396 mm
Height	255 mm; Without basic adapter	255 mm
Depth	101 mm; Without basic adapter	163 mm
<b>Weights</b>		
Weight (without packaging)	4 kg	4 kg

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

### Technical specifications

Article number	<b>6AV7466-6MA01-0AA0</b> SIMATIC IFP1900 PRO HD OEM ETH pedestal	<b>6AV7466-6MA02-0AA0</b> SIMATIC IFP1900 PRO HD OEM ETH sup. arm
<b>General information</b>		
Product type designation	IFP1900 PRO HD	IFP1900 PRO HD
Short designation	Flat Panel 19" PRO Full HD ETH multi-touch ext.	Flat Panel 19" PRO Full HD ETH multi-touch ext.
<b>Display</b>		
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	18.5 in	18.5 in
Screen diagonal [cm]	47 cm	47 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit
Viewing angle	178° x 178°	178° x 178°
<b>General features</b>		
• Brightness/contrast	350 cd/m² / 1 000:1	350 cd/m² / 1 000:1
• non-reflective and tempered mineral glass screen	Yes	Yes
• Detachable from computer unit	100 m; Ethernet	100 m; Ethernet
<b>Backlighting</b>		
• Type of backlighting	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>		
<b>Input device</b>		
• Integrated mouse cursor control	Yes; Also externally via USB	Yes; Also externally via USB
<b>Touch operation</b>		
• Design as touch screen	Yes	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes
<b>Installation type/mounting</b>		
Design	Pedestal mounting	Support arm mounting
<b>Supply voltage</b>		
Rated value (DC)	24 V; PELV / SELV floating	24 V; PELV / SELV floating
<b>Interfaces</b>		
Number of industrial Ethernet interfaces	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45
USB on the rear	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB
<b>Video interfaces</b>		
• analog video signal (VGA)	No	No
• DVI-D	No	No
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>		
• USB	Yes	Yes
<b>Degree and class of protection</b>		
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

##### Technical specifications

Article number	<b>6AV7466-6MA01-0AA0</b> SIMATIC IFP1900 PRO HD OEM ETH pedestal	<b>6AV7466-6MA02-0AA0</b> SIMATIC IFP1900 PRO HD OEM ETH sup. arm
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
UL approval	Yes; In application process	Yes; In application process
cULus	Yes; In application process	Yes; In application process
RCM (formerly C-TICK)	Yes; In application process	Yes; In application process
KC approval	No	No
EAC (formerly Gost-R)	Yes; In application process	Yes; In application process
<b>Use in hazardous areas</b>		
• ATEX Zone 2	No	No
• ATEX Zone 22	No	No
• FM Class I Division 2	No	No
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	50 °C; Vertical installation (horizontal)	50 °C; Vertical installation (horizontal)
<b>Relative humidity</b>		
• Operation, max.	95 %; no condensation	95 %; no condensation
<b>Vibrations</b>		
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>		
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Mechanics/material</b>		
Enclosure material (front)		
• Glass	Yes; at front	Yes; at front
<b>Dimensions</b>		
Width	462 mm	462 mm
Height	292 mm; Without basic adapter	292 mm
Depth	94 mm; Without basic adapter	163 mm
<b>Weights</b>		
Weight (without packaging)	5.7 kg	5.7 kg

Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

### Technical specifications

Article number	<b>6AV7466-8MA01-0AA0</b> SIMATIC IFP2200 PRO OEM ETH pedestal	<b>6AV7466-8MA02-0AA0</b> SIMATIC IFP2200 PRO OEM ETH support arm
<b>General information</b>		
Product type designation	IFP2200 PRO	IFP2200 PRO
Short designation	Flat Panel 22" PRO ETH multi-touch ext.	Flat Panel 22" PRO ETH multi-touch ext.
<b>Display</b>		
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	22 in	22 in
Screen diagonal [cm]	56 cm	56 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit	16 777 216; 24 bit
<b>General features</b>		
• Brightness/contrast	300 cd/m <sup>2</sup> / 1 000:1	300 cd/m <sup>2</sup> / 1 000:1
• non-reflective and tempered mineral glass screen	Yes	Yes
• Detachable from computer unit	100 m; Ethernet	100 m; Ethernet
<b>Backlighting</b>		
• Type of backlighting	LED	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>		
<b>Input device</b>		
• Integrated mouse cursor control	Yes; Also externally via USB	
<b>Touch operation</b>		
• Design as touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes
<b>Installation type/mounting</b>		
Design	Pedestal mounting	Support arm mounting
<b>Supply voltage</b>		
Rated value (DC)	24 V; PELV / SELV floating	24 V; PELV / SELV floating
<b>Interfaces</b>		
Number of industrial Ethernet interfaces	1; Ethernet, 1 port, RJ45	1; Ethernet, 1 port, RJ45
USB on the rear	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB
<b>Video interfaces</b>		
• analog video signal (VGA)	No	No
• DVI-D	No	No
• DisplayPort	Yes; DisplayPort V1.1	Yes; DisplayPort V1.1
<b>Touch interfaces</b>		
• USB	Yes	Yes
<b>Degree and class of protection</b>		
NEMA (front)		
• Enclosure Type 4x at the front	Yes	Yes

## PC-based Automation

Industrial PC

Devices for special requirements

### Fully-enclosed IP65-protected devices > SIMATIC Industrial Flat Panel PRO

#### Technical specifications

Article number	<b>6AV7466-8MA01-0AA0</b>	<b>6AV7466-8MA02-0AA0</b>
SIMATIC IFP2200 PRO OEM ETH pedestal		SIMATIC IFP2200 PRO OEM ETH support arm
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
UL approval	Yes; In application process	Yes; In application process
cULus	Yes; In application process	Yes; In application process
RCM (formerly C-TICK)	Yes; In application process	Yes; In application process
KC approval	No	No
EAC (formerly Gost-R)	Yes; In application process	Yes; In application process
<b>Use in hazardous areas</b>		
• ATEX Zone 2	No	No
• ATEX Zone 22	No	No
• FM Class I Division 2	No	No
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	45 °C; Vertical installation (horizontal)	45 °C; Vertical installation (horizontal)
<b>Relative humidity</b>		
• Operation, max.	95 %; no condensation	95 %; no condensation
<b>Vibrations</b>		
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>		
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Mechanics/material</b>		
Enclosure material (front)		
• Glass	Yes; at front	Yes; at front
<b>Dimensions</b>		
Width	527 mm	527 mm
Height	329 mm; Without basic adapter	329 mm
Depth	94 mm; Without basic adapter	163 mm
<b>Weights</b>		
Weight (without packaging)	6.7 kg	6.7 kg

More information can be found on the Internet at:

<http://www.siemens.com/ip65-hmi-devices>

Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

**Overview**



**SIMATIC Industrial Thin Client PRO**

SIMATIC Industrial Thin Client PRO with capacitive multi-touch display is suitable for mounting directly on the support arm/pedestal.

**Ordering data**

**Article No.**

*SIMATIC Industrial Thin Client PRO*

**SIMATIC ITC1500 V3 PRO**

Industrial Thin Client  
15" widescreen TFT display  
Capacitive touch sensor  
Supported protocols: RDP, VNC,  
SMARTSERVER HTML5, etc.  
Standard design

- Pedestal mounting
- Prepared for support arm without extension components
- Prepared for support arm with extension components

**6AV6646-1BB15-0AA0**  
**6AV6646-1BC15-0AA0**  
**6AV6646-1BD15-0AA0**

**SIMATIC ITC1900 V3 PRO**

Industrial Thin Client  
19" widescreen TFT display  
Capacitive touch sensor  
Supported protocols: RDP, VNC,  
SMARTSERVER HTML5, etc.  
Standard design

- Pedestal mounting
- Prepared for support arm without extension components
- Prepared for support arm with extension components

**6AV6646-1BB18-0AA0**  
**6AV6646-1BC18-0AA0**  
**6AV6646-1BD18-0AA0**

**SIMATIC ITC2200 V3 PRO**

Industrial Thin Client  
22" widescreen TFT display  
Capacitive touch sensor  
Supported protocols: RDP, VNC,  
SMARTSERVER HTML5, etc.  
Standard design

- Pedestal mounting
- Prepared for support arm without extension components
- Prepared for support arm with extension components

**6AV6646-1BB22-1AA0**  
**6AV6646-1BC22-1AA0**  
**6AV6646-1BD22-1AA0**

Note:

An adapter plate is required for mounting on the support arm systems of well-known manufacturers; see "Accessories for fully enclosed HMI devices".

# PC-based Automation

Industrial PC

Devices for special requirements

## Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

### Technical specifications

Article number	<b>6AV6646-1BB15-0AA0</b> SIMATIC ITC1500 V3 PRO	<b>6AV6646-1BC15-0AA0</b> SIMATIC ITC1500 V3 PRO	<b>6AV6646-1BD15-0AA0</b> SIMATIC ITC1500 V3 PRO
<b>General information</b>			
Product type designation	ITC1500 V3	ITC1500 V3	ITC1500 V3
<b>Display</b>			
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	15.6 in; 15"	15.6 in; 15"	15.6 in; 15"
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Image resolution	1 366 x 768	1 366 x 768	1 366 x 768
<b>General features</b>			
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes
• Detachable from computer unit	100 m	100 m	100 m
<b>Backlighting</b>			
• Type of backlighting	LED, dimmable	LED, dimmable	LED, dimmable
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>			
Control elements	multi-touch screen	multi-touch screen	multi-touch screen
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Design	Pedestal mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>			
Type of supply voltage	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch)	2; 2 ports (switch)	2; 2 ports (switch)
Number of USB interfaces	4; on rear	4; on rear	4; on rear
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB	USB
<b>Industrial Ethernet</b>			
• Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	No	No	No
• ATEX Zone 22	No	No	No
• IECEx Zone 2	No	No	No
• IECEx Zone 22	No	No	No
• cULus Class I Zone 2, Division 2	No	No	No
• FM Class I Division 2	No	No	No

Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

**Technical specifications**

Article number	6AV6646-1BB15-0AA0 SIMATIC ITC1500 V3 PRO	6AV6646-1BC15-0AA0 SIMATIC ITC1500 V3 PRO	6AV6646-1BD15-0AA0 SIMATIC ITC1500 V3 PRO
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>			
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>			
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Software</b>			
Web browser	Yes	Yes	Yes
PDF reader	Yes	Yes	Yes
<b>Configuration</b>			
<b>Configuration</b>			
• Local	Yes	Yes	Yes
• Remote	Yes; Via web page	Yes; Via web page	Yes; Via web page
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	2; german / english	2; german / english	2; german / english
<b>Peripherals/Options</b>			
USB memory	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected
<b>Mechanics/material</b>			
Enclosure material (front)			
• Aluminum	Yes	Yes	Yes
<b>Dimensions</b>			
Width of the housing front	396 mm	396 mm	396 mm
Height of housing front	256 mm; Without basic adapter	256 mm; Without basic adapter	256 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	6.3 kg	6.3 kg	6.3 kg

## PC-based Automation

Industrial PC

Devices for special requirements

### Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

#### Technical specifications

Article number	<b>6AV6646-1BB18-0AA0</b> SIMATIC ITC1900 V3 PRO	<b>6AV6646-1BC18-0AA0</b> SIMATIC ITC1900 V3 PRO	<b>6AV6646-1BD18-0AA0</b> SIMATIC ITC1900 V3 PRO
<b>General information</b>			
Product type designation	ITC1900 V3	ITC1900 V3	ITC1900 V3
<b>Display</b>			
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	18.5 in; 19"	18.5 in; 19"	18.5 in; 19"
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Image resolution	1 366 x 768	1 366 x 768	1 366 x 768
<b>General features</b>			
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes
• Detachable from computer unit	100 m	100 m	100 m
<b>Backlighting</b>			
• Type of backlighting	LED, dimmable	LED, dimmable	LED, dimmable
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C	50 000 h; At 25°C	50 000 h; At 25°C
<b>Control elements</b>			
Control elements	multi-touch screen	multi-touch screen	multi-touch screen
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Design	Pedestal mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>			
Type of supply voltage	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch)	2; 2 ports (switch)	2; 2 ports (switch)
Number of USB interfaces	4; on rear	4; on rear	4; on rear
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB	USB
<b>Industrial Ethernet</b>			
• Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s
<b>Degree and class of protection</b>			
NEMA (front)	NEMA 4x (when installed)	NEMA 4x (when installed)	NEMA 4x (when installed)
• Enclosure Type 4x at the front	Yes	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes	Yes

Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

### Technical specifications

Article number	6AV6646-1BB18-0AA0 SIMATIC ITC1900 V3 PRO	6AV6646-1BC18-0AA0 SIMATIC ITC1900 V3 PRO	6AV6646-1BD18-0AA0 SIMATIC ITC1900 V3 PRO
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	No	No	No
• ATEX Zone 22	No	No	No
• IECEx Zone 2	No	No	No
• IECEx Zone 22	No	No	No
• cULus Class I Zone 2, Division 2	No	No	No
• FM Class I Division 2	No	No	No
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>			
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>			
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Software</b>			
Web browser	Yes	Yes	Yes
PDF reader	Yes	Yes	Yes
<b>Configuration</b>			
<b>Configuration</b>			
• Local	Yes	Yes	Yes
• Remote	Yes; Via web page	Yes; Via web page	Yes; Via web page
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	2; german / english	2; german / english	2; german / english
<b>Peripherals/Options</b>			
USB memory	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected
<b>Mechanics/material</b>			
Enclosure material (front)			
• Aluminum	Yes	Yes	Yes
<b>Dimensions</b>			
Width of the housing front	462 mm	462 mm	462 mm
Height of housing front	293 mm; Without basic adapter	293 mm; Without basic adapter	293 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	7.4 kg	7.4 kg	7.4 kg

# PC-based Automation

Industrial PC

Devices for special requirements

## Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

### Technical specifications

Article number	<b>6AV6646-1BB22-1AA0</b> SIMATIC ITC2200 V3 PRO	<b>6AV6646-1BC22-1AA0</b> SIMATIC ITC2200 V3 PRO	<b>6AV6646-1BD22-1AA0</b> SIMATIC ITC2200 V3 PRO
<b>General information</b>			
Product type designation	ITC2200 V3	ITC2200 V3	ITC2200 V3
<b>Display</b>			
Design of display	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting	TFT widescreen display, LED backlighting
Screen diagonal	21.5 in; 22"	21.5 in; 22"	21.5 in; 22"
Number of colors	16 777 216	16 777 216	16 777 216
<b>Resolution (pixels)</b>			
• Image resolution	1 920 x 1 080	1 920 x 1 080	1 920 x 1 080
<b>General features</b>			
• non-reflective and tempered mineral glass screen	Yes	Yes	Yes
• Detachable from computer unit	100 m	100 m	100 m
<b>Backlighting</b>			
• Type of backlighting	LED, dimmable	LED, dimmable	LED, dimmable
• MTBF backlighting (at 25 °C)	30 000 h; At 25°C	30 000 h; At 25°C	30 000 h; At 25°C
<b>Control elements</b>			
Control elements	multi-touch screen	multi-touch screen	multi-touch screen
<b>Touch operation</b>			
• Design as touch screen	Yes	Yes	Yes
• Design as multi-touch screen	Yes; Projective-capacitive	Yes; Projective-capacitive	Yes; Projective-capacitive
• Monitor keyboard	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Design	Pedestal mounting	Support arm mounting	Support arm mounting
<b>Supply voltage</b>			
Type of supply voltage	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	2; 2 ports (switch)	2; 2 ports (switch)	2; 2 ports (switch)
Number of USB interfaces	4; on rear	4; on rear	4; on rear
USB on the rear	Yes; 2x onboard	Yes; 2x onboard	Yes; 2x onboard
Connection for keyboard/mouse	USB	USB	USB
<b>Industrial Ethernet</b>			
• Transmission rate, max.	1 000 Mbit/s	1 000 Mbit/s	1 000 Mbit/s
<b>Degree and class of protection</b>			
NEMA (front)			
• Enclosure Type 4x at the front	Yes	Yes	Yes
• Enclosure Type 12 at the front	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes	Yes	Yes
FM approval	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes
KC approval	Yes	Yes	Yes
EAC (formerly Gost-R)	Yes	Yes	Yes
<b>Use in hazardous areas</b>			
• ATEX Zone 2	No	No	No
• ATEX Zone 22	No	No	No
• IECEx Zone 2	No	No	No
• IECEx Zone 22	No	No	No
• cULus Class I Zone 2, Division 2	No	No	No
• FM Class I Division 2	No	No	No

Fully-enclosed IP65-protected devices > SIMATIC Industrial Thin Client PRO

**Technical specifications**

Article number	6AV6646-1BB22-1AA0 SIMATIC ITC2200 V3 PRO	6AV6646-1BC22-1AA0 SIMATIC ITC2200 V3 PRO	6AV6646-1BD22-1AA0 SIMATIC ITC2200 V3 PRO
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	45 °C	45 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
<b>Vibrations</b>			
• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
<b>Shock testing</b>			
• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
<b>Software</b>			
Web browser	Yes	Yes	Yes
PDF reader	Yes	Yes	Yes
<b>Configuration</b>			
<b>Configuration</b>			
• Local	Yes	Yes	Yes
• Remote	Yes; Via web page	Yes; Via web page	Yes; Via web page
<b>Languages</b>			
<b>Online languages</b>			
• Number of online/runtime languages	2; german / english	2; german / english	2; german / english
<b>Peripherals/Options</b>			
USB memory	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected	Yes; USB storage medium can be connected
<b>Mechanics/material</b>			
Enclosure material (front)			
• Aluminum	Yes	Yes	Yes
<b>Dimensions</b>			
Width of the housing front	527 mm	527 mm	527 mm
Height of housing front	330 mm; Without basic adapter	330 mm; Without basic adapter	330 mm; Without basic adapter
Overall depth	101 mm; Without basic adapter	101 mm; Without basic adapter	101 mm; Without basic adapter
<b>Weights</b>			
Weight (without packaging)	8.5 kg	8.5 kg	8.5 kg

More information is available on the Internet at:

<http://www.siemens.com/ip65-hmi-devices>

## PC-based Automation

Industrial PC

Devices for special requirements

### Fully-enclosed IP65-protected devices > SIMATIC IPC477E PRO

#### Overview



#### SIMATIC IPC477E PRO

The fully enclosed IP65-protected SIMATIC IPC477E PRO in 15", 19" and 22" versions extends the portfolio of PRO devices.

The robust aluminum housing allows it to be used directly on the machine even in harsh environmental conditions.

The operating unit can either be mounted on a pedestal or connected to a support arm system from above.

#### Ordering data

#### Article No.

##### SIMATIC IPC477E PRO<sup>1)</sup>

###### CPUs and fieldbus

- Celeron G3902E; 3x Gigabit Ethernet (IE/PN)
- Core i3-6102E; 3x Gigabit Ethernet (IE/PN)
- Core i5-6442EQ; 3x Gigabit Ethernet (IE/PN)
- XEON E3-1505L; 3x Gigabit Ethernet (IE/PN)

6AV7251-

1

3

5

7

###### Operating unit

- 15" multi-touch (1 366 x 768), for support arm (not expandable, flange on top)
- 15" multi-touch (1 366 x 768), for pedestal (expandable, flange below)
- 15" multi-touch (1 366 x 768), for support arm (expandable, round tube)
- 19" multi-touch (1 366 x 768), for support arm (not expandable, flange on top)
- 19" multi-touch (1 366 x 768), for pedestal (expandable, flange below)
- 19" multi-touch (1 366 x 768), for support arm (expandable, round tube)
- 19" multi-touch (1 920 x 1 080), for pedestal (expandable, flange below)
- 19" multi-touch (1 920 x 1 080), for support arm (expandable, round tube)
- 22" multi-touch (1 920 x 1 080), for support arm (not expandable, flange on top)
- 22" multi-touch (1 920 x 1 080), for pedestal (expandable, flange below)
- 22" multi-touch (1 920 x 1 080), for support arm (expandable, round tube)
- 24" multi-touch (1 920 x 1 080), for pedestal (expandable, flange below)
- 24" multi-touch (1 920 x 1 080), for support arm (expandable, round tube)

B

C

D

E

F

G

V

W

H

J

K

X

Y

**Fully-enclosed IP65-protected devices > SIMATIC IPC477E PRO**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>SIMATIC IPC477E PRO<sup>1)</sup></b>	<b>6AV7251-</b>	<b>6AV7251-</b>
<u>Work memory/NVRAM</u>		
• 4 GB • 8 GB • 16 GB • 8 GB with ECC • 16 GB with ECC • 4 GB and NVRAM • 8 GB and NVRAM • 16 GB and NVRAM • 8 GB with ECC and NVRAM • 16 GB with ECC and NVRAM	A B C D E F G H J K	0 1 2 3 4 5 6 7 8
<u>Expansions/interfaces</u>		
• No RS232/485, without PCIe • Two RS232/RS485, without PCIe • No RS232 without PCIe with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2 • Two RS232 without PCIe with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	0 3 5 6	A D F G
<u>Operating system</u>		
• Without operating system • Windows Embedded Standard 7 SP1, English, 32-bit • Windows Embedded Standard 7 SP1, English, 64-bit • Windows Embedded Standard 7 P SP1, MUI, 64-bit, multi-touch • Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es) • Windows 10 Enterprise 2019 LTSC (64-bit) for Celeron, i3 and i5 • Windows 10 Enterprise 2019 LTSC (64-bit) for Xeon • Windows 10 IoT Enterprise 2016 LTSB (64-bit) for Celeron, i3 and i5 • Windows 10 IoT Enterprise 2016 LTSB (64-bit) for Xeon	0 1 2 3 4 5 6 7 8	A S
<u>SIMATIC IPC477E PRO<sup>1)</sup></u>	<u>Mass storage, external</u>	<u>Mass storage, external</u>
	• Without external mass storage • CFast 2 GB, without operating system • CFast 4 GB, without operating system • CFast 8 GB (only optionally with operating system/software if no internal mass storage or HDD) • CFast 16 GB (only optionally with operating system/software if no internal mass storage or HDD) • CFast 128 GB (only optionally with operating system/software if no internal mass storage or HDD)	0 1 2 3 4 5
	<u>Mass storage, internal</u>	<u>Mass storage, internal</u>
	• Without internal mass storage • 128 GB solid-state drive SATA • 240 GB solid-state drive SATA • 480 GB solid-state drive SATA	A D F G
	<u>SIMATIC software pre-installed (bundles)</u>	<u>SIMATIC software pre-installed (bundles)</u>
	• Without SIMATIC software • IPC starter system with CPU 1507S and WinCC RT Advanced, without licenses	A S
	<u>Power supply</u>	<u>Power supply</u>
	• 24 V DC industrial power supply • 24 V DC industrial power supply and TPM <sup>2)</sup> (not for China or Russia)	0 8

<sup>1)</sup> IPC477E PRO as "built to order" version (max. delivery time 15 working days).

<sup>2)</sup> TPM = Trusted Platform Module

5

Note:

As with the existing 4:3 IPC477C/D PRO devices, adaptation to different support arm/pedestal systems is by means of the basic adapter. The basic adapter is included in the scope of supply (except in the case of the "prepared for support arm and extension components" version, as the connection is made via a round tube).

For the version "prepared for support arm and extension components", installation can alternatively take place with the Siemens round tube adapter or with a standard 48 mm diameter round tube. The round tube adapter enables the transition from a round tube connection to the familiar mechanical interface of the basic adapter. This means you can combine different versions of the PRO devices with the same support arm or pedestal system.

# PC-based Automation

Industrial PC

Devices for special requirements

## Fully-enclosed IP65-protected devices > SIMATIC IPC477E PRO

### Technical specifications

Article number	<b>6AV7251-.....</b> SIMATIC IPC477E PRO	Article number	<b>6AV7251-.....</b> SIMATIC IPC477E PRO
<b>General information</b>			
Product type designation	IPC477E	Monitoring functions	
<b>Installation type/mounting</b>			
Mounting	For mounting on stand or supporting bracket	• Temperature monitoring	Yes
Design	Panel PC on pedestal or supporting arm	• Watchdog	Yes
maximum permissible installation angle +/-	$\pm 45^\circ$	• Fan	No
<b>Supply voltage</b>			
Type of supply voltage	24 V DC	• Monitoring function via network	Optional
<b>Mains buffering</b>			
• Mains/voltage failure stored energy time	20 ms	<b>EMC</b>	
<b>Processor</b>			
Processor type	Celeron G3902 (2C/2T, 1.6 GHz, 2 MB Cache); Core i3-6102E (2C/4T, 1.9 GHz, 3 MB Cache); Core i5-6442EQ (4C/4T, 1.9 (2.7) GHz, 6 MB Cache, iAMT); Xeon E3-1505L v5 (4C/8T, 2.0 (2.8) GHz, 8 MB Cache, iAMT)	Interference immunity against discharge of static electricity	$\pm 6$ kV contact discharge acc. to IEC 61000-4-2; $\pm 8$ kV air discharge acc. to IEC 61000-4-2
Chipset	Intel C236 / Intel H110	Interference immunity against high-frequency electromagnetic fields	10 V/m, 80 ... 2 000 MHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m, 2 ... 2.7 GHz; 10 V, 10 kHz ... 80 MHz acc. to IEC 61000-4-6
<b>Graphic</b>			
Graphics controller	Intel HD graphics controller	Interference immunity to cable-borne interference	$\pm 2$ kV acc. to IEC 61000-4-4, burst; $\pm 1$ kV acc. to IEC 61000-4-5, surge symmetric; $\pm 2$ kV acc. to IEC 61000-4-5, surge asymmetric
<b>Drives</b>			
SSD	Yes; $\geq$ 128 GB optional	• Interference immunity on signal cables >30m	$\pm 2$ kV acc. to IEC 61000-4-5, surge length > 30 m
<b>Memory</b>			
Type of memory	DDR4-2400 SO-DIMM	• Interference immunity on signal cables <30m	$\pm 1$ kV acc. to IEC 61000-4-4; burst; length < 3 m; $\pm 2$ kV acc. to IEC 61000-4-4; burst; length > 3 m
Main memory	4 / 8 / 16 GB, ECC optional	<b>Interference immunity against voltage surge</b>	
<b>Data areas and their retentivity</b>			
Retentive data area (incl. timers, counters, flags), max.	512 kbyte; 128 KB can be stored in the buffer time	• asymmetric interference	$\pm 2$ kV acc. to IEC 61000-4-5, surge asymmetric
<b>Interfaces</b>			
Number of industrial Ethernet interfaces	3; 3x Ethernet (RJ45)	• symmetric interference	$\pm 1$ kV acc. to IEC 61000-4-5, surge symmetric
USB port	4x USB 3.0 onboard (rear)	<b>Interference immunity to magnetic fields</b>	
Connection for keyboard/mouse	USB / USB	• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
serial interface	Without / 2x COM (RS 232 / 422 / 485), selectable in the BIOS	<b>Emission of conducted and non-conducted interference</b>	
<b>Video interfaces</b>			
• Graphics interface	2x DisplayPort	• Interference emission via line/AC current cables	EN 61000-6-3, EN 61000-6-4, CISPR 22 Class B, FCC Class A
<b>Industrial Ethernet</b>			
• Industrial Ethernet interface	3x Ethernet (RJ45)	<b>Degree and class of protection</b>	
- 100 Mbps	Yes	IP65 (all-round)	Yes; IP65 fully enclosed
- 1000 Mbps	Yes	IP (at the front)	IP65
		IP (rear)	IP65

**Fully-enclosed IP65-protected devices > SIMATIC IPC477E PRO****Technical specifications**

Article number	<b>6AV7251-.....</b> SIMATIC IPC477E PRO
<b>Standards, approvals, certificates</b>	
CE mark	Yes
CSA approval	Yes
UL approval	Yes
• UL 508	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
EMC	CE, EN 61000-6-4; CISPR 22 Class A; FCC Class A
<b>Use in hazardous areas</b>	
• ATEX Zone 2	Yes; Optional
• IECEx Zone 2	Yes; Optional
• cULus Class I Zone 2, Division 2	Yes; Optional
<b>Marine approval</b>	
• Germanischer Lloyd (GL)	Yes
• American Bureau of Shipping (ABS)	Yes
• Det Norske Veritas (DNV)	Yes
• Korean Register of Shipping (KRS)	Yes
• Lloyds Register of Shipping (LRS)	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• Ambient temperature during operation	0 °C to 45 °C
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	tested to DIN IEC 60068-2-6: 10 Hz to 58 Hz: 0.075 mm, 58 Hz to 200 Hz: 9.8 m/s <sup>2</sup> (1 g)
<b>Shock testing</b>	
• Shock load during operation	Tested according to IEC 60068-2-27, IEC 60068-2-29: half-sine: 50 m/s <sup>2</sup> (5 g), 30 ms, 100 shocks per axis
<b>Operating systems</b>	
pre-installed operating system	Windows 7 Ultimate (Multi-Language) 64-bit, Windows Embedded Standard 7 E/P 32-bit / 64-bit, Windows 10
without operating system	Yes; Optional

**More information**

More information is available on the Internet at:

<http://www.siemens.com/ip65-hmi-devices>

## PC-based Automation

Industrial PC

Devices for special requirements

### System components for fully-enclosed IP65-protected devices

#### Overview

##### ***System components for fully-enclosed IP65-protected devices***

System components for PRO devices are only suitable for SIMATIC HMI/IPC PRO devices. In combination with the SIMATIC HMI PRO basic devices, these components enable easy adaptation to individual customer requirements for operator control and monitoring at the machine level, as well as offering a versatile and attractive cabinet-free solution for visualization and automation.

The following system components are available:

- Fixing elements
  - Adapter sets
  - Basic adapters
  - Round tube adapter
- Extension Units and operator controls
- Extension components
  - Stainless steel keyboard
  - Tool and keyboard tray
  - USB interface for PRO devices

System components for fully-enclosed IP65-protected devices > Fixing elements

## Overview

### Fixing elements

Adapter sets, basic adapter, round tube adapter and round tube cap

The fixing elements are required for connecting the SIMATIC HMI PRO device with the support arm head of the respective support arm system.

Since the support arm head is connected directly to the device, there is complete flexibility in the choice of support arm components.

Adapter sets are available for the VESA 75 and VESA 100 systems.

Further adapter sets can be obtained directly from the respective support arm manufacturers:

- Bernstein
- Rittal
- Rose
- Haseke and
- Rolec

For the 4:3 and 16:9 variants, basic adapters are available according to design:

- The basic adapter is included in the scope of delivery of the device for 4:3 systems (dark gray)
- The basic adapter is included in the scope of delivery of the device for 16:9 systems (silver) (the basic adapter is included in the scope of delivery as a matter of principle. It is excluded only from the version "prepared for support arm and extension components", because connection is made via a round tube.)

For the version "prepared for support arm and extension components" of the 16:9 PRO devices, installation can alternatively take place with the Siemens round tube adapter or with a standard 48 mm diameter round tube. The round tube adapter enables the transition from a round tube connection to the familiar mechanical interface of the basic adapter. This means you can combine different versions of the PRO devices with the same support arm or pedestal system.

## Ordering data

## Article No.

<b>VESA 100 adapter set<sup>1)</sup></b>	<b>6AV7674-0KD00-0AA0</b>
<b>VESA 75 adapter set</b>	<b>6AV7674-0KE00-0AA0</b>
<b>Basic adapter for 16:9 systems</b>	<b>6AV7674-1KA00-0AA0</b>
Spare part (silver, included in the scope of delivery of the device)	
<b>Round tube adapter for 16:9 systems</b>	<b>6AV7674-1KF00-0AA0</b>
Suitable for 16:9 PRO devices of the type "prepared for support arm and extension components (round tube connection)"	
<b>VESA 100/75 round tube adapter</b>	<b>6AV6881-0AD56-0AA0</b>
For SIMATIC PRO devices. Can be mounted with a 100 mm (M6) or 75 mm (M6) VESA. IP20 cable entry directly in the round tube adapter. Suitable for all common support arm systems with corresponding VESA coupling, load capacity and hole spacing. More information is available in the technical specifications.	
<b>Round tube cap for PRO devices</b>	<b>6AV7674-1LB40-0AA0</b>
Replacement adapter for PRO devices	<b>6AV7674-1LB50-0AA0</b>

<sup>1)</sup> The VESA 100 adapter set cannot be used in combination with the 19" Flat Panel PRO.

### Note:

The 48 mm internal diameter of the support arm tubes is not suitable for feeding through the standard DVI-D cable.

### Scope of delivery:

- One adapter set or basic adapter, round tube adapter
- Fittings for mounting

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### System components for fully-enclosed IP65-protected devices > Fixing elements

##### Technical specifications

Article number	<b>6AV7674-1KF00-0AA0</b>
Flange Mount for Pro Devices	
<b>General information</b>	
Product type designation	Flange mount
<b>Installation type/mounting</b>	
Mounting	for the transition from a size 48 round tube to a flange plate (compatible with basic adapter interface)
<b>Degree and class of protection</b>	
IP (all-round)	IP65 when installed
<b>Mechanics/material</b>	
Material	Steel, powder coating in RAL 9006
<b>Dimensions</b>	
Width	76.3 mm; Width of flange plate, distance between holes 40 mm
Height	168 mm; Round tube and flange plate
Depth	80 mm; Depth of flange plate, distance between holes 63 mm
Enclosure diameter	48.3 mm; Round tube in interface area
<b>Weights</b>	
Weight (without packaging)	900 g
<b>Scope of supply</b>	
Delivery quantity in pieces	1
<b>Other</b>	
Target devices	Suitable for PRO devices, prepared for support arm and extension components (round tube connection)

Article number	<b>6AV6881-0AD56-0AA0</b>
Flange mount adapter VESA 100/75	
<b>Scope of supply</b>	
Delivery quantity in pieces	1; VESA round tube adapter 100/75 suitable for PRO devices, max. IP20 attainable
Components included	Without additional accessories
<b>Other</b>	
Merchandise	Yes; VESA 100/75 PRO adapter
Manufacturer name	QUERUM products UG
Manufacturer's address	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany
contacting the manufacturer	email: querumproducts@web.de
Target devices	Not suitable for 19" 4:3 devices
Note:	Max. load 35 kg, for expandable support arm mounting

Article number	<b>6AV7674-1LB40-0AA0</b>	<b>6AV7674-1LB50-0AA0</b>
	Round tube plug for PRO devices	Exchange adapter for PRO devices
<b>General information</b>		
Product type designation	Round tube plug for PRO devices	Interchangeable adapter for PRO devices
<b>Degree and class of protection</b>		
IP (all-round)	IP65 when installed	IP65 when installed
NEMA (front)		
• Enclosure Type 4 at the front	Yes; When installed	Yes; When installed
<b>Mechanics/material</b>		
Material		
• Aluminum	Yes; Powder-coated, RAL 9006	Yes; Powder-coated, RAL 9006
<b>Weights</b>		
Weight (without packaging)	0.24 kg	0.34 kg
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
Components included	Round tube plug for PRO devices	Screws for attachment
<b>Other</b>		
Target devices	PRO devices for support arm (extendable, round tube)	PRO devices for support arm (extendable, round tube) and pedestal (extendable, flange below)

Additional information is available on the Internet at:

<http://www.siemens.com/ip65-hmi-devices>

##### Article number

**6AV6881-0AD56-0AA0**

Flange mount adapter VESA 100/75

##### General information

Product type designation

VESA 100/75 flange adapter

##### Installation type/mounting

Mounting

VESA 100 mm / 75 mm with M6 thread

Mounting type

Support arm with VESA 100 mm or 75 mm

##### Degree and class of protection

IP (at the front)

IP20 (depending on mounting)

##### Ambient conditions

Suited for indoor use

Yes

Suited for outdoor use

No

##### Ambient temperature during operation

• min.

0 °C

• max.

55 °C

##### Relative humidity

• Operation, max.

90 %

• Condensation permissible

No

##### Mechanics/material

Material

steel

• Aluminum

No; Powder-coated

##### Dimensions

Width

135 mm

Height

120 mm

Depth

67.5 mm

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

## Overview

### Extension Units

Extension Units with 12" to 22", as well as a 24" portrait version for SIMATIC HMI PRO devices, are part of the system components for fully-enclosed IP65-protected devices. They enable the expansion of the operating options on site by the installation of various operator controls. Communication can take place via PROFINET, PROFIsafe or conventional wiring.

### SIMATIC Extension Unit (BTO & Advanced)

With Customized Automation, Extension Units are built to specific customer requirements and given their own customer MLFB. BTO (built to order).

#### Extension Units for 16:9 PRO devices



Extension Units for the 16:9 PRO devices are suitable for the flexible installation of various operator controls that extend the operating options on site easily and on an individual basis. They are coordinated with the design of the 16:9 PRO devices and can easily be mounted below the device by the customers themselves.

Additionally, the Extension Unit box is available for the flexible installation of lower operator controls.

5

## Ordering data

## Article No.

### Extension Units for 16:9 PRO devices

#### Extension Unit Hardwired

- 12"
- 15"
- 19"
- 22"
- 24"
- 24" portrait

6AV7674-1LA31-0AA0  
6AV7674-1LA41-0AA0  
6AV7674-1LA51-0AA0  
6AV7674-1LA61-0AA0  
6AV7674-1LA71-0AA0  
6AV7674-1LA81-0AA0

#### Extension Unit PROFINET

- 12"
- 15"
- 19"
- 22"
- 24"
- 24" Portrait

6AV7674-1LA32-0AA0  
6AV7674-1LA42-0AA0  
6AV7674-1LA52-0AA0  
6AV7674-1LA62-0AA0  
6AV7674-1LA72-0AA0  
6AV7674-1LA82-0AA0

#### Extension Unit PROFIsafe

- 12"
- 15"
- 19"
- 22"
- 24"
- 24" portrait

6AV7674-1LA33-0AA0  
6AV7674-1LA43-0AA0  
6AV7674-1LA53-0AA0  
6AV7674-1LA63-0AA0  
6AV7674-1LA73-0AA0  
6AV7674-1LA83-0AA0

#### Extension Unit box

- 12"
- 15"
- 19"
- 22"
- 24"
- 24" portrait

6AV7674-1LA30-0AA0  
6AV7674-1LA40-0AA0  
6AV7674-1LA50-0AA0  
6AV7674-1LA60-0AA0  
6AV7674-1LA70-0AA0  
6AV7674-1LA80-0AA0

#### Extension Unit Advanced PROFINET<sup>1)</sup>

- 12" KP12 PN
- 15" KP12 PN
- 19" KP12 PN
- 22" KP12 PN
- 12" KP24 PN
- 15" KP36 PN
- 19" KP36 PN
- 22" KP48 PN

6AV2185-8CE01-0AA0  
6AV2185-8DE01-0AA0  
6AV2185-8EE01-0AA0  
6AV2185-8FE01-0AA0  
6AV2185-8CE08-0AA0  
6AV2185-8DE08-0AA0  
6AV2185-8EE08-0AA0  
6AV2185-8FE08-0AA0

#### Extension Unit Advanced PROFIsafe<sup>1)</sup>

- 12" KP12F PN
- 15" KP12F PN
- 19" KP12F PN
- 22" KP12F PN

6AV2185-8CF01-0AA0  
6AV2185-8DF01-0AA0  
6AV2185-8EF01-0AA0  
6AV2185-8FF01-0AA0

<sup>1)</sup> Max. two Extension Units possible as extension

## Scope of delivery

### Extension Units Hardwired:

- 1 Extension Unit
- 1 plug connector, 16-pin, for interface X12
- 1 plug connector, 12-pin, for interface X11
- 1 plug connector, 8-pin, for interface X10
- 1 power supply terminal for 24 V DC
- 4 bolts M4x20 for mounting the Extension Unit on the SIMATIC PRO device

### PROFINET Extension Units:

- 1 Extension Unit
- 1 plug connector, 8-pin, for interface X10
- 1 power supply connector for 24 V DC
- 4 bolts M4x20 for mounting the Extension Unit on the SIMATIC PRO device

# PC-based Automation

Industrial PC

Devices for special requirements

## System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

Ordering data	Article No.	Article No.
<i>Operator controls</i>		
<b>EMERGENCY STOP button</b>	<b>6AV7674-1MA00-0AA0</b>	<b>6AV7674-1MF00-0AA0</b>
<b>Illuminated pushbutton</b>		
• One NO contact	<b>6AV7674-1MB00-0AA0</b>	
• One NO contact and one NC contact	<b>6AV7674-1MG00-0AA0</b>	
<b>Pushbutton Safety</b>	<b>6AV7674-1MG50-0AA0</b>	
<b>Indicator light</b>	<b>6AV7674-1MC00-0AA0</b>	
<b>Selector switch</b>	<b>6AV7674-1MD00-0AA0</b>	
<b>Key-operated switch</b>	<b>6AV7674-1ME00-0AA0</b>	
<b>Keyswitch Safety</b>	<b>6AV7674-1ME50-0AA0</b>	
<i>Accessories</i>		
<b>USB interface for front mounting in Extension Unit</b>		<b>6AV7674-1LB30-0AA0</b>
USB 2.0 type A, IP65 degree of protection with closed protective cover, cable and plug		
<b>Insert labels for self-inscription</b>		<b>6AV7674-1LB20-0AA0</b>
<b>Label holders for self-inscription</b>		

## Technical specifications

Article number	<b>6AV7674-1LA31-0AA0</b>	<b>6AV7674-1LA41-0AA0</b>	<b>6AV7674-1LA51-0AA0</b>	<b>6AV7674-1LA61-0AA0</b>
	Extension Unit 12" hardwired	Extension Unit 15" hardwired	Extension Unit 19" hardwired	Extension Unit 22" hardwired
<b>General information</b>				
Product type designation	Extension Unit 12" Hardwired	Extension Unit 15" hardwired	Extension Unit 19" hardwired	Extension Unit 22" hardwired
<b>Connection type</b>				
• Connection type of the LED module	12-pin connector	12-pin connector	12-pin connector	12-pin connector
• Connection type of the contacts of the control elements	16-pin connector	16-pin connector	16-pin connector	16-pin connector
• Connection type of the safety-related contacts (emergency stop)	8-pin connector	8-pin connector	8-pin connector	8-pin connector
<b>Installation type/mounting</b>				
Mounting	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)
Mounting type	Screwed joint	Screwed joint	Screwed joint	Screwed joint
Rack mounting	No	No	No	No
Front mounting	No	No	No	No
Number of slots for command devices and signaling units	6	8	10; Max. 8 control elements + 1 emergency stop button can be mounted (refer to manual)	10; Max. 8 control elements + 1 emergency stop button can be mounted (refer to manual)
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Input current</b>				
Current consumption (rated value)	10 mA; without load	10 mA; without load	10 mA; without load	10 mA; without load
<b>Degree and class of protection</b>				
NEMA (front)				
• Enclosure Type 4 at the front	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	<b>6AV7674-1LA31-0AA0</b>	<b>6AV7674-1LA41-0AA0</b>	<b>6AV7674-1LA51-0AA0</b>	<b>6AV7674-1LA61-0AA0</b>
	Extension Unit 12" hardwired	Extension Unit 15" hardwired	Extension Unit 19" hardwired	Extension Unit 22" hardwired
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation			
<b>Cables</b>				
Cable length	30 m	30 m	30 m	30 m
<b>Mechanics/material</b>				
Material				
• Aluminum	Yes	Yes	Yes	Yes
Enclosure material (front)				
• Aluminum	Yes; Knockout covered with black film			
<b>Dimensions</b>				
Width	313 mm	396 mm	462 mm	527 mm
Height	99 mm	99 mm	99 mm	99 mm
Depth	100.65 mm			
Thickness		100.65 mm	100.65 mm	100.65 mm
<b>Weights</b>				
Weight (without packaging)	2.2 kg	2.5 kg	2.7 kg	2.8 kg
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
Components included	all connectors required for customer interfaces			

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

##### Technical specifications

Article number	<b>6AV7674-1LA32-0AA0</b> Extension Unit 12" PROFINET	<b>6AV7674-1LA42-0AA0</b> Extension Unit 15" PROFINET	<b>6AV7674-1LA52-0AA0</b> Extension Unit 19" PROFINET	<b>6AV7674-1LA62-0AA0</b> Extension Unit 22" PROFINET
<b>General information</b>				
Product type designation	Extension Unit 12" PROFINET	Extension Unit 15" PROFINET	Extension Unit 19" PROFINET	Extension Unit 22" PROFINET
<b>Control elements</b>				
With parameterizable keys	Yes	Yes	Yes	Yes
<b>Connection type</b>				
• Connection type of the safety-related contacts (emergency stop)	8-pin connector	8-pin connector	8-pin connector	8-pin connector
<b>Installation type/mounting</b>				
Mounting	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)
Mounting type	Screwed joint	Screwed joint	Screwed joint	Screwed joint
Rack mounting	No	No	No	No
Front mounting	No	No	No	No
Number of slots for command devices and signaling units	6	8	10	12
RFID reader can be installed		Yes; SIMATIC RF200 Access Control Reader RF1060R	Yes; SIMATIC RF200 Access Control Reader RF1060R	Yes; SIMATIC RF200 Access Control Reader RF1060R
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Input current</b>				
Current consumption (rated value)	150 mA; without load			
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch	2; Incl. switch	2; Incl. switch	2; Incl. switch
<b>Protocols</b>				
PROFINET	Yes	Yes	Yes	Yes
<b>Redundancy mode</b>				
<b>Media redundancy</b>				
- MRP	Yes	Yes	Yes	Yes
<b>Test commissioning functions</b>				
Key and signal lamp test	Yes; automatically when switching on			
<b>Degree and class of protection</b>				
NEMA (front)				
• Enclosure Type 4x at the front	Yes; All-round	Yes; All-round	Yes; All-round	Yes; All-round

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	<b>6AV7674-1LA32-0AA0</b> Extension Unit 12" PROFINET	<b>6AV7674-1LA42-0AA0</b> Extension Unit 15" PROFINET	<b>6AV7674-1LA52-0AA0</b> Extension Unit 19" PROFINET	<b>6AV7674-1LA62-0AA0</b> Extension Unit 22" PROFINET
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation			
<b>Cables</b>				
Cable length	30 m; Max. for emergency stop			
<b>Mechanics/material</b>				
Material				
• Aluminum	Yes	Yes	Yes	Yes
Enclosure material (front)				
• Aluminum	Yes; Knockout covered with black film			
<b>Dimensions</b>				
Width	313 mm	396 mm	462 mm	527 mm
Height	99 mm	99 mm	99 mm	99 mm
Depth	100.65 mm	100.65 mm	100.65 mm	100.65 mm
<b>Weights</b>				
Weight (without packaging)	2.2 kg	2.5 kg	2.7 kg	2.8 kg
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
Components included	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs

# PC-based Automation

Industrial PC

Devices for special requirements

## System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

### Technical specifications

Article number	<b>6AV7674-1LA33-0AA0</b>	<b>6AV7674-1LA43-0AA0</b>	<b>6AV7674-1LA53-0AA0</b>	<b>6AV7674-1LA63-0AA0</b>
	Extension Unit 12" PROFISAFE	Extension Unit 15" PROFISAFE	Extension Unit 19" PROFISAFE	Extension Unit 22" PROFISAFE
<b>General information</b>				
Product type designation	Extension Unit 12" PROFIsafe	Extension Unit 15" PROFIsafe	Extension Unit 19" PROFIsafe	Extension Unit 22" PROFIsafe
<b>Control elements</b>				
With parameterizable keys	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>				
Mounting	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)
Mounting type	Screwed joint	Screwed joint	Screwed joint	Screwed joint
Rack mounting	No	No	No	No
Front mounting	No	No	No	No
Number of slots for command devices and signaling units	6	8	10	12
RFID reader can be installed	Yes; SIMATIC RF200 Access Control Reader RF1060R			
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Input current</b>				
Current consumption (rated value)	150 mA; without load			
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch	2; Incl. switch	2; Incl. switch	2; Incl. switch
<b>Protocols</b>				
PROFIsafe	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor
<b>Redundancy mode</b>				
<b>Media redundancy</b>				
- MRP	Yes	Yes		
<b>Test commissioning functions</b>				
Key and signal lamp test	Yes; automatically when switching on			
<b>Degree and class of protection</b>				
NEMA (front)				
• Enclosure Type 4x at the front	Yes; All-round	Yes; All-round	Yes; All-round	Yes; All-round
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	<b>6AV7674-1LA33-0AA0</b> Extension Unit 12" PROFISAFE	<b>6AV7674-1LA43-0AA0</b> Extension Unit 15" PROFISAFE	<b>6AV7674-1LA53-0AA0</b> Extension Unit 19" PROFISAFE	<b>6AV7674-1LA63-0AA0</b> Extension Unit 22" PROFISAFE
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation			
<b>Mechanics/material</b>				
Material				
• Aluminum	Yes	Yes	Yes	Yes
Enclosure material (front)				
• Aluminum	Yes; Knockout covered with black film			
<b>Dimensions</b>				
Width	313 mm	396 mm	462 mm	527 mm
Height	99 mm	99 mm	99 mm	99 mm
Depth	100.65 mm	100.65 mm	100.65 mm	100.65 mm
<b>Weights</b>				
Weight (without packaging)	2.2 kg	2.5 kg	2.7 kg	2.8 kg
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
Components included	Power supply connector	Power supply connector	Power supply connector	Power supply connector

**PC-based Automation**

Industrial PC

Devices for special requirements

**System components for fully-enclosed IP65-protected devices > Extension Units and operator controls****Technical specifications**

Article number	<b>6AV2185-8CE01-0AA0</b> Extension Unit 12" KP12 PN	<b>6AV2185-8DE01-0AA0</b> Extension Unit 15" KP12 PN	<b>6AV2185-8EE01-0AA0</b> Extension Unit 19" KP12 PN	<b>6AV2185-8FE01-0AA0</b> Extension Unit 22" KP12 PN
<b>Control elements</b>				
Version of actuating element	1x Key Panel 12			
Operating principle of the actuating element	Tactile feedback	Tactile feedback	Tactile feedback	Tactile feedback
Functional lighting	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow
With parameterizable keys	Yes	Yes	Yes	Yes
<b>Connection type</b>				
• Connection type of the safety-related contacts (emergency stop)	8-pin connector	8-pin connector	8-pin connector	8-pin connector
<b>Installation type/mounting</b>				
Mounting	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)
Mounting type	Screwed joint	Screwed joint	Screwed joint	Screwed joint
Rack mounting	No	No	No	No
Front mounting	No	No	No	No
Number of slots for command devices and signaling units	3	5	6	8
RFID reader can be installed	Yes; SIMATIC RF200 Access Control Reader RF1060R			
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Input current</b>				
Current consumption (rated value)	150 mA; without load			
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch	2; Incl. switch	2; Incl. switch	2; Incl. switch
<b>Protocols</b>				
PROFINET	Yes	Yes	Yes	Yes
<b>Redundancy mode</b>				
<b>Media redundancy</b>				
- MRP	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	<b>6AV2185-8CE01-0AA0</b> Extension Unit 12" KP12 PN	<b>6AV2185-8DE01-0AA0</b> Extension Unit 15" KP12 PN	<b>6AV2185-8EE01-0AA0</b> Extension Unit 19" KP12 PN	<b>6AV2185-8FE01-0AA0</b> Extension Unit 22" KP12 PN
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation			
<b>Cables</b>				
Cable length	30 m; Max. for emergency stop			
<b>Mechanics/material</b>				
Material				
• Aluminum	Yes	Yes	Yes	Yes
Enclosure material (front)				
• Aluminum	Yes; Knockout covered with black film			
<b>Dimensions</b>				
Width	313 mm	396 mm	462 mm	527 mm
Height	99 mm	99 mm	99 mm	99 mm
Depth	100.65 mm	100.65 mm	100.65 mm	100.65 mm
<b>Weights</b>				
Weight (without packaging)	2.2 kg	2.5 kg	2.7 kg	2.8 kg
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
Components included	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

##### Technical specifications

Article number	<b>6AV2185-8CE08-0AA0</b>	<b>6AV2185-8DE08-0AA0</b>	<b>6AV2185-8EE08-0AA0</b>	<b>6AV2185-8FE08-0AA0</b>
	Extension Unit 12" KP24 PN	Extension Unit 15" KP36 PN	Extension Unit 19" KP36 PN	Extension Unit 22" KP48 PN
<b>Control elements</b>				
Version of actuating element	2x Key Panel 12	3x Key Panel 12	3x Key Panel 12	4x Key Panel 12
Operating principle of the actuating element	Tactile feedback	Tactile feedback	Tactile feedback	Tactile feedback
Functional lighting	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow
With parameterizable keys	Yes	Yes	Yes	Yes
<b>Connection type</b>				
• Connection type of the safety-related contacts (emergency stop)	8-pin connector	8-pin connector	8-pin connector	8-pin connector
<b>Installation type/mounting</b>				
Mounting	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)
Mounting type	Screwed joint	Screwed joint	Screwed joint	Screwed joint
Rack mounting	No	No	No	No
Front mounting	No	No	No	No
Number of slots for command devices and signaling units	0	0	0	0
RFID reader can be installed	No	No	No	No
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Input current</b>				
Current consumption (rated value)	150 mA; without load			
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch	2; Incl. switch	2; Incl. switch	2; Incl. switch
<b>Protocols</b>				
PROFINET	Yes	Yes	Yes	Yes
<b>Redundancy mode</b>				
<b>Media redundancy</b>				
- MRP	Yes	Yes	Yes	Yes

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	<b>6AV2185-8CE08-0AA0</b> Extension Unit 12" KP24 PN	<b>6AV2185-8DE08-0AA0</b> Extension Unit 15" KP36 PN	<b>6AV2185-8EE08-0AA0</b> Extension Unit 19" KP36 PN	<b>6AV2185-8FE08-0AA0</b> Extension Unit 22" KP48 PN
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes		Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation			
<b>Cables</b>				
Cable length	30 m; Max. for emergency stop			
<b>Mechanics/material</b>				
Material				
• Aluminum	Yes	Yes	Yes	Yes
Enclosure material (front)				
• Aluminum	Yes; Knockout covered with black film			
<b>Dimensions</b>				
Width	313 mm	396 mm	462 mm	527 mm
Height	99 mm	99 mm	99 mm	99 mm
Depth	100.65 mm	100.65 mm	100.65 mm	100.65 mm
<b>Weights</b>				
Weight (without packaging)	2.2 kg	2.5 kg	2.7 kg	2.8 kg
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
Components included	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs	Power supply connectors and 8-pole plug-in connectors for safety-related inputs

**PC-based Automation**

Industrial PC

Devices for special requirements

**System components for fully-enclosed IP65-protected devices > Extension Units and operator controls****Technical specifications**

Article number	<b>6AV2185-8CF01-0AA0</b>	<b>6AV2185-8DF01-0AA0</b>	<b>6AV2185-8EF01-0AA0</b>	<b>6AV2185-8FF01-0AA0</b>
	Extension Unit 12" KP12F PN	Extension Unit 15" KP12F PN	Extension Unit 19" KP12F PN	Extension Unit 22" KP12F PN
<b>Control elements</b>				
Version of actuating element	1x Key Panel 12			
Operating principle of the actuating element	Tactile feedback	Tactile feedback	Tactile feedback	Tactile feedback
Functional lighting	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow	Yes; Freely configurable colors: Red, green, blue, white, yellow
With parameterizable keys	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>				
Mounting	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)	For mounting on a 16:9 HMI / IPC PRO device (lower part)
Mounting type	Screwed joint	Screwed joint	Screwed joint	Screwed joint
Rack mounting	No	No	No	No
Front mounting	No	No	No	No
Number of slots for command devices and signaling units	3	5	6	8
RFID reader can be installed	Yes; SIMATIC RF200 Access Control Reader RF1060R			
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Input current</b>				
Current consumption (rated value)	150 mA; without load			
<b>Interfaces</b>				
Number of industrial Ethernet interfaces	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch	2; For the construction of lines and rings without external switch
Number of PROFINET interfaces	2; Incl. switch	2; Incl. switch	2; Incl. switch	2; Incl. switch
<b>Protocols</b>				
PROFIsafe	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor	Yes; 1x SIL 2 (two-channel) or 2x SIL 3 (single-channel) emergency stop sensor
<b>Redundancy mode</b>				
<b>Media redundancy</b>				
- MRP	Yes	Yes	Yes	Yes

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	6AV2185-8CF01-0AA0	6AV2185-8DF01-0AA0	6AV2185-8EF01-0AA0	6AV2185-8FF01-0AA0
	Extension Unit 12" KP12F PN	Extension Unit 15" KP12F PN	Extension Unit 19" KP12F PN	Extension Unit 22" KP12F PN
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	2 000 m	2 000 m	2 000 m	2 000 m
<b>Relative humidity</b>				
• Operation, max.	90 %; no condensation			
<b>Mechanics/material</b>				
Material				
• Aluminum	Yes	Yes	Yes	Yes
Enclosure material (front)				
• Aluminum	Yes; Knockout covered with black film			
<b>Dimensions</b>				
Width	313 mm	396 mm	462 mm	527 mm
Height	99 mm	99 mm	99 mm	99 mm
Depth	100.65 mm	100.65 mm	100.65 mm	100.65 mm
<b>Weights</b>				
Weight (without packaging)	2.2 kg	2.5 kg	2.7 kg	2.8 kg
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
Components included	Power supply connector	Power supply connector	Power supply connector	Power supply connector

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

##### Technical specifications

Article number	<b>6AV7674-1MA00-0AA0</b>	<b>6AV7674-1MB00-0AA0</b>	<b>6AV7674-1MG00-0AA0</b>	<b>6AV7674-1MG50-0AA0</b>	<b>6AV7674-1MC00-0AA0</b>
	E-Stop Pushbutton for Ext. Unit	Illuminated Pushbutton for Ext. Unit	Illum. pushbutton for ext.unit (1NO+1NC)	Pushbutton Safety for Ext. Unit	Indicator Light for Ext. Unit
<b>General information</b>					
Product type designation	EMERGENCY STOP mushroom pushbutton for Extension Unit	Illuminated pushbutton for Extension Unit	Illuminated pushbutton for Extension Unit (1 NC contact / 1 NO contact)	Safety pushbutton for Extension Unit (2 NO contacts)	Indicator light for Extension Unit
<b>Control elements</b>					
Version of actuating element	Conical mushroom pushbutton	Pushbutton with flat button	Pushbutton with flat button	Pushbutton with flat button	Flat lens
Operating principle of the actuating element	Latching, rotate to unlatch	Momentary contact	Momentary contact	Momentary contact	
Shape of actuating element	Round	Round	Round	Round	Round
Illuminant	No; Cannot be illuminated	Yes; Can be illuminated	Yes; Can be illuminated	No; Cannot be illuminated	Yes; Can be illuminated SMT LED
• Type of light source					
• Color of light source		Translucent white (different colors are created using the colored disk supplied)	Translucent white (different colors are created using the colored disk supplied)	Translucent white (different colors are created using the colored disk supplied)	Translucent white (different colors are created using the colored disk supplied)
Contact configuration	2 NC contacts	1 NO contact	1 NC contact, 1 NO contact	2 NO contacts	
<b>Installation type/mounting</b>					
Mounting type	Threaded ring	Threaded ring	Threaded ring	Threaded ring	Threaded ring
Front mounting	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
<b>Input current</b>					
Current consumption (rated value)	100 mA	100 mA	100 mA	100 mA	100 mA
<b>Degree and class of protection</b>					
IP (at the front)	IP65 (on front) to EN60529 and NEMA4	IP65 (on front) to EN60529 and NEMA4	IP65 (on front) to EN60529 and NEMA4	IP65 (on front) to EN60529 and NEMA4	IP65 (on front) to EN60529 and NEMA4
<b>Standards, approvals, certificates</b>					
CE mark	Yes	Yes	Yes	Yes	Yes
cULus	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit
RCM (formerly C-TICK)	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	6AV7674-1MA00-0AA0	6AV7674-1MB00-0AA0	6AV7674-1MG00-0AA0	6AV7674-1MG50-0AA0	6AV7674-1MC00-0AA0
	E-Stop Pushbutton for Ext. Unit	Illuminated Pushbutton for Ext. Unit	Illum. pushbutton for ext.unit (1NO+1NC)	Pushbutton Safety for Ext. Unit	Indicator Light for Ext. Unit
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• min.	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>					
• Installation altitude above sea level, max.	3 500 m	3 500 m	3 500 m	3 500 m	3 500 m
<b>Relative humidity</b>					
• Operation, max.	90 %	90 %	90 %	90 %	90 %
• Condensation permissible	No	No	No	No	No
<b>Mechanics/material</b>					
Material					
• Plastic	Yes	Yes	Yes	Yes	Yes
Material of the actuating element	plastic	plastic	plastic	plastic	plastic
Material of the front ring	plastic	plastic	plastic	plastic	plastic
Enclosure color (front)	red	Colorless	Colorless	Colorless	Colorless
Color of the front ring	Yellow	Silver-metallic	Silver-metallic	Silver-metallic	Silver-metallic
<b>Service life</b>					
• Number of operating cycles, keys	50 000	1 000 000	1 000 000	1 000 000	
<b>Dimensions</b>					
Height of housing front	33.2 mm	9.85 mm	9.85 mm	9.85 mm	9.85 mm
Mounting diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm	22.3 mm
<b>Weights</b>					
Weight (without packaging)	50 g	50 g	50 g	50 g	50 g
<b>Scope of supply</b>					
Delivery quantity in pieces	1	1	1	1	1
Components included					
• Number of colored lenses		5; colorless, red, yellow, green, blue	5; colorless, red, yellow, green, blue	6; colorless, red, yellow, green, blue, black	5; colorless, red, yellow, green, blue
<b>Other</b>					
Target devices	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)	suitable for Extension Units of the 16:9 HMI/IPC PRO devices as of TIA Portal V16 (refer to manual) configurable as of TIA Portal V16	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)
Note:					

# PC-based Automation

Industrial PC

Devices for special requirements

## System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

### Technical specifications

Article number	<b>6AV7674-1MD00-0AA0</b>	<b>6AV7674-1ME00-0AA0</b>	<b>6AV7674-1ME50-0AA0</b>	<b>6AV7674-1MF00-0AA0</b>
	Selector Switch for Ext. Unit	Key-operated Switch for Ext. Unit	Key-operated Safety Switch for Ext. Unit	USB interface for extension unit
<b>General information</b>				
Product type designation	Selector switch for Extension Unit	Key-operated switch for Extension Unit	Safety keyswitch for Extension Unit	USB interface for Extension Unit
<b>Control elements</b>				
Version of actuating element	Rotary handle, 3 switch positions	3 switch positions (withdrawal positions)	2 switch positions (pos. 0 removal position)	
Operating principle of the actuating element	Latching	Latching	Latching	
Shape of actuating element	Round	Round	Round	
Illuminant	Yes; Can be illuminated	No; Cannot be illuminated	No; Cannot be illuminated	
• Type of light source	SMT LED			
• Color of light source	Translucent white			
Contact configuration	2 NO contacts	2 NO contacts	2 NO contacts	
<b>Connection type</b>				
• USB				Yes; USB 2.0 type A
• Cable length				0.7 m
<b>Installation type/mounting</b>				
Mounting type	Threaded ring	Threaded ring	Threaded ring	Threaded ring
Front mounting	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices	Yes; Front plate attachment in an Extension Unit for 16:9 PRO devices
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	
<b>Input current</b>				
Current consumption (rated value)	100 mA	100 mA	100 mA	
<b>Degree and class of protection</b>				
IP (all-round)				IP65 fully enclosed (when protective cover is closed)
IP (at the front)	IP65 (on front) to EN60529 and NEMA4	IP65 (on front) to EN60529 and NEMA4	IP65 (on front) to EN60529 and NEMA4	IP20 when protective cover is open
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes
RCM (formerly C-TICK)	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes; Only in combination with Extension Unit	Yes

System components for fully-enclosed IP65-protected devices > Extension Units and operator controls

**Technical specifications**

Article number	6AV7674-1MD00-0AA0	6AV7674-1ME00-0AA0	6AV7674-1ME50-0AA0	6AV7674-1MF00-0AA0
	Selector Switch for Ext. Unit	Key-operated Switch for Ext. Unit	Key-operated Safety Switch for Ext. Unit	USB interface for extension unit
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	50 °C	50 °C	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>				
• Installation altitude above sea level, max.	3 500 m	3 500 m	3 500 m	3 500 m
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	90 %	90 %
• Condensation permissible	No	No	No	No
<b>Runs under operating system</b>				
• other				Yes; Windows 7 Ultimate 32-bit / 64-bit, MUI; Windows Embedded Standard 7 E/P, 32-bit / 64-bit
<b>Cables</b>				
Cable length				0.5 m
smallest bending radius				0 mm
<b>Mechanics/material</b>				
Material				aluminum
• Plastic	Yes	Yes	Yes	
Material of the actuating element	plastic	plastic	plastic	
Material of the front ring	plastic	plastic	plastic	
Enclosure color (front)	gray	gray	gray	Silver-metallic
Color of the front ring	Silver-metallic	Silver-metallic	Silver-metallic	
<b>Service life</b>				
• Number of operating cycles, keys	300 000	50 000	50 000	1 500; Insertion cycles
<b>Dimensions</b>				
Height of housing front	22.24 mm	45.1 mm	45.1 mm	
Overall depth				10 mm
Mounting diameter	22.3 mm	22.3 mm	22.3 mm	22.3 mm
<b>Weights</b>				
Weight (without packaging)	50 g	50 g	50 g	0.13 g
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1; Including 2 keys	1; Including 2 keys	
Components included				USB socket with cable and connector, threaded ring
<b>Other</b>				
Target devices	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)	suitable for Extension Units of the 16:9 HMI/IPC PRO devices as of TIA Portal V16 (refer to manual) configurable as of TIA Portal V16	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)
Note:				

**PC-based Automation**

Industrial PC

Devices for special requirements

**System components for fully-enclosed IP65-protected devices > Extension Units and operator controls****Technical specifications**

Article number	<b>6AV7674-1LB20-0AA0</b> 12 Label Holder for Self Inscription	<b>6AV7674-1LB30-0AA0</b> Label Inserts for Self Inscription
<b>General information</b>		
Product type designation	Label holder	Insert labels
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	50 °C	50 °C
<b>Altitude during operation relating to sea level</b>		
• Installation altitude above sea level, max.	3 500 m	3 500 m
<b>Relative humidity</b>		
• Operation, max.	90 %	90 %
• Condensation permissible	No	No
<b>Mechanics/material</b>		
Material		
• Plastic	Yes	
<b>Dimensions</b>		
Width	29.9 mm	
Height	50 mm	
Depth	3.6 mm	
Mounting diameter	22.3 mm	
<b>Weights</b>		
Weight (without packaging)	33 g	
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
• Number of films per sheet		54; 54 perforated insert labels per sheet
• Parts per unit	12	4; 4 sheets
Components included	12 label holders, 12 transparent covers, installation instructions	
<b>Other</b>		
printable with laser printer	Yes; Word template available for labeling in SIOS, writable surface area: 28 mm x 16 mm (width x height)	Yes; Word template available for labeling in SIOS
Target devices	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)	Suitable for Extension Units of the 16:9 HMI/IPC PRO devices (refer to manual)

Additional information is available on the Internet at:

<https://www.siemens.com/simatic-hmi-pro>

System components for fully-enclosed IP65-protected devices > Extension components

**Overview**



**Extension components**

The extension components are part of the system components for PRO devices and complement the portfolio of fully enclosed devices. These components in combination with the basic devices enable customers to implement a large variety of operating scenarios.

The following products are available as extension components:

- Keyboard shelf for PRO devices
- Keyboard tray for PRO devices
- USB keyboard INT, KV25605 INOX with IP67 USB plug
- USB keyboard GER, KV25605 INOX with IP67 USB plug
- USB interface for PRO devices
- Handles for PRO devices (12" – 22" variant and 24" variant)

**Ordering data**

**Article No.**

<b>Keyboard shelf for PRO devices</b> Tilttable, incl. 2-way USB interface; color: silver	<b>6AV7674-1NF01-0AA0</b>
<b>Keyboard tray for PRO devices</b> Tilttable, incl. 2-way USB interface; color: silver	<b>6AV7674-1NG00-0AA0</b>
<b>USB interface for PRO devices</b> Cable and connector, USB 2.0 type A. IP65 degree of protection if protective cover is closed. Integrated via cover on the side of the basic adapter	<b>6AV7674-1LX00-0AA0</b>
<b>Tray for 16:9 PRO devices</b> Tray in RAL9006 (silver) for all fully- enclosed IP65 16:9 PRO devices	<b>6AV7674-1NE01-0AA0</b>
<b>Handles for PRO devices</b> For optimum handling and haptics when positioning and tilting the HMI PRO device. Universally adjustable from 12° to 22°.	<b>6AV7674-1LB10-0AA0</b>
<b>Handles for PRO devices 24"</b>	<b>6AV7674-1LB15-0AA0</b>

# PC-based Automation

Industrial PC

Devices for special requirements

## System components for fully-enclosed IP65-protected devices > Extension components


### Technical specifications

Article number	<b>6AV7674-1LX00-0AA0</b>
	USB Interface for Pro Devices
<b>General information</b>	
Product type designation	USB interface for PRO devices
<b>Connection type</b>	
• USB	Yes; USB 2.0 type A
• Cable length	0.5 m
<b>Installation type/mounting</b>	
Mounting	Integrated by means of cover on the side of the basic adapter.
<b>Degree and class of protection</b>	
IP (all-round)	IP65 fully enclosed (when protective cover is closed)
IP (at the front)	IP20 when protective cover is open
<b>Standards, approvals, certificates</b>	
CE mark	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	50 °C
<b>Altitude during operation relating to sea level</b>	
• Installation altitude above sea level, max.	3 500 m
<b>Relative humidity</b>	
• Operation, max.	90 %
• Condensation permissible	No
<b>Cables</b>	
Cable length	0.5 m
<b>Mechanics/material</b>	
Material	Brass, nickel-plated
Enclosure material (front)	USB cover: Anodized aluminum, cover for basic adapter: Aluminum, powder-coated, RAL 9006
Enclosure color (front)	Silver-metallic
<b>Service life</b>	
• Number of operating cycles, keys	1 500; Insertion cycles
<b>Dimensions</b>	
Enclosure diameter	22.5 mm; Hole diameter in the cover for the basic adapter
Overall depth	20 mm
<b>Weights</b>	
Weight (without packaging)	0.25 kg
<b>Scope of supply</b>	
Delivery quantity in pieces	1
Components included	USB socket with cable and connector, cover for the basic adapter, bolts for fastening

Article number	<b>6AV7674-1LB15-0AA0</b>
	Handles for HMI PRO devices 24"
<b>General information</b>	
Product type designation	Handles for HMI PRO devices 24"
<b>Degree and class of protection</b>	
IP (all-round)	IP65 when installed
NEMA (front)	
• Enclosure Type 4 at the front	Yes
<b>Mechanics/material</b>	
Material	
• Aluminum	Yes; Powder-coated, RAL 9006
<b>Weights</b>	
Weight (without packaging)	1.9 kg
<b>Scope of supply</b>	
Delivery quantity in pieces	1
Components included	Screws for attachment
<b>Other</b>	
Target devices	PRO devices for support arm (extendable, round tube) and pedestal (extendable, flange below)

Devices with stainless steel front > SIMATIC Industrial Thin Client INOX

## Overview

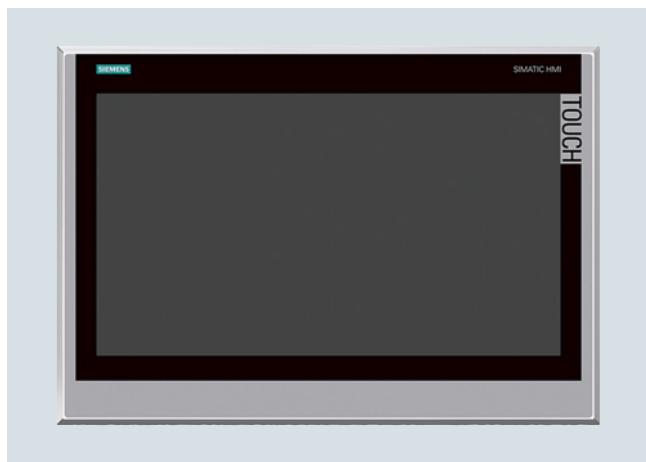

### SIMATIC ITC1900 INOX

The Industrial Thin Client with touch screen and stainless steel front is designed for use in the food and beverage industry, the pharmaceuticals industry, fine chemicals and in other hygiene areas for machine-level operator control and monitoring.

For this reason, the devices with stainless steel front have been developed in compliance with EN 1672-2 "Food processing machinery – Safety and hygiene requirements".

## Ordering data

### Article No.

#### SIMATIC ITC1900 INOX

With accessory pack comprising:

- Clamping frame
- Device seal
- Tension jack
- Terminal
- Installation instructions

**6AV6646-8AC10-0AA0**

The device seals can be replaced using the corresponding service packages from the accessories.

## Technical specifications

Article number	<b>6AV6646-8AC10-0AA0</b> SIMATIC ITC1900 INOX
<b>General information</b>	
Product type designation	ITC1900 INOX
<b>Display</b>	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	18.5 in
Number of colors	16 777 216
<b>Backlighting</b>	
• Type of backlighting	LED, dimmable
<b>Control elements</b>	
<b>Touch operation</b>	
• Design as touch screen	Yes
• Monitor keyboard	Yes
<b>Supply voltage</b>	
Type of supply voltage	24 V DC
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	1
Number of USB interfaces	2; on rear
Connection for keyboard/mouse	USB
<b>Industrial Ethernet</b>	
• Transmission rate, max.	1 000 Mbit/s

# PC-based Automation

Industrial PC

Devices for special requirements

## Devices with stainless steel front > SIMATIC Industrial Thin Client INOX

### Technical specifications

Article number	<b>6AV6646-8AC10-0AA0</b> SIMATIC ITC1900 INOX	Article number	<b>6AV6646-8AC10-0AA0</b> SIMATIC ITC1900 INOX
<b>Degree and class of protection</b>			
NEMA (front)		Configuration	
• Enclosure Type 4x at the front	Yes; indoor use only	Configuration	
<b>Standards, approvals, certificates</b>			
CE mark	Yes	• Local	Yes
cULus	Yes	• Remote	Yes; With Remote Configuration Center (RCC) as of V2.0
<b>Use in hazardous areas</b>			
• ATEX Zone 2	Yes	<b>Languages</b>	
• ATEX Zone 22	Yes	<b>Online languages</b>	
• IECEx Zone 2	Yes	• Number of online/runtime languages	2; german / english
• IECEx Zone 22	Yes	<b>Peripherals/Options</b>	
• cULus Class I Zone 2, Division 2	Yes	USB memory	Yes; USB storage medium can be connected
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	Enclosure material (front)	No
• max.	45 °C	• Aluminum	Yes
<b>Relative humidity</b>			
• Operation, max.	70 %	• Stainless steel	
<b>Software</b>			
Web browser	Yes	<b>Dimensions</b>	
PDF reader	Yes	Width of the housing front	483 mm
		Height of housing front	337 mm
		Mounting cutout, width	465 mm
		Mounting cutout, height	319 mm
		Overall depth	73 mm
		<b>Weights</b>	
		Weight (without packaging)	8.5 kg

### More information

#### Customized modifications

- Customized design (logo, type designation and membrane color)
- Protection against condensation and corrosive gases

#### Quotation preparation

Customized automation specialists define the product modifications precisely in accordance with customer requirements.

The quotation is then prepared with:

- Non-recurring costs
- Prototype costs
- Serial device prices and
- The general conditions in the form of a product agreement (e.g. minimum quantity).

The defined device can then be ordered easily using this product agreement and a customer-specific order number.

Devices with stainless steel front > SIMATIC Industrial Flat Panel IFP1900 INOX PRO

## Overview



### SIMATIC IFP1900 INOX PRO

Industrial Flat Panel in fully-enclosed stainless steel housing with high degree of protection for machine-level operator control and monitoring in the food and beverage, pharmaceutical and fine chemicals industries and in other areas where hygienic requirements are high.

The device has been developed on the basis of EN 1672-2 "Food processing machinery – Safety and hygiene requirements".

With its fully enclosed design and optional expansion modules, the SIMATIC PRO devices are eminently suitable for industrial and machine-level use.

The INOX PRO devices with their stainless steel housing are compact and hygienically designed and feature integrated operating elements. They are also even better equipped to meet the high requirements presented by the food and beverage production environment. IP66K degree of protection protects against water, even with a jet strength of 100 l/min at 10 bar from a distance of 2.5 m to 3 m.

The optimized profile and minimal housing depth allow liquids to run off.

The high quality requirements in the food and beverages industry demand a high standard of the food processing machinery. There are many relevant regulations, directives, ordinances, standards and laws. Essential here is that all equipment and components are easy to clean and disinfect so that cross-contamination of foodstuffs can be avoided.

## Ordering data

## Article No.

<b>SIMATIC IFP1900 INOX PRO for pedestal mounting</b> 19"; with accessory pack comprising: Documentation and driver CD, product information; terminals; Quickinstall Guide	<b>6AV7484-6AB00-0AA0</b>
<b>SIMATIC IFP1900 INOX PRO for support-arm mounting</b> 19"; with accessory pack comprising: Documentation and driver CD, product information; terminals; Quickinstall Guide	<b>6AV7484-6AB10-0AA0</b>
<b>Accessories</b>  Mounting packages are provided as accessories for mounting the devices on the support system. The device seals can be replaced using the corresponding service packages from the accessories.	See "System components for fully-enclosed IP65-protected devices"

## Technical specifications

Article number	<b>6AV7484-6AB00-0AA0</b>	<b>6AV7484-6AB10-0AA0</b>
	IFP1900 INOX PRO STAND	IFP1900 INOX PRO ARM
<b>General information</b>		
Product type designation	IFP1900 INOX PRO	IFP1900 INOX PRO
Short designation	Flat Panel 19" INOX PRO ETH single-touch	Flat Panel 19" INOX PRO ETH single-touch
<b>Display</b>		
Design of display	18.5" TFT widescreen display	18.5" TFT widescreen display
Screen diagonal	18.5 in	18.5 in
Screen diagonal [cm]	47 cm	47 cm
Number of colors	16 000 000	16 000 000
<b>General features</b>		
• Brightness/contrast	400 cd/m <sup>2</sup> / 700:1	400 cd/m <sup>2</sup> / 700:1
• non-reflective and tempered mineral glass screen	No	No
• Detachable from computer unit	100 m	100 m
<b>Backlighting</b>		
• Type of backlighting	LED, dimmable	LED, dimmable
• MTBF backlighting (at 25 °C)	50 000 h	50 000 h

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Devices with stainless steel front > SIMATIC Industrial Flat Panel IFP1900 INOX PRO

##### Technical specifications

Article number	<b>6AV7484-6AB00-0AA0</b>	<b>6AV7484-6AB10-0AA0</b>	Article number	<b>6AV7484-6AB00-0AA0</b>	<b>6AV7484-6AB10-0AA0</b>
	IFP1900 INOX PRO STAND	IFP1900 INOX PRO ARM		IFP1900 INOX PRO STAND	IFP1900 INOX PRO ARM
<b>Control elements</b>			<b>Standards, approvals, certificates</b>		
Control elements	single-touch screen	single-touch screen	CE mark	Yes	Yes
<b>Touch operation</b>			UL approval	Yes	Yes
• Design as touch screen	Yes	Yes	• UL 508	Yes	Yes
• Design as multi-touch screen	No	No	cULus	Yes	Yes
• Monitor keyboard	No	No	FM approval	No	No
<b>Installation type/mounting</b>			RCM (formerly C-TICK)	No	No
Design	Pedestal mounting	Support arm mounting	KC approval	No	No
Mounting in portrait format possible	No	No	EAC (formerly Gost-R)	No	No
<b>Supply voltage</b>			CCC	No	No
Rated value (DC)	24 V	24 V	FCC	Yes	Yes
<b>Input current</b>			EMC	CE, EN 61000-6-4; CISPR 22 Class A; FCC Class A	CE, EN 61000-6-4; CISPR 22 Class A; FCC Class A
Current consumption (rated value)	2 A	2 A	Marine approval	No	No
<b>Interfaces</b>			<b>Use in hazardous areas</b>		
Number of industrial Ethernet interfaces	1	1	• ATEX Zone 2	No	No
Number of USB interfaces	2	2	• ATEX Zone 22	No	No
USB on the rear	No	No	• IECEx Zone 2	No	No
USB at the front	No	No	• IECEx Zone 22	No	No
Connection for keyboard/mouse	USB	USB	• cULus Class I Zone 2, Division 2	No	No
<b>Video interfaces</b>			• FM Class I Division 2	No	No
• analog video signal (VGA)	No	No			
• DVI-D	No	No			
• DisplayPort	Yes	Yes			
<b>Touch interfaces</b>			<b>Ambient conditions</b>		
• USB	Yes	Yes	<b>Ambient temperature during operation</b>		
<b>Industrial Ethernet</b>			• min.	0 °C	0 °C
• Transmission rate, max.	1 Mbit/s	1 Mbit/s	• max.	45 °C	45 °C
<b>Degree and class of protection</b>			<b>Relative humidity</b>		
IP (at the front)	IP66	IP66	• Operation, max.	85 %	85 %
IP (rear)	IP66	IP66	<b>Vibrations</b>		
NEMA (front)			• Vibration load in operation	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Enclosure Type 4x at the front	No	No	• Vibration load during transport/storage	10 m/s <sup>2</sup>	10 m/s <sup>2</sup>
• Enclosure Type 12 at the front	No	No	<b>Shock testing</b>		
			• Shock load during operation	150 m/s <sup>2</sup>	150 m/s <sup>2</sup>
			• shock acceleration during storage/transport	250 m/s <sup>2</sup>	250 m/s <sup>2</sup>
			<b>Mechanics/material</b>		
			Enclosure material (front)	Stainless steel V2A	Stainless steel V2A
			• Aluminum	No	No
			• Aluminum casting	No	No
			• Glass	No	No
			Enclosure material (rear)	Stainless steel V2A	Stainless steel V2A
			<b>Dimensions</b>		
			Width	544 mm	544 mm
			Height	430.7 mm	430.7 mm
			Depth	136 mm	136 mm
			<b>Weights</b>		
			Weight (without packaging)	15.5 kg	15.5 kg

## More information

More information is available on the Internet at:

<http://www.siemens.com/inox-pro-hmi-devices>

### Customized modifications

- Customized design (logo, type designation and membrane color)
- Other display sizes
- Changes to the operator controls
- Further certificates and approvals

### Quotation preparation

Customized automation specialists define the product modifications precisely in accordance with customer requirements.

The quotation is then prepared with:

- Non-recurring costs
- Prototype costs
- Serial device prices and
- The general conditions in the form of a product agreement (e.g. minimum quantity).

The defined device can then be ordered easily using this product agreement and a customer-specific order number.

## PC-based Automation

Industrial PC

Devices for special requirements

**Devices with stainless steel front > SIMATIC Industrial Flat Panel IFP2200 INOX MT ETH**

### Overview



### SIMATIC Industrial Flat Panel IFP2200 INOX MT ETH

The Industrial Flat Panel (Ethernet monitor) with its projective-capacitive touch screen for multi-finger operation and stainless steel front is designed for use in the food and beverage, pharmaceutical, and fine chemicals industries as well as in other hygienic areas for machine level operator control and monitoring.

For this reason, these stainless steel front devices have been developed in compliance with EN 1672-2 "Food processing machinery – Safety and hygiene requirements".

### Ordering data

### Article No.

#### SIMATIC IFP2200 INOX MT ETH

With accessory pack comprising:

- Clamping frame
- Device seal
- Mounting clamp
- Terminal
- Installation instructions

**6AV7485-6BE00-0AA0**

The device seals can be replaced using the corresponding service packages from the accessories.

### Technical specifications

Article number	<b>6AV7485-6BE00-0AA0</b> SIMATIC FLAT PANEL 22" INOX MT ETH
<b>General information</b>	
Product type designation	IFP2200 INOX
Short designation	Flat Panel 22" INOX multi-touch Ethernet
<b>Display</b>	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	21.5 in
Screen diagonal [cm]	56 cm
On Screen Display (OSD) configuration	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit
<b>General features</b>	
• Brightness/contrast	250 cd/m <sup>2</sup> / 1 000:1
<b>Backlighting</b>	
• Type of backlighting	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C
<b>Touch operation</b>	
• Design as touch screen	Yes; Projective-capacitive
• Design as multi-touch screen	Yes
• Monitor keyboard	Yes
<b>Supply voltage</b>	
Rated value (DC)	24 V
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	1; Ethernet, 1 port, RJ45
USB on the rear	Yes; 2x onboard
<b>Video interfaces</b>	
• analog video signal (VGA)	No
• DisplayPort	Yes; DisplayPort V1.1
<b>Touch interfaces</b>	
• USB	Yes
<b>Industrial Ethernet</b>	
• Transmission rate, max.	1 000 Mbit/s

## Devices with stainless steel front &gt; SIMATIC Industrial Flat Panel IFP2200 INOX MT ETH

**Technical specifications**

Article number	<b>6AV7485-6BE00-0AA0</b> SIMATIC FLAT PANEL 22" INOX MT ETH
<b>Degree and class of protection</b>	
IP (at the front)	IP66 / IPx6K and IP69 / IPx9K
NEMA (front)	
• Enclosure Type 4x at the front	No; Available soon
<b>Standards, approvals, certificates</b>	
CE mark	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
KC approval	No
EAC (formerly Gost-R)	Yes
<b>Use in hazardous areas</b>	
• ATEX Zone 2	No; Available soon
• ATEX Zone 22	No; Available soon
• FM Class I Division 2	No; Available soon
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	45 °C; Vertical installation (horizontal)
<b>Vibrations</b>	
• Vibration load in operation	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>
<b>Shock testing</b>	
• Shock load during operation	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>
<b>Mechanics/material</b>	
Enclosure material (front)	
• Glass	Yes
<b>Dimensions</b>	
Width of the housing front	544 mm
Height of housing front	345 mm
Mounting cutout, width	513 mm; Tolerance: +1 mm
Mounting cutout, height	315 mm; Tolerance: +1 mm
Overall depth	62.5 mm
<b>Weights</b>	
Weight (without packaging)	8 kg

**More information**Customized modifications

- Neutral design (black, no logo, type designation)
- Protection against condensation and corrosive gases

Quotation preparation

Customized automation specialists define the product modifications precisely in accordance with customer requirements.

The quotation is then prepared with:

- Non-recurring costs
- Prototype costs
- Serial device prices
- General conditions in the form of a product agreement (e.g. minimum quantity)

The defined device can then be ordered easily using this product agreement and a customer-specific order number.

# PC-based Automation

Industrial PC

Devices for special requirements

Devices for hazardous areas > SIMATIC HMI Panel PC Ex NG

## Overview



### SIMATIC HMI Panel PC Ex NG

The new generation SIMATIC HMI Panel PC Ex NG has been specially developed for use in the pharmaceutical, chemical and life science industries, but can also be used in many other areas since it satisfies the requirements for operator control and monitoring directly in hazardous areas.

Due to the 22" and 24" display diagonals, these devices are ideal for showing plant and process information provided from systems such as PCS.

A modern Intel ATOM E3845 Quad Core processor is used with this SIMATIC HMI Panel PC Ex NG.

#### Highlights:

- High degree of industrial functionality and industry-compatible front panels
  - Single-touch fronts 22" (1 680 x 1 050), 24" (1 920 x 1 080) and 24" WU (1 920 x 1 200)
  - -30 °C up to 55 °C ambient temperature in operation
  - Resistive Touch Display 300 cd/m<sup>2</sup>
  - Built-in unit optional stainless steel enclosure or GMP/ cleanroom
- Certificates for hazardous area
  - IECEx, ATEX Zones 1, 21 and 2, 22
  - Class 1, Division 2
  - NEC
  - CEC
  - KGS
  - TR
  - Certificates for marine applications DNV / GL
- High system performance in hazardous areas
  - Intel Bay Trail (BT) 1.91 GHz Quad Core

## Ordering data

## Article No.

<b>SIMATIC HMI Panel PC Ex NG</b>	<b>6AV7200-</b>	<b>6</b>	<b>■ ■ ■ ■ ■</b>
<u>Display</u>			
• 22", 1 680 x 1 050, 16:10 format, Zone 1		<b>A</b>	
• 24", 1 920 x 1 080, 16:9 format, Zone 1		<b>B</b>	
• 24", 1 920 x 1 200, 16:10 format, Zone 1		<b>C</b>	
• 22", 1 680 x 1 050, 16:10 format, Zone 2		<b>D</b>	
• 24", 1 920 x 1 080, 16:9 format, Zone 2		<b>E</b>	
• 24", 1 920 x 1 200, 16:10 format, Zone 2		<b>F</b>	
• 22", 1 680 x 1 050, 16:10 format, non-Ex		<b>G</b>	
• 24", 1 920 x 1 080, 16:9 format, non-Ex		<b>H</b>	
• 24", 1 920 x 1 200, 16:10 format, non-Ex		<b>J</b>	
<u>Network</u>			
• 10/100BaseTX - copper Ethernet		<b>A</b>	
• 2 x 10/100BaseTX - 2 x copper Ethernet		<b>B</b>	
• 1000BaseSX - Fiber Optic Ethernet		<b>C</b>	
• 1000BaseLX - Fiber Optic Ethernet		<b>D</b>	
• 100BaseFX - Fiber Optic Ethernet		<b>E</b>	
<u>Mass storage / main memory / operating system</u>			
• 32 GB SSD, 4 GB RAM, Windows 7 Ultimate 64-bit		<b>0</b>	
• 64 GB SSD, 4 GB RAM, Windows 7 Ultimate 64-bit		<b>1</b>	
• 128 GB SSD MLD, 4 GB RAM, Windows 7 Ultimate 64-bit		<b>2</b>	
• 32 GB SSD, 4 GB RAM, Windows Embedded Standard 7 (WES 7) 64-bit		<b>3</b>	
• 64 GB SSD, 4 GB RAM, Windows Embedded Standard 7 (WES 7) 64-bit		<b>4</b>	
• 128 GB SSD MLD, 4 GB RAM, Windows Embedded Standard 7 (WES 7) 64-bit		<b>5</b>	
<u>Touch and front design</u>			
• Without touch, panel mount with aluminum front		<b>0</b>	
• Analog-resistive, polyester membrane with aluminum front		<b>1</b>	
• Analog-resistive, glass touch with aluminum front		<b>2</b>	

Ordering data	Article No.	Article No.
<b>SIMATIC HMI Panel PC Ex NG</b>	6AV7200- 6 [ ] - [ ] [ ] [ ] [ ]	
<u>Enclosure type and material</u>		
• No enclosure	0	
• Cleanroom enclosure front door (CFR), SS304	1	
• Front door enclosure (FR), SS304	2	
• Back door enclosure (BD), SS304	3	
<u>Keyboard with housing / layout</u>	A B C D E F G H	
• No keyboard	A	
• Keyboard housing SS304; layout DE	B	
• Keyboard housing SS304; layout US	C	
• Keyboard housing SS304; layout FR	D	
• Keyboard housing SS304; layout CH	E	
• Keyboard housing SS304; layout ES	F	
• Keyboard housing SS304; layout SI	G	
• Keyboard housing SS304; layout FR-BE	H	
<u>Integrated mouse / trackball</u>	A B C D E F	
• No mouse / trackball	A	
• Trackball 50 mm IP54	B	
• Trackball (SS304) 50 mm IP54	C	
• Touchpad	D	
• Joystick	E	
• Mouse module	F	
<u>Mounting options</u>	0 1 2 3	
• Without, front panel mounting only	0	
• Direct wall mounting	1	
• Fastener for pedestal or elbow on enclosure bottom	2	
• Fastener for ceiling or elbow mounting on enclosure top part	3	
<u>Additional options</u>	A01 B01 C01 D01 E01	
• 24 V DC power supply	A01	
• Outdoor to -20 °C for enclosure	B01	
• Outdoor to -30 °C	C01	
• Emergency off button 8003 right, only with enclosure	D01	
• Emergency off button 8003 left, only with enclosure	E01	

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mail in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Devices for hazardous areas > SIMATIC HMI Panel PC Ex NG

##### Technical specifications

SIMATIC HMI Panel PC Ex NG		SIMATIC HMI Panel PC Ex NG	
<b>General features</b>		<b>Power supply</b>	
Design	Built-in unit	• 230 V AC	• Yes (100 – 240 V AC)
<b>Fronts</b>		• 24 V DC	• Yes; optional
Display diagonal	• 22" (1 680 x 1 050) 16:10, • 24" (1 920 x 1 080) 16:9 and • 24" WU (1 920 x 1 200) 16:10		
Resolution	1 680 x 1 050 or 1 920 x 1 080 or 1 920 x 1 200	Temperature	• -20 °C ... +55 °C • -30 °C ... +55 °C with heater • Storage -40 °C ... +70 °C
Number of colors	16.7 million	Relative humidity during operation	+55 °C ( $\pm 2$ °C) $\geq$ 95%, according to IEC 60068-2-30 : 2005
Brightness	• Standard display 300 cd/m <sup>2</sup>	Degree of protection	IP66 front, IP65 rear optionally according to GMP
Contrast	1 000:1	Vibration	Operation: 5 to 13.2 Hz: $\pm$ 1 mm 13.2 to 100 Hz: $\pm$ 0.7 g
MTBF backlight	LED backlight approx. 50 000 h	Shock	Operation: 15 g / 11 ms
Single-touch	Resistive 5-wire glass or membrane touch	<b>Miscellaneous</b>	
<b>Computing unit</b>		Power consumption at 24 V DC	Typ. 50 W / 100 W at O30 / max. 150 W (typ. 170 BTU / 341 BTU at O30 / max. 510 BTU)
Processor	ATOM E3845, Intel Bay Trail (BT) 1.91 GHz Quad Core	<b>Weight / Size</b>	
Main memory	4 GB RAM	Weights	
<b>Operating system</b>		Dimensions (W x H x D)	• 22": 660 mm x 475 mm x 110 mm • 24": 660 mm x 475 mm x 110 mm
Windows Embedded Standard 7 (64-bit)	Pre-installed	<b>Approvals</b>	
Windows 7 Ultimate (64-bit)	Pre-installed	IECEx	• Ex e q [ia op is Ga] IIC T4 Gb • Ex tb IIIC [ia op is Da] IP65 T110 °C Db
<b>Drives</b>		ATEX	• II 2(1) G Ex e q [ia op is Ga] IIC T4 Gb II 2(1) D • Ex tb IIIC [ia op is Da] IP65 T110 °C Db
Mass storage	32 GB SSD, 64 GB SSD, 128 GB SSD MLC	NEC	Class I, Zone 1 AEx e q [ia] IIC T4 Gb
<b>Interfaces</b>		CEC	Ex e q [ia] IIC T4 Gb Class I, Division 2
Ethernet	• 10/100BaseTX - copper Ethernet or • 2x 10/100BaseTX - 2x copper Ethernet or • 1000BaseSX - Fiber Optic Ethernet or • 1000BaseLX - Fiber Optic Ethernet or • 100BaseFX - Fiber Optic Ethernet	TR	• 1Ex e q [ia op is Ga] IIC T4 Gb X • Ex tb IIIC [ia op is Da] IP65 T110 °C Db
USB	2 x USB (Ex ia), 1 x USB (Ex e), 2 x USB (Ex ia) (keyboard, pointer instrument)	KGS	• Ex e q IIC T4 • Ex tb IIIC IP64 T110 °C • Ex ia IIC T4 • Ex ia IIIB T110 °C
Serial	1 x RS 232 (Ex e)		
Audio	1 x audio line out (Ex e)		
Barcode	Optionally via USB		
Bluetooth	Optionally via USB		

##### More information

You can find additional information on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

**Overview**

SIMATIC HMI Panel PC Ex OG with international approvals for operator control and monitoring in hazardous areas.

**Ordering data****Article No.****SIMATIC HMI Panel PC Ex OG**

6AV7200- 2 ■■■■■ - ■■■■■ A 0

Display

- 15", 1 024 x 768, 4:3 format; Zone 1
- 21.5" Full HD, 1 920 x 1 080, format 16:9; Zone 1
- 15", 1 024 x 768, 4:3 format; Zone 2 and non-Ex
- 21.5" Full HD, 1 920 x 1 080, format 16:9; Zone 2 and non-Ex

A

B

C

D

A

B

C

1

2

3

1

2

1

2

3

4

5

6

Network

- 1 x 1000 Base TX – copper Ethernet in combination with WLAN
- 2 x 1000 Base TX – copper Ethernet not in combination with WLAN
- 2 x 1000 Base FX - fiber optic Ethernet not in combination with WLAN

A

B

C

A

B

1

2

1

2

Mass storage/main memory

- 240 GB SSD, 4 GB RAM
- 240 GB SSD, 8 GB RAM
- 480 GB SSD, 8 GB RAM

2

3

1

2

Operating system

- Windows 7 Ultimate
- WES7 P

1

2

Display options

- Standard TFT, not touch; for 15" display only
- Sunlight-readable display 15", not touch
- Sunlight-readable display 21.5", not touch
- Standard TFT, capacitive glass touch, for 15" display only
- Sunlight-readable display 15", capacitive glass touch
- Sunlight-readable display 21.5", capacitive glass touch

**SIMATIC HMI Panel PC Ex OG**Optional expansions<sup>1)</sup>

- No WLAN, no Bluetooth, no RFID
- WLAN 2.4 GHz, no Bluetooth, no RFID
- WLAN 2.4 GHz and 5 GHz, no Bluetooth, no RFID
- No WLAN, Bluetooth, no RFID
- WLAN 2.4 GHz, Bluetooth, no RFID
- WLAN 2.4 GHz and 5 GHz, Bluetooth, no RFID
- No WLAN, no Bluetooth, RFID, not for 15" display
- WLAN 2.4 GHz, no Bluetooth, RFID, not for 15" display
- WLAN 2.4 GHz and 5 GHz, no Bluetooth, RFID, not for 15" display
- No WLAN, Bluetooth, RFID, not for 15" display
- WLAN 2.4 GHz, Bluetooth, RFID, not for 15" display
- WLAN 2.4 GHz and 5 GHz, Bluetooth, RFID, not for 15" display

Additional options

- 24 V power supply
- CAN bus interface open CAN Ex e
- VESA 200 and table pedestal and bracket SS316L material
- Outdoor design E01, F01, G01 and H01 now listed under accessories

**Article No.**

6AV7200- 2 ■■■■■ - ■■■■■ A 0

A

B

C

D

E

F

G

H

J

K

L

M

-A01

-B01

-C01

-D01

<sup>1)</sup> RFID option only with 21.5" display

An adapter plate is required for mounting on the support arm systems of well-known manufacturers; see "System components for fully-enclosed IP65-protected devices".

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mail in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Devices for hazardous areas > SIMATIC HMI Panel PC Ex OG

Ordering data	Article No.	Technical specifications
<b>Accessories</b>		<b>SIMATIC HMI Panel PC Ex OG</b>
<b>Digital KVM for HMI Thin Client Ex monitor option</b> With 2 x USB, 2 x PS/2, 1 x VGA/DVI-i	<b>6AV7675-0EX00-0AA0</b>	<b>General features</b>
<b>USB drive</b> <ul style="list-style-type: none"><li>• Intrinsically safe, 16 GB</li><li>• Intrinsically safe, 16 GB with recovery function</li><li>• Non-intrinsically safe, 16 GB with recovery and backup function</li></ul>	<b>6AV7675-0FX00-0AA0</b> <b>6AV7675-0FX10-0AA0</b> <b>6AV7675-0FX20-0AA0</b>	Design Panel PC, stand-alone device for use outdoors Front 15" 4:3 or 21.5" 16:9 Resolution 1 024 x 768 or 1 920 x 1 080 Number of colors 16.7 million Brightness <ul style="list-style-type: none"><li>• Standard display 350 cd/m<sup>2</sup></li><li>• Sunlight readable display 21.5", 1 000 cd/m<sup>2</sup></li><li>• Sunlight readable display 15", 1 200 cd/m<sup>2</sup></li></ul>
<b>Yoke Mount (fixing bracket)</b>	<b>6AV7675-0KB00-0AA0</b>	MTBF backlight LED backlight approx. 50 000 h (70 000 h at 25 °C)
<b>Sun roof</b> <ul style="list-style-type: none"><li>• For 15"</li><li>• For 21.5"</li></ul>	<b>6AV7675-0KC00-0AA0</b> <b>6AV7675-0KD00-0AA0</b>	Multi-touch Capacitive Keys 8 function keys (capacitive)
<b>Keyboard</b> <ul style="list-style-type: none"><li>• DE layout, trackball</li><li>• US layout, trackball</li><li>• FR layout, trackball</li><li>• DE layout, touchpad</li><li>• US layout, touchpad</li><li>• FR layout, touchpad</li><li>• DE layout, joystick</li><li>• US layout, joystick</li><li>• FR layout, joystick</li><li>• Desktop keyboard US Zone 1, 2, 21, 22</li><li>• Desktop keyboard DE Zone 1, 2, 21, 22</li></ul>	<b>6AV7675-0NA00-0AA0</b> <b>6AV7675-0NB00-0AA0</b> <b>6AV7675-0NC00-0AA0</b> <b>6AV7675-0ND00-0AA0</b> <b>6AV7675-0NE00-0AA0</b> <b>6AV7675-0NG00-0AA0</b> <b>6AV7675-0NH00-0AA0</b> <b>6AV7675-0NJ00-0AA0</b> <b>6AV7675-0NL00-0AA0</b> <b>6AV7675-0NK00-0AA0</b> <b>6AV7675-0NM00-0AA0</b>	<b>Computing unit</b> Processor Intel Core i7-3517UE with 1.7 GHz Main memory 4 GB or 8 GB RAM <b>Operating system</b> Windows 7 Ultimate Pre-installed WES 7 P Pre-installed <b>Drives</b> Mass storage SSD with <ul style="list-style-type: none"><li>• 240 GB</li><li>• 480 GB</li></ul> <b>Interfaces</b> Ethernet <ul style="list-style-type: none"><li>• 2 x Ethernet 10/100/1000 Base Tx (Ex e) or</li><li>• FO 100 Base Fx 100 Mb (Ex op is)</li></ul> USB 1 x USB (Ex e). 3 x USB (Ex ia) Serial 1x RS 232/RS 422/RS 485 (Ex e) DVI 1 x DVI Out (Ex e) Barcode 1 x reader interface (external barcode scanner/reader) Bluetooth 1 x (optional) <b>Power supply</b> <ul style="list-style-type: none"><li>• 230 V AC</li><li>• 24 V DC</li></ul> <ul style="list-style-type: none"><li>• Standard (100 - 240 V AC)</li><li>• Optional</li></ul> <b>Ambient conditions</b> Temperature <ul style="list-style-type: none"><li>• Running operation: -10 °C to +65 °C</li><li>• Optional: -40 °C to +65 °C</li><li>• Storage: -40 °C to +70 °C</li></ul> Relative humidity during operation > 95% at +65 °C in accordance with IEC 60068-2-30 Degree of protection IP66/4X all-round Vibration Operation: 3 Hz to 22 Hz: 1 mm 22 to 500 Hz: 9.8 m/s <sup>2</sup> = 1 g In accordance with EN 60068-2-6 and DNV Marine approval vibration class A Shock Operation: 15 g/11 mS <b>Miscellaneous</b> Power consumption at 24 V DC 4.6 A (6.9 A in heating mode), (recommended fuses: 12 A) <b>Weight/size</b> Weights 15" Zone 1; < 22.6 kg 21.5" Zone 1; < 34 kg Dimensions (W x H x D) 15": 380 x 394 x 137 mm 21.5": 553 x 458 x 141 mm <b>Approvals</b> ATEX, IECEx <ul style="list-style-type: none"><li>• Gas: II 2 (1) G Ex e q [ia op is Ga] IIC T4 Gb</li><li>• Dust: II 2 (1) D Ex tb [ia op is Da] IIIC T115°C Db</li></ul>

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

## Overview



SIMATIC HMI Panel PC Ex with international approvals for operator control and monitoring in hazardous areas.

## Notice:

Effective immediately, the SIMATIC Panel PC Ex will be supplied with a Quad-Core Intel Atom Processor E3845, thus enabling it to offer around four times the performance of the current Intel Atom N270 systems.

A new ordering configurator with the Article No. 6AV7200-4....-.... has been created:

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

And in the Industry Mall:

<https://mall.industry.siemens.com>

## Ordering data

Article No.

<b>SIMATIC HMI Panel PC Ex2</b>	<b>6AV7200-</b>	<b>4</b>	<b>-</b>	<b>A 0</b>
SIMATIC HMI Panel PC Ex; 4 x USB 2.0, 2 x RS232/422; power supply 24 V DC; Intel Atom E3845; 1.91 GHz				
<u>Design / display size</u>				
• Zone 2: 15" touch with 8 function keys		<b>A</b>		
• Zone 2: 19" touch with 8 function keys		<b>B</b>		
• Zone 1: 15" touch with 8 function keys		<b>C</b>		
• Zone 1: 19" touch with 8 function keys		<b>D</b>		
• Zone 2: 15" touch, sunlight-readable with 8 function keys		<b>E</b>		
• Zone 1: 15" touch, sunlight-readable with 8 function keys		<b>F</b>		
<u>Network</u>				
• 10/100 base Tx, Ex e		<b>A</b>		
• 100 base Fx FOC (SC), Ex op is		<b>B</b>		
<u>Mass storage</u>				
• SSD 32 GB, 4 GB RAM			<b>0</b>	
• SSD 128 GB MLC, 4 GB RAM			<b>1</b>	
<u>Operating system (pre-installed)</u>				
• Windows 7 Ultimate 64-bit			<b>0</b>	
• Windows 7 Embedded Standard 7 E 64-bit			<b>1</b>	
• Without			<b>2</b>	
<u>Enclosure options</u>				
• Without protective enclosure			<b>0</b>	
• Stainless steel enclosure for:				
- Wall mounting			<b>1</b>	
- Pedestal (incl. coupling, 300° rotatable)			<b>2</b>	
- Suspension bracket (incl. coupling, 300° rotatable)			<b>3</b>	
- Support arm (incl. coupling, 300° rotatable)			<b>4</b>	
- Swivel arm from above (incl. coupling, 300° rotatable)			<b>5</b>	

## PC-based Automation

### Industrial PC

#### Devices for special requirements

##### Devices for hazardous areas > SIMATIC HMI Panel PC Ex

Ordering data	Article No.	Article No.
<b>SIMATIC HMI Panel PC Ex2</b> <u>External keyboard</u> • Without • QWERTZ keyboard, mounted on protective enclosure • QWERTY keyboard, mounted on protective enclosure • AZERTY keyboard, mounted on protective enclosure • QWERTZ keyboard with trackball, mounted on protective enclosure • QWERTY keyboard with trackball, mounted on protective enclosure • AZERTY keyboard with trackball, mounted on protective enclosure	6AV7200- 4  -  A 0  A B C D E F G	<b>Accessories</b> <b>Digital KVM for HMI Thin Client Ex</b> <b>USB drive</b> • Intrinsically safe, 16 GB • Intrinsically safe, 16 GB with recovery function • Not intrinsically safe, 16 GB with recovery and backup function
<b>Further options together with stainless steel enclosure</b> • Breather glands (to avoid build-up of condensation) • Heater (2 x 50 W incl. temp. controller, only in protective enclosure) • Handles, mounted (only in protective enclosure) • Front USB (bottom) (only in protective enclosure) • NPT thread for pedestal mounting (only in protective enclosure)	-z A01 -z B01 -z C01 -z D01 -z G01	6AV7675-0EX00-0AA0  6AV7675-0FX00-0AA0 6AV7675-0FX10-0AA0  6AV7675-0FX20-0AA0

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

Devices for hazardous areas > SIMATIC HMI Panel PC Ex

**Technical specifications**

<b>SIMATIC HMI Panel PC Ex</b>		<b>SIMATIC HMI Panel PC Ex</b>
<b>General features</b>		<b>Devices in version "Zone 2"</b>
<b>Design</b>		
<b>Design</b>	Panel PC built-in unit, protective enclosure available as an option	ATEX directive 94/9/EC • Network 10/100 Base-Tx
<b>Front</b>	15" and 19", optional 15" sunlight-readable displays	II 3 (2/3) G Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc II3 (2/3) D Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66
<b>Operation</b>	Touch with 8 function keys	• Network 10/100 Base-Fx
<b>Processor</b>	Intel Atom E3845 with 1.91 GHz	II 3 (2/3) G Ex d e ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc II 3 (2/3) D Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
<b>Main memory</b>	4 GB DDR2 SDRAM	
<b>Operating system, preinstalled and configured</b>	Windows 7 MUI, Windows 7 Ultimate, WES7 E	
<b>Mass storage</b>	32 GB SSD, 128 GB SSD	IECEx • Network 10/100 Base-Tx
<b>Power supply</b>	24 V DC, max. 2.1 A (19")	Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66
<b>Interfaces</b>		Ex d e ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
Ethernet	10/100 Mbit Ex e, or fiber-optics 100 Mbit (SC) Ex op is	• Network 10/100 Base-Fx
USB 2.0	2 x Ex i, 2 x Ex e (Zone 1) or 2 x Ex nA (Zone 2)	2 Ex d e ia ib mb nA [ib][ic] IIC T4 DIP A21 TA80°C, IP66
Serial	1 x RS232 or 1 x RS422/485	2 Ex d e ia ib mb nA [ib opis][ic] IIC T4 DIP A21 TA80°C, IP66
<b>Ambient conditions</b>		CSA
Degree of protection	IP66 at front, IP65 at rear, IP66 in protective enclosure	Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc, Type 4X, IP66 Class II, Division 2, Groups E, F, G, T80°C; Ex ia tc [ib ic] IIIC T80°C Dc, IP66
Ambient temperature during operation	- 20 °C ... + 50 °C (cold start -10 °C) with optional auxiliary heater down to - 30 °C	
Relative humidity during operation	90 % at + 40 °C, no condensation	
<b>Approvals/directives</b>		InMetro
<b>Devices in version "Zone 1"</b>		• Network 10/100 Base-Tx
ATEX directive 94/9/EC		Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66
• Network 10/100 Base-Tx	II 2 (2) G Ex d e ia ib mb [ia ib] IIC T4 Gb II 2 (2) D Ex ia tb [ia ib] IIIC T80°C Db IP66	Ex d e ia ib mb nA [ib op is] IIC T4 Gb II 2 (2) D Ex ia tb [ia ib op is] IIIC T80°C Db IP66
• Network 10/100 Base-Fx	II 2 (2) G Ex d e ia ib mb [ia ib op is] IIC T4 Gb II 2 (2) D Ex ia tb [ia ib op is] IIIC T80°C Db IP66	Ex d e ia ib mb nA [ib op is Gb] [ic] IIC T4 Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
IECEx		Device version "UL Class 1, Division 2"
• Network 10/100 Base-Tx	Ex d e ia ib mb [ia ib] IIC T4 Gb Ex ia tb [ia ib] IIIC T80°C Db IP66	Class 1, Division 2, Groups A, B, C, D Class 2, Division 2, Groups F, G Class 3, Hazardous Locations
• Network 10/100 Base-Fx	Ex d e ia ib mb [ia ib op is] IIC T4 Gb Ex ia tb [ia ib op is] IIIC T80°C Db IP66	
GOST-R		<b>Dimensions</b>
• Network 10/100 Base-Tx	2 Ex d e ia ib mb [iaib] IIC T4 DIP A21 TA80°C, IP66	Mounting dimensions (W x H x D) 15": 427.5 mm x 327.5 mm x 165 mm 19": 522.5 mm x 412.5 mm x 165 mm
• Network 10/100 Base-Fx	2 Ex d e ia ib mb [iaibopis] IIC T4 DIP A21 TA80°C, IP66	Front dimensions (W x H) 15": 440 mm x 340 mm 19": 535 mm x 425 mm
CSA		<b>Weight</b>
	Ex d e ia ib mb [ia ib] IIC T4 Gb, Type 4X, IP66 Class II, Division 1, Groups E, F, G, T80°C Ex ia tb [ia ib] IIIC T80°C Db, IP66	15": 15 kg 19": 23 kg
KGS	Ex d e ia ib mb [ia ib] IIC T4 Ex ia tb [ia ib] IIIC T80°C Db IP66	
InMetro		
• Network 10/100 Base-Tx	Ex d e ia ib mb [ia ib] IIC T4 Gb Ex ia tb [ia ib] IIIC T80°C Db IP66	
• Network 10/100 Base-Fx	Ex d e ia ib mb [ia ib op is] IIC T4 Gb Ex ia tb [ia ib op is] IIIC T80°C Db IP66	
Device version "UL Class 1, Division 2"	Class 1, Division 2, Groups A, B, C, D Class 2, Division 2, Groups F, G Class 3, Hazardous Locations	

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

## PC-based Automation

Industrial PC

Devices for special requirements

Devices for hazardous areas > SIMATIC HMI Thin Client Ex NG

### Overview



### SIMATIC HMI Thin Client Ex NG

The new generation SIMATIC HMI Thin client Ex NG has been specially developed for use in the pharmaceutical, chemical and life science industries, but can also be used in many other areas since it satisfies the requirements for operator control and monitoring directly in hazardous areas.

Due to the 22" and 24" display diagonals, these devices are ideal for showing plant and process information provided from systems such as PCS.

#### Highlights:

- High degree of industrial functionality and industrial front panels
  - Single-touch fronts 22" (1 680 x 1 050), 24" (1 920 x 1 080) and 24" WU (1 920 x 1 200)
  - -30 °C up to 55 °C ambient temperature in operation
  - Resistive Touch Display 300 cd/m<sup>2</sup>
  - Built-in unit optional stainless steel enclosure or GMP/cleanroom
- Certificates for hazardous area
  - IECEx, ATEX Zones 1, 21 and 2, 22
  - Class 1, Division 2
  - NEC
  - CEC
  - KGS
  - TR
  - Certificates for marine applications DNV / GL
- High system performance in hazardous areas
  - Intel Bay Trail (BT) 1.91 GHz Quad Core

### Ordering data

### Article No.

<b>SIMATIC HMI Thin Client Ex NG</b>	<b>6AV7200-</b>	<b>5</b>	<b>A</b>
<u>Display</u>			
• 22", 1 680 x 1 050, 16:10 format, Zone 1			<b>B</b>
• 24", 1 920 x 1 080, 16:9 format, Zone 1			<b>C</b>
• 24", 1 920 x 1 200, 16:10 format, Zone 1			<b>D</b>
• 22", 1 680 x 1 050, 16:10 format, Zone 2			<b>E</b>
• 24", 1 920 x 1 080, 16:9 format, Zone 2			<b>F</b>
• 24", 1 920 x 1 200, 16:10 format, Zone 2			<b>G</b>
• 22", 1 680 x 1 050, 16:10 format, non-Ex			<b>H</b>
• 24", 1 920 x 1 080, 16:9 format, non-Ex			<b>I</b>
• 24", 1 920 x 1 200, 16:10 format, non-Ex			<b>J</b>
<u>Network</u>			
• 10/100BaseTX - copper Ethernet			<b>A</b>
• 2 x 10/100BaseTX - 2 x copper Ethernet			<b>B</b>
• 1000BaseSX - Fiber Optic Ethernet			<b>C</b>
• 1000BaseLX - Fiber Optic Ethernet			<b>D</b>
• 100BaseFX - Fiber Optic Ethernet			<b>E</b>
<u>Mass storage / main memory / operating system</u>			
• 64 GB SSD, 4 GB RAM, Windows 10 IoT & Remote Firmware V5		<b>0</b>	
• 128 GB SSD MLC, 4 GB RAM, Windows 10 IoT & Remote Firmware V5		<b>1</b>	
<u>Touch and front design</u>			
• Without touch, panel mount with aluminum front		<b>0</b>	
• Analog-resistive, polyester membrane with aluminum front		<b>1</b>	
• Analog-resistive, glass touch with aluminum front		<b>2</b>	

Ordering data	Article No.	Article No.
<b>SIMATIC HMI Thin Client Ex NG</b>	6AV7200- 5  -	
<u>Enclosure type and material</u>		
• No enclosure	0	
• Cleanroom enclosure front door (CFR), SS304	1	
• Front door enclosure (FR), SS304	2	
• Back door enclosure (BD), SS304	3	
<u>Keyboard with housing / layout</u>		
• No keyboard	A	
• Keyboard housing SS304; layout DE	B	
• Keyboard housing SS304; layout US	C	
• Keyboard housing SS304; layout FR	D	
• Keyboard housing SS304; layout CH	E	
• Keyboard housing SS304; layout ES	F	
• Keyboard housing SS304; layout SI	G	
• Keyboard housing SS304; layout FR-BE	H	
<u>Integrated mouse / trackball</u>		
• No mouse / trackball	A	
• Trackball 50 mm IP54	B	
• Trackball (SS304) 50 mm IP54	C	
• Touch pad	D	
• Joystick	E	
• Mouse module	F	
<u>Mounting options</u>		
• Without, front panel fastening only	0	
• Direct wall mounting	1	
• Fastener for pedestal or elbow on enclosure bottom	2	
• Fastener for ceiling or elbow mounting on enclosure top part	3	
<u>Additional options</u>		
• 24 V DC power supply	A01	
• Outdoor to -20 °C for enclosure	B01	
• Outdoor to -30 °C	C01	
• Emergency-off button 8003 right, <u>only with enclosure</u>	D01	
• Emergency off button 8003 left, <u>only with enclosure</u>	E01	

Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Devices for hazardous areas > SIMATIC HMI Thin Client Ex NG

##### Technical specifications

SIMATIC HMI Thin Client Ex NG		SIMATIC HMI Thin Client Ex NG
<b>General features</b>		<b>Ambient conditions</b>
Design	Built-in unit	Temperature • -20 °C ... +55 °C • -30 °C ... +55 °C with heater • Storage -40 °C ... +70 °C
<b>Fronts</b>		Relative humidity during operation +55 °C (+2 °C) > 95%, according to IEC 60068-2-30 : 2005
Display diagonal	• 22" (1 680 x 1 050) 16:10, • 24" (1 920 x 1 080) 16:9 and • 24" WU (1 920 x 1 200) 16:10	Degree of protection IP66 front, IP65 rear optionally according to GMP
Resolution	1 680 x 1 050 or 1 920 x 1 080 or 1 920 x 1 200	Vibration Operation: 5 to 13.2 Hz: ± 1 mm 13.2 to 100 Hz: ± 0.7 g
Number of colors	16.7 million	Shock Operation: 15 g / 11 ms
Brightness	• Standard display 300 cd/m <sup>2</sup>	<b>Miscellaneous</b>
Contrast	1 000:1	Power consumption at 24 V DC Typ. 50 W / 100 W at O30 / max. 150 W (typ. 170 BTU / 341 BTU at O30 / max. 510 BTU)
MTBF backlight	LED backlight approx. 50 000 h	<b>Weight / Size</b>
Single-touch	Resistive 5-wire glass or membrane touch	Weights Dimensions (W x H x D) • 22": 660 mm x 475 mm x 110 mm • 24": 660 mm x 475 mm x 110 mm
<b>Computing unit</b>		<b>Approvals</b>
Processor	ATOM E3845, Intel Bay Trail (BT) 1.91 GHz Quad Core	IECEx • Ex e q [ia op is Ga] IIC T4 Gb • Ex tb IIIC [ia op is Da] IP65 T110 °C Db
Main memory	4 GB RAM	ATEX • II 2(1) G Ex e q [ia op is Ga] IIC T4 Gb II 2(1) D • Ex tb IIIC [ia op is Da] IP65 T110 °C Db
<b>Operating system</b>		NEC Class I, Zone 1 AEx e q [ia] IIC T4 Gb
Windows 10 IoT Enterprise	Pre-installed	CEC Ex e q [ia] IIC T4 Gb Class I, Division 2
Image	Remote firmware	TR • 1Ex e q [ia op is Ga] IIC T4 Gb X • Ex tb IIIC [ia op is Da] IP65 T110 °C Db
<b>Drives</b>		KGS • Ex e q IIC T4 • Ex tb IIIC IP64 T110 °C • Ex ia IIC T4 • Ex ia IIIB T110 °C
Mass storage	64 GB SSD	
<b>Interfaces</b>		
Ethernet	• 10/100BaseTX - copper Ethernet or • 2x 10/100BaseTX - 2x copper Ethernet or • 1000BaseSX - Fiber Optic Ethernet or • 1000BaseLX - Fiber Optic Ethernet or • 100BaseFX - Fiber Optic Ethernet	
USB	2 x USB (Ex ia), 1 x USB (Ex e), 2 x USB (Ex ia) (keyboard, pointer instrument)	
Serial	1 x RS 232 (Ex e)	
Audio	1 x audio line out (Ex e)	
Barcode	Optionally via USB	
Bluetooth	Optionally via USB	
<b>Power supply</b>		
• 230 V AC	• Yes (100 – 240 V AC)	
• 24 V DC	• Yes; optional	

##### More information

You can find additional information on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

## Overview



SIMATIC HMI Thin Client Ex OG with international approvals for operator control and monitoring in hazardous areas.

Ordering data	Article No.	Article No.
<b>SIMATIC HMI Thin Client Ex OG</b>	<b>6AV7200- 3 ■■■■■ - ■■■■■ A 0</b>	<b>6AV7200- 3 ■■■■■ - ■■■■■ A 0</b>
<u>Display</u>		
• 15", 1 024 x 768, 4:3 format; Zone 1	A	A
• 21.5" Full HD, 1 920 x 1 080, format 16:9; Zone 1	B	B
• 15", 1 024 x 768, 4:3 format; Zone 2	C	C
• 21.5" Full HD, 1 920 x 1 080, format 16:9; Zone 2	D	D
<u>Network</u>		
• 1 x 1000 Base TX - copper Ethernet in combination with WLAN	A	A
• 2 x 1000 Base TX - copper Ethernet not in combination with WLAN	B	B
• 2 x 1000 Base FX - fiber-optic Ethernet not in combination with WLAN	C	C
<u>Mass storage / main memory</u>		
• 60 GB SSD, 4 GB RAM	0	0
• 80 GB SSD, 4 GB RAM	1	1
<u>Processor</u>		
• AMD GX-217GA	0	0
• Intel Core i/-3517 UE	1	1
• Intel Core i/-3517 UE with TPM	2	2
<u>Display options</u>		
• Standard TFT, not touch; for 15" display only	0	0
• Sunlight readable display 15", not touch	1	1
• Sunlight-readable display 21.5", not touch	2	2
• Standard TFT, capacitive glass touch, for 15" display only	3	3
• Sunlight-readable display 15", capacitive glass touch	4	4
• Sunlight readable display 21.5", capacitive glass touch	5	5
<u>Optional expansions</u> <sup>1)</sup>		
• No WLAN, no Bluetooth, no RFID		A
• WLAN 2.4 GHz, no Bluetooth, no RFID		B
• WLAN 2.4 GHz and 5 GHz, no Bluetooth, no RFID		C
• No WLAN, Bluetooth, no RFID		D
• WLAN 2.4 GHz, Bluetooth, no RFID		E
• WLAN 2.4 GHz and 5 GHz, Bluetooth, no RFID		F
• No WLAN, no Bluetooth, RFID, not for 15" display		G
• WLAN 2.4 GHz, no Bluetooth, RFID, not for 15" display		H
• WLAN 2.4 GHz and 5 GHz, no Bluetooth, RFID, not for 15" display		J
• No WLAN, Bluetooth, RFID, not for 15" display		K
• WLAN 2.4 GHz, Bluetooth, RFID, not for 15" display		L
• WLAN 2.4 GHz and 5 GHz, Bluetooth, RFID, not for 15" display		M
<u>Additional options</u>		
• 24 V power supply		-A01
• CAN bus interface open CAN Ex e		-B01
• VESA 200 and table pedestal and bracket SS316L material		-C01
• Outdoor design up to -40 °C		-D01

<sup>1)</sup> RFID option only with 21.5" display

### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or the configurator in the Industry Mall in order to ensure suitability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

An adapter plate is required for mounting on the support arm systems of well-known manufacturers; see "System components for fully-enclosed IP65-protected devices".

# PC-based Automation

## Industrial PC

### Devices for special requirements

#### Devices for hazardous areas > SIMATIC HMI Thin Client Ex OG

Ordering data		Article No.	SIMATIC HMI Thin Client Ex OG	
<b>Accessories</b>			<b>Drives</b>	
Digital KVM for HMI Thin Client Ex monitor option		<b>6AV7675-0EX00-0AA0</b>	Mass storage	SSD with <ul style="list-style-type: none"> <li>• 60 GB</li> <li>• 80 GB</li> </ul>
With 2 x USB, 2 x PS/2, 1 x VGA/DVI-i				
<b>USB drive</b>		<b>6AV7675-0FX00-0AA0</b>	<b>Interfaces</b>	
• Intrinsically safe, 16 GB		<b>6AV7675-0FX10-0AA0</b>	Ethernet	<ul style="list-style-type: none"> <li>• 2 x Ethernet 10/100/1000 Base Tx (Ex e) or</li> <li>• FO 100 Base Fx 100 Mb (Ex op is)</li> </ul>
• Intrinsically safe, 16 GB with recovery function		<b>6AV7675-0FX20-0AA0</b>	USB	1 x USB (Ex e). 3 x USB (Ex ia)
• NOT intrinsically safe, 16 GB with recovery and backup function			Serial	1x RS232 / RS422 / RS485 (Ex e)
<b>Yoke Mount (fixing bracket)</b>		<b>6AV7675-0KB00-0AA0</b>	DVI	1 x DVI Out (Ex e)
<b>Sun roof</b>		<b>6AV7675-0KC00-0AA0</b>	Barcode	1 x reader interface (external bar code scanner/reader)
• For 15"		<b>6AV7675-0KD00-0AA0</b>	Bluetooth	1 x (optional)
• For 21.5"				
<b>Keyboard</b>		<b>6AV7675-0NA00-0AA0</b>	<b>Power supply</b>	
• DE layout, trackball		<b>6AV7675-0NB00-0AA0</b>	• 230 V AC	• Standard (100 - 240 V AC)
• US layout, trackball		<b>6AV7675-0NC00-0AA0</b>	• 24 V DC	• Optional
• FR layout, trackball		<b>6AV7675-0ND00-0AA0</b>		
• DE layout, touchpad		<b>6AV7675-0NE00-0AA0</b>	<b>Ambient conditions</b>	
• US layout, touchpad		<b>6AV7675-0NG00-0AA0</b>	Temperature	<ul style="list-style-type: none"> <li>• Running operation: -10 °C to +65 °C</li> <li>• Optional: -40 °C to +65 °C</li> <li>• Storage: -40 °C to +70 °C</li> </ul>
• FR layout, touchpad		<b>6AV7675-0NH00-0AA0</b>	Relative humidity during operation	> 95% at +65 °C in accordance with IEC 60068-2-30
• DE layout, joystick		<b>6AV7675-0NJ00-0AA0</b>	Degree of protection	IP66/4X fully-enclosed
• US layout, joystick		<b>6AV7675-0NL00-0AA0</b>	Vibration	Operation: 3 Hz to 22 Hz: 1 mm 22 to 500 Hz: 9.8 m/s <sup>2</sup> = 1 g In accordance with EN 60068-2-6 and DNV Marine approval vibration class A
• FR layout, joystick		<b>6AV7675-0NK00-0AA0</b>	Shock	Operation: 15 g/11 mS
• Desktop keyboard US Zone 1, 2, 21, 22		<b>6AV7675-0NM00-0AA0</b>	<b>Miscellaneous</b>	
• Desktop keyboard DE Zone 1, 2, 21, 22			Power consumption at 24 V DC	4.6 A (6.9 A in heating mode), (recommended fuses: 12 A)

#### Technical specifications

SIMATIC HMI Thin Client Ex OG	
<b>General features</b>	
Design	Panel PC, stand-alone device for use outdoors
Front	15" 4:3 or 21.5" 16:9
Resolution	1 024 x 768 or 1 920 x 1 080
Number of colors	16.7 million
Brightness	<ul style="list-style-type: none"> <li>• Standard display 350 cd/m<sup>2</sup></li> <li>• Sunlight-readable display 21.5", 1 000 cd/m<sup>2</sup></li> <li>• Sunlight-readable display 15", 1 200 cd/m<sup>2</sup></li> </ul>
MTBF backlight	LED backlight approx. 50 000 h (70 000 h at 25 °C)
Multi-touch	Capacitive
Keys	8 function keys (capacitive)
<b>Computing unit</b>	
Processor	Intel Core i7-3517UE with 1.7 GHz; AMD GX-217GA
Main memory	4 GB
<b>Operating system</b>	
Windows 10 Enterprise 2016 LTSB	Pre-installed
Remote Firmware V5	Pre-installed
<b>Approvals</b>	
ATEX, IECEEx	<ul style="list-style-type: none"> <li>• Gas: II 2 (1) G Ex e q [ia op is Ga] IIC T4 Gb</li> <li>• Dust: II 2 (1) D Ex tb [ia op is Da] IIIC T115°C Db</li> </ul>
More, such as UL, NEC, CSA, coming soon	

#### More information

More information is available on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

**Overview**

SIMATIC HMI Thin Client Ex2 with international approvals for operator control and monitoring in hazardous areas.

**Ordering data****Article No.****SIMATIC HMI Thin Client Ex2**

Intel Atom E3845 1.91 GHz,  
24 V DC power supply

Design / display size

- Zone 2: 15" touch with 8 function keys
- Zone 2: 19" touch with 8 function keys
- Zone 1: 15" touch with 8 function keys
- Zone 1: 19" touch with 8 function keys

6AV7200-

7 0 -

A

B

C

D

Networks

- 10/100 BaseTX, copper Ethernet
- 100 BaseFX, fiber optic Ethernet

A

B

Mass storage / main memory / operating system

- 64 GB SSD, 4 GB RAM, Windows 10 IoT & Remote Firmware V5

0

Optional interfaces

- No interfaces
- Second serial interface
- Intrinsically safe reader interface

0

1

2

Enclosure type and material

- No enclosure
- Cleanroom enclosure front door (CFR), SS304
- Front door enclosure (FR), SS304
- Backdoor enclosure (BD), SS304; (only without wall mounting, without 240 V AC and without -30 °C options)

0

1

2

3

Keyboard with housing; layout

- No keyboard
- Keyboard SS304, layout DE
- Keyboard SS304, layout US
- Keyboard SS304, layout FR
- Keyboard SS304, layout DK

A

B

C

D

E

## PC-based Automation

Industrial PC

Devices for special requirements

### Devices for hazardous areas > SIMATIC HMI Thin Client Ex2

Ordering data	Article No.	Article No.
<b>SIMATIC HMI Thin Client Ex2</b>	6AV7200- 7  - 	
Integrated mouse / trackball		
• No mouse/trackball		
• Trackball 50 mm IP54 integrated	A	
• Trackball 50 mm IP54 separate	B	
Mounting options	C	
• Without, front panel mounting only	0	
• Direct wall mounting	1	
• Mount for pedestal or bracket mounting on enclosure bottom	2	
• Mount for ceiling or bracket mounting on enclosure top part	3	
<b>Additional options</b>		
• 100 ... 240 V AC power supply, (requires enclosure)	<b>A01</b>	
• Outdoor to -20 °C (requires enclosure, only without keyboard)	<b>B01</b>	
• -20°C (only without keyboard)	<b>C01</b>	
• Emergency off button 8003 right (only with enclosure)	<b>D01</b>	
• Emergency off button 8003 left (only with enclosure)	<b>E01</b>	
• Outdoor to -30 °C (requires enclosure, only without keyboard)	<b>F01</b>	
• Outdoor to -10 °C (requires enclosure, for keyboard)	<b>G01</b>	

#### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

<https://www.siemens.com/ipc-configurators>

**Technical specifications**

<b>SIMATIC HMI Thin Client Ex2</b>		<b>SIMATIC HMI Thin Client Ex2</b>
<b>General features</b>		<b>Devices in version "Zone 2"</b>
<b>Design</b>	Thin Client built-in unit, available in protective enclosure as an option	ATEX directive 94/9/EC
Front	15" and 19" display	• Network 10/100 Base-Tx II 3 (2/3) G Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc II3 (2/3) D Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66
Operation	Touch with 8 function keys	• Network 10/100 Base-Fx II 3 (2/3) G Ex d e ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc II 3 (2/3) D Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
MTBF backlight	50 000 h	
<b>Operating system</b>	Windows 10 Enterprise 2016 LTSB	
<b>Mass storage</b>	integrated, 64 GB SSD	
<b>Power supply</b>	24 V DC, max. 2.1 A (19")	
<b>Interfaces</b>		IECEx
Ethernet	100 Mbit Ex e, or alternatively fiber-optics 100 Mbit (SC) Ex op is	• Network 10/100 Base-Tx Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66
USB 2.0	2 x Ex i, 2 x Ex e (Zone 1) or 2 x Ex nA (Zone 2)	• Network 10/100 Base-Fx Ex d e ia ib mb nA [ib op is Gb] [ic] IIC T4 Gc Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
Serial	1 x RS232 or 1 x RS422/485	
<b>Ambient conditions</b>		GOST-R
Degree of protection	IP66 at front, IP65 at rear, IP66 in protective enclosure	• Network 10/100 Base-Tx 2 Ex de i a ib mb nA [ib] [ic] IIC T4 Dc DIP A21 TA80°C, IP66
Ambient temperature during operation	-20 °C ... + 50 °C, (cold start -10 °C) with optional auxiliary heater down to -30 °C	• Network 10/100 Base-Fx 2 Ex de i a ib mb nA [ibopis] [ic] IIC T4 Dc DIP A21 TA80°C, IP66
Relative humidity during operation	90 % at 40 °C, no condensation	
<b>Approvals/directives</b>		CSA
<b>Devices in "Zone 1" version</b>		Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc, Type 4X, IP66 Class II, Division 2, Groups E, F, G, T80°C; Ex ia tc [ib ic] IIIC T80°C Dc, IP66
ATEX directive 94/9/EC		
• Network 10/100 Base-Tx	II 2 (2) G Ex d e ia ib mb [ia ib] IIC T4 Gb II 2 (2) D Ex ia tb [ia ib] IIIC T80°C Db IP66	• Network 10/100 Base-Tx Ex d e ia ib mb nA [ib Gb] [ic] IIC T4 Gc Ex ia tc [ib Db] [ic] IIIC T80°C Dc IP66
• Network 10/100 Base-Fx	II 2 (2) G Ex d e ia ib mb [ia ib op is] IIC T4 Gb II 2 (2) D Ex ia tb [ia ib op is] IIIC T80°C Db IP66	• Network 10/100 Base-Fx Ex d e ia ib mb nA [ib op is Gb] IIC T4 Ex ia tc [ib op is Db] [ic] IIIC T80°C Dc IP66
IECEx		
• Network 10/100 Base-Tx	Ex d e ia ib mb [ia ib] IIC T4 Gb Ex ia tb [ia ib] IIIC T80°C Db IP66	
• Network 10/100 Base-Fx	Ex d e ia ib mb [ia ib op is] IIC T4 Gb Ex ia tb [ia ib op is] IIIC T80°C Db IP66	
GOST-R		
• Network 10/100 Base-Tx	2 Ex d e ia ib mb [iaib] IIC T4 DIP A21 TA80°C, IP66	
• Network 10/100 Base-Fx	2 Ex d e ia ib mb [iaibopis] IIC T4 DIP A21 TA80°C, IP66	
CSA	Ex d e ia ib mb [ia ib] IIC T4 Gb, Type 4X, IP66 Class II, Division 1, Groups E, F, G, T80°C Ex ia tb [ia ib] IIIC T80°C Db, IP66	
KGS	Ex d e ia ib mb [ia ib] IIC T4 Ex ia tb [ia ib] IIIC T80°C Db IP66	
InMetro		
• Network 10/100 Base-Tx	Ex d e ia ib mb [ia ib] IIC T4 Gb Ex ia tb [ia ib] IIIC T80°C Db IP66	
• Network 10/100 Base-Fx	Ex d e ia ib mb [ia ib op is] IIC T4 Gb Ex ia tb [ia ib op is] IIIC T80°C Db IP66	

Additional information is available on the Internet at:

<http://www.siemens.com/simatic-hmi-ex>

# PC-based Automation

Industrial PC  
IPC software

## Introduction

### Overview

#### **Higher system availability**

A graded concept is available for effective early detection of potential failures and minimization of actual downtimes. It consists of software developed specifically for the SIMATIC IPCs, which enables system availability to be individually increased according to the safety requirements.

#### **Reduced costs**

Special backup mechanisms reduce the risk of data loss and allow the introduction of new concepts at initial or repeated commissioning. The remote control and automatic self-diagnostics options reduce travel expenditure and time spent on on-site service calls, allowing service measures to be planned more efficiently. Downtimes are minimized or eliminated altogether.

The SIMATIC IPC software products thus help to significantly reduce the total cost of ownership (TCO) of the installation according to the motto: "Small effort, great effect".

The following components are available:

#### SIMATIC IPC Image & Partition Creator

- Software tool for preventive data backup of hard disk contents
- High-speed restoring of system and data partitions with bit accuracy; user software and special installations are also backed up
- Secure processing of hard disk partitions
- Creation of bootable and password-protected USB flash drives
- Secure deletion of data storage media

#### SIMATIC IPC DiagMonitor

- Diagnostics and alarm software for monitoring SIMATIC IPCs
- Comprehensive monitoring of temperature, fans, hard disks (SMART, RAID, CompactFlash, CFast, SSD), watchdog
- Operating hours counter for preventive maintenance
- Event logging and task planning
- Data exchange via OPC, email, text messages or SNMP
- Integrated BIOS Manager

#### SIMATIC IPC Remote Manager

- Efficient remote maintenance and operation of SIMATIC IPCs
- Use of the Intel Active Management Technology (Intel AMT) for SIMATIC IPCs
- Remote access to desktop, BIOS and power management
- Booting of a remote PC by means of a local ISO image


#### SIMATIC IPC FirmwareManager

- Display of the firmware information
- Updating the firmware
- Setting the booting behavior
- Display of the SMBIOS data
- Setting the password parameters
- Editing the setup settings (BIOS configuration)
- Insertion of a boot logo
- Setup of a secure boot

#### ***Operating systems for applications in the industrial environment***

#### SIMATIC Industrial OS

Apart from the hardware, the operating system is the most important internal component of a computer. It can come supplied with user programs or simply provide the application resources. The SIMATIC Industrial OS with its Linux-based operating system not only constitutes an alternative to the Microsoft Windows operating systems also available for the SIMATIC IPCs, it also offers a suitable solution to the challenges listed above.

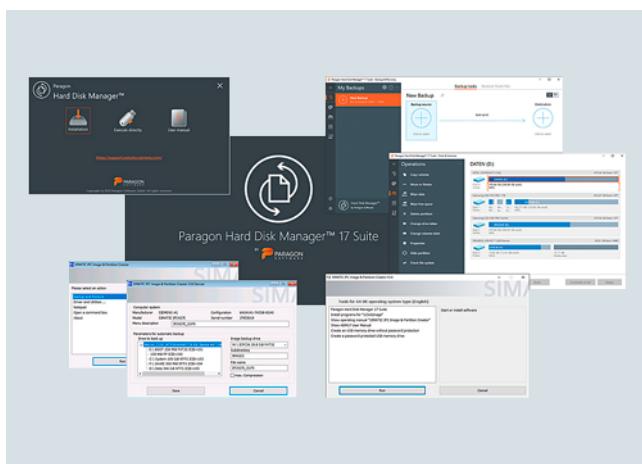**SIMATIC IPC Image & Partition Creator****Overview**

SIMATIC IPC Image & Partition Creator is the software tool for easy, preventive backup and restoring of hard disk contents (images of individual partitions or complete hard disks). This software can be ordered using the SIMATIC IPC Configurator, or separately as a single license.

- Can run on all SIMATIC PCs, regardless of the computer configuration
- Direct starting from the USB flash drive possible (no installation required)
- Complete backup by means of a mouse double-click with "1ClickImage" (installation required)
- Independent of operating system thanks to start from bootable USB flash drive with Image & Partition Creator
- Extremely easy system restore using end user's USB flash drive

<https://support.industry.siemens.com/cs/ww/en/view/109781271>

Licenses:

The SIMATIC IPC Image & Partition Creator V3.6 may only be installed on one device at a time or operated without installation.

<https://support.industry.siemens.com/cs/ww/en/view/109740914>

**Ordering data****Article No.****SIMATIC IPC Image & Partition Creator V3.6**

Can be ordered using the SIMATIC IPC Configurator

**SIMATIC IPC Image & Partition Creator V3.6**

**6ES7648-6AA13-6YA0**

Software tool for very easy preventive data backup and efficient partition management on SIMATIC PCs


## PC-based Automation

Industrial PC

IPC software

### SIMATIC IPC DiagMonitor

#### Overview

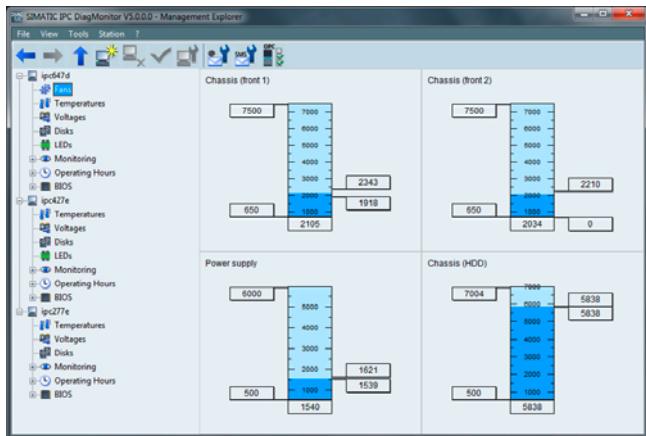

The SIMATIC IPC DiagMonitor permits intelligent and comprehensive monitoring and diagnostics of SIMATIC Industrial PCs.

It detects potential hardware and software faults at an early stage, visualizes operating states and offers various options for access and data exchange.

The SIMATIC IPC DiagMonitor supports not only local diagnostics, but also access via the network to SIMATIC IPC. When installed on a standard PC, all remote functions required for remote access are available.

Only the following SIEMENS products are supported:

- SIMATIC IPC127E
- SIMATIC IPC227E / IPC277E
- SIMATIC IPC427E / IPC477E / IPC427D / IPC477D
- SIMATIC IPC547G
- SIMATIC IPC647E / IPC627D / IPC647D / IPC677D
- SIMATIC IPC847E / IPC827D / IPC847D
- CPU 1515SP PC
- CPU 1515SP PC2

The software can be ordered as:

- Individual product from stock (e.g. for server applications on third-party PCs or immediate integration in new systems) on USB flash drive, as download via Online Software Delivery (OSD), or
- as option ordered according to the SIMATIC IPC Configurator (Internet, Industry Mall).

#### Note:

As of Version 5.1, the SIMATIC IPC DiagMonitor is delivered on a USB flash drive.

One version of SIMATIC IPC DiagMonitor is required for each monitoring PC or for each SIMATIC IPC to be monitored.

<https://support.industry.siemens.com/cs/ww/en/view/109763202>

#### Ordering data

#### Article No.

##### SIMATIC IPC DiagMonitor V5.1

Can be ordered using the SIMATIC IPC Configurator


##### SIMATIC IPC DiagMonitor V5.1

Software for diagnostics/messages via Ethernet, email, SMS, OPC, web

- On USB flash drive; single license
- Download via OSD; single license; software and license for download; email address required for delivery

**6ES7648-6CA15-1YX0**

**6ES7648-6CA85-1YX0**

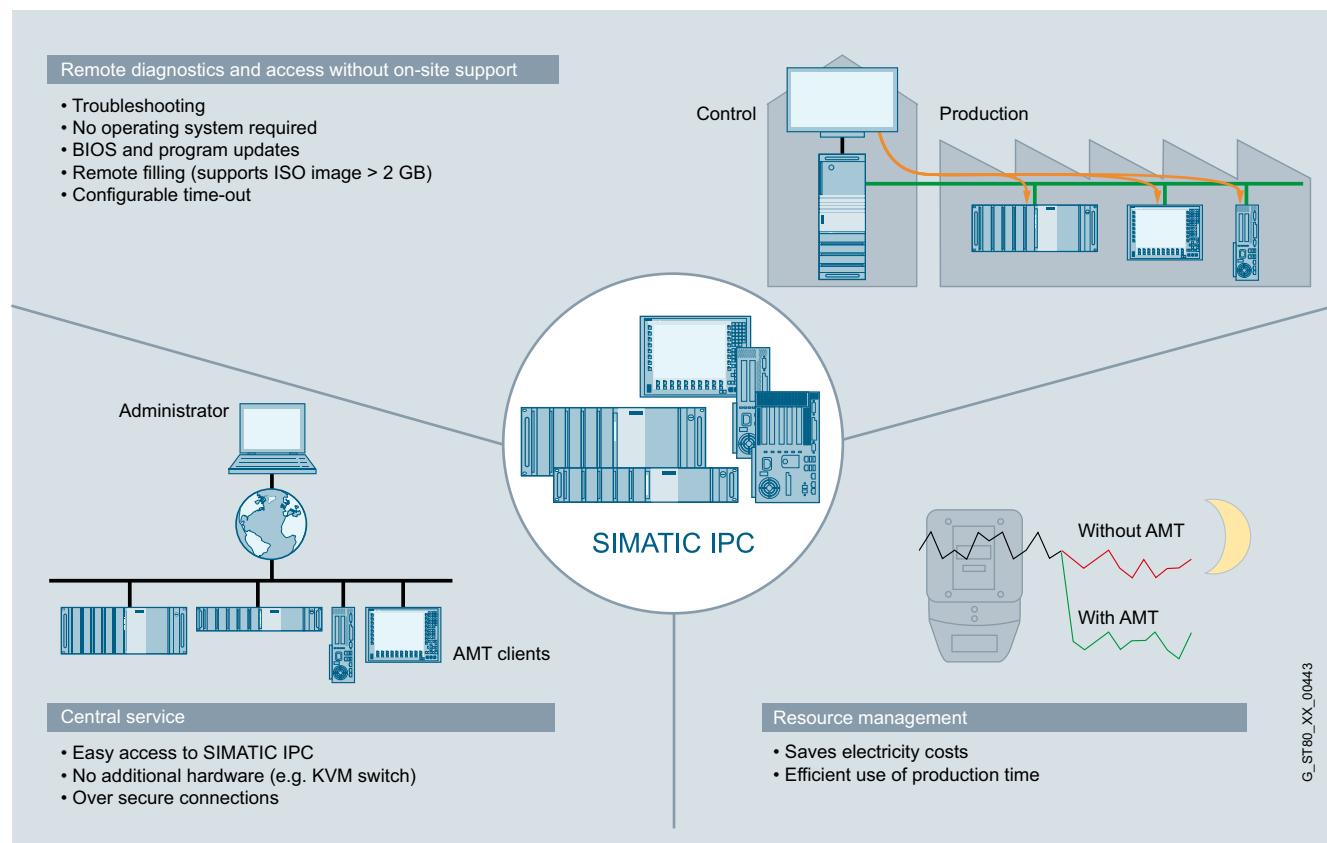**Overview****SIMATIC IPC Remote Manager**

Efficient remote maintenance and management of SIMATIC IPCs.

With the SIMATIC IPC Remote Manager you can use functions of the Intel Active Management Technology (Intel AMT) for SIMATIC IPCs. Intel AMT is used for remote management of PCs.

Intel AMT offers a range of functions, such as:

- Remote reboot
- IDE redirection
- Keyboard video mouse redirection
- Power on / off / reset, and
- an integrated web server.

<https://support.industry.siemens.com/cs/ww/en/view/109744024>

**Ordering data****Article No.****SIMATIC IPC Remote Manager V1.3**

Software tool for remote maintenance and management of SIMATIC IPC, incl. manual on CD-ROM (English, German), single license

6ES7648-6EA01-3YA0

## PC-based Automation

Industrial PC  
IPC software

### SIMATIC IPC FirmwareManager

#### Overview

##### **SIMATIC IPC FirmwareManager**

The SIMATIC IPC FirmwareManager is a management tool for configuring and replacing firmware components.  
The FirmwareManager is controlled via command line options.

Only the following Siemens products are supported:

- SIMATIC IPC647E, SIMATIC IPC647D, SIMATIC IPC847E, SIMATIC IPC847D
- SIMATIC IPC127E, IPC227E, SIMATIC IPC427E, SIMATIC IPC427D, SIMATIC IPC627E, SIMATIC IPC627D, SIMATIC IPC827D
- SIMATIC IPC277E, SIMATIC IPC477E, SIMATIC IPC477D, SIMATIC IPC677E, SIMATIC IPC677D
- SIMATIC Field PG M5, SIMATIC Field PG M6
- SIMATIC ITP1000

Supported operating systems:

- UEFI Shell
- Windows XP 32/64-bit
- Windows 7 32/64-bit
- Windows 10 64-bit
- Linux-based (kernel 3.x, 4.x, 5.x) 32/64-bit

The SIMATIC IPC FirmwareManager is available via online software delivery (OSD).

#### Licenses:

There are two license versions available for the SIMATIC IPC FirmwareManager.

- The single license is intended for use with a single IPC. It allows installation or mobile use with only one SIMATIC IPC.
- The license for 50 devices allows mobile use (via e.g. a USB flash drive) together with up to 50 IPCs. If the FirmwareManager is to be used with more than 50 IPCs, a corresponding number of licenses is required.

#### Ordering data

#### Article No.

##### **SIMATIC IPC FirmwareManager V4.0**

Software and license for download:  
Email address is essential for delivery

- Single license;  
One version of the "SIMATIC IPC FirmwareManager" is required for each SIMATIC IPC on which the firmware manager is installed
- SIMATIC IPC FirmwareManager for 50 devices;  
One version of the "SIMATIC IPC FirmwareManager for 50 devices" is required for mobile use with up to 50 SIMATIC IPC

**6ES7648-6FA84-0YX0**

**6ES7648-6GA84-0YX0**

#### More information

Additional information is available on the Internet at:

<https://support.industry.siemens.com/cs/ww/en/view/109773878>

<https://support.industry.siemens.com/cs/ww/en/view/109778609>

**Overview****Ordering data****Article No.**

<b>SIMATIC Industrial OS V1.5, based on Linux</b> Operating system for SIMATIC IPC; single license; software and license for download; email address required for delivery	<b>6ES7648-6LA81-0YA8</b>
--	---------------------------

***SIMATIC Industrial OS – the operating system for applications in the industrial environment***

The SIMATIC Industrial OS with its Linux-based operating system constitutes an alternative to the tried-and-tested Microsoft Windows operating systems available for the SIMATIC IPCs.

The focus is on a small footprint, without unnecessary ballast, but with all components for fast commissioning and simple further development.

It was put together and tested on the SIMATIC IPCs and can be used in industrial environments and other areas of application.

Released devices:

Siemens has released the following SIMATIC IPCs for version 1.5 of SIMATIC Industrial OS:

- SIMATIC IPC127E
- SIMATIC IPC227E/277E
- SIMATIC IPC327E/377E/IPC347E
- SIMATIC IPC427E/477E
- SIMATIC IPC527G/IPC547G
- SIMATIC IPC647E
- SIMATIC IPC847E

Minimum requirements:

- USB flash drive with a memory of at least 8 GB
- SIMATIC IPC (see released devices) with at least 4 GB capacity on the target storage medium (CFast, SSD, etc.)

<https://support.industry.siemens.com/cs/ww/en/view/109766374>

## PC-based Automation

Industrial PC

Embedded bundles, starter systems, software packages

### Introduction

#### Overview

##### **Embedded bundles and starter systems - The fast, efficient way to get started with PC-based automation**

##### **Embedded bundles and starter systems**

Embedded bundles and IPC starter systems for PC-based automation are based on rugged, fan-free embedded industrial PCs:

- Nanobox PC SIMATIC IPC227 and Microbox PC SIMATIC IPC427 or
- Panel PC SIMATIC IPC277 and SIMATIC IPC477

They are pre-installed, configured, and ready-to-use with the SIMATIC S7-1507S Software Controller and/or a version of the SIMATIC WinCC Advanced visualization software.

Embedded bundles and IPC starter systems are embedded IPC configurations with pre-installed software, specially designed for automation and visualization tasks.

- All embedded bundles and IPC starter systems are based on rugged, fanless SIMATIC IPCs
  - Various CPU performance classes are available for different applications.
- From Intel Atom CPUs for simple open-loop control and visualization tasks, all the way to Intel Xeon CPUs for complex automation solutions
- Optionally pre-installed and configured with the SIMATIC S7-1507S Software Controller (for IPC227E / 277E / IPC427E / IPC477E / IPC477E PRO) and/or SIMATIC WinCC RT Advanced visualization software
  - Embedded bundles are based on Windows Embedded Standard 7 and the scope of supply includes licenses for the configured system in each case
  - IPC Starter systems are built with Windows 10 Enterprise 2016 LTSB as the basis.

The license for the CPU 1507S can be obtained for the IPC427E and IPC477E when ordering the software controller. Software packages can be accessed for the IPC227E and IPC277E.

For WinCC Runtime Advanced licenses, we recommend ordering the software packages required in order to benefit from price savings.

##### **Software packages**

Software packages with SIMATIC WinCC (SCADA, Advanced, Professional) are available for all SIMATIC IPCs.

Additional software packages with SIMATIC S7-1500 Software Controller CPU 1507S are available for the IPC227E and IPC277E. Ordering the automation software together with an industrial PC results in significant price savings.

A software package can only be supplied if the same number of SIMATIC industrial PCs is ordered together with the software.

**SIMATIC IPC227E bundles****Overview*****SIMATIC IPC227E (Nanobox PC): The Box PC with optimized performance in compact design – maintenance-free and rugged***

The SIMATIC IPC227E Nanobox PC is an extremely compact and flexible embedded industrial PC.

Thanks to its closed, dust-protected all-metal enclosure, the IPC227E offers maximum industrial functionality for flexible use under harsh conditions – while remaining maintenance-free.

Modern interfaces and the option for expansion via a PCIe slot mean this Box PC can be easily integrated into the automation system. In the version with pre-installed Industrial Edge Runtime, it also supports modern Edge architectures. In the version with pre-installed Industrial Edge Runtime, it also supports modern Edge architectures. The latest Intel Dual-Core and Quad-Core processors ensure excellent performance here in an ultra-compact design.

**Ordering data****Article No.****SIMATIC IPC227E**

6ES7647- 8 B - ■■■■■

Processor

- Celeron N2807 (2C/2T)
- Celeron N2930 (4C/4T)
- Celeron N2807 (2C/2T)/TPM
- Celeron N2930 (4C/4T)/TPM
- Celeron E3845 ET (4C/4T) / TPM

A  
B  
C  
D  
EWork memory/NVRAM

- 2 GB
- 4 GB
- 8 GB
- 2 GB/NVRAM
- 4 GB/NVRAM
- 8 GB/NVRAM
- 4 GB RAM ET / NVRAM

1  
2  
3  
4  
5  
6  
7Device version/interface

- Basis without COM
- Basis with COM1/2
- PCIe without COM
- PCIe with COM1/2

1  
2  
3  
4

## PC-based Automation

Industrial PC

Embedded bundles, starter systems, software packages

## SIMATIC IPC227E bundles

Ordering data		Article No.	Article No.
<b>SIMATIC IPC227E</b>		6ES7647- 8 B 	6ES7647- 8 B 
<u>Operating system</u>			
• Without operating system	0		
• Windows Embedded Standard 7 E SP1, English, 32-bit	1		
• Windows Embedded Standard 7 E SP1, English, 64-bit	2		
• Windows Embedded Standard 7 P SP1, English, 32-bit	3		
• Windows Embedded Standard 7 P SP1, English, 64-bit	4		
• Windows 7 Ultimate SP1, 32-bit, MUI (en, de, fr, it, es)	5		
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	6		
• Windows 10 Enterprise 2016 LTSB, 64-bit, MUI (de, en, es, fr, it)	7		
• Windows 10 IoT Enterprise 2019 LTSC, 64-bit, MUI (de, en, es, fr, it)	8		
<u>Mass storage</u>			
• Without	A		
• 256 GB Eco SSD	E		
• 240 GB SSD	C		
• 480 GB SSD	D		
• 60 GB SSD ET	H		
• 4 GB CFast	K		
• 8 GB CFast	L		
• 16 GB CFast	M		
• 128 GB CFast	N		
• 320 GB HDD	R		
<u>Mounting accessories</u>			
• Top hat DIN rail	1		
• Wall mounting	2		
• Portrait mounting	3		
• DIN rail mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	4		
• Wall mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	5		
• Portrait mounting with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	6		

## **SIMATIC IPC227E (Nanobox PC) with pre-installed Industrial Edge Runtime**


1 x DisplayPort;  
2x 10/100/1000 Mbps  
Ethernet RJ45;  
1 x USB 3.0, 3 x USB 2.0;  
CFast slot;  
24 V DC industrial power supply  
Industrial Edge (SIMATIC)

6ES7647-8BD31-0CW1

**Note:**

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

For an up-to-date overview, see the SIMATIC PC Online Configurator: <https://www.siemens.com/pc-configurators>

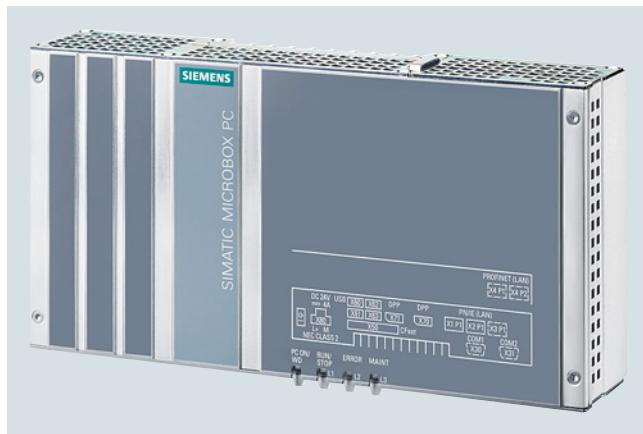**SIMATIC IPC427E bundles and starter systems****Overview****SIMATIC IPC427E (Microbox PC): The powerful embedded IPC – maintenance-free with versatile configuration**

Ready-to-run, complete solution:

- Ultra-compact
- Maintenance-free
- 6th Generation Intel Core i technology

**Ordering data****Article No.****SIMATIC IPC427E (Box PC)<sup>1)</sup>**

Processor and fieldbus

- Celeron G3902E;  
2 x Gigabit Ethernet (IE/PN)
- Celeron G3902E;  
3 x Gigabit Ethernet (IE/PN)
- Core i3-6102E;  
3 x Gigabit Ethernet (IE/PN)
- Core i5-6442EQ;  
3 x Gigabit Ethernet (IE/PN)
- Xeon E3-1505L;  
3 x Gigabit Ethernet (IE/PN)

6AG4141-

■ ■ ■ - ■ ■ ■ ■

0

1

3

5

7

**Mounting accessories/ATEX**

- DIN rail mounting
- Wall mounting
- Portrait mounting
- DIN rail mounting with ATEX/IECEx  
Cat 3G Zone 2 / cULus Class I  
Div. 2
- Wall mounting with ATEX/IECEx  
Cat 3G Zone 2 / cULus Class I  
Div. 2
- Portrait mounting with ATEX/IECEx  
Cat 3G Zone 2 / cULus Class I  
Div. 2

B

C

D

F

G

H

**Work memory/NVRAM/ECC**

- 4 GB
- 8 GB
- 16 GB
- 8 GB with ECC
- 16 GB with ECC
- 4 GB and NVRAM
- 8 GB and NVRAM
- 16 GB and NVRAM
- 8 GB with ECC and NVRAM
- 16 GB with ECC and NVRAM

A

B

C

D

E

F

G

H

J

K


## PC-based Automation

Industrial PC

Embedded bundles, starter systems, software packages

### SIMATIC IPC427E bundles and starter systems

Ordering data	Article No.	Article No.
<b>SIMATIC IPC427E (Box PC)<sup>1)</sup></b>	<b>6AG4141-</b>	<b>6AG4141-</b>
<u>Expansions/interfaces</u>		
• No RS232/RS485, without PCIe	0	0
• No RS232/RS485 and one PCIe	1	1
• No RS232/RS485 and two PCIe	2	2
• Two RS232/RS485, without PCIe	3	3
• Two RS232/RS485 and one PCIe	4	4
• Two RS232/RS485 and two PCIe	5	5
<u>Operating system</u>		
• Without operating system	0	
• Windows Embedded Standard 7 SP1, English, 32-bit	1	
• Windows Embedded Standard 7 SP1, English, 64-bit	2	
• Windows Embedded Standard 7 SP1, English, 64-bit, multi-touch	3	
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	4	
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for Celeron, Core i3 and Core i5 processors	5	
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for Xeon processor	6	
• Windows 10 Enterprise 2016 LTSB (64-bit) for Celeron, Core i3 and Core i5 processors	7	
• Windows 10 Enterprise 2016 LTSB (64-bit) for Xeon processor	8	
<u>Mass storage, externally accessible</u>		
• Without external mass storage		0
• CFast 2 GB without operating system		1
• CFast 4 GB without operating system		2
• CFast 8 GB (only optionally with operating system/software if no internal mass storage or HDD)		3
• CFast 16 GB (only optionally with operating system/software if no internal mass storage or HDD)		4
• CFast 128 GB (only optionally with operating system/software if no internal mass storage or HDD)		5
<u>Mass storage, internal</u>		
• Without internal mass storage		A
• 256 GB Eco solid-state drive		D
• 240 GB solid-state drive SATA		F
• 480 GB solid-state drive SATA		G
• 320 GB HDD		J

Ordering data	Article No.
<b>SIMATIC IPC427E (Box PC)<sup>1)</sup></b>	6AG4141- 
<u>SIMATIC Software (bundles/starter system)</u>	
<ul style="list-style-type: none"> <li>• Without SIMATIC software</li> <li>• CPU 1507S</li> <li>• WinCC RT Advanced V16 Update 1           <ul style="list-style-type: none"> <li>- 128 PT</li> <li>- 512 PT</li> <li>- 2 048 PT</li> <li>- 4 096 PT</li> <li>- 8 192 PT</li> </ul> </li> </ul>	<b>A</b> <b>B</b> <b>C</b> <b>D</b> <b>E</b> <b>F</b> <b>G</b>
CPU 1507S / WinCC RT Advanced V16 Update 1 <ul style="list-style-type: none"> <li>- 128 PT</li> <li>- 512 PT</li> <li>- 2 048 PT</li> <li>- 4 096 PT</li> <li>- 8 192 PT</li> </ul>	<b>H</b> <b>J</b> <b>K</b> <b>L</b> <b>M</b> <b>S</b>
<ul style="list-style-type: none"> <li>• IPC starter system with CPU 1507S and WinCC RT Advanced, without licenses</li> </ul>	
<u>Power supply</u>	<b>0</b>
<ul style="list-style-type: none"> <li>• 24 V DC industrial power supply</li> <li>• 24 V DC and TPM<sup>2)</sup></li> </ul>	<b>8</b>

<sup>1)</sup> For an up-to-date overview, see the SIMATIC PC Online Configurator:  
<http://www.siemens.com/ipc-configurators>

<sup>2)</sup> TPM = Trusted Platform Module

## PC-based Automation

Industrial PC

Embedded bundles, starter systems, software packages

### SIMATIC IPC277E bundles

#### Overview



#### **SIMATIC IPC277E: The Panel PC with optimized performance – maintenance-free and compact with displays from 7"**

The SIMATIC IPC277E Nanopanel PC is a flexible embedded industrial PC with rugged and durable displays.

Technologically it is based on the IPC227E Nanobox PC and thus offers maximum industrial functionality for flexible use even under harsh conditions – all without the need for maintenance.

The Panel PC is characterized by modern interfaces and a high degree of flexibility in the selection of the display. The latest Intel Dual-Core and Quad-Core processors ensure excellent performance here for visualization and control tasks.

#### Ordering data

#### Article No.

#### Article No.

##### **SIMATIC IPC277E (Nanopanel PC)**

6AV7882- 0 ■■■ 0 - ■■■ 0

##### **SIMATIC IPC277E (Nanopanel PC)**

6AV7882- 0 ■■■ 0 - ■■■ 0

##### Operating unit

- 7" touch
- 9" touch
- 12" touch
- 15" touch front USB
- 19" touch front USB
- 12" multi-touch (with WES7-E only single-touch mode)
- 15" multi-touch (with WES7-E only single-touch mode)
- 19" multi-touch (with WES7-E only single-touch mode)
- 15" multi-touch (1 366 x 768; ATEX/IECEx/UL HazLoc; with WES7-E only single-touch mode)
- 19" multi-touch (1 366 x 768; ATEX/IECEx/UL HazLoc; with WES7-E only single-touch mode)

A  
B  
C  
D  
E  
H  
F  
G  
J  
K

##### Mass storage

- Without
- 256 GB Eco SSD
- 240 GB SSD
- 480 GB SSD
- 4 GB CFast
- 8 GB CFast
- 16 GB CFast
- 128 GB CFast

A  
E  
C  
D  
K  
L  
M  
N

##### Processor

- Celeron N2807 (2C/2T)
- Celeron N2930 (4C/4T)
- Celeron N2807 (2C/2T)/TPM
- Celeron N2930 (4C/4T)/TPM

A  
B  
C  
D

##### Software

- Without SIMATIC software
- CPU 1507S V20.8
- WinCC RT Advanced V16 Update 1, 128 PT
- WinCC RT Advanced V16 Update 1, 512 PT
- WinCC RT Advanced V16 Update 1, 2 048 PT
- WinCC RT Advanced V16 Update 1, 4 096 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 128 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 512 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 2 048 PT
- CPU 1507S V20.8 / WinCC RT Advanced V16 Update 1, 4 096 PT
- Starter system, with CPU1507S and WinCC RT Advanced, without licenses

A  
B  
D  
E  
F  
G  
J  
K  
L  
M  
S

##### Work memory/NVRAM

- 2 GB
- 4 GB
- 8 GB
- 2 GB/NVRAM
- 4 GB/NVRAM
- 8 GB/NVRAM

1  
2  
3  
4  
5  
6

##### Operating system

- Without operating system
- Windows Embedded Standard 7 E SP1, English, 32-bit
- Windows Embedded Standard 7 E SP1, English, 64-bit
- Windows Embedded Standard 7 P SP1, English, 32-bit
- Windows Embedded Standard 7 P SP1, English, 64-bit
- Windows 7 Ultimate SP1, 32-bit, MUI (en, de, fr, it, es)
- Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)
- Windows 10 Enterprise 2016 LTSB
- Windows 10 IoT Enterprise 2019 LTSC

0  
1  
2  
3  
4  
5  
6  
7  
8

#### Note:

Please assemble the required IPC configuration using the TIA Selection Tool or configurator in the Industry Mall in order to ensure availability; we do not accept any liability for configurations compiled by users themselves.

For an up-to-date overview, see the SIMATIC PC Online Configurator: <http://www.siemens.com/pc-configurators>

**SIMATIC IPC477E bundles and starter systems****Overview****SIMATIC IPC477E: The powerful embedded Panel PC – maintenance-free with versatile configuration**

- Embedded PC platform with extremely high industrial compatibility for demanding tasks in the field of PC-based automation
- Maintenance-free (no rotating components such as fan and hard disk)
- Rugged construction: The PC is resistant to even the harshest mechanical stress and extremely reliable in operation
- Compact design
- Battery-independent retentive memory onboard
- High degree of investment security
- Fast integration capability
- Built-in versions
  - 15" TFT touch
  - 19" TFT touch
  - 22" TFT touch
  - 15" TFT multi-touch
  - 19" TFT multi-touch
  - 22" TFT multi-touch
  - 24" TFT multi-touch

**Ordering data****Article No.****SIMATIC IPC477E<sup>1)</sup>**

## Processor and fieldbus

- Celeron G3902E; 3 x Gigabit Ethernet (IE/PN) **1**
- Core i3-6102E; 3 x Gigabit Ethernet (IE/PN) **3**
- Core i5-6442EQ; 3 x Gigabit Ethernet (IE/PN) **5**
- Xeon E3-1505L; 3 x Gigabit Ethernet (IE/PN) **7**

## Operating unit

- 15" single-touch (1 280 x 800) with front USB **B**
- 19" single-touch (1 366 x 768) with front USB **D**
- 22" single-touch (1 920 x 1 080) with front USB **E**
- 15" multi-touch (1 366 x 768), single-touch mode only with WES7-E **J**
- 19" multi-touch (1 366 x 768), single-touch mode only with WES7-E **K**
- 19" multi-touch (1 920 x 1 080), single-touch mode only with WES7-E **G**
- 22" multi-touch (1 920 x 1 080), single-touch mode only with WES7-E **L**
- 24" multi-touch (1 920 x 1 080), single-touch mode only with WES7-E **R**

## Work memory/NVRAM

- 4 GB **A**
- 8 GB **B**
- 16 GB **C**
- 8 GB with ECC **D**
- 16 GB with ECC **E**
- 4 GB and NVRAM **F**
- 8 GB and NVRAM **G**
- 16 GB and NVRAM **H**
- 8 GB with ECC and NVRAM **J**
- 16 GB with ECC and NVRAM **K**

**PC-based Automation**

## Industrial PC

Embedded bundles, starter systems, software packages

**SIMATIC IPC477E bundles and starter systems**

Ordering data	Article No.	Article No.
<b>SIMATIC IPC477E<sup>1)</sup></b>	<b>6AV7241-</b>	<b>6AV7241-</b>
<u>Expansions/interfaces</u>		
• No RS232/RS485, without PCIe	0	A
• No RS232/RS485 and one PCIe	1	D
• Second RS232/RS485, without PCIe	3	F
• Second RS232/RS485 and one PCIe	4	G
• No RS232, without PCIe with ATEX/IECEx Cat 3G Zone 2	5	J
• No RS232 and one PCIe with ATEX/IECEx Cat 3G Zone 2	6	
• Two RS232 without PCIe with ATEX/IECEx Cat 3G Zone 2	7	
• Two RS232 and one PCIe with ATEX/IECEx Cat 3G Zone 2	8	
<u>Operating system</u>		
• Without operating system	0	A
• Windows Embedded Standard 7 SP1, English, 32-bit	1	B
• Windows Embedded Standard 7 SP1, English, 64-bit	2	C
• Windows Embedded Standard 7 P SP1, English, 64-bit, multi-touch	3	D
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	4	E
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for the Celeron, Core i3 and Core i5 processors	5	F
• Windows 10 IoT Enterprise 2019 LTSC (64-bit) for Xeon processor	6	G
• Windows 10 Enterprise 2016 LTSB (64-bit) for Celeron, Core i3 and Core i5 processors	7	H
• Windows 10 Enterprise 2016 LTSB (64-bit) for Xeon processors	8	J
<u>Mass storage, externally accessible</u>		
• Without external mass storage	0	K
• CFast 2 GB, without operating system	1	L
• CFast 4 GB, without operating system	2	M
• CFast 8 GB (only optionally with operating system/software if no internal mass storage or HDD)	3	N
• CFast 16 GB (only optionally with operating system/software if no internal mass storage or HDD)	4	O
• CFast 128 GB (only optionally with operating system/software if no internal mass storage or HDD)	5	P
<u>Power supply:</u>		
• 24 V DC industrial power supply	0	0
• 110/230 V AC industrial power supply with NAMUR; European power supply cord	1	1
• 110/230 V AC industrial power supply with TPM <sup>2)</sup> (not for China or Russia) NAMUR, European power supply cord	7	
• 24 V DC industrial power supply and TPM <sup>2)</sup>	8	

<sup>1)</sup> For an up-to-date overview, see the SIMATIC PC Online Configurator:  
<http://www.siemens.com/IPC-Configurators>

<sup>2)</sup> TPM = Trusted Platform Module

**Overview****SIMATIC IPC477E PRO**

The fully enclosed IP65-protected SIMATIC IPC477E PRO in 15", 19" and 22" versions extends the portfolio of PRO devices.

The robust aluminum housing allows it to be used directly on the machine even in harsh environmental conditions. The operating unit can either be mounted on a pedestal or connected to a support arm system from above.

**Ordering data****Article No.**

<b>SIMATIC IPC477E PRO<sup>1)</sup></b>	<b>Article No.</b>
<b>CPU and fieldbus</b>	<b>6AV7251-</b>
• Celeron G3902E; 3x Gigabit Ethernet (IE/PN)	<b>1</b>
• Core i3-6102E; 3x Gigabit Ethernet (IE/PN)	<b>3</b>
• Core i5-6442EQ; 3x Gigabit Ethernet (IE/PN)	<b>5</b>
• XEON E3-1505L; 3x Gigabit Ethernet (IE/PN)	<b>7</b>
<b>Operating unit</b>	<b>B</b>
• 15" multi-touch (1 366 x 768), for support arm (not expandable, flange on top)	<b>C</b>
• 15" multi-touch (1 366 x 768), for pedestal (expandable, flange below)	<b>D</b>
• 15" multi-touch (1 366 x 768), for support arm (expandable, round tube)	<b>E</b>
• 19" multi-touch (1 366 x 768), for support arm (not expandable, flange on top)	<b>F</b>
• 19" multi-touch (1 366 x 768), for pedestal (expandable, flange below)	<b>G</b>
• 19" multi-touch (1 366 x 768), for support arm (expandable, round tube)	<b>H</b>
• 19" multi-touch (1 920 x 1 080), for pedestal (expandable, flange below)	<b>I</b>
• 19" multi-touch (1 920 x 1 080), for support arm (expandable, round tube)	<b>J</b>
• 22" multi-touch (1 920 x 1 080), for support arm (not expandable, flange on top)	<b>K</b>
• 22" multi-touch (1 920 x 1 080), for pedestal (expandable, flange below)	<b>L</b>
• 22" multi-touch (1 920 x 1 080), for support arm (expandable, round tube)	<b>M</b>
• 24" multi-touch (1 920 x 1 080), for pedestal (expandable, flange below)	<b>N</b>
• 24" multi-touch (1 920 x 1 080), for support arm (expandable, round tube)	<b>O</b>

**Article No.**

<b>SIMATIC IPC477E PRO<sup>1)</sup></b>	<b>Article No.</b>
<b>Work memory/NVRAM</b>	<b>6AV7251-</b>
• 4 GB	<b>A</b>
• 8 GB	<b>B</b>
• 16 GB	<b>C</b>
• 8 GB with ECC	<b>D</b>
• 16 GB with ECC	<b>E</b>
• 4 GB and NVRAM	<b>F</b>
• 8 GB and NVRAM	<b>G</b>
• 16 GB and NVRAM	<b>H</b>
• 8 GB with ECC and NVRAM	<b>J</b>
• 16 GB with ECC and NVRAM	<b>K</b>
<b>Expansions/interfaces</b>	<b>0</b>
• No RS232/485, without PCIe	<b>0</b>
• Two RS232/RS485, without PCIe	<b>3</b>
• No RS232 without PCIe with ATEX/IECEx Cat 3G Zone 2 / cULus Class I Div. 2	<b>5</b>
• Two RS232 without PCIe with ATEX/IECEx Cat. 3G Zone 2 / cULus Class I Div. 2	<b>6</b>
<b>Operating system</b>	<b>1</b>
• Without operating system	<b>0</b>
• Windows Embedded Standard 7 SP1, English, 32-bit	<b>1</b>
• Windows Embedded Standard 7 SP1, English, 64-bit	<b>2</b>
• Windows Embedded Standard 7 SP1, MUI, 64-bit, multi-touch	<b>3</b>
• Windows 7 Ultimate SP1, 64-bit, MUI (en, de, fr, it, es)	<b>4</b>
• Windows 10 Enterprise 2019 LTSC (64-bit) for Celeron, i3 and i5	<b>5</b>
• Windows 10 Enterprise 2019 LTSC (64-bit) for Xeon	<b>6</b>
• Windows 10 IoT Enterprise 2016 LTSB (64-bit) for Celeron, i3 and i5	<b>7</b>
• Windows 10 IoT Enterprise 2016 LTSB (64-bit) for Xeon	<b>8</b>

## PC-based Automation

Industrial PC

Embedded bundles, starter systems, software packages

### SIMATIC IPC477E PRO bundles

Ordering data	Article No.
<b>SIMATIC IPC477E PRO<sup>1)</sup></b>	<b>6AV7251-</b> 
Mass storage, external	
• Without external mass storage	0
• CFast 2 GB, without operating system	1
• CFast 4 GB, without operating system	2
• CFast 8 GB (only optionally with operating system/software if no internal mass storage or HDD)	3
• CFast 16 GB (only optionally with operating system/software if no internal mass storage or HDD)	4
• CFast 128 GB (only optionally with operating system/software if no internal mass storage or HDD)	5
Mass storage, internal	
• Without internal mass storage	A
• 128 GB solid-state drive SATA	D
• 240 GB solid-state drive SATA	F
• 480 GB solid-state drive SATA	G
<u>SIMATIC software pre-installed (bundles)</u>	
• Without SIMATIC software	A
• IPC starter system with CPU 1507S and WinCC RT Advanced, without licenses	S
Power supply	
• 24 V DC industrial power supply	0
• 24 V DC industrial power supply and TPM <sup>2)</sup> (not for China or Russia)	8

<sup>1)</sup> IPC477E PRO as "built to order" version (max. delivery time 15 working days).

<sup>2)</sup> TPM = Trusted Platform Module

5

#### Note:

As with the existing 4:3 IPC477C/D PRO devices, adaptation to different support arm/pedestal systems is by means of the basic adapter. The basic adapter is included in the scope of supply (except in the case of the "prepared for support arm and extension components" version, as the connection is made via a round tube).

For the version "prepared for support arm and extension components", installation can alternatively take place with the Siemens flange mount or with a standard 48 mm diameter round tube. The flange mount enables the transition from a round tube connection to the familiar mechanical interface of the basic adapter. This means you can combine different versions of the PRO devices with the same support arm or pedestal system.

**Software packages for SIMATIC IPC****Overview****Software packages with SIMATIC IPC**

Software packages with SIMATIC WinCC, WinCC flexible, or SIMATIC SW Controller together with the corresponding SIMATIC IPC.

Available:

- SIMATIC IPC packages with WinCC Unified PC RT (TIA Portal)
- SIMATIC IPC packages with WinCC V7
- SIMATIC IPC packages with WinCC Open Architecture – WinCC OA
- SIMATIC IPC packages with WinCC RT Advanced (TIA Portal)
- SIMATIC IPC packages with WinCC RT Professional (TIA Portal)
- SIMATIC WinCC flexible
- SIMATIC IPC packages with SIMATIC Software Controller

A software package can only be supplied if the same number of SIMATIC industrial PCs is ordered together with the software. It cannot be ordered subsequently.

**Ordering data****Article No.***Software packages for SIMATIC IPC***SIMATIC WinCC Unified V16 PC Runtime 1)<sup>2)</sup>**

Software and documentation on DVD, single license, license key on USB flash drive for:

- 150 PowerTags
- 500 PowerTags
- 1k PowerTags
- 2.5k PowerTags
- 5k PowerTags
- 10k PowerTags
- 50k PowerTags

**6AV2155-3DB01-6AA0  
6AV2155-1EB01-6AA0  
6AV2155-2EB01-6AA0  
6AV2155-2MB01-6AA0  
6AV2155-1FB01-6AA0  
6AV2155-2FB01-6AA0  
6AV2155-1GB01-6AA0**

**SIMATIC WinCC Runtime Advanced V16 1)<sup>2)</sup>**

Software and documentation on DVD, incl. WinCC Archives and WinCC Recipes.

Single license, license key on USB flash drive for:

- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags
- 8 192 PowerTags

**6AV2114-2BA06-0AA0  
6AV2114-2DA06-0AA0  
6AV2114-2FA06-0AA0  
6AV2114-2HA06-0AA0  
6AV2114-2KA06-0AA0**

**SIMATIC WinCC Runtime Advanced V15.1 1)<sup>2)</sup>**

Software and documentation on DVD, including WinCC Archives and WinCC Recipes.

Single license, license key on USB flash drive for:

- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags
- 8 192 PowerTags

**6AV2114-2BA05-0AA0  
6AV2114-2DA05-0AA0  
6AV2114-2FA05-0AA0  
6AV2114-2HA05-0AA0  
6AV2114-2KA05-0AA0**

**SIMATIC WinCC Runtime Professional V16 1)<sup>2)</sup><sup>3)</sup>**

- WinCC Client for RT Professional
- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags
- 8 192 PowerTags
- 65 536 PowerTags

**6AV2117-2DB06-0AA0  
6AV2115-2BA06-0AA0  
6AV2115-2DA06-0AA0  
6AV2115-2FA06-0AA0  
6AV2115-2HA06-0AA0  
6AV2115-2KA06-0AA0  
6AV2115-2MA06-0AA0**

**SIMATIC WinCC Runtime Professional V15.1 1)<sup>2)</sup><sup>3)</sup>**

- WinCC Client for RT Professional
- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags
- 8 192 PowerTags
- 65 536 PowerTags

**6AV2117-2DB05-0AA0  
6AV2115-2BA05-0AA0  
6AV2115-2DA05-0AA0  
6AV2115-2FA05-0AA0  
6AV2115-2HA05-0AA0  
6AV2115-2KA05-0AA0  
6AV2115-2MA05-0AA0**

<sup>1)</sup> Only if ordered together with a SIMATIC IPC.

<sup>2)</sup> The current version is always supplied.

<sup>3)</sup> IPC127 only as client and single-user station for small projects, IPC227E/IPC277E and IPC327E/IPC377E only as WinCC client & single-user station.

## PC-based Automation

Industrial PC

Embedded bundles, starter systems, software packages

### Software packages for SIMATIC IPC

Ordering data	Article No.	Article No.
<i>Software packages for SIMATIC IPC</i>		
<b>SIMATIC WinCC V7.5 SP1 Runtime</b> <sup>1)2)</sup>		
• WinCC RT Client	<b>6AV6382-2AA07-5AX0</b>	
• 128 PowerTags	<b>6AV6382-2CA07-5AX0</b>	
• 512 PowerTags	<b>6AV6382-2DA07-5AX0</b>	
• 2 048 PowerTags	<b>6AV6382-2EA07-5AX0</b>	
• 8 192 PowerTags	<b>6AV6382-2HA07-5AX0</b>	
• 65 536 PowerTags	<b>6AV6382-2FA07-5AX0</b>	
<b>SIMATIC WinCC V7.5 SP1 Runtime ASIA</b> <sup>1)2)</sup>		
• WinCC RT Client	<b>6AV6382-2AA07-5AV0</b>	
• 128 PowerTags	<b>6AV6382-2CA07-5AV0</b>	
• 512 PowerTags	<b>6AV6382-2DA07-5AV0</b>	
• 2 048 PowerTags	<b>6AV6382-2EA07-5AV0</b>	
• 8 192 PowerTags	<b>6AV6382-2HA07-5AV0</b>	
• 65 536 PowerTags	<b>6AV6382-2FA07-5AV0</b>	
<b>SIMATIC WinCC Open Architecture Version 3.17</b>		
Only offered with IPC127E and IPC227E/IPC277E.		
These packages cannot be extended with further WinCC OA options (restrictions according to WinCC OA documentation).		
N/EAR99S 9377		
• 128 PowerTags	<b>6AV6355-1AA31-7FA0</b>	
• 512 PowerTags	<b>6AV6355-1AA31-7FA1</b>	
• 2 048 PowerTags	<b>6AV6355-1AA31-7FA2</b>	
• 4 096 PowerTags	<b>6AV6355-1AA31-7FA3</b>	
<b>SIMATIC S7-1500 Software Controller CPU1507S Package</b>		
SW package only available for IPC227E/IPC277E		
• SW Controller CPU 1507S for IPC2x7E (DVD) <sup>1)2)</sup>		<b>6ES7672-7AC01-6YA0</b>
• SW Controller CPU 1507S (F) for IPC2x7E (DVD) <sup>1)2)</sup>		<b>6ES7672-7FC01-6YA0</b>

<sup>1)</sup> Only if ordered together with a SIMATIC IPC

<sup>2)</sup> The current version is always supplied

### SIMATIC WinCC Open Architecture Version 3.17

Only offered with IPC127E and IPC227E/IPC277E.

These packages cannot be extended with further WinCC OA options (restrictions according to WinCC OA documentation).

N/EAR99S 9377

- 128 PowerTags
- 512 PowerTags
- 2 048 PowerTags
- 4 096 PowerTags

<sup>1)</sup> Only if ordered together with a SIMATIC IPC

<sup>2)</sup> The current version is always supplied

#### Note:

For ordering data for Panel PCs and accessories, see configurators in "SIMATIC Panel PCs".

#### More information

You can find the latest list of software packages for SIMATIC IPCs under the following SIOS notification:

<https://support.industry.siemens.com/cs/ww/en/view/99860269>

More information is available on the Internet at:

<http://www.automation.siemens.com/simatic-hmi>

**Overview****SIMATIC IOT2000**

The SIMATIC IOT2000 is the reliable, open platform designed for the acquisition, processing and transfer of data directly in the production environment.

It is ideally suited for use as a gateway between the cloud or company IT level and production.

It can serve as an interface in both directions. It can also transfer evaluated data from the cloud to production control. This continuous exchange of data closes the control loop for optimizing the production process. The openness of the system in supporting numerous communication protocols and programming in high-level languages enables tailored solutions.

# PC-based Automation

Industrial IoT Gateway  
SIMATIC IOT2000

## SIMATIC IOT2050

### Overview

The SIMATIC IOT2050 is the reliable, open platform designed for the acquisition, processing and transfer of data directly in the production environment.

It is ideally suited for use as a gateway between the cloud or company IT level and production.

The openness of the system in supporting numerous communication protocols and programming in high-level languages enables tailored solutions.

Openness for industrial IOT applications

- Wide range of options for programming in high-level languages
- Implementation of flexible communication solutions with different protocols, from Modbus RTU, OPC UA to cloud protocols such as MQTT/AMQP
- Use of open source application examples and libraries
- SIMATIC Industrial OS, via OSD + free "ISAR" Debian via download

Additional information is available on the Internet at:

<http://siemens.com/iot2000>

### Ordering data

#### Article No.

##### SIMATIC IOT2050

2 x GB Ethernet RJ45;  
Display Port; 2x USB 2.0;  
SD CARD slot;  
24 V DC industrial power supply  
 • Hard disk:  
1x microSD card slot;  
memory: DDR4-SDRAM 1 GB  
 • Hard disk:  
16 GB eMMC  
1x microSD card slot;  
memory: DDR4-SDRAM 2 GB

**6ES7647-0BA00-0YA2**

**6ES7647-0BA00-1YA2**

5

### Technical specifications

Article number	<b>6ES7647-0BA00-0YA2</b> SIMATIC IoT2050	<b>6ES7647-0BA00-1YA2</b> SIMATIC IoT2050
<b>General information</b>		
Product type designation	IOT2050	IOT2050
<b>Installation type/mounting</b>		
Design	IoT Gateway, built-in unit	IoT Gateway, built-in unit
<b>Supply voltage</b>		
Type of supply voltage	12/24 V DC	12/24 V DC
<b>Mains buffering</b>		
• Mains/voltage failure stored energy time	5 ms	5 ms
<b>Processor</b>		
Processor type	ARM TI AM6528 GP	ARM TI AM6548 HS
<b>Graphic</b>		
Graphics controller	Integrated	Integrated
<b>Drives</b>		
Slot for drives	1x microSD card slot	1x microSD card slot
<b>Memory</b>		
Type of memory	DDR4	DDR4
Main memory	1 GB RAM	2 GB RAM
<b>Hardware configuration</b>		
<b>Slots</b>		
• free slots	1x Arduino, 1x mPCIe	1x Arduino, 1x mPCIe
<b>Digital inputs</b>		
Number of digital inputs	20	20
<b>Input voltage</b>		
• Type of input voltage	DC	DC
<b>Digital outputs</b>		
Number of digital outputs	20	20
<b>Output voltage</b>		
• Type of output voltage	DC	DC
• permissible voltage at output, min.	3.3 V	3.3 V
• permissible voltage at output, max.	5 V	5 V
<b>Analog inputs</b>		
Number of analog inputs		6
<b>Input ranges</b>		
• Voltage		Yes; 0 ... 5 V
<b>Interfaces</b>		
PROFIBUS/MPI	can be implemented with plug-in card	can be implemented with plug-in card
Number of industrial Ethernet interfaces	2	2
Number of PROFINET interfaces	2	2
USB port	2x USB 2.0	2x USB 2.0
Connection for keyboard/mouse	USB	USB
serial interface	1x COM (1x RS 232 / 422 / 485)	1x COM (1x RS 232 / 422 / 485)
<b>Video interfaces</b>		
• Graphics interface	1x DisplayPort	1x DisplayPort
<b>Industrial Ethernet</b>		
• Industrial Ethernet interface	2x Ethernet (RJ45) - 100 Mbps - 1000 Mbps	2x Ethernet (RJ45) Yes Yes

**Technical specifications**

Article number	<b>6ES7647-0BA00-0YA2</b> SIMATIC IoT2050	<b>6ES7647-0BA00-1YA2</b> SIMATIC IoT2050	Article number	<b>6ES7647-0BA00-0YA2</b> SIMATIC IoT2050	<b>6ES7647-0BA00-1YA2</b> SIMATIC IoT2050
<b>Integrated Functions</b>					
<b>Monitoring functions</b>					
• Temperature monitoring	Yes	Yes	CE mark	Yes	Yes
• Watchdog	Yes	Yes	UL approval	Yes	Yes
• Status LEDs	Yes	Yes	cULus	Yes	Yes
<b>EMC</b>					
<b>Interference immunity against discharge of static electricity</b>					
• Interference immunity against discharge of static electricity	$\pm 4$ kV contact discharge acc. to IEC 61000-4-2; $\pm 8$ kV air discharge acc. to IEC 61000-4-2		RCM (formerly C-TICK)	Yes	Yes
<b>Interference immunity against high-frequency electromagnetic fields</b>			KC approval	Yes	Yes
• Interference immunity against high frequency radiation	10 V/m for 80 ... 1 000 MHz, 80 % AM according to IEC 61000-4-3; 3 V/m for 1.4 ... 6 GHz, 80 % AM according to IEC 61000-4-3		EAC (formerly Gost-R)	Yes	Yes
<b>Interference immunity to cable-borne interference</b>			FCC	Yes	Yes
• Interference immunity on supply cables	$\pm 2$ kV (according to IEC 61000-4-4, burst); $\pm 1$ kV (according to IEC 61000-4-5, surge pulse/line to line); $\pm 2$ kV (according to IEC 61000-4-5, surge pulse/line to ground)		EMC	CE, EN 61000-6-4:2007 +A1:2011, EN 61000-6-2:2005, CE, EN IEC 61000-6-4:2019, EN IEC 61000-6-2:2019	
• Interference immunity on signal cables >30m	$\pm 2$ kV acc. to IEC 61000-4-5, surge, length > 30 m		<b>Altitude during operation relating to sea level</b>		
• Interference immunity on signal cables < 30m	$\pm 1$ kV acc. to IEC 61000-4-4, Burst		• Installation altitude above sea level, max.	2 000 m	2 000 m
<b>Interference immunity against voltage surge</b>					
• asymmetric interference	$\pm 2$ kV acc. to IEC 61000-4-5, surge asymmetric		<b>Relative humidity</b>		
• symmetric interference	$\pm 1$ kV acc. to IEC 61000-4-5, surge symmetric		• Relative humidity	5 ... 85 % at 30 °C, no condensation	5 ... 85 % at 30 °C, no condensation
<b>Degree and class of protection</b>			• Operation, max.	85 %	85 %
IP (all-round)	IP20	IP20	<b>Vibrations</b>		
			• Vibration resistance during operation acc. to IEC 60068-2-6	tested according to IEC 60068-2-6: 10 cycles; 5 to 8.4 Hz: deflection 3.5 mm; 8.4 to 200 Hz: acceleration 9.8 m/s <sup>2</sup>	
<b>Shock testing</b>					
			• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms	
<b>Operating systems</b>					
			pre-installed operating system	No	SIMATIC Industrial OS
			without operating system	Yes	No
<b>Mechanics/material</b>					
			Enclosure material (front)	plastic	plastic
			• Plastic	Yes	Yes
			• Aluminum	Yes	Yes
			• Stainless steel	Yes	Yes
			• Glass	No	No
<b>Dimensions</b>					
			Width	37 mm	37 mm
			Height	142 mm	142 mm
			Depth	100 mm	100 mm

Additional information is available on the Internet at:


<http://siemens.com/iot2000>

# PC-based Automation

Industrial IoT Gateway  
SIMATIC IOT2000

## SIMATIC IOT2040

### Overview

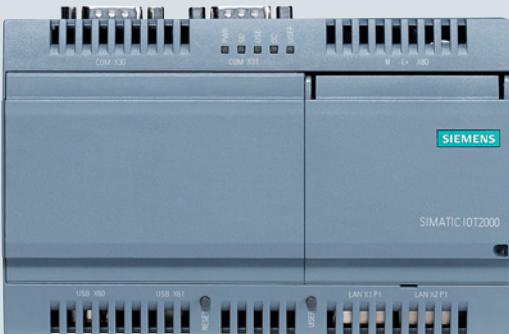

### SIMATIC IOT2040

The SIMATIC IOT2040 is the reliable, open platform designed for the acquisition, processing and transfer of data directly in the production environment.

It is ideally suited for use as a gateway between the cloud or company IT level and production.

The openness of the system in supporting numerous communication protocols and programming in high-level languages enables tailored solutions.

#### Openness for industrial IOT applications

- Wide range of options for programming in high-level languages
- Implementation of flexible communication solutions with different protocols, from Modbus RTU, OPC UA to cloud protocols such as MQTT/AMQP
- Use of open source application examples and libraries
- Yocto Linux support

#### Additional information

More information is available on the Internet at:  
<http://siemens.com/iot2000>

### Technical specifications

Article number	<b>6ES7647-0AA00-1YA2</b> SIMATIC IOT2040
<b>Installation type/mounting</b>	
Design	IoT Gateway, built-in unit
<b>Supply voltage</b>	
Type of supply voltage	24 V DC (9 ... 36 V)
<b>Mains buffering</b>	
• Mains/voltage failure stored energy time	5 ms
<b>Processor</b>	
Processor type	Intel Quark X1020
<b>Drives</b>	
Hard disk	1x microSD card slot
<b>Memory</b>	
Type of memory	DDR3-SDRAM
Main memory	1 GB
<b>Hardware configuration</b>	
<b>Slots</b>	
• free slots	1x Arduino, 1x mPCIe
<b>Interfaces</b>	
Number of industrial Ethernet interfaces	2
Number of PROFINET interfaces	0
USB port	1x USB 2.0, 1x USB client
Connection for keyboard/mouse	USB / USB
serial interface	2x COM ports (RS 232, RS 485)
<b>Industrial Ethernet</b>	
• Industrial Ethernet interface	2x Ethernet (RJ45)
- 100 Mbps	Yes
- 1000 Mbps	No
<b>Integrated Functions</b>	
<b>Monitoring functions</b>	
• Temperature monitoring	No
• Watchdog	Yes
• Status LEDs	Yes
• Fan	No

### Ordering data

#### Article No.

**SIMATIC IOT2040**  
2 x 10/100 Mbps Ethernet RJ45;  
1 x USB 2.0, 1 x USB client;  
SD card slot; 24 V DC industrial power supply

**6ES7647-0AA00-1YA2**

**Technical specifications**

Article number	<b>6ES7647-0AA00-1YA2</b> SIMATIC IoT2040
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	• Interference immunity against discharge of static electricity  ±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2
<b>Interference immunity against high-frequency electromagnetic fields</b>	• Interference immunity against high frequency radiation  10 V/m for 80 - 1 000 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 1 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 150 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6
<b>Interference immunity to cable-borne interference</b>	• Interference immunity on supply cables  ±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric  • Interference immunity on signal cables >30m  ±2 kV acc. to IEC 61000-4-5, surge, length > 30 m  • Interference immunity on signal cables < 30m  ±2 kV in accordance with IEC 61000-4-4, burst, length > 30 m
<b>Interference immunity against voltage surge</b>	• asymmetric interference  ±2 kV acc. to IEC 61000-4-5, surge asymmetric  • symmetric interference  ±1 kV acc. to IEC 61000-4-5, surge symmetric
<b>Interference immunity to magnetic fields</b>	• Interference immunity to magnetic fields at 50 Hz  100 A/m; to IEC 61000-4-8
<b>Emission of conducted and non-conducted interference</b>	• Interference emission via line/AC current cables  EN 61000-6-4:2007 +A1:2011

Article number	<b>6ES7647-0AA00-1YA2</b> SIMATIC IoT2040
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
cULus	Yes
KC approval	Yes
EMC	CE, EN 61000-6-4:2007 +A1:2011, EN 61000-6-2:2005, EN 61000-6-3:2007 +A1:2011, EN 61000-6-1:2007
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	0 °C to 50 °C
<b>Relative humidity</b>	
• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Vibrations</b>	
• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6: 5 Hz to 9 Hz: 3.5 mm; 9 Hz to 200 Hz: 9.8 m/s <sup>2</sup>
<b>Shock testing</b>	
• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms
<b>Operating systems</b>	
pre-installed operating system	No
without operating system	Yes
<b>Dimensions</b>	
Width	144 mm
Height	90 mm
Depth	53 mm

**More information**

Additional information is available on the Internet at:

<http://siemens.com/iot2000>

# PC-based Automation

Industrial IoT Gateway  
SIMATIC IOT2000

## SIMATIC IOT2000 Input/Output Module

### Overview

#### **IO shield for SIMATIC IOT2000 Industrial IoT Gateways**

The SIMATIC IOT2000 IO shield allows for direct connection of non-time-critical sensor data to the SIMATIC IOT2000 via digital and analog IOs.

#### Essential highlights:

- High degree of industrial functionality
- Arduino shield with 5x DI, 2x DQ, 2x AI
- Rapid installation since suitable cover and fixing accessories supplied
- Industrial design
- For use in standard industrial voltage ranges (e.g. 24 V with digital In)
- Tested environmental conditions as for IOT2040 (e.g. for 0 ... 50° C)
- Approvals as for IOT2040 (CE UL)
- Developed and tested for 24/7 operation
- Extremely versatile application creation
- Module addressing via GPIOs allows wide choice of programming language and development environment.

#### Target applications:

- Direct connection of
  - Sensors
  - Actuators (especially lamps, horns)
- Distribution of data to higher-level units, such as clouds

### Ordering data

### Article No.

#### **SIMATIC IOT2000 Input/Output Module**

5x DI, 2x AI, 2x DO, Arduino shield for SIMATIC IOT2020 and IOT2040

### Technical specifications

Article number	<b>6ES7647-0KA01-0AA2</b> SIMATIC IOT2000 input/output module
<b>General information</b>	
Product type designation	5x DI, 2x AI, 2x DO
<b>Installation type/mounting</b>	
Mounting	On Arduino interface
Design	Plug-in card
<b>Supply voltage</b>	
Type of supply voltage	24 V DC
<b>Digital inputs</b>	
Number of digital inputs	5
<b>Input voltage</b>	
• Type of input voltage	DC
• for signal "0"	< 5 V DC
• for signal "1"	> 12 V DC
<b>Input current</b>	
• for signal "0", max. (permissible quiescent current)	0.9 mA
• for signal "1", typ.	2.1 mA
<b>Input delay (for rated value of input voltage)</b>	
<b>for standard inputs</b>	
- at "0" to "1", max.	1.5 ms
- at "1" to "0", max.	1.5 ms
<b>Digital outputs</b>	
Type of digital output	transistor
Number of digital outputs	2
Short-circuit protection	Yes
<b>Output voltage</b>	
• Type of output voltage	DC
• permissible voltage at output, min.	0 V
• permissible voltage at output, max.	28.8 V
<b>Output current</b>	
• for signal "1" rated value	0.3 A
<b>Parallel switching of two outputs</b>	
• for uprating	No
<b>Switching frequency</b>	
• with resistive load, max.	10 Hz
• with inductive load, max.	0.5 Hz

**Technical specifications**

Article number	<b>6ES7647-0KA01-0AA2</b> SIMATIC IoT2000 input/output module	Article number	<b>6ES7647-0KA01-0AA2</b> SIMATIC IoT2000 input/output module
<b>Analog inputs</b>			
Number of analog inputs	2	Interference immunity against voltage surge	
<b>Input ranges</b>			
• Voltage	Yes; 0 to 10V	• asymmetric interference	±2 kV acc. to IEC 61000-4-5, surge asymmetric
• Current	Yes; 0 to 20 mA	• symmetric interference	±1 kV acc. to IEC 61000-4-5, surge symmetric
• Thermocouple	No	<b>Interference immunity to magnetic fields</b>	
• Resistance thermometer	No	• Interference immunity to magnetic fields at 50 Hz	100 A/m; to IEC 61000-4-8
• Resistance	No	<b>Emission of conducted and non-conducted interference</b>	
<b>Input ranges (rated values), voltages</b>		• Interference emission via line/AC current cables	EN 61000-6-4:2007 +A1:2011
• 0 to +10 V	Yes	<b>Degree and class of protection</b>	
<b>Input ranges (rated values), currents</b>		IP (at the front)	n.a.
• 0 to 20 mA	Yes	<b>Standards, approvals, certificates</b>	
<b>Analog value generation for the inputs</b>		CE mark	Yes
<b>Integration and conversion time/ resolution per channel</b>		UL approval	Yes
• Resolution with overrange (bit including sign), max.	9 bit	cULus	Yes
<b>Integrated Functions</b>		KC approval	Yes; For use inside SIMATIC IoT2040
<b>Monitoring functions</b>		EMC	CE, EN 61000-6-4:2007 +A1:2011, EN 61000-6-2:2005, EN 61000-6-3:2007 +A1:2011, EN 61000-6-1:2007
• Temperature monitoring	No	<b>Ambient conditions</b>	
• Watchdog	No	<b>Ambient temperature during operation</b>	
• Status LEDs	No	• Ambient temperature during operation	0 °C to 50 °C
• Fan	No	<b>Relative humidity</b>	
<b>EMC</b>		• Relative humidity	Tested according to IEC 60068-2-78, IEC 60068-2-30: Operation: 5 % to 85 % at 30 °C (no condensation), storage / transport: 5 % to 95 % at 25 / 55 °C (no condensation)
<b>Interference immunity against discharge of static electricity</b>		<b>Vibrations</b>	
• Interference immunity against discharge of static electricity	±4 kV contact discharge acc. to IEC 61000-4-2; ±8 kV air discharge acc. to IEC 61000-4-2	• Vibration resistance during operation acc. to IEC 60068-2-6	Tested according to IEC 60068-2-6: 5 Hz to 9 Hz: 3.5 mm; 9 Hz to 200 Hz: 9.8 m/s <sup>2</sup>
<b>Interference immunity against high-frequency electromagnetic fields</b>		<b>Shock testing</b>	
• Interference immunity against high frequency radiation	10 V/m for 80 - 1 000 MHz, 80% AM acc. to IEC 61000-4-3; 3 V/m for 1.4 - 2 GHz, 80% AM acc. to IEC 61000-4-3; 1 V/m for 2 - 2.7 GHz, 80% AM acc. to IEC 61000-4-3; 10 V for 150 kHz - 80 MHz, 80% AM acc. to IEC 61000-4-6	• Shock load during operation	Tested according to IEC 60068-2-27: 150 m/s <sup>2</sup> , 11 ms
<b>Interference immunity to cable-borne interference</b>		<b>Operating systems</b>	
• Interference immunity on supply cables	±2 kV acc. to IEC 61000-4-4, burst; ±1 kV acc. to IEC 61000-4-5, surge symmetric; ±2 kV acc. to IEC 61000-4-5, surge asymmetric	without operating system	Yes
• Interference immunity on signal cables >30m	±2 kV acc. to IEC 61000-4-5, surge, length > 30 m	<b>Dimensions</b>	
• Interference immunity on signal cables < 30m	±2 kV in accordance with IEC 61000-4-4, burst, length > 30 m	Width	75 mm
		Height	57 mm
		Depth	32 mm

**More information**Technical support:

Technical and application support for the SIMATIC IOT2000 Input/Output Module is exclusively via the moderated Siemens Industry Online Forum:  
IOT2000 Forum link:

<https://support.industry.siemens.com/tf/ww/en/search/mainsearch/?text=IOT2000>

Here you can find Getting Started, FAQs etc.

Application examples are continually being added.

# PC-based Automation

Industrial IoT Gateway  
SIMATIC IOT2000

## SIMATIC IOT2000 Input Module Sink/Source

### Overview



### **IO shield for SIMATIC IOT2000 industrial IoT gateway**

The SIMATIC IOT2000 IO shield allows for direct connection of non-time-critical sensor data to the SIMATIC IOT2000 via its digital IOs.

#### Essential highlights:

- High degree of industrial functionality
- Arduino shield with 10x DI
- Each input can be used as a sink or source, no configuration necessary
- Rapid installation since suitable cover and fixing accessories supplied
- Industrial design
- For use with standard industrial voltage ranges (e.g. 24 V with digital In)
- Tested environmental conditions as for IOT2040 (e.g. for 0 ... 50° C)
- Approvals as for IOT2040 (CE UL)
- Developed and tested for 24/7 operation
- Extremely versatile application creation
- Module addressing via GPIOs allows wide choice of programming languages and development environments.

#### Target applications:

- Direct connection of sensors
- Distribution of data to higher-level units, such as clouds

### Ordering data

#### Article No.

##### **SIMATIC IOT2000 Input Module Sink/Source**

10x DI, Arduino shield for SIMATIC  
IOT2020 and IOT2040

### Technical specifications

Article number	<b>6ES7647-0KA02-0AA2</b> SIMATIC IOT2000 input module sink/source
<b>General information</b>	
Product type designation	10x DI
<b>Installation type/mounting</b>	
Mounting	On Arduino interface
Design	Plug-in card
<b>Supply voltage</b>	
Type of supply voltage	24 V
<b>Digital inputs</b>	
Number of digital inputs	10
<b>Input voltage</b>	
• for signal "0"	< 5 V DC
• for signal "1"	> 12 V DC
<b>Input current</b>	
• for signal "0", max. (permissible quiescent current)	0.9 mA
• for signal "1", typ.	2.1 mA
<b>Input delay (for rated value of input voltage)</b>	
<b>for standard inputs</b>	
- at "0" to "1", max.	1.5 ms
- at "1" to "0", max.	1.5 ms
<b>Digital outputs</b>	
Type of digital output	without
<b>EMC</b>	
<b>Interference immunity against discharge of static electricity</b>	
• Interference immunity against discharge of static electricity	± 6 KV contact discharge at the front in accordance with IEC 61000-4-2; ± 4 KV, housing contact discharge at the back in accordance with IEC 61000-4-2; ± 8 KV air discharge in accordance with IEC 61000-4-2
<b>Interference immunity to cable-borne interference</b>	
• Interference immunity on signal cables < 30m	±1 KV acc. to IEC 61000-4-4, Burst
<b>Emission of conducted and non-conducted interference</b>	
• Interference emission via line/ AC current cables	10 V/m for 80 - 2 000 MHz, 80 % AM acc. to IEC 61000-4-3; 3 V/m for 2 - 2.7 GHz, 80 % AM acc. to IEC 61000-4-3
<b>Compliance with line harmonic distortion limits</b>	
• Compliance with line harmonic distortion acc. to IEC 61000-3-2, IEC 61000-3-3	No

**Technical specifications**

Article number	<b>6ES7647-0KA02-0AA2</b> SIMATIC IoT2000 input module sink/source
<b>Degree and class of protection</b>	
IP (at the front)	20
<b>Standards, approvals, certificates</b>	
CE mark	Yes
UL approval	Yes
cULus	Yes
RCM (formerly C-TICK)	Yes
FCC	Yes
EMC	CE (industry)
<b>Mechanics/material</b>	
Enclosure material (front)	plastic
• Plastic	Yes
• Aluminum	No
• Stainless steel	No
• Glass	No
<b>Dimensions</b>	
Width	75 mm
Height	57 mm
Depth	32 mm

**More information****Technical support:**

Technical and application support for the SIMATIC IOT2000 Input/Output Module is exclusively via the moderated Siemens Industry Online Forum:  
IOT2000 Forum link:

<https://support.industry.siemens.com/tf/ww/en/search/mainsearch/?text=IOT2000>

You can find Getting Started, FAQs etc. here.

Application examples are continually being added.

## PC-based Automation

### Software Controllers

#### SIMATIC S7-1500 Software Controllers

##### Overview



- SIMATIC S7-1500 Software Controller for implementing control tasks with SIMATIC IPC
- Very high availability thanks to innovative real-time system
- Available as standard and fail-safe version
- Improved know-how and copy protection
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes, support for external encoders, output cams / output cam tracks and measuring inputs
- Integrated web server for diagnostics with the option of creating user-defined web pages
- SIMATIC ODK 1500S for the development and integration of control functions under Windows with the high-level languages C/C++, VB and C#
- SIMATIC Target 1500™ for the development of control functions using MATLAB Simulink®

**Overview**

- Software Controller for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use as a PC-based PLC in machines with distributed I/O via PROFINET and PROFIBUS
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET and PROFIBUS connections
- Optimized for PC-based control tasks with the IPC427E Microbox PC and the IPC477E Panel PC
- Can also be used on the IPC227E, IPC627D, IPC627E and IPC827D Box PCs, the IPC277E, IPC677D and IPC677E Panel PCs, and the IPC647D, IPC647E, IPC847D and IPC847E Rack PCs
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1507S (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as runtime option for easy connection of the software controller to Windows applications or non-Siemens devices/systems

**Ordering data****Article No.****SIMATIC S7-1500 Software Controller CPU 1507S**

For implementing the function of an S7-1500 Controller on SIMATIC IPCs

**Target system:**

Optimized for PC-based control tasks with IPC427E Microbox PC and IPC477E Panel PC; Can also be used with IPC277E Panel PC, IPC677D Panel PC, IPC677E Panel PC, IPC227E Box PC, IPC627D Box PC, IPC627E Box PC, IPC827D Box PC, IPC647D Rack PC, IPC647E Rack PC, IPC847D Rack PC, IPC847E Rack PC

**Requirement:**

Windows 7 / Windows Embedded Standard 7 / Windows 10 Enterprise; for supported Windows 10 version, see technical specifications

**Type of delivery:**

English, German, Chinese, Italian, French, Spanish

- Single license for one installation Software and documentation on DVD, license key on USB flash drive
- Single license for one installation; Software download including license key<sup>1)</sup>

**6ES7672-7AC01-0YAO**

**6ES7672-7AC01-0YG0**

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

## PC-based Automation

Software Controllers  
Standard CPUs

### CPU 1508S

#### Overview



- Software Controller for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use with control applications with increased requirements for program and data memory
- For use as a PC-based PLC in machines with distributed I/O via PROFINET and PROFIBUS
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET and PROFIBUS connections
- Optimized for PC-based control tasks with the IPC627E Box PC, the IPC677E Panel PC, and the IPC647E and IPC847E Rack PCs
- Can also be used on the IPC427E, IPC627D and IPC827D Box PCs, the IPC477E and IPC677D Panel PCs, and the IPC647D and IPC847D Rack PCs
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1508S (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- OPC UA server (data access) and client as runtime option for easy connection of the software controller to Windows applications or non-Siemens devices/systems

#### Ordering data

#### Article No.

##### SIMATIC S7-1500 Software Controller CPU 1508S

For implementing the function of an S7-1500 Controller on SIMATIC IPCs

##### Target system:

Optimized for PC-based control tasks with  
Panel PC IPC677E,  
Box PC IPC627E,  
Rack PC IPC647E,  
Rack PC IPC847E;  
can also be used with  
Panel PC IPC477E,  
Panel PC IPC677D,  
Box PC IPC427E,  
Box PC IPC627D,  
Box PC IPC827D,  
Rack PC IPC647D,  
Rack PC IPC847D;

##### Requirement:

Windows 7 / Windows Embedded Standard 7 / Windows 10 (64-bit)

##### Type of delivery:

en, de, fr, it, es, zh

- Single license for one installation  
Software and documentation on DVD, license key on USB flash drive
- Single license for one installation;  
Software download including license key<sup>1)</sup>

**6ES7672-8AC01-0YA0**

**6ES7672-8AC01-0YG0**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

**Overview**

- Software Controller for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use as a PC-based PLC in machines with distributed I/O via PROFINET and PROFIBUS
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET and PROFIBUS connections
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Supports PROFIsafe in distributed configurations
- Optimized for PC-based control tasks with the IPC427E Microbox PC and the IPC477E Panel PC (requires configuration with NVRAM)
- Can also be used on IPC227E, IPC627D, IPC627E and IPC827D Box PCs, IPC277E, IPC677D and IPC677E Panel PCs, and IPC647E and IPC847E Rack PCs (configurations with NVRAM are required for the IPC227E, IPC427E, IPC627D, IPC827D, IPC277E, IPC477E and IPC677D PCs)
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1507S F (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as runtime option for easy connection of the software controller to Windows applications or non-Siemens devices/systems

**Ordering data****Article No.**

**For supported Windows 10 versions, see  
Technical specifications of the  
SIMATIC S7-1500 Software  
Controller CPU 1507S F**

For implementing the function of a fail-safe S7-1500 Controller on SIMATIC IPCs

**Target system:**

Optimized for PC-based control tasks with IPC427E Microbox PC and IPC477E Panel PC; Can also be used with IPC227E Panel PC, IPC627D Panel PC, IPC677E Panel PC, IPC227E Box PC, IPC627D Box PC, IPC627E Box PC, IPC827D Box PC, IPC647E Rack PC, IPC847E Rack PC

**Requirement:**

Windows 7 / Windows Embedded Standard 7 / Windows 10 Enterprise LTSB with MBR boot;

For supported Windows 10 versions, see Technical specifications

For the IPC227E, IPC427E, IPC627D, IPC827D, IPC277E, IPC477E and IPC677D, IPC configurations with NVRAM are required)

**Type of delivery:**

English, German, Chinese, Italian, French, Spanish

- Single license for one installation Software and documentation on DVD, license key on USB flash drive
- Single license for one installation; Software download including license key<sup>1)</sup>

**6ES7672-7FC01-0YA0**

**6ES7672-7FC01-0YG0**

<sup>1)</sup> For up-to-date information and download availability, see: <http://www.siemens.com/tia-online-software-delivery>

## PC-based Automation

Software Controllers  
Fail-safe CPUs

### CPU 1508S F

#### Overview



- Software Controller for implementing the functions of a SIMATIC S7-1500 Controller on a SIMATIC IPC
- For use with control applications with increased requirements for program and data memory
- For use as a PC-based PLC in machines with distributed I/O via PROFINET and PROFIBUS
- For utilizing IPC onboard interfaces and PC plug-in cards for PROFINET and PROFIBUS connections
- Can be used for safety functions up to SIL 3 according to IEC 61508 and up to PL e according to ISO 13849
- Supports PROFIsafe in distributed configurations
- Optimized for PC-based control tasks with the IPC627E Box PC, the IPC677E Panel PC, and the IPC647E and IPC847E Rack PCs
- Can also be used on the IPC427E, IPC627D and IPC827D Box PCs and the IPC477E and IPC677D Panel PCs (configuration with NVRAM required)
- Execution of functions and algorithms implemented with high-level languages under Windows (C/C++, C#, VB) and locally in the CPU 1508S F (C/C++)
- Integrated Motion Control functionalities for controlling speed-controlled and positioning axes as well as synchronous operation, support for external encoders, precise position gearing between axes, output cams/cam tracks and probes
- Integrated web server for diagnostics with the option of creating user-defined web pages
- OPC UA server (data access) and client as runtime option for easy connection of the software controller to Windows applications or non-Siemens devices/systems

#### Ordering data

#### Article No.

##### SIMATIC S7-1500 Software Controller CPU 1508S F

For implementing the function of a fail-safe S7-1500 Controller on SIMATIC IPCs (IPC configuration with NVRAM required)

##### Target system:

Optimized for PC-based control tasks with  
IPC677E Panel PC,  
IPC627E Box PC,  
IPC647E Rack PC,  
IPC847E Rack PC;  
Can also be used with  
IPC477E Panel PC,  
IPC677D Panel PC,  
IPC427E Box PC,  
IPC627D Box PC,  
IPC827D Box PC;

##### Requirement:

Windows 7 / Windows Embedded Standard 7 / Windows 10 (64-bit);  
for supported Windows 10 versions,  
see technical specifications.  
On IPC477E, IPC677D, IPC427E,  
IPC627D and IPC827D,  
configurations with NVRAM are  
required

##### Type of delivery:

English, German, Chinese, Italian,  
French, Spanish
 

- Single license for one installation  
Software and documentation on  
DVD, license key on USB flash  
drive
- Single license for one installation;  
Software download including  
license key <sup>1)</sup>

**6ES7672-8FC01-0YA0**

**6ES7672-8FC01-0YG0**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

**Overview**

- For developing dynamically loadable function libraries for the S7-1500 Software Controllers and S7-1500 Advanced Controllers CPU 1518 MFP and PLCSIM Advanced:
  - Implementation of function libraries for the SIMATIC S7-1500 Software Controller that are executed under Windows with the high-level languages C/C++, C# and VB
  - Implementation of function libraries for the PLCSIM Advanced that are executed under Windows with the high-level languages C/C++
  - Implementation of function libraries that are executed in real-time in the context of the user program of the CPU with the high-level language C++
  - Implementation of applications for the C++ runtime of the CPU 1518 MFP
- "Eclipse" development environment for real-time function libraries in the CPU user program and applications for the C++ runtime in the scope of delivery.
- Development of library functions under Windows with MS Visual Studio (optional)
- Easy introduction to development by using basic projects via templates
- Automatic creation of function blocks for calling the library functions
- Simple integration of the function blocks into STEP 7 by importing.
- Simple use of the library functions in the PLC without specific high-level language know-how.

**Licensing**

- ODK 1500S is supplied with a floating license. The floating license allows installation of the software on any number of computers. The number of licenses acquired determines the number of computers on which the software can be used simultaneously.
- An upgrade to version 2.5 is offered for users of the previous versions 1.0 and 2.0.
- The integrated development environment Eclipse, required for developing real-time libraries, is included in the scope of supply of ODK 1500S as well as templates for Visual Studio.
- SIMATIC ODK 1500S is available as a standalone product or in a bundle with SIMATIC Target 1500ST™ for Simulink®.

You can find more information on the Software Update Service, license types, online software delivery and handling your SW licenses with the Automation License Manager here:

<http://www.siemens.com/simatic-licenses>

**Ordering data****Article No.****SIMATIC ODK 1500S**

- Open Development Kit V2.0 for support in developing high-level language applications for SIMATIC S7-1500 Software Controllers V2.0 or V2.1; single license; supplied on DVD
- Open Development Kit V2.0 for support in developing high-level language applications for SIMATIC S7-1500 Software Controllers V2.0 or V2.1; single license; software download<sup>1)</sup> E-mail address required for delivery
- Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; supplied on DVD, license key (floating license) on USB flash drive
- Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; software download including license key (floating license)<sup>1)</sup> E-mail address required for delivery
- Open Development Kit for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; upgrade to V2.5 for existing installations as from V1.0; software download including license key (floating license)<sup>1)</sup> E-mail address required for delivery

**6ES7806-2CD02-0YA0****6ES7806-2CD02-0YG0****6ES7806-2CD03-0YA0****6ES7806-2CD03-0YG0****6ES7806-2CD03-0YK0**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

# PC-based Automation

## PC-based Controllers

### ET 200SP Open Controllers

#### Overview

##### Compact and powerful

The ET 200SP Open Controller, CPU 1515SP PC (F/T/TF), is a rugged, compact control system that combines the functionality of an ET 200SP controller with a PC-based platform. It can be used to control special and series machines, or plants in a distributed configuration. As well as the standard and fail-safe variants, technology and technology fail-safe variants are also available.

The ET 200SP I/O modules can be inserted centrally and communicate via the integrated backplane bus. S7 communication can be established and distributed I/Os can be connected via the PROFINET adapter of the ET 200SP system.

The PROFIBUS CM DP module provides simple expandability for PROFIBUS communication. The CPU 1515SP PC (Failsafe) + HMI with pre-installed WinCC Runtime Advanced is offered for additional HMI functionality.

The CPU 1515SP PC is used wherever special automation functions are to be integrated with support from SIMATIC ODK 1500S via the programming language C or C++, or if a close connection of independent applications is required in Windows for the software controller.

Characteristics	CPU 1515SP PC (F)	CPU 1515SP PC2 (F/T/TF)
DDR3 DRAM	4 GB	8 GB
CFast card	30 GB	30 GB
Operating system	WES 7E 32-bit / WES 7P 64-bit	Windows 10 Enterprise LTSB 2016
WinCC RT Advanced (optional)	Yes	Yes (not for T or TF)
Work memory for program, integrated	1 MB (1.5 MB for F)	
Work memory for data, integrated	5 MB	
Load memory	320 MB	
<b>Command execution times</b>		
• Bit operations	10 ns	
• Word operations	12 ns	
• Fixed-point operations	16 ns	
• Floating-point operations	64 ns	
<b>Bit memories, timers, counters</b>		
S7 counters/timers	2 048	
IEC counters	Any number (limited only by work memory)	
IEC timers	Any number (limited only by work memory)	
Bit memories	16 KB	
<b>I/O address range</b>		
Inputs	32 KB (all inputs stored in process image)	
Outputs	32 KB (all inputs stored in process image)	
<b>Motion</b>		
Motion Control resources	2 400	
<b>Communication</b>		
PtP	Yes (via CM)	
PROFINET IO	1 x PN IO IRT (BusAdapter not included in scope of delivery)	
PROFIBUS DP	Yes (via CM DP)	
Web server	Yes	
GB-Ethernet	Yes, 1 x via GB-Ethernet RJ45 interface	

#### ***Further information and downloads***

##### Manuals

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support.

<https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

##### General information

<http://www.siemens.com/open-controller>

##### SIMATIC Selection Tool

<http://www.siemens.com/tia-selection-tool>

**Overview**

- Turnkey all-in-one solution with pre-installed SIMATIC S7-1500 Software Controller Standard control and optional pre-installed WinCC Runtime Advanced
- Central expansion via ET 200SP modules (station width up to 1 m or up to 64 modules)
- SIMATIC Hypervisor: for separating Windows systems from control functions
- Dual-core processor for optimal use of the Hypervisor
- Swappable flash memory (CFast card) for operating system, runtime and project data
- Integrated DVI-I graphics connection; 3x USB 2.0 connection
- 2 PROFINET interfaces: X1 via PN-IO bus adapter (RJ45 or FC) with 2 ports; X2: GB Ethernet interface (RJ45)
- PROFINET IRT
- Open Ethernet communication (TCP/IP, UDP, ISO-on-TCP)
- Web server functionality for information, status, diagnostics and user-defined web pages
- PROFIBUS DP communication optionally via CM DP module as DP master
- Configuration control (option handling)
- Improved know-how and copy protection; Security Integrated
- Integrated system diagnostics
- Integrated motion control functionalities for controlling speed-controlled and positioning axes with support for external encoders
- Trace function
- Especially suitable for high data volumes and user-specific, open applications
- Integration of control functions and applications implemented in C/C++ (using SIMATIC ODK-1500S Open Development Kit)

**Ordering data****Article No.****SIMATIC ET 200SP Open Controller CPU 1515SP PC (+ HMI)**

ET 200SP CPU with Windows Embedded Standard 7 and pre-installed SIMATIC S7-1500 Software Controller (with WinCC RT Advanced as option);

**Type of delivery:**  
German, English, Chinese, Italian, French, Spanish

**Windows Embedded Standard 7 E 32-bit, 8 GB CFast card**

- CPU 1515SP PC (4 GB RAM)

6ES7677-2AA31-0EB0

**Windows Embedded Standard 7 P 64-bit (multi-touch), 16 GB CFast card**

- CPU 1515SP PC (4 GB RAM)
- CPU 1515SP PC + HMI 128PT (4 GB RAM)
- CPU 1515SP PC + HMI 512PT (4 GB RAM)
- CPU 1515SP PC + HMI 2048PT (4 GB RAM)

6ES7677-2AA41-0FB0

6ES7677-2AA41-0FK0

6ES7677-2AA41-0FL0

6ES7677-2AA41-0FM0

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

**Further information and downloads****Manuals**

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support:  
<https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

**General information**

<http://www.siemens.com/open-controller>

**SIMATIC Selection Tool**

<http://www.siemens.com/tia-selection-tool>

## PC-based Automation

PC-based Controllers

ET 200SP Open Controllers

### Standard CPUs > CPU 1515SP PC2

#### Overview



ET 200SP Open Controller, CPU 1515SP PC2, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the ET 200SP system, the S7-1500 Controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of an ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

#### Ordering data

#### Article No.

##### **SIMATIC ET 200SP Open Controller CPU 1515SP PC2 (+ HMI)**

ET 200SP central module with Windows 10 IoT Enterprise 64-bit and pre-installed SIMATIC S7-1500 Software Controller (optionally with WinCC RT Advanced); 8 GB RAM, 128 GB CFast card

##### **Type of delivery:**

German, English, Chinese, Italian, French, Spanish

##### **• CPU 1515SP PC2**

With pre-installed WinCC RT Advanced

##### **• CPU 1515SP PC2 + HMI 128PT**

##### **• CPU 1515SP PC2 + HMI 512PT**

##### **• CPU 1515SP PC2 + HMI 2048PT**

Open Development Kit V2.5 for support in developing high-level language applications for SIMATIC S7-1500 Advanced Controllers; supplied on DVD, license key (floating license) on USB flash drive

**6ES7677-2DB42-0GB0**

**6ES7677-2DB42-0GK0**

**6ES7677-2DB42-0GL0**

**6ES7677-2DB42-0GM0**

**6ES7806-2CD03-0YA0**

<sup>1)</sup> For up-to-date information and download availability, see: <https://www.siemens.com/tia-online-software-delivery>

#### **Further information and downloads**

##### **Manuals**

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support: <https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

##### **General information**

<http://www.siemens.com/open-controller>

##### **SIMATIC Selection Tool**

<http://www.siemens.com/tia-selection-tool>

**Overview**

- Turnkey all-in-one solution with pre-installed fail-safe SIMATIC S7-1500 Software Controller and optional pre-installed WinCC Runtime Advanced
- Fail-safe versions make it possible to control machines or plants in a fail-safe environment. This makes it possible to address applications which require an SIL3 (Safety Integrity Level) safety class according to IEC 61508 2nd Edition or a PL e (Performance Level) according to ISO 13849.
- Central expansion via ET 200SP modules (station width up to 1 m or up to 64 modules)
- SIMATIC Hypervisor: for separating Windows systems from control functions
- Dual-core processor for optimal use of the Hypervisor
- Swappable flash memory (CFast card) for operating system, runtime and project data
- Integrated DVI-I graphics connection; 3x USB 2.0 connection
- 2 PROFINET interfaces: X1 via PN-IO bus adapter (RJ45 or FC) with 2 ports; X2: GB Ethernet interface (RJ45)
- PROFINET IRT
- Open Ethernet communication (TCP/IP, UDP, ISO-on-TCP)
- Web server functionality for information, status, diagnostics and user-defined web pages
- PROFIBUS DP communication optionally via CM DP module as DP master
- Configuration control (option handling)
- Improved know-how and copy protection; Security Integrated
- Integrated system diagnostics
- Integrated motion control functionalities for controlling speed-controlled and positioning axes with support for external encoders
- Trace function
- Especially suitable for high data volumes and user-specific, open applications
- Integration of control functions and applications implemented in C/C++ (using SIMATIC ODK-1500S Open Development Kit)

**Ordering data****Article No.****SIMATIC ET 200SP Open Controller CPU 1515SP PC F (+ HMI)**

Fail-safe ET 200SP CPU with Windows Embedded Standard 7 and pre-installed fail-safe SIMATIC S7-1500 Software Controller (with WinCC RT Advanced option)

**Type of delivery:**  
German, English, Chinese, Italian, French, Spanish

**Windows Embedded Standard 7 E 32-bit, 8 GB CFast card**

- CPU 1515SP PC F (4 GB RAM)

6ES7677-2FA31-0EB0

**Windows Embedded Standard 7 P 64-bit (multi-touch), 16 GB CFast card**

- CPU 1515SP PC F (4 GB RAM)
- CPU 1515SP PC F + HMI 128PT (4 GB RAM)
- CPU 1515SP PC F + HMI 512PT (4 GB RAM)
- CPU 1515SP PC F + HMI 2048PT (4 GB RAM)

6ES7677-2FA41-0FB0

6ES7677-2FA41-0FK0

6ES7677-2FA41-0FL0

6ES7677-2FA41-0FM0

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

**More information****Further information and downloads****Manuals**

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support:  
<https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

**General information**

<http://www.siemens.com/open-controller>

**SIMATIC Selection Tool**

<http://www.siemens.com/tia-selection-tool>

## PC-based Automation

PC-based Controllers

ET 200SP Open Controllers

### Fail-safe CPUs > CPU 1515SP PC2 F

#### Overview



ET 200SP Open Controller, CPU 1515SP PC2 F, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the ET 200SP system, the S7-1500 Controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of an ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- Can be used up to safety class SIL3 (Safety Integrity Level) according to IEC 61508 2nd Edition or PL e (Performance Level) according to ISO 13849
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

#### Ordering data

#### Article No.

##### **SIMATIC ET 200SP Open Controller CPU 1515SP PC2 F (+ HMI)**

Fail-safe ET 200SP CPU with Windows 10 IoT Enterprise 64-bit and pre-installed SIMATIC S7-1500 Failsafe Software Controller (optionally with WinCC RT Advanced); 8 GB RAM, 128 GB CFast card;

##### **Type of delivery:**

German, English, Chinese, Italian, French, Spanish

- **CPU 1515SP PC2 F**

With pre-installed WinCC RT Advanced

- **CPU 1515SP PC2 F + HMI 128PT**

**6ES7677-2SB42-0GB0**

- **CPU 1515SP PC2 F + HMI 512PT**

**6ES7677-2SB42-0GK0**

- **CPU 1515SP PC2 F + HMI 2048PT**

**6ES7677-2SB42-0GL0**

**6ES7677-2SB42-0GM0**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

**Overview**

ET 200SP Open Controller CPU 1515SP PC2 T combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the ET 200SP system, the S7-1500 Controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of an ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

**Ordering data****Article No.****SIMATIC ET 200SP Open Controller CPU 1515SP PC2 T**

ET 200SP central module with Windows 10 IoT Enterprise 64-bit and pre-installed SIMATIC S7-1500 Software Controller (with WinCC RT Advanced option); 8 GB RAM, 128 GB CFast card; with extended Motion Control functionality

**Type of delivery:**

German, English, Chinese, Italian, French, Spanish

- **CPU 1515SP PC2 T**

With pre-installed WinCC RT Advanced

- **CPU 1515SP PC2 T + HMI 128PT**
- **CPU 1515SP PC2 T + HMI 512PT**
- **CPU 1515SP PC2 T + HMI 2048PT**

**6ES7677-2VB42-0GB0**

**6ES7677-2VB42-0GK0**

**6ES7677-2VB42-0GL0**

**6ES7677-2VB42-0GM0**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

**More information****Further information and downloads****Manuals**

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support:  
<https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

**General information**

<http://www.siemens.com/open-controller>

**SIMATIC Selection Tool**

<http://www.siemens.com/tia-selection-tool>

## PC-based Automation

PC-based Controllers

ET 200SP Open Controllers

Technology CPUs > CPU 1515SP PC2 TF

### Overview



ET 200SP Open Controller, CPU 1515SP PC2 TF, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the ET 200SP system, the S7-1500 Controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of a ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- Can be used up to safety class SIL3 (Safety Integrity Level) according to IEC 61508 2nd Edition or PL e (Performance Level) according to ISO 13849
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

### Ordering data

### Article No.

#### SIMATIC ET 200SP Open Controller CPU 1515SP PC2 TF

Fail-safe ET 200SP central module with Windows 10 IoT Enterprise 64-bit and pre-installed fail-safe SIMATIC S7-1500 Software Controller (with WinCC RT Advanced option); 8 GB RAM, 128 GB CFast card; with extended Motion Control functionality

#### Type of delivery:

German, English, Chinese, Italian, French, Spanish

#### • CPU 1515SP PC2 TF

With pre-installed WinCC RT Advanced

#### • CPU 1515SP PC2 TF + HMI 128PT

#### • CPU 1515SP PC2 TF + HMI 512PT

#### • CPU 1515SP PC2 TF + HMI 2048PT

**6ES7677-2WB42-0GB0**

**6ES7677-2WB42-0GK0**

**6ES7677-2WB42-0GL0**

**6ES7677-2WB42-0GM0**

<sup>1)</sup> For up-to-date information and download availability, see:  
<http://www.siemens.com/tia-online-software-delivery>

### More information

#### Further information and downloads

#### Manuals

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support:  
<https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

#### General information

<http://www.siemens.com/open-controller>

#### SIMATIC Selection Tool

<http://www.siemens.com/tia-selection-tool>

## Overview

### Compact and powerful

SIPLUS ET 200SP Open Controller, SIPLUS CPU 1515SP PC (F) is a rugged, compact control system that combines the functionality of a SIPLUS ET 200SP controller with a PC-based platform. It can be used to control special-purpose and series machines, or plants in a distributed configuration.

The SIPLUS ET 200SP I/O modules can be inserted centrally and communicate via the integrated backplane bus. S7 communication can be established and distributed I/Os can be connected via the PROFINET adapter of the SIPLUS ET 200SP system. The PROFIBUS CM DP module provides simple expandability for PROFIBUS communication.

The SIPLUS CPU 1515SP PC is used wherever special automation functions are to be integrated with support from SIMATIC ODK 1500S via the programming language C or C++, or if a close connection of independent applications is required in Windows for the software controller.

Characteristics	SIPLUS CPU 1515SP PC (F)	SIPLUS CPU 1515SP PC2 (F)
DDR3 DRAM	4 GB	8 GB
CFast card	30 GB	30 GB
Operating system	WES 7E 32-bit / WES 7P 64-bit	Windows 10 Enterprise LTSB 2016
Work memory for program, integrated	1 MB (1.5 MB for F)	
Work memory for data, integrated	5 MB	
Load memory	320 MB	
<b>Command runtimes</b>		
Bit operations	10 ns	
Word operations	12 ns	
Fixed-point operations	16 ns	
Floating-point operations	64 ns	
<b>Bit memories, timers, counters</b>		
S7 counters/timers	2048	
IEC counter	Arbitrary (only limited by the work memory)	
IEC timer	Arbitrary (only limited by the work memory)	
Bit memories	16 KB	
<b>I/O address range</b>		
Inputs	32 KB (all inputs are stored in the process image)	
Outputs	32 KB (all inputs are stored in the process image)	
<b>Motion</b>		
Motion Control resources	2400	
<b>Communication</b>		
PtP	Yes (via CM)	
PROFINET IO	1 x PN IO IRT (BusAdapter not included in scope of delivery)	
PROFIBUS DP	Yes (via CM DP)	
Web server	Yes	
GB Ethernet	Yes, 1 x via GB Ethernet RJ45 interface	

### Note

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

### Further information and downloads

#### Manuals

The manuals for the ET 200SP Open Controller can be downloaded online for free from SIMATIC Customer Support.

<https://support.industry.siemens.com/cs/ww/en/ps/13891/man>

#### General information

<http://www.siemens.com/open-controller>

#### SIMATIC Selection Tool

<http://www.siemens.com/tia-selection-tool>

## PC-based Automation

PC-based Controller

SIPLUS ET 200SP Open Controller

### SIPLUS CPU 1515SP PC2

#### Overview



#### Ordering data

#### Article No.

##### SIPLUS ET 200SP Open Controller CPU 1515SP PC2

(Extended temperature range and exposure to environmental substances)

SIPLUS ET 200SP CPU with Windows 10 IoT Enterprise 64-bit and pre-installed SIMATIC S7-1500 Software Controller; 8 GB RAM, 30 GB CFast card

Type of delivery:  
English, German, Chinese, Italian, French, Spanish

- **SIPLUS CPU 1515SP PC2**

Spare part, without CFast card

- **SIPLUS CPU 1515SP PC2**

**6AG1677-2DB42-2GB0**

**6AG1677-2DB40-2AA0**

SIPLUS ET 200SP Open Controller, SIPLUS CPU 1515SP PC2, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the SIPLUS ET 200SP system, the SIPLUS S7-1500 Controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of a SIPLUS ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

#### Note:

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were adopted from the respective standard products. SIPLUS extreme-specific information was added.

**Overview**

SIPLUS ET 200SP Open Controller, SIPLUS CPU 1515SP PC2 F, combines robustness and compact dimensions with the flexibility of centralized or decentralized communication in the highest industrial functionality. Furthermore, the CPU offers the entire value added of the SIPLUS ET 200SP system, the SIPLUS S7-1500 Controller family and the TIA world together.

- Rugged, compact control system
- Combines the functions of a SIPLUS ET 200SP controller with those of a PC-based platform
- Turnkey all-in-one controller
- Can be used up to safety class SIL3 (Safety Integrity Level) according to IEC 61508 2nd Edition or PL e (Performance Level) according to ISO 13849
- High performance automation tasks with the use of new generation Intel Quad Core processors
- Connects high-level language applications and processes high data volumes with support from SIMATIC ODK 1500S

**Note**

SIPLUS extreme products are based on SIMATIC standard products. The contents listed here were taken from the respective standard products. SIPLUS extreme-specific information was added.

**Ordering data****Article No.****SIPLUS ET 200SP Open Controller CPU 1515SP PC2 F**

(Extended temperature range and exposure to environmental substances)

Fail-safe ET 200SP CPU with Windows 10 IoT Enterprise 64-bit and pre-installed SIMATIC S7-1500 Failsafe Software Controller (with WinCC RT Advanced option); 8 GB RAM, 30 GB CFast card;

**Type of delivery:**  
 English, German, Chinese, Italian, French, Spanish

- **SIPLUS CPU 1515SP PC2 F**

**6AG1677-2SB42-2GB0**

## PC-based Automation

SITOP power supply  
Standard power supplies

### SITOP PSU6200

#### Overview



SITOP PSU6200 family

#### **High performance – Focused diagnostics – The all-round power supply for a wide variety of applications**

The SITOP PSU6200 product family is the new standard power supply for customers with high technical requirements regarding reliability, efficiency and integration. It is suitable for many fields of application, particularly in the industrial environment, such as series machine building. The SITOP PSU6200 represents the state-of-the-art and takes the SITOP product portfolio into new dimensions of efficiency.

The slim and excellent design of the PSU6200 family combined with the push-in terminals means easy installation and wiring. The power supply units in this product family are all-rounders featuring a long service life and absolute reliability.

The high efficiency of up to 96% guarantees resource-saving energy consumption.

To further increase the 24 V availability, the SITOP PSU6200 power supplies can be combined with **buffer**, **DC UPS**, **redundancy** and **selectivity modules**.

#### **Product highlights of the product line**

- Diagnostics monitor<sup>1)</sup>
  - LED display for DC OK, utilization (<30%, >30%, >60%, >90%) and remaining life time
- Diagnostics interface<sup>1)</sup>
  - Provision of important operating parameters (e.g. output current/voltage, overload, temperature status, undervoltage and overvoltage detection at output, operating hours, device settings, etc.)
- Switchable output characteristic<sup>1)</sup>
  - Constant current: Power supply not switched off immediately in the event of overload
  - Parallel operation: Uniform load sharing between power supply units connected in parallel for longer service life in every scenario
- Rugged input
  - Active PFC (Power Factor Correction)<sup>1)</sup> for lower reactive and inrush current and protection against mains pulses
  - Optimized protection of the input circuit
  - Wide-range input
  - DC capability of 1-phase devices
  - Continuous operation possible on 2 phases of 3-phase devices
- Coordinated product family
  - For 12 V, 24 V and 48 V applications of varying power requirements
  - 24 V versions for NEC Class 2 and Ex protection applications
- Narrow overall width
  - For direct side-by-side mounting without lateral clearance requirements
  - Visually attractive design (IF Design Award 2019)
- Push-in connection system
  - Easy, time-saving installation without need for tools
  - Additional minus terminal<sup>1)</sup> (grounding) for wiring according to PELV (Protected Extra Low Voltage)
- High overload capability<sup>2)</sup>
  - Power reserves in case of overload 150% extra power for 5 s/min
  - Continuous 120% rated current up to 45 °C ambient temperature

<sup>1)</sup> from 24 V/10 A and 12 V/12 A

<sup>2)</sup> from 24 V/5 A and 12 V/7 A

**Overview**

SITOP PSU6200 family 24 V, the power supplies starting at 10 A have extensive diagnostic options - see video.

Stabilized single-phase power supplies with wide-range input in six power levels with versions for NEC Class 2 requirements and explosion protection.

**Product highlights**

- Single-phase, 24 V DC/1.3 A, 2.5 A, 3.7 A, 5 A, 10 A and 20 A
- 1.3 A, 2.5 A and 3.7 A with 100 VA power limitation acc. to NEC Class 2
- PSU6200 24 V/5 A, 10 A and 20 A: The coating of the electronic modules also provides special protection from harmful environmental influences such as corrosive gases and salts, dust and abrasion particles, and humidity
- Enclosure
  - Attractive metal enclosure from 3.7 A, plastic enclosure with similar form and color up to 2.5 A
- Can be expanded with SITOP add-on and DC UPS modules
  - BUF1200 buffer module, SEL1200/1400 selectivity modules and RED1200 redundancy modules in the design of the SITOP PSU6200

**Ordering data****Article No.**

<b>SITOP PSU6200 1-phase, 24 V DC/1.3 A</b>	<b>6EP3331-7SB00-0AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/1.3 A	
<b>SITOP PSU6200 1-phase, 24 V DC/2.5 A</b>	<b>6EP3332-7SB00-0AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/2.5 A	
<b>SITOP PSU6200 1-phase, 24 V DC/3.7 A</b>	<b>6EP3333-7LB00-0AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/3.7 A	
<b>SITOP PSU6200 1-phase, 24 V DC/5 A</b>	<b>6EP3333-7SB00-0AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/5 A	
<b>SITOP PSU6200 1-phase, 24 V DC/10 A</b>	<b>6EP3334-7SB00-3AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/10 A	
<b>SITOP PSU6200 1-phase, 24 V DC/20 A</b>	<b>6EP3336-7SB00-3AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/20 A	
<b>SITOP PSU6200 Ex 1-phase, 24 V DC/5 A</b>	<b>6EP3333-7SC00-0AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/5 A	
<b>SITOP PSU6200 Ex 1-phase, 24 V DC/10 A</b>	<b>6EP3334-7SC00-3AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/10 A	
<b>SITOP PSU6200 Ex 1-phase, 24 V DC/20 A</b>	<b>6EP3336-7SC00-3AX0</b>
Stabilized power supply Input: 120-230 V AC/120-240 V DC Output: 24 V DC/20 A	

## PC-based Automation

SITOP power supply  
Standard power supplies

### 1-phase, 24 V DC

Ordering data	Article No.	Article No.
<i>Add-on modules</i>		
<b>SITOP buffer module BUF1200</b>  Buffer time 300 ms at 40 A Buffer time depends on load current	<b>6EP4231-7HB00-0AX0</b>	<b>SITOP SEL1200</b>  Selectivity module, 8-channel, switching Input: 24 V DC Output: 24 V DC/10 A per output Adjustable response threshold 2 ... 10 A
<b>SITOP RED1200 redundancy module</b>  Input/output: 12 V DC, 24 V, 48 V/20 A (maximum total current) Suitable for decoupling two SITOP power supplies with a maximum of 10 A output current each	<b>6EP4346-7RB00-0AX0</b>	<b>SITOP SEL1400</b>  Selectivity module, 4-channel, limiting Input: 24 V DC Output: 24 V DC/10 A per output Adjustable response threshold 2 ... 10 A
<b>SITOP RED1200 redundancy module</b>  Input/output: 12 V DC, 24 V, 48 V/40 A (maximum total current) Suitable for decoupling two SITOP power supplies with a maximum of 20 A output current each	<b>6EP4347-7RB00-0AX0</b>	<b>SITOP SEL1400</b>  Selectivity module, 8-channel, limiting Input: 24 V DC Output: 24 V DC/5 A per output Adjustable response threshold 1 ... 5 A
<b>SITOP SEL1200</b>  Selectivity module, 4-channel, switching Input: 24 V DC Output: 24 V DC/10 A per output Adjustable response threshold 2 ... 10 A	<b>6EP4437-7FB00-3CX0</b>	<b>SITOP SEL1400</b>  Selectivity module, 8-channel, limiting Input: 24 V DC Output: 24 V DC/10 A per output Adjustable response threshold 2 ... 10 A
<b>SITOP SEL1200</b>  Selectivity module, 8-channel, switching Input: 24 V DC Output: 24 V DC/5 A per output Adjustable response threshold 1 ... 5 A	<b>6EP4437-7FB00-3DX0</b>	<b>DC UPS modules</b>
		<b>SITOP DC UPS<sup>1)</sup></b>
		<i>Accessories</i>
		<b>SIMATIC ET 200SP labels</b>  160 reference identification labels, 10 sheets (160 labels)
		<b>6ES7193-6LF30-0AW0</b>

<sup>1)</sup> For more information, visit: <https://www.siemens.com/sitop-ups/mall>

### More information

Select the appropriate power supply quickly and easily with the TIA Selection Tool:

<http://www.siemens.com/tst>

**Overview**

SITOP PSU6200 3-phase 24 V family

Stabilized 3-phase power supplies with 400 to 500 V AC input in three power levels.

**Product highlights**

- 3-phase, 24 V DC/5 A, 10 A and 20 A
- Rugged input
  - Input voltage 323 ... 576 V AC, 450 ... 600 V DC
  - In the event of a phase failure, continuous operation with only 2 phases possible
- Enclosure
  - Attractive metal enclosure
- Can be expanded with SITOP add-on and DC UPS modules
  - BUF1200 buffer module, SEL1200/1400 selectivity modules and RED1200 redundancy modules in the design of the SITOP PSU6200

**Ordering data****Article No.**

<b>SITOP PSU6200 3-phase, 24 V DC/5 A</b> Stabilized power supply Input: 3 AC 400 - 500 V Output: 24 V DC/5 A	<b>6EP3433-7SB00-0AX0</b>
<b>SITOP PSU6200 3-phase, 24 V DC/10 A</b> Stabilized power supply Input: 3 AC 400 - 500 V Output: 24 V DC/10 A	<b>6EP3434-7SB00-3AX0</b>
<b>SITOP PSU6200 3-phase, 24 V DC/20 A</b> Stabilized power supply Input: 3 AC 400 - 500 V Output: 24 V DC/20 A	<b>6EP3436-7SB00-3AX0</b>
<b>Add-on modules</b>	
<b>SITOP buffer module BUF1200</b> Buffer time 300 ms at 40 A Buffer time depends on load current	<b>6EP4231-7HB00-0AX0</b>
<b>SITOP RED1200 redundancy module</b> Input/output: 12 V DC, 24 V, 48 V/20 A (maximum total current) Suitable for decoupling two SITOP power supplies with a maximum of 10 A output current each	<b>6EP4346-7RB00-0AX0</b>
<b>SITOP RED1200 redundancy module</b> Input/output: 12 V DC, 24 V, 48 V/40 A (maximum total current) Suitable for decoupling two SITOP power supplies with a maximum of 20 A output current each	<b>6EP4347-7RB00-0AX0</b>
<b>SITOP SEL1200</b> Selectivity module, 8-channel, switching Input: 24 V DC Output: 24 V DC/10 A per output Adjustable response threshold 2 ... 10 A	<b>6EP4438-7FB00-3DX0</b>
<b>SITOP SEL1400</b> Selectivity module, 8-channel, limiting Input: 24 V DC Output: 24 V DC/10 A per output Adjustable response threshold 2 ... 10 A	<b>6EP4438-7EB00-3DX0</b>
<b>DC UPS modules</b>	
<b>SITOP DC UPS<sup>1)</sup></b>	
<b>Accessories</b>	
<b>SIMATIC ET 200SP labels</b> 160 reference identification labels, 10 sheets (160 labels)	<b>6ES7193-6LF30-0AW0</b>

<sup>1)</sup> For more information, visit: <https://www.siemens.com/sitop-ups/mall>

**More information**

Select the appropriate power supply quickly and easily with the TIA Selection Tool:

<http://www.siemens.com/tst>

## PC-based Automation

SITOP power supply

SITOP DC UPS uninterruptible power supplies

### SITOP DC UPS uninterruptible power supplies

#### Overview

SITOP offers a comprehensive portfolio to protect against power failures with durations from a few seconds to several hours, ranging from buffer modules to system-integrated DC UPS units. Selection is based on the energy storage unit used, the associated ambient conditions, performance and functionality.

The selection matrix should help you to find the right 24 V buffering for your application:

SITOP modules for 24 V buffering	Buffer module <sup>1)</sup> <sup>2)</sup>	DC UPS with capacitors		DC UPS with rechargeable battery	
		SITOP DC UPS	SITOP UPS1100 battery modules	SITOP DC UPS	SITOP UPS1100 battery modules
<b>Energy storage units</b>					
24 V buffering up to	10 s	Minutes	Hours	Hours	Hours
Storage medium	Electrolytic capacitors	Double-layer capacitors	Lead-gel batteries	Lead-gel batteries, rechargeable lithium iron phosphate batteries	
Battery service life dependent on temperature. Specified time indicates the drop of the original capacity to 80% for lead-acid batteries.	0 ... +50 °C: > 8 years	0 ... +50 °C: > 8 years	+20 ... +40 °C: 4 ... 1 years (high-temperature rechargeable battery: +20 ... +60 °C; > 10 ... 1 years)	+20 ... +40 °C: 1 ... 4 years (high-temperature rechargeable battery: +20 ... +60 °C; > 1 ... 10 years) (LiFePO: +20° ... +40 °C: 15 ... 9 years)	
Operating temperature range of battery	0 ... +60 °C	0 ... +60 °C	-15° ... +50 °C (high-temperature rechargeable battery: -40° ... +60 °C)	-15° ... +60 °C (high-temperature rechargeable battery: -40° ... +60 °C)	
Ventilation required	-	-	•	• (Lead gel) - (Lithium iron phosphate)	
<b>UPS module/electronics</b>					
Max. rated output current	40 A	15 A	40 A	40 A	40 A
Max. dynamic overload current	40 A (200 ms)	25 A (200 ms)	56 A (80 ms)	120 A (30 ms) / 60 A (5 s/min)	
Interfaces	-	I/O, USB	I/O, serial, USB	I/O, USB, OPC UA, Ethernet/ PROFINET	
Information about operation and diagnostics via					
• Signaling contact	-	•	•	•	
• OPC servers	-	•	•	•	
• Web server	-	-	-	•	
• OPC UA server	-	-	-	•	
• S7 function blocks	-	-	-	•	
• Library for SIMATIC PCS 7	-	-	-	•	
• WinCC faceplate	-	-	-	•	
Shutdown of multiple PCs/PLCs	-	-	-	•	
Starting from the battery, without supply voltage (stand-alone mode)	-	-	-	•	
Engineering via					
• Software tool (PC)	-	•	•	•	
• TIA Portal	-	-	-	•	
• SIMATIC STEP 7	-	-	-	•	
• SIMATIC PCS 7	-	-	-	•	
Degree of protection	IP20	IP20	IP00	IP00	

<sup>1)</sup> for SITOP smart and SITOP modular power supplies

<sup>2)</sup> Technical specifications can be found under "Add-on modules/Buffer module" <https://www.siemens.com/sitop-buffering/mall>

#### More information

The TIA Selection Tool offers detailed selection guidance according to criteria such as the required buffer time, load current or peak current:

<http://www.siemens.com/tst>

**Overview**

SITOP 24 V power supplies can be expanded with a SITOP UPS500 uninterruptible DC power supply (DC UPS) for bridging short-term power failures in the order of minutes. In PC-based automation solutions, the highly capacitive double-layer capacitors of the SITOP UPS500 supply enough energy to safeguard operating and application data and close software applications in a defined manner. You can increase the buffer times using SITOP PSU501S expansion modules (up to 3).

**Ordering data****Article No.****SITOP UPS500S**

- DC UPS basic device 15 A
- With USB interface and 2.5 kWs
  - With USB interface and 5 kWs

**6EP1933-2EC41**  
**6EP1933-2EC51**
**SITOP UPS501S**

- Expansion module 5 kWs for UPS500S

**6EP1935-5PG01**
**Accessories****Unit labeling plate**
**3RT2900-1SB20**
**More information**

The TIA Selection Tool offers detailed selection guidance according to criteria such as the required buffer time, load current or peak current:

<http://www.siemens.com/tst>

## PC-based Automation

SITOP power supply

DC UPS with battery modules

### SITOP UPS1600 DC UPS modules

#### Overview



#### Ordering data

#### Article No.

##### SITOP UPS1600 24 V/ 10 A

- With USB interface
- With PROFINET/Ethernet: two RJ45 sockets (2 port switch)

6EP4134-3AB00-0AY0

6EP4134-3AB00-1AY0

6EP4134-3AB00-2AY0

##### SITOP UPS1600, 24 V/ 20 A

- With USB interface
- With PROFINET/Ethernet: two RJ45 sockets (2 port switch)

6EP4136-3AB00-0AY0

6EP4136-3AB00-1AY0

6EP4136-3AB00-2AY0

##### SITOP UPS1600 24 V/ 40 A

- With USB interface
- With PROFINET/Ethernet: two RJ45 sockets (2 port switch)

6EP4137-3AB00-0AY0

6EP4137-3AB00-1AY0

6EP4137-3AB00-2AY0

#### Accessories

##### Unit labeling plate

3RT2900-1SB20

By combining one SITOP UPS1600 DC UPS module with at least one BAT1600 battery module and a SITOP power supply unit, longer power failures can be bridged without any interruption whatsoever. The intelligent battery management automatically detects the BAT1600 energy storage unit, and ensures optimized temperature-specific charging and continuous monitoring. The compact DC UPS modules have overload capability, to enable the industrial PC inrush current, for example. In stand-alone mode, they support starting from the battery.

The DC UPS communicates openly over a USB or Ethernet/PROFINET. It is easily integrated into the PC or PLC environment over the two Ethernet/PROFINET ports.

Total integration in TIA provides user-friendly engineering in the TIA Portal and is supported with ready-to-use function blocks for S7 user programs and WinCC faceplates for fast visualization.

SITOP Manager also enables simple monitoring and configuration in PC systems, e.g. shutting down multiple PCs according to the master-slave principle.

The UPS1600 modules with Ethernet/PROFINET ports have an OPC UA server, with which the DC UPS can communicate with both PCs and PLCs, even from different manufacturers, thanks to the open communication standard. Parameter assignment and the diagnostics of the uninterruptible power supply is possible via the open interface.

The integrated web server supports remote monitoring of the DC UPS.

**SITOP UPS1100 battery modules****Overview**

Maintenance-free SITOP UPS1100 battery modules with 1.2 Ah up to 12 Ah and various types of energy storage (lead, pure lead, lithium iron phosphate = LiFePo) for SITOP UPS1600 DC UPS modules. The intelligent UPS1600 battery management charges the UPS1100 with the optimal temperature-controlled charging characteristics and monitors the status (operating data and diagnostics information) of the connected battery modules via the energy storage link. For longer buffer times, up to six battery modules can be connected in parallel. These can be mounted onto a DIN rail or directly to the wall.

**Ordering data****Article No.**

<b>SITOP UPS1100 battery module 1.2 Ah</b>  With maintenance-free, sealed lead-acid batteries for DC UPS module SITOP UPS1600, 10 A	<b>6EP4131-0GB00-0AY0</b>
<b>SITOP UPS1100 battery module 3.2 Ah</b>  With maintenance-free, sealed lead-acid batteries for DC UPS module SITOP UPS1600, 10 A and 20 A	<b>6EP4133-0GB00-0AY0</b>
<b>SITOP UPS1100 battery module 5 Ah, LiFePo</b>  With maintenance-free, sealed lithium iron phosphate batteries for DC UPS module SITOP UPS1600, 10 A and 20 A	<b>6EP4133-0JB00-0AY0</b>
<b>SITOP UPS1100 battery module 7 Ah</b>  With maintenance-free, sealed lead-acid batteries for DC UPS module SITOP UPS1600, 10 A, 20 A and 40 A	<b>6EP4134-0GB00-0AY0</b>
<b>SITOP UPS1100 battery module 12 Ah</b>  With maintenance-free, sealed lead-acid batteries for DC UPS module SITOP UPS1600, 20 A and 40 A	<b>6EP4135-0GB00-0AY0</b>
<b>SITOP UPS1100 battery module 2.5 Ah, high temperature</b>  With maintenance-free, sealed lead-acid batteries for DC UPS module SITOP UPS1600, 10 A and 20 A	<b>6EP4132-0GB00-0AY0</b>


**Accessories****Unit labeling plate****3RT2900-1SB20**

## PC-based Automation

Communication for PC-based systems  
Industrial Ethernet

### CP 1604

#### Overview

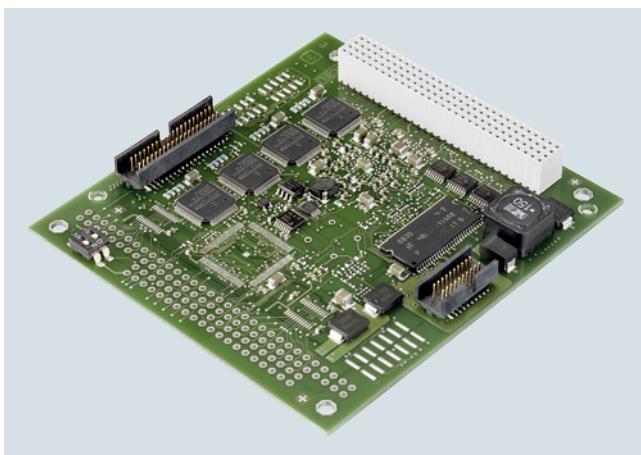

CP 1604

- PCI-104 module for connecting PCI-104 systems to PROFINET IO
- Full/half duplex with autonegotiation
- With Ethernet real-time ASIC ERTEC 400
- Integral 4-port real-time switch
- Communication services:
  - PROFINET IO controller and/or PROFINET IO device
  - Support of IRT for Motion Control applications
  - Support of PROFenergy functionality
- High performance through direct memory access
- Integration in network management systems through the support of SNMP
- Comprehensive diagnostics possibilities for installation, commissioning and operation of the module
- Powerful configuration tools are part of the scope of delivery of the module

#### Ordering data

#### Article No.

**CP 1604**  
**communications processor**

PCI-104 card (32-bit) with ASIC ERTEC 400 for connecting PCI-104 systems to PROFINET IO with 4-port real-time switch (RJ45); incl. IO-Base software for PROFINET IO Controller and NCM PC; floating license for one installation, runtime software, software and electronic manual on DVD, Class A, for 32-bit Windows XP Professional and Windows 7; other operating systems using DK-16xx PN IO Development Kit English/German

6GK1160-4AA01

**Overview****Ordering data****Article No.**

**CP 1616**  
**communications processor**  
 PCI card (32 bit; 3.3/5 V universal keyed) with ASIC ERTEC 400 for connecting PCs to PROFINET IO with 4-port real-time switch (RJ45); incl. IO-Base software for PROFINET IO Controller and NCM PC; floating license for one installation, runtime software, software and electronic manual on DVD, Class A, for 32-bit Windows XP Professional and Windows 7; other operating systems via Development Kit DK-16xx PN IO; English/German

6GK1161-6AA02

- PCI module for connecting PCs and SIMATIC PGs/PCs to PROFINET IO (universal keyed 3.3 V and 5 V; 33 MHz/ 66 MHz; 32-bit, runs in 64-bit PCI-X systems)
- Full/half duplex with autonegotiation
- With Ethernet real-time ASIC ERTEC 400
- Integral 4-port real-time switch
- Communication services:
  - PROFINET IO controller and/or PROFINET IO device
  - Support of IRT in motion control applications
- High performance through direct memory access
- Integration in network management systems through the support of SNMP
- Comprehensive diagnostics possibilities for installation, start-up and operation of the module
- Powerful configuration tools are part of the scope of delivery of the module

## PC-based Automation

Communication for PC-based systems  
Industrial Ethernet

### CP 1612 A2

#### Overview



#### Ordering data

#### Article No.

**CP 1612 A2  
communications processor**

PCI card (32 bit, 33 MHz/66 MHz; 3.3 V/5 V universal keyed) for connection to Industrial Ethernet (10/100/1000 Mbps) with RJ45 interface, incl. driver for 32-bit Windows XP Professional SP2/3, 32/64-bit Windows 7, 2003 R2 Server SP2, Vista Business/Ultimate SP1, Windows 2008 Server; German/English

6GK1161-2AA01

- PCI card (32 bit; 33 MHz/66 MHz; 3.3 V/5 V universal key) for the connection of PG/PC to Industrial Ethernet
- 1 x 10/100/1000 Mbps RJ45 port, electrical
- Automatic data transmission rate detection (10/100/1000 Mbps), with autosensing and autocrossover function
- Communication services via
  - PROFINET
  - ISO or TCP/IP transport protocol
  - PG/OP communication
  - S7 communication
  - Open communication (SEND/RECEIVE)
- Designed for use in industrial environments
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communication software.

**Overview**

- PCI Express card (PCIe x1) with internal microprocessor for connection of PG/PC to Industrial Ethernet
- 10/100/1000 Mbps (autosensing/autocrossover/ autonegotiation)
- Integrated 2-port switch (2 x RJ45 connection)
- Communication services via:
  - Open IE communication (TCP/IP and UDP)
  - ISO transport protocol
  - PG/OP communication
  - S7 communication
  - Open communication (SEND/RECEIVE)
- Time synchronization
- ISO and TCP/IP transport protocol on board
- Integration into network management systems through the support of SNMP (V1)
- The appropriate OPC server and configuration tools are included in the scope of supply of the respective communication software

**Ordering data****Article No.****CP 1623  
communications processor**

PCI Express x1 card for connection to Industrial Ethernet (10/100/ 1000 Mbps), with 2-port switch (RJ45) via HARDNET-IE S7/S7-1613 and S7-REDCONNECT.  
 For operating system support, see SIMATIC NET Software


6GK1162-3AA00

## PC-based Automation

Communication for PC-based systems  
Industrial Ethernet

### CP 1625

#### Overview

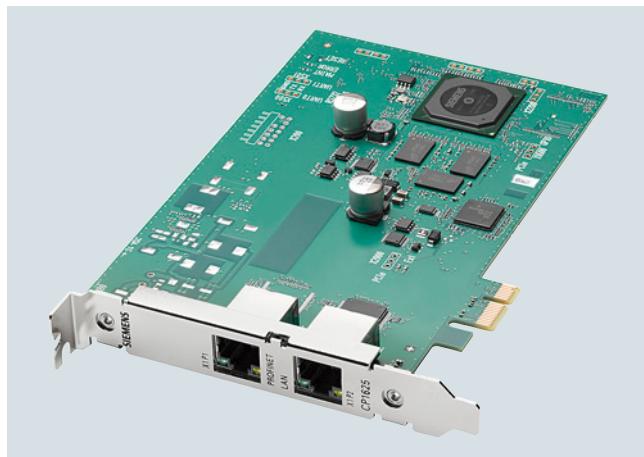

#### Ordering data

#### Article No.

**SIMATIC CP 1625**  
PCIe card for PROFINET IRT for  
CPU1500S Software Controller


6ES7648-2CF10-1AA0

#### CP 1625

CP 1625 is a PCIe module for connecting IPCs to Industrial Ethernet and for PROFINET IRT with Software Controller S7-1500.

##### Requirement:

- TIA Portal ≥ V15
- Software Controller S7-1500 CPU 1507S (F) ≥ V2.5 is installed on the IPC

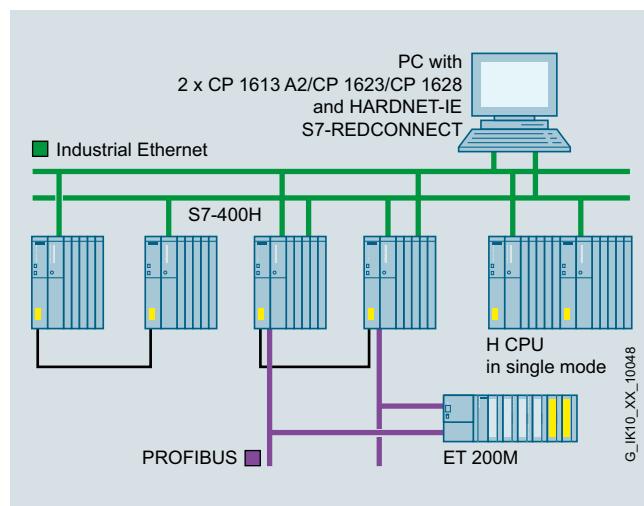**Overview**

System configuration for S7-REDCONNECT

- For connecting PCs over redundant Industrial Ethernet to the SIMATIC S7-400H
- Protects against communication failures arising from a fault in the double bus or in redundant rings
- For redundant Layer 2 or Layer 3 Industrial Ethernet
- Can also be implemented in non-redundant networks
- No additional programming overhead for the PC and in H systems
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communications software
- Enhanced redundancy over 4-way communication (STEP 7 V5.1 + SP4 and higher)

**Ordering data****Article No.****HARDNET-IE S7-REDCONNECT**

Software for fail-safe S7 communication via redundant networks, incl. S7 OPC server, HARDNET-IE S7, runtime software, software and electronic manual on DVD, license key on USB flash drive, Class A

For 1623

**HARDNET-IE S7-REDCONNECT V16**

For 64-bit:

- Windows 7 SP1 Professional/Enterprise/Ultimate
- Windows 10 PRO and Ent.
- Windows Server 2016
- Windows Server 2012 R2
- Windows Server 2019

English/German; floating license for one installation

- On DVD
- Download <sup>1)</sup>

6GK1716-0HB16-0AA0

6GK1716-0HB16-0AK0

**Software Update Service**

For one year with automatic extension;  
 Requirement: current software version

**Upgrade**

- As of Edition 2006 to S7-REDCONNECT current version

For CP 1623

6GK1716-0HB00-3AE0

**HARDNET-IE S7-REDCONNECT PowerPack**

For expansion from HARDNET-IE S7 to HARDNET-IE S7-REDCONNECT, floating license for one installation, runtime software, software and electronic manual on DVD, license key on USB flash drive, Class A

**HARDNET-IE S7-REDCONNECT PowerPack V16**

For 64-bit:

- Windows 7 SP1 Professional/Enterprise/Ultimate
- Windows 10 PRO and Ent.
- Windows Server 2016
- Windows Server 2012 R2
- Windows Server 2019

English/German

- On DVD
- Download <sup>1)</sup>

6GK1716-0HB16-0AC0

6GK1716-0HB16-0AK1

**CP 1623 communications processor**

PCI Express x1 card for connection to Industrial Ethernet (10/100/1000 Mbps), with 2-port switch (RJ45) via HARDNET-IE S7 and S7-REDCONNECT. For operating system support, see SIMATIC NET Software

6GK1162-3AA00


<sup>1)</sup> You can find more details of online software delivery here:  
<http://www.siemens.com/tia-online-software-delivery>  
 under Ordering data.

## PC-based Automation

Communication for PC-based systems  
Industrial Ethernet

### SOFTNET for Industrial Ethernet

#### Overview

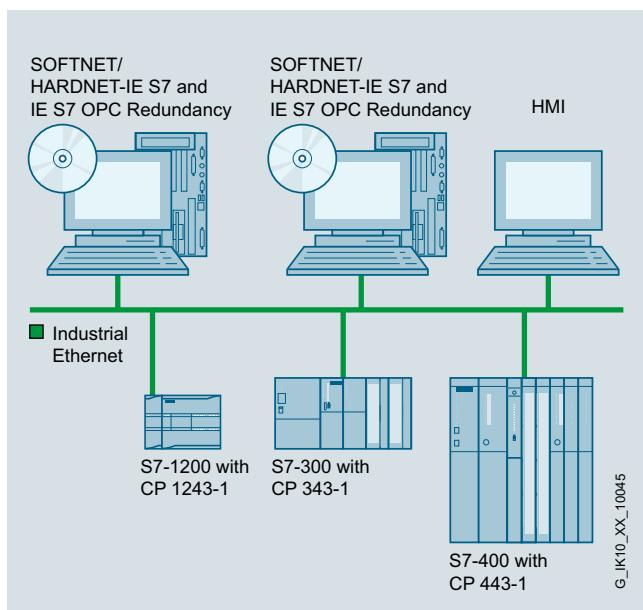

System configuration SOFTNET for Industrial Ethernet

- Software for coupling programming devices/PCs/workstations to automation systems
- Communication services:
  - PG/OP communication
  - S7 communication
  - Open communication (SEND/RECEIVE)
- Can be used with
  - Layer 2 Ethernet card (PCI/PCIe), e.g. CP 1612 A2
  - Integrated Industrial Ethernet interface
  - Modem/ISDN (Remote Access Service RAS)
- Complete protocol stack as a software package
- Increased availability thanks to additional option packages such as OPC server redundancy

5

#### Ordering data

#### Article No.

##### **SOFTNET S7 for Industrial Ethernet**

Software for S7 and open communication, incl. OPC server, PG/OP communication, and NCM PC/STEP 7 Professional, runtime software, software and electronic manual on DVD, license key on USB flash drive, Class A

##### **SOFTNET-IE S7 V16**

- For 64-bit:
- Windows 7 SP1 Professional/Enterprise/Ultimate
  - Windows 10 PRO and Ent.
  - Windows Server 2016
  - Windows Server 2012 R2
  - Windows Server 2019
- English/German;  
up to 64 connections; floating license for one installation
- On DVD
  - Download <sup>1)</sup>

**6GK1704-1CW16-0AA0  
6GK1704-1CW16-0AK0**

##### **Software Update Service**

For one year with automatic extension;  
Requirement: current software version

**6GK1704-1CW00-3AL0**

##### **Upgrade**

- As of Edition 2006 to current version
- From V6.0, V6.1, V6.2 or V6.3 to V13

**6GK1704-1CW00-3AE0  
6GK1704-1CW00-3AE1**

##### **SOFTNET-IE S7 REDCONNECT V16**

Software for fail-safe S7 communication via redundant networks, incl. S7 OPC server, runtime software, software and electronic manual on DVD, license key on USB flash drive, Class A

For 64-bit:

- Windows 7 SP1 Professional/Enterprise/Ultimate
- Windows 10 PRO and Ent.
- Windows Server 2016
- Windows Server 2012 R2
- Windows Server 2019

English/German  
• Floating license for one installation

**6GK1704-0HB16-0AA0**

##### **SOFTNET-IE S7 Lean Edition V16**

- For 64-bit:
- Windows 7 SP1 Professional/Enterprise/Ultimate
  - Windows 10 PRO and Ent.
  - Windows Server 2016
  - Windows Server 2012 R2
  - Windows Server 2019

up to eight connections;  
English/German;  
floating license for one installation

- On DVD
- Download <sup>1)</sup>

**6GK1704-1LW16-0AA0  
6GK1704-1LW16-0AK0**

##### **Software Update Service**

For one year with automatic extension;  
Requirement: current software version

**6GK1704-1LW00-3AL0**


##### **Upgrade**

- As of Edition 2006 to current version
- From V6.0, V6.1, V6.2 or V6.3 to V13

**6GK1704-1LW00-3AE0**

**6GK1704-1LW00-3AE1**

<sup>1)</sup> You can find more details of online software delivery here:  
<http://www.siemens.com/tia-online-software-delivery>  
under Ordering data.

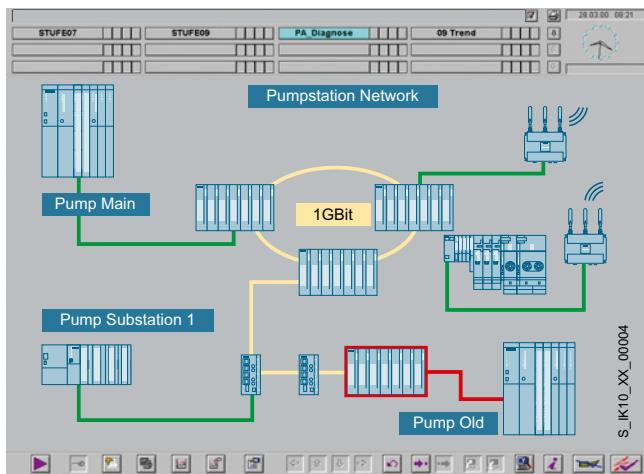**Overview**

- Status monitoring of SNMP-capable devices in any OPC client systems; e.g. SIMATIC WinCC/PCS 7
- Easy access to SNMP-capable devices over the OPC interface
- Devices without SNMP agents can be monitored using the ping mechanism
- Configuration with STEP 7 (up to STEP 7 V5.6)
- Ready-to-use SNMP diagnostics profiles for Siemens devices, e.g. SCALANCE X/W
- Generation of any SNMP diagnostics profiles by means of the integral MIB compiler
- Easy setup of the monitored devices with the help of an Autodiscovery function

**Ordering data****Article No.****SNMP OPC Server**

Including MIB compiler; floating license for one installation of runtime software; software and electronic manual on DVD; license key on USB flash drive, Class A;

**SNMP OPC Server Basic**

Administration of up to 20 IP addresses

**Basic V16**

- For 64-bit:
- Windows 7 SP1 Professional/Enterprise/Ultimate
  - Windows 10 PRO and Ent.
  - Windows Server 2016
  - Windows Server 2012 R2
  - Windows Server 2019

Floating license for one installation

**6GK1706-1NW16-0AA0**

**Software Update Service SNMP OPC Server Basic**

**6GK1706-1NW00-3AL0**

For one year with automatic extension;  
Requirement: current software version

**Upgrade SNMP OPC Server Basic**

**6GK1706-1NW00-3AE0**

- As of Edition 2006 to current version
- From V6.0, V6.1, V6.2 or V6.3 to Edition 2008 or V13

**6GK1706-1NW00-3AE1**

**SNMP OPC Server Extended**

Administration of up to 200 IP addresses

**6GK1706-1NX16-0AA0**

**Extended V16**

- For 64-bit:
- Windows 7 SP1 Professional/Enterprise/Ultimate
  - Windows 10 PRO and Ent.
  - Windows Server 2016
  - Windows Server 2012 R2
  - Windows Server 2019

Floating license for one installation

**Software Update Service SNMP OPC Server Extended**

**6GK1706-1NX00-3AL0**

For one year with automatic extension;  
Requirement: current software version

**Upgrade SNMP OPC Server Extended**

**6GK1706-1NX00-3AE0**

- As of Edition 2006 to current version
- From V6.0, V6.1, V6.2 or V6.3 to V13

**6GK1706-1NX00-3AE1**

**SNMP OPC Server PowerPack**

For upgrade from SNMP OPC Server Basic to SNMP OPC Server Extended

**PowerPack V16**

**6GK1706-1NW16-0AC0**

## PC-based Automation

Communication for PC-based systems  
Industrial Ethernet

### SINEMA Server

#### Overview

The SINEMA server software has been specially developed for industrial applications. It enables you to fully visualize and monitor networks. Using SNMP and simultaneous diagnostics via SIMATIC and PROFINET mechanisms, many aspects of plant diagnostics can be portrayed in a single tool.

Captured data is stored in a long-term archive and can be evaluated and presented as required. The predefined network diagnostics can also be seamlessly integrated into HMI/SCADA systems (e.g. WinCC, PCS 7) via OPC UA and web mechanisms.

#### Main features:

**Inventory:** Inventorying of all network subscribers

**Topology:** Topological representation of the network (HTML 5-based UI)

**Monitoring:** Read-out of status information

**Diagnostics:** Evaluation and presentation of diagnostic states

**Reporting:** Presentation of statistics for any time period

**Validation:** Validation of network parameters

**Propagation:** Forwarding of data to other systems

**Management:** Configuration of devices via CLI / firmware management

#### Ordering data

#### Article No.

##### SINEMA server V14

Network monitoring software for Industrial Ethernet and PROFINET networks, runtime software, software and electronic manual on DVD (not with download), license key on USB stick (not with download); software for installation on PC hardware with Windows 7 Professional/Ultimate/Enterprise SP1 (64-bit), Windows Server 2008 R2 + SP1 (64-bit), Windows 10 Pro/Enterprise Version 1607/1703 (64-bit)  
English/German/French/Chinese.  
Other languages possible on request.

##### For 50 devices that can be identified via IP address

- On DVD
  - Download <sup>1)</sup>
- 6GK1781-1BA14-0AA0**  
**6GK1781-1BA14-0AK0**

##### For 100 devices that can be identified via IP address

- On DVD
  - Download <sup>1)</sup>
- 6GK1781-1DA14-0AA0**  
**6GK1781-1DA14-0AK0**

##### For 250 devices that can be identified via IP address

- On DVD
  - Download <sup>1)</sup>
- 6GK1781-1JA14-0AA0**  
**6GK1781-1JA14-0AK0**

##### For 500 devices that can be identified via IP address

- On DVD
  - Download <sup>1)</sup>
- 6GK1781-1TA14-0AA0**  
**6GK1781-1TA14-0AK0**

##### Upgrade SINEMA server V13 to V14

- On DVD
  - Download <sup>1)</sup>
- 6GK1781-2AA14-0AA0**  
**6GK1781-2AA14-0AK0**

<sup>1)</sup> For more details of online software delivery, visit:  
<http://www.siemens.com/tia-online-software-delivery>

under Ordering Data.

**Overview****Ordering data****Article No.**

**CP 5613 A3  
communications processor**  
 PCI card (32-bit; 3.3/5 V;  
 33/66 MHz); with an interface for  
 connecting to PROFIBUS;  
 including Configuration Tool and  
 DP-Base software;  
 DP-RAM interface for DP master  
 incl. PG and FDL protocol,  
 single license for 1 installation,  
 runtime software, Class A;  
 software+manuals on DVD;  
 2 languages (en, de)  
 For operating system support see  
<https://support.industry.siemens.com/cs/ww/en/view/22611503>

6GK1561-3AA02

- PCI card (universal keyed 5 V/3.3 V) with internal microprocessor for connection of PCs and SIMATIC PG/PC to PROFIBUS at up to 12 Mbps
- Communication services:
  - PROFIBUS DP master according to IEC 61158/61784 on one PCI card
  - PG/OP communication with STEP 7
  - S7 communication with HARDNET-PB S7 software package
  - Open communication (SEND/RECEIVE) based on the FDL interface
- Comprehensive diagnostics possibilities for installation, commissioning and operation of the module
- High performance over direct dual-port RAM access
- Event and filter mechanisms to reduce the loading on the host CPU
- Multiprotocol operation and parallel operation of up to four CPUs
- Implementation in motion control applications is possible because a constant bus cycle time is supported
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communications software

## PC-based Automation

Communication for PC-based systems  
PROFIBUS

### CP 5614 A3

#### Overview



#### Ordering data

#### Article No.

**CP 5614 A3**  
**communications processor**  
PCI card (32-bit; 3.3/5 V, 33/66 MHz); with master and slave interface for connecting to PROFIBUS; including Configuration Tool and DP-Base software:  
DP-RAM interface for DP master; incl. PG and FDL protocol; single license for 1 installation, runtime software, Class A; software+electr. Manuals on DVD; 2 languages (en, de)  
For operating system support, see SIMATIC NET software

6GK1561-4AA02

- PCI card (universal keyed 5 V/3.3 V) with own microprocessor for connection of PCs and SIMATIC PG/PC to PROFIBUS at up to 12 Mbps
- Communication services:
  - PROFIBUS DP master and slave interface according to IEC 61158/61784 on one PCI card
  - PG/OP communication with STEP 5 and STEP 7
  - S7 communication with HARDNET-PB S7 software package
  - Open communication (SEND/RECEIVE) based on the FDL interface
- Comprehensive diagnostics possibilities for installation, commissioning and operation of the module
- High performance over direct dual-port RAM access
- Event and filter mechanisms to reduce the loading on the host CPU
- Multiprotocol operation and parallel operation of up to four CPUs
- Implementation of motion control applications is possible because a constant bus cycle time is supported
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communications software

**Overview****Ordering data****Article No.****CP 5623  
communications processor**

PCI Express X1 (3.3 V) for connecting to PROFIBUS; incl. DP-Base software, NCM PC: DP-RAM interface for DP master incl. PG and FDL protocol, single license for 1 installation, runtime software, Class A; software and electronic manual on CD-ROM, 2 languages (en, de)  
 See SIMATIC NET software for operating system support

6GK1562-3AA00

- PCI Express card (PCIe x1) with internal microprocessor for connecting PCs and SIMATIC PG/PC to PROFIBUS at up to 12 Mbps
- Communication services:
  - PROFIBUS DP master Class 1 and 2 or DP slave according to IEC 61158/61784 on one PCI card
  - PG/OP communication with STEP 5 and STEP 7
  - S7 communication with HARDNET-PB S7 software package
  - Open communication (SEND/RECEIVE) based on the FDL interface
  - PROFIBUS FMS according to IEC 61158/61784 with FMS-5613 software package
- Extensive diagnostics options for installation, commissioning and operation of the module
- Event and filter mechanism for reducing the load on the host CPU
- Multiprotocol operation and parallel operation of up to four CPUs
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communication software

## PC-based Automation

Communication for PC-based systems  
PROFIBUS

### CP 5624

#### Overview



#### Ordering data

#### Article No.

**CP 5624  
communications processor**

PCI Express X1 (3.3 V) M. master and slave interface to PB; incl. DP-Base software, NCM PC: DP-RAM interface for DP master incl. PG and FDL protocol, single license for 1 installation, runtime software, Class A; software and electronic manual on CD-ROM, 2 languages (en, de) See SIMATIC NET software for operating system support

6GK1562-4AA00

- PCI Express card (PCIe x1) with own microprocessor for connecting PCs and SIMATIC PG/PC to PROFIBUS at up to 12 Mbps
- Two 9-pin sub-D sockets for parallel operation as DP master and DP slave
- Communication services:
  - PROFIBUS DP master and slave interface according to IEC 61158/61784 on one PCI card
  - PG/OP communication with STEP 5 and STEP 7
  - S7 communication with HARDNET-PB S7 software package
  - Open communication (SEND/RECEIVE) based on the FDL interface
  - PROFIBUS FMS according to IEC 61158/61784 with FMS-5613 software package
- Extensive diagnostics options for installation, commissioning and operation of the module
- Event and filter mechanism for reducing the load on the host CPU
- Multiprotocol operation and parallel operation of up to four CPUs
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communication software

**Overview**

- PCI card (universal keyed 5 V/3.3 V) for connection of PCs and SIMATIC PG/PC to PROFIBUS at up to 12 Mbps and to the MPI interface of SIMATIC S7
- Communication services:
  - PROFIBUS DP master Class 1 incl. acyclic DP expansions with SOFTNET-PB DP software package
  - PROFIBUS DP master Class 2 incl. acyclic DP expansions with SOFTNET-PB DP software package
  - PROFIBUS DP slave with SOFTNET-PB DP slave software package
  - PG/OP communication with STEP 7
  - S7 communication with SOFTNET-PB S7 software package
  - Open communication (SEND/RECEIVE on basis of FDL interface) with SOFTNET-PB DP or SOFTNET-PB S7 software package
- Can be used with:
  - STEP 7, STEP 7 Micro/Win, SIMATIC PDM (for PG/OP communication)
  - SOFTNET-PB S7 (for S7 communication)
  - SOFTNET-PB DP, SOFTNET-PB DP slave (for DP)
- Corresponding OPC servers and configuration tools are included in the scope of delivery of the respective communication software

**Ordering data****Article No.****CP 5612  
communications processor**

PCI card for connecting a PG or PC with PCI bus to PROFIBUS or MPI, can be used under 32-bit and 64-bit operating systems (see also Entry ID 22611503)

**6GK1561-2AA00**

## PC-based Automation

Communication for PC-based systems  
PROFIBUS

### CP 5622

#### Overview



#### Ordering data

#### Article No.

**CP 5622  
communications processor**

PCI Express X1 card for connecting a PG or PC with PCI Express bus to PROFIBUS or MPI, can be used under 32-bit and 64-bit operating systems (see also Entry ID 22611503)

**6GK1562-2AA00**

- PCI Express card (PCIe x1) for connection of PCs and SIMATIC PG/PC to PROFIBUS at up to 12 Mbps and to the MPI interface of SIMATIC S7
- Communication services:
  - PROFIBUS DP master Class 1 incl. acyclic DP expansions with SOFTNET-PB DP software package
  - PROFIBUS DP master Class 2 incl. acyclic DP expansions with SOFTNET-PB DP software package
  - PROFIBUS DP slave with SOFTNET-PB DP slave software package
  - PG/OP communication with STEP 7
  - S7 communication with SOFTNET-PB S7 software package
  - Open communication (SEND/RECEIVE on basis of FDL interface) with SOFTNET-PB DP or SOFTNET-PB S7 software package
- Can be used with:
  - STEP 7, STEP 7-Micro/Win, SIMATIC PDM (for PG/OP communication)
  - SOFTNET-PB S7 (for S7 communication)
  - SOFTNET-PB DP, SOFTNET-PB DP slave (for DP)
- Corresponding OPC servers and configuration tools are included in the scope of delivery of the respective communication software

**Overview****Ordering data****Article No.****CP 5711  
communications processor**

USB adapter (USB 2.0) for connecting a PG or notebook to PROFIBUS or MPI; 2 m USB cable included

**6GK1571-1AA00****PROFIBUS bus terminal 12M**

Bus terminal for connection of PROFIBUS stations up to 12 Mbps with connecting cable 1.5 m long

**6GK1500-0AA10**


- USB adapter for the connection of PCs and SIMATIC PG/PC to PROFIBUS DP or MPI via USB 2.0
- Operation in extended temperature range of -20 °C to +60 °C
- Active PROFIBUS termination to supply the PROFIBUS network as the end station of a segment
- Robust USB connection due to mechanical locking of the USB plug to the CP 5711 housing
- Communication services:
  - PROFIBUS DP master Class 1 and 2 according to IEC 61158/61784 with SOFTNET-PB DP software package
  - PROFIBUS DP slave with SOFTNET-PB DP slave software package
  - PG/OP communication with STEP 5 or STEP 7 software package
  - S7 communication with SOFTNET-PB S7 software package
  - Open communication (SEND/RECEIVE on basis of FDL interface) with SOFTNET-PB DP or SOFTNET-PB S7 software package
- PROFIBUS connection with up to 12 Mbps
- Can be used with:
  - STEP 7, STEP 7 Micro/WIN, WinCC/WinCC flexible, NCM PC, SIMATIC PDM (for PG/OP communication)
  - SOFTNET-PB S7 (for S7 communication)
  - SOFTNET-PB DP, SOFTNET-PB DP slave (for DP)
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communication software

## PC-based Automation

Communication for PC-based systems  
PROFIBUS

### SOFTNET for PROFIBUS

#### Overview

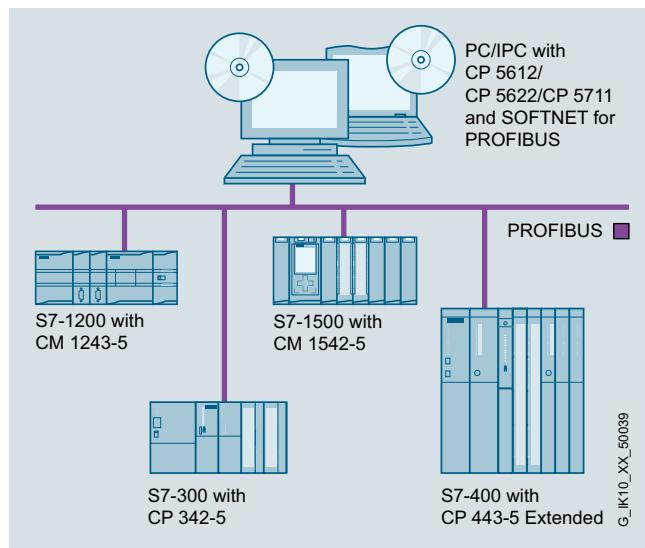

- Software for connecting PCs/programming devices and notebooks to automation systems
- Communication services:
  - PROFIBUS DP master Class 1 and 2 with acyclic expansions
  - PROFIBUS DP slave
  - PG/OP communication
  - S7 communication
  - Open communication (SEND/RECEIVE) based on the FDL interface
- The appropriate OPC servers and configuration tools are included in the scope of supply of the respective communications software

5

#### Ordering data

#### Article No.

##### SOFTNET-PB S7

Software for S7 communication, incl. FDL protocol with OPC server and configuration tool, runtime software, software and electronic manual on DVD-ROM, license key on USB flash drive, Class A; for CP 5612 (Win 7 and higher), CP 5622 (Win 7 and higher), CP 5711

##### SOFTNET-PB S7 V15

For 32/64-bit: Windows 7 SP1 P for Windows 7 SP1 (Professional, Enterprise, Ultimate), 64-bit  
For Windows Server 2008 R2 SP1 (Standard or Enterprise Edition)  
For Windows Server 2012 R2 Update (Standard Edition)  
For Windows 10 Pro, 64-bit, Version 1607 or higher  
For Windows 10 Enterprise, 64-bit, Version 1607 or higher  
English/German  
• Single license for one installation

6GK1704-5CW15-0AA0

##### Software Update Service

For 1 year with automatic extension  
Requirement: current software version

6GK1704-5CW00-3AL0

##### Upgrade

• From Edition 2006 to SOFTNET-S7 Edition 2008 or V15

6GK1704-5CW00-3AE0

##### SOFTNET-PB DP

Software for DP protocol (master Class 1 and 2), incl. FDL protocol with OPC server and configuration tool; runtime software, software and electronic manual on DVD-ROM, license key on USB flash drive; for CP 5612 (Win 7 and higher), CP 5622 (Win 7 and higher), CP 5711

##### SOFTNET-PB DP V15

For Windows 7 SP1 (Professional, Enterprise, Ultimate), 64-bit  
For Windows Server 2008 R2 SP1 (Standard or Enterprise Edition)  
For Windows Server 2012 R2 Update (Standard Edition)  
For Windows 10 Pro, 64-bit, Version 1607 or higher  
For Windows 10 Enterprise, 64-bit, Version 1607 or higher  
English/German  
• Single license for one installation

6GK1704-5DW15-0AA0

##### Software Update Service

For 1 year with automatic extension  
Requirement: current software version

6GK1704-5DW00-3AL0

##### Upgrade

• From Edition 2006 to SOFTNET-DP Edition 2008 or V15

6GK1704-5DW00-3AE0

Ordering data	Article No.
<b>SOFTNET-PB DP Slave</b>  Software for DP slave, with OPC server and configuration tool, single license for one installation, runtime software, software and electronic manual on DVD-ROM, license key on USB flash drive, Class A; for CP 5612 (Win 7 and higher), CP 5622 (Win 7 and higher), CP 5711	
<b>SOFTNET-PB DP Slave V15</b>  For Windows 7 SP1 (Professional, Enterprise, Ultimate), 64-bit For Windows Server 2008 R2 SP1 (Standard or Enterprise Edition) For Windows Server 2012 R2 Update (Standard Edition) For Windows 10 Pro, 64-bit, Version 1607 or higher For Windows 10 Enterprise, 64-bit, Version 1607 or higher English/German • Single license for one installation	<b>6GK1704-5SW15-0AA0</b>
<b>Software Update Service</b>  For 1 year with automatic extension Requirement: current software version	<b>6GK1704-5SW00-3AL0</b>
<b>Upgrade</b> • From Edition 2006 to SOFTNET-DP Slave Edition 2008 or V15	<b>6GK1704-5SW00-3AE0</b>


# PC-based Automation

Communication for PC-based systems  
PROFIBUS

## OPC server for PROFIBUS

### Overview

- Standardized, open multi-vendor interface
- Interfacing of OPC-capable Windows applications to DP, FMS, S7 communication and open communication (SEND/RECEIVE) based on the FDL interface
- OPC Scout with browser functionality as an OPC client and OCX-Data-Control/.NET Data Control for simple OPC client creation
- The relevant OPC servers are supplied with each communication software package

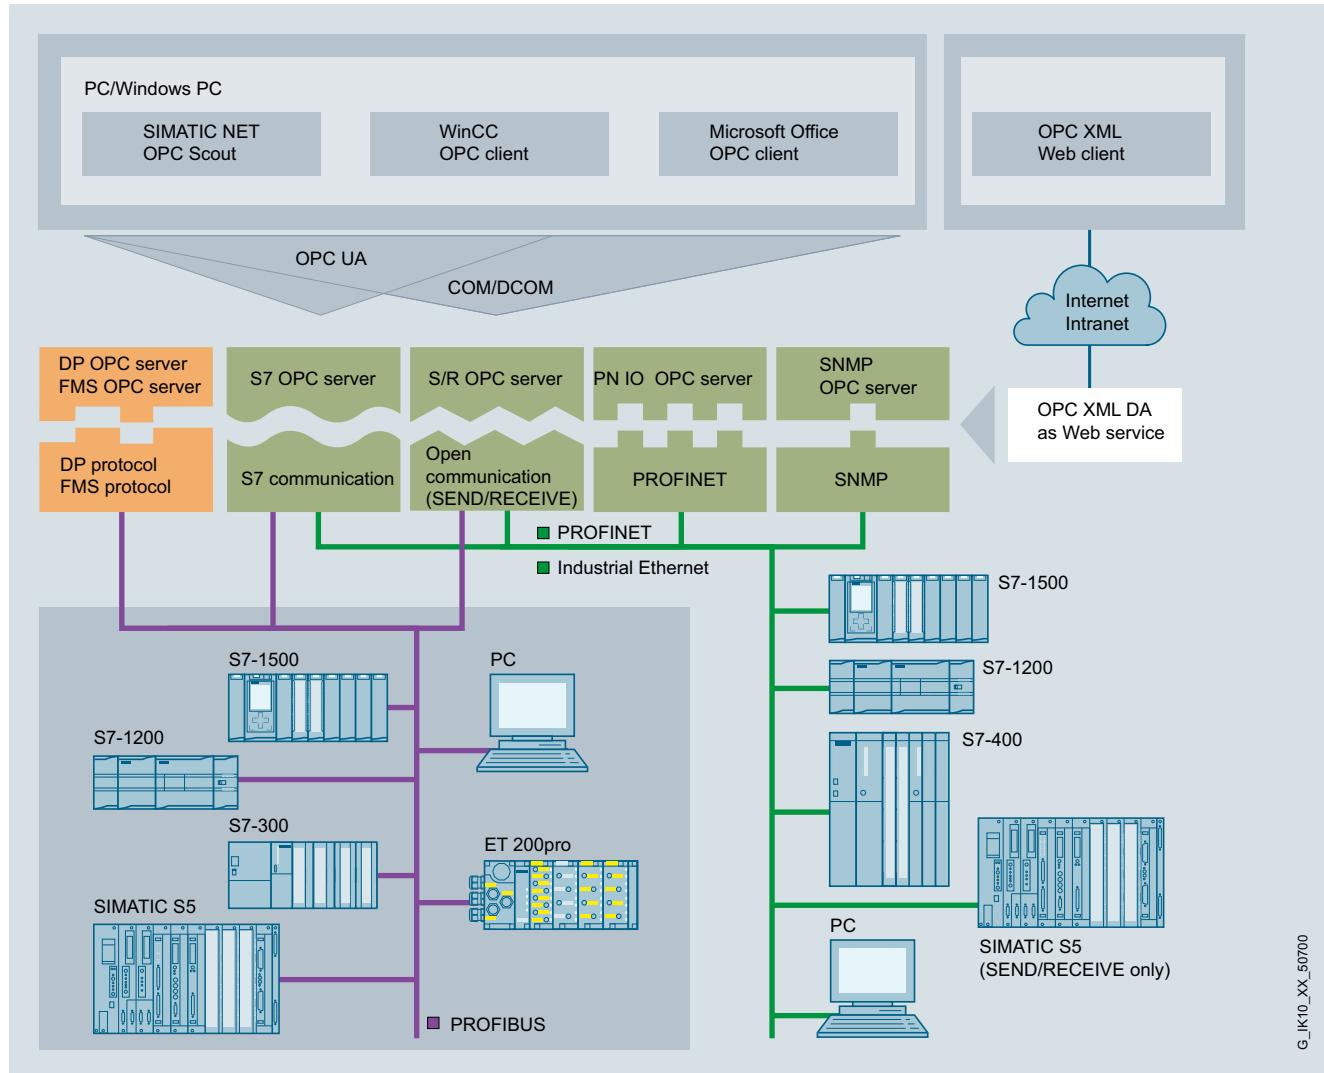

System integration with OPC server

G\_IK10\_XX\_50700

## Overview

OPC (Openness, Productivity & Collaboration) is a standardized, open, and vendor-independent interface that is widely used in automation. OPC UA (Unified Architecture) is the result of consistent further development of this standard, offering additional functions such as security or redundancy.

S7 OPC Redundancy is a software product compliant with the OPC UA standard that enables redundant configuration of OPC UA servers for SIMATIC S7. The availability of automation data to operator control and monitoring systems is ensured thanks to the redundant use of OPC UA servers. This requires neither additional cabling for synchronizing the redundant OPC UA servers, nor additional programming effort on the PC. The OPC UA servers are synchronized via high-performance Industrial Ethernet network accesses at 10/100 and 1000 Mbps. S7 OPC Redundancy represents an integrated customer solution for all SIMATIC NET S7 SOFTNET and HARDNET software products in the automation world.

## Ordering data

## Article No.

### *S7 OPC Redundancy*

Software for redundant OPC servers, runtime software, software and electronic manual on CD-ROM, license key on USB stick, Class A

### **S7 OPC Redundancy V13 for PROFIBUS**

for 64-bit Windows 2008 server R2; English/German

- Single license for one installation

**6GK1706-5CW13-0AA0**

## PC-based Automation

Communication for PC-based systems  
PROFIBUS

### PC adapter USB A2

#### Overview



USB adapter for the connection of PCs/notebooks and SIMATIC PG/PC to the SIMATIC S7 automation system via USB interface.

- For connection to USB 1.1, 2.0 and 3.0 interfaces
- Power supply from the USB interface
- PROFIBUS connection with up to 12 Mbps
- Support for routing
- Automatic transmission rate and profile search
- Can be used as of Windows XP SP2
- As of Windows 7, can also be used with 64-bit systems
- Scope of delivery:
  - PC adapter USB A2
  - CD with drivers for the PC adapter USB A2
  - USB cable
  - MPI cable 0.3 m

#### Ordering data


#### Article No.

##### PC adapter USB A2

USB adapter (USB V2.0) for connecting a PG/PC or notebook to SIMATIC S7 via PROFIBUS or MPI, USB cable 5 m included, MPI cable 0.3 m, can be used under Windows XP/Vista/ Windows 7 32/64-bit and higher

**6GK1571-0BA00-0AA0**

## Accessories

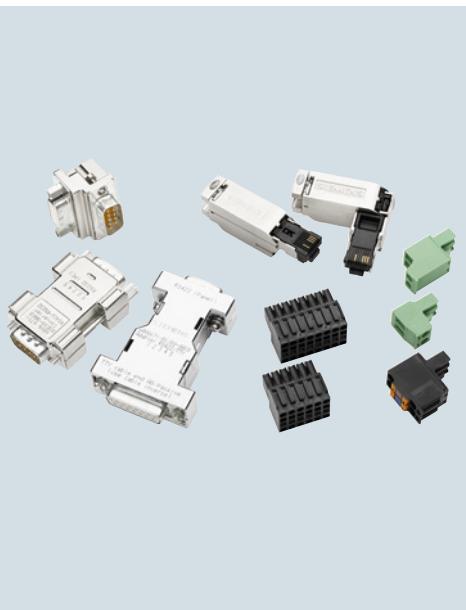


<b>6/2</b>	<b>Introduction</b>
<b>6/4</b>	<b>Batteries</b>
<b>6/7</b>	<b>Fixing elements</b>
<b>6/20</b>	<b>Labeling strips</b>
<b>6/24</b>	<b>Input devices, cables</b>
<b>6/41</b>	<b>Input tools</b>
<b>6/44</b>	<b>HMI connecting components</b>
<b>6/51</b>	<b>IWLAN accessories</b>
<b>6/54</b>	<b>Power supply units, power supply cords</b>
<b>6/59</b>	<b>Back covers</b>
<b>6/63</b>	<b>Protective films</b>
<b>6/79</b>	<b>Protective covers, dust caps</b>
<b>6/82</b>	<b>Service sets</b>
<b>6/89</b>	<b>Storage media</b>
<b>6/103</b>	<b>Transport and storage</b>
<b>6/106</b>	<b>Distribution boards</b>
<b>6/107</b>	<b>Additional accessories</b>

<b>6/109</b>	<b>Process coupling</b>
6/109	Connecting cables
6/116	Connecting cable 830-1T
6/117	IE TP Cord
6/119	RS 485 bus connector
6/120	IE FC RJ45 plug 2 x 2, Cat5e
6/121	IE FC RJ45 plug 4 x 2, Cat6a
6/122	IE FC TP cable 2 x 2
6/125	IE FC TP cable 4 x 2

# Accessories

## Introduction

### Overview

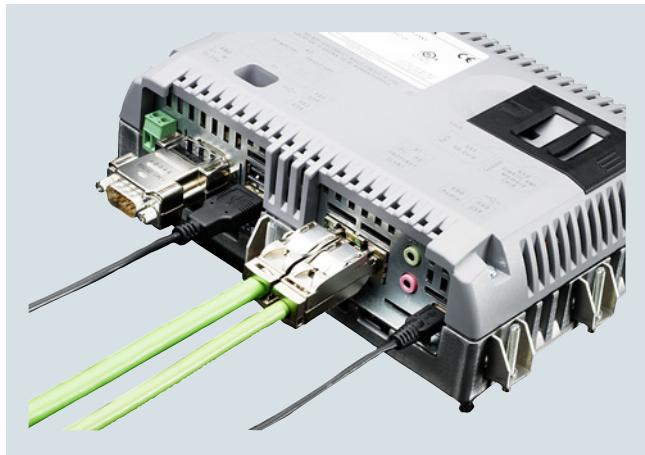

HMI accessories, connection

SIMATIC not only offers first-class Panels, thin clients and IPCs, but also an extensive range of original accessories which harmonizes optimally with the core products. We place the same quality requirements on our accessories as we do on our core products.

Since accessory parts are required over the entire service life of a product despite wear, everything is done to ensure that all accessories remain available throughout the entire life cycle of the core products. In the event of deviations in exceptional cases, a relevant product announcement will be placed in the Customer Support area. We recommend subscribing to these announcements electronically.

SIMATIC accessories are intended exclusively for industrial use, such as in offices, workshops etc. In some cases, accessories can also be used with competitor products. This use is at your own responsibility.

The range of accessories includes:

- Batteries (rechargeable buffer battery, lithium batteries, main rechargeable battery, etc.)
- Fasteners (memory card lock, wall bracket, mounting frame, mounting clips, mounting bracket, etc.)
- Labeling strips (labeling strips, front film, labeling set, protective sleeve, etc.)
- Input devices, cables (keyboards, mice)
- Input tools (e.g. touch pens)
- HMI connecting components (converters, connectors, adapters)
- WLAN accessories (access points, KeyPlug, power supplies, Moby D, small parts)
- Power supply units, power cables (supply units, non-heating apparatus cables)
- Back covers (in IP20 design)
- Protective films
- Protective covers, dust caps (covers, caps, port keys, USB/RJ45)
- Service sets (spare parts package with coordinated contents)
- Storage media (MM memory card, SD memory card, PC memory card, PC memory card adapter, CF memory card, USB memory stick, USB FlashDrive, memory module for pushbutton Panels, memory expansions)
- Transport and storage (bags and handles)
- Distribution boards (USB HUB, USB extensions, keyboard, video, mouse switch, Ethernet switch)
- Additional accessories (e.g. spare key, spare cover)
- Process coupling
  - Connecting cables
  - Bus connector DP
  - Bus connector PN

The aim is to offer accessories as new parts throughout the entire lifecycle of the core product.

This cannot be guaranteed because the consumer market changes quickly.

## More information

The latest information and a "Cross list" (quick overview) of accessories suitable for specific core products can be found here:

<https://support.industry.siemens.com/cs/document/40466415>

### Information on the delivery quantity:

Because the exact contents of an article number (MLFB) cannot be limited to a single quantity, the delivery quantity and the exact contents of an article number (MLFB) are only ever specified in the technical specifications for accessories. Therefore, the delivery quantity in the display of commercial data is always only indicated with "1" (unit, pack or SET)!

Example: Set MLFB: 6AV6881-0WJ22-0AA0 -> Delivery quantity "1" unit (summary in the technical specifications: 5x protective films, 5x removers, 5x cleaning cloths, 1x spatula).

### Trade goods:

To be able to react quickly and flexibly to new requirements, we also use high quality accessories from major manufacturers and market these directly via our Mall. Introducing products as trade goods saves having to perform time-consuming, in-house tests, or applying for and generating our own certificates.

Trade goods are qualified in a short power-on test (power-on test only and no system test at Siemens), as the manufacturer tests are usually sufficient.

### Certificates:

On account of technical requirements placed on trade goods, technical specifications, drivers, certificates and test certificates, etc. are provided by the manufacturer, and are partially available for downloading from the Siemens SIOS pages.

Current certificates for products marked as trade goods are always to be requested directly from the manufacturer.

The technical properties of trade goods may differ from the assured characteristics of our own products (for example, in respect of electromagnetic compatibility, releases for areas of application, etc.) and restrict the field of use of the Siemens core product when used.

Trade goods are marked as such in the relevant technical specifications. The manufacturer is always listed at the end of the technical specifications.

### 3D data:

3D data and technical drawings for trade goods are only available for download in the SIOS delivery release, providing the manufacturer has granted their approval.

Integration into the Siemens 3D download area is unfortunately not possible. For this reason, it is also not possible to provide a 3D (Step) file for every accessory.

The responsibility for trade good files always lies with the manufacturer. The manufacturer is always listed at the end of the technical specifications.

### Note:

SIMATIC accessories are intended exclusively for industrial use, such as in offices, workshops, etc.

In some cases, accessories can also be used with competitor products. This use is at your own responsibility.

### Tip:

The TIA Selection Tool automatically shows appropriate accessories for every SIMATIC product, making it even easier to find the right accessory.

In SIOS entry with entry ID: 40466415 "Accessory status", all news, changes and product discontinuations are documented. There is also a link bar here to allow direct access to additional product information.

### Notice:

Photos and product images may differ from the actual product.

## Accessories

### Batteries

#### Overview



HMI accessories, battery, accumulator

#### Batteries and accumulators

The following batteries and accumulators are available:

- Rechargeable buffer battery
- Button cell
- Main rechargeable battery

#### Note:

Transporting lithium batteries by air is not possible at all, or only feasible under restricted conditions.

When ordering replacements, please allow transport times of up to 6 months depending on the region (outside the EU).

Please read the notes under "More information".

Ordering data	Article No.
<b>Rechargeable buffer battery for Mobile Panel for wired Mobile Panels</b>	<b>6AV6671-5AD00-0AX0</b>
<b>Main rechargeable battery for Mobile Panel WLAN</b>	<b>6AV6671-5CL00-0AX1</b>
<b>Lithium battery for SIMATIC HMI, C7, S7 and PG</b> <small>including connecting cable (approx. 250 mm) and adapter cable</small>	<b>6ES7623-1AE01-5AA0</b>
<b>Lithium battery for SIMATIC HMI and S7</b> <small>Spare part incl. connecting cable 210 mm.</small>	<b>W79084-E1001-B2</b>
<b>Lithium battery (button cell) for SIMATIC IPC227D/IPC277D</b> <small>Currently only as spare part in the EDN</small>	<b>A5E30314053</b>
<b>Lithium battery (button cell) for SIMATIC IPC227E/IPC277E</b> <small>Currently only as spare part in the EDN</small>	<b>A5E34345932</b>
<b>Lithium battery (button cell) for SIMATIC IPC427E, IPC477E</b> <small>Currently only as spare part in the EDN</small>	<b>A5E34734290</b>

**Technical specifications**

Article number	<b>6AV6671-5AD00-0AX0</b> Buffer battery Mobile Panel	<b>6ES7623-1AE01-5AA0</b> Lithium battery SIMATIC HMI, C7 and S7	<b>6AV6671-5CL00-0AX1</b> Main battery Mobile Panel IWLAN
<b>General information</b>			
Product type designation	Rechargeable back-up battery Mobile Panel	Lithium battery	Main battery Mobile Panel IWLAN
<b>Installation type/mounting</b>			
Wall mounting/direct mounting	Yes; in HMI devices, battery compartment	Yes; in HMI devices, battery compartment	Yes; in HMI devices, battery compartment
<b>Supply voltage</b>			
Type of supply voltage	DC	DC	DC
Rated value (DC)	3.6 V	3.6 V	7.2 V
<b>Accumulator</b>			
Charge status display	No	No	No
Rechargeable	Yes	Yes	Yes
Capacity	1.15 A·h	1.6 A·h	5.1 A·h
Lithium-ion	Yes; 1/CP7/34/50 01 CGA	Yes; SL-361	Yes; ICR18650-26J
Special design	Yes; flat	Yes; 2/3 AA	Yes; bent
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	Yes		Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C; Don't charge below	0 °C	0 °C; Don't charge below
• max.	55 °C	55 °C	45 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Mechanics/material</b>			
Material			
• Plastic			Yes; Enclosure, black
<b>Dimensions</b>			
Width	35 mm		75 mm
Height	50 mm		78 mm
Thickness	10 mm		33 mm
Length		33 mm	
Diameter		14.7 mm	
<b>Weights</b>			
Weight (without packaging)	38 g	14 g	320 g
<b>Scope of supply</b>			
Delivery quantity in pieces	1; incl. 65 mm connecting cable	1; Incl. 45 mm + 210 mm connecting cable	1; with ejector
<b>Other</b>			
Merchandise	No; 1S1P CQA 103450A	Yes; SL-361 PGHK	No; 2S2P ICR18650-26J / 11273-02
Manufacturer name	BMZ GmbH	Tadiran Batteries GmbH	BMZ GmbH
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Industriestr. 22, 63654 Büdingen, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for Mobile Panel DP cabled, Mobile Panel PN cabled, Mobile Panel 277 IWLAN, Mobile Panel 277F IWLAN	for TD17, OP17, OP25, OP27, OP35, OP37, TP27, TP37, OP/TP270, MP270, MP270B, MP370, C7-621, C7-623, C7-624, C7-626 and PG 7xx	for Mobile Panel 277 IWLAN, Mobile Panel 277F IWLAN, Mobile Panel 277 IWLAN V2, Mobile Panel 277F IWLAN V2, Mobile Panel 277F IWLAN (RFID tag)
Note:	Dispose of battery (lithium) properly; hazardous product!	Dispose of battery (lithium) properly; hazardous product!	Dispose of battery (lithium) properly; hazardous product!

## Accessories

### Batteries

#### More information

Accumulators are shipped with less than 30% of their maximum charging capacity to minimize risks during transport. Diverse certificates are required for transport and import in some regions. They can be downloaded from Industry Online Support/ Product Support. Enter the "Article No." as the search term and select "Certificate" as the Entry type.

<https://support.industry.siemens.com/cs/products>

Before first use, accumulators should always be recharged; this also ensures the longest possible service life of the accumulators.

#### Disposal of waste batteries and old electrical and electronic devices:

The device must not be disposed of with household waste (Battery Law, WEEE Directive). The waste bin symbol on the product, the batteries or the packaging means that the product and any batteries contained within it must not be disposed of with household waste. You are obliged to dispose of the product at an appropriate disposal point. You can find out more about disposing of batteries and old electrical and electronic devices from the authorities in your city or community, the responsible waste disposal company, or the manufacturer.

#### Notes:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.


<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Fixing elements

## Overview

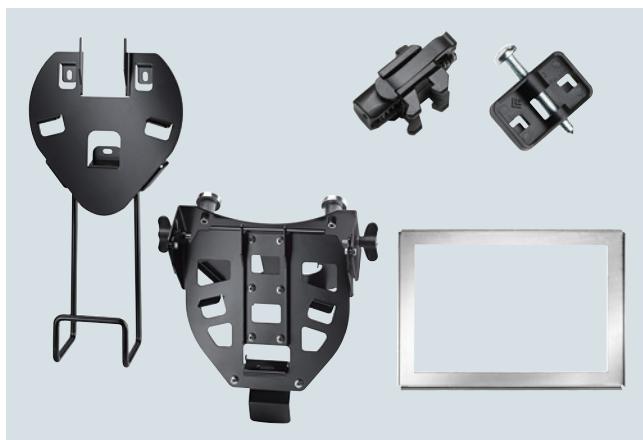

## Fixing elements

All parts required to install a SIMATIC device are listed here.

Depending on the device, various fasteners are available for attaching the Panel.

- Interlock
- Wall brackets and fixing elements
- Mounting frame <sup>1)</sup>
- Adapter frame
- Mounting clip
- Mounting bracket
- Installation enclosure

<sup>1)</sup> The mounting frame for the USB HUB4 is contained in the service set (see "Service sets").

**Mounting frames** enable compliance with device-specific degrees of protection IP65, NEMA4x and NEMA12 if the thickness of the mounting plate is less than the minimum plate thickness specified in the operating instructions of the device. The mounting frames have been specially developed for thin plates.

## Ordering data

## Article No.

<b>Mounts and interlocks</b>	
<b>Memory card lock</b>	<b>Article No.</b>
• 4"	<b>6AV2181-4DM10-0AX0</b>
• 7" ... 22"	<b>6AV2181-4XM00-0AX0</b>
<b>Wall bracket for Mobile Panels</b>	
• Type 10, for Mobile Panel and Mobile Client900, without cable storage	<b>6AV6574-1AF04-4AA0</b>
• Type 13, for KTP Mobile Panels	<b>6AV2181-5AG80-0AX0</b>
<b>For IP65 installation of Panels in thin-walled mounting plates</b>	
<b>Mounting frame for stabilizing and increasing the strength of the mounting plate</b>	
• 8" Touch	<b>6AV6671-3CS00-0AX0</b>
• 8" Key	<b>6AV6671-3CS01-0AX0</b>
• 10"/12" Touch	<b>6AV6671-8XS00-0AX0</b>
• 7" Unified Panels	<b>6AV6881-0GD33-0DA0</b>
• 10" Unified Panels	<b>6AV6881-0KD33-0DA0</b>
• 12" Unified Panels	<b>6AV6881-0LD33-0DA0</b>
• 15" Unified Panels	<b>6AV6881-0QD33-0DA0</b>
• 19" Unified Panels	<b>6AV6881-0UD33-0DA0</b>
• 22" Unified Panels	<b>6AV6881-0VD33-0DA0</b>
<b>Mounting clip/bracket for practical mounting of SIMATIC Panels, Thin Clients and IPCs</b>	
<b>Mounting clip</b>	
• Aluminum	<b>6AV6671-8XK00-0AX0</b>
• Spring	<b>6AV6671-8XK00-0AX1</b>
• Plastic	<b>6AV6671-8XK00-0AX2</b>
• Sheet steel	<b>6AV6671-8XK00-0AX3</b>
• Captive sheet steel	<b>6AV6881-6AD10-0AA0</b>
• Die-cast aluminum	<b>6AV2185-8MA00-0AA0</b>
• Thin Client	<b>6AV6671-6AP00-0AX0</b>
• Thin Client spring	<b>6AV6671-6AP00-0AX1</b>
<b>Mounting bracket</b>	<b>6AV6671-8XK00-0AX4</b>
Steel	
<b>Interlock bolt</b>	<b>6AV6881-4AW41-4AA0</b>
Interlock bolt for PRO keyboards and keyboard trays to lock the tilt adjustment, hardened V2A	
<b>VESA 100/75 in IP20 / ST37 round tube adapter</b>	<b>6AV6881-0AD56-0AA0</b>
Can be used with all PRO devices with matching tube connector for support arm systems. ST37 partly RAL 9006, powder-coated	
<b>VESA 100/75 in IP20 / V2A round tube adapter</b>	
Can be used with all PRO devices with matching tube connector for support arm systems.	
• 100% V2A	<b>6AV6881-0AD56-2CA0</b>
• 100% V2A with ICOTEK cable entry	<b>6AV6881-0AD56-3CA0</b>

## Accessories

### Fixing elements

Ordering data		Technical specifications		
<b>Adapter frame</b>		Article number	<b>6AV2181-4DM10-0AX0</b>	<b>6AV2181-4XM00-0AX0</b>
Adapter frame for widescreen rack mounting INOX; For widescreen Unified Panels and IPC WFP2.3			Memory card lock 4"	Memory card lock 7 to 22"
• 15" • 19" • 22"	<b>6AV6881-6QD41-0AA0</b> <b>6AV6881-6UD42-0AA0</b> <b>6AV6881-6VD41-0AA0</b>	General information	Memory card lock 4"	Memory card lock 7" ... 22"
<b>Installation enclosure for KP8 and KP8F:</b>	<b>6AV6881-2AM12-2AA0</b>	Installation type/mounting	Wall mounting/direct mounting	Yes; Snap-on
Prefabricated IP65 installation enclosure for KP8 and KP8F, including 2 x 22.5 mm cutouts for long stroke keys or switches. Supplied with blanking covers. Max. of 4 cables can be connected in IP65, cable sleeves enclosed. The enclosure can be permanently mounted or used as a portable device. The Key Panel is not included in the scope of delivery.		Standards, approvals, certificates		
		CE mark	Yes	Yes
<b>Installation enclosure KP8F</b>	<b>6AV6881-2AM12-1AA0</b>	Ambient conditions		
Prefabricated IP65 installation enclosure KP8F, including 1x 22.5 mm cutout. Supplied with an EMERGENCY OFF button. Max. of 4 cables can be connected in IP65, cable sleeves enclosed. The enclosure can be permanently mounted or used as a portable device. The Key Panel is not included in the scope of delivery.		Ambient temperature during operation		
		• min. -40 °C	-40 °C	-40 °C
		• max. 80 °C	80 °C	80 °C
<b>icotek replacement grommets</b>		Relative humidity		
• single for 4-5 mm cable • single for 5-6 mm cable • single for 6-7 mm cable • single for 7-8 mm cable • single for 8-9 mm cable • single for 9-10 mm cable • double for 6 mm cable • double for 8 mm cable • dummy grommet	<b>6AV6881-0AM62-0AD0</b> <b>6AV6881-0AM62-0AE0</b> <b>6AV6881-0AM62-0AF0</b> <b>6AV6881-0AM62-0AG0</b> <b>6AV6881-0AM62-0AH0</b> <b>6AV6881-0AM62-0AJ0</b> <b>6AV6881-0AM62-0AQ0</b> <b>6AV6881-0AM62-0AR0</b> <b>6AV6881-0AM62-0AX0</b>	• Operation, max. 90 %	90 %	90 %
		Mechanics/material		
		Material		
		• Plastic	Yes	Yes
		Dimensions		
		Width	25 mm	45 mm
		Height	30 mm	59 mm
		Thickness	10 mm	12 mm
		Weights		
		Weight (without packaging)	4 g; Per unit	6 g; Per unit
		Scope of supply		
		Delivery quantity in pieces	5	5
		Other		
		Merchandise	No	No
		Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
		Target devices	Comfort Panel 4"	Comfort Panels 7" ... 22"

**Technical specifications**

Article number	<b>6AV6574-1AF04-4AA0</b> Mobile Panels wall bracket, type 10	<b>6AV2181-5AG80-0AX0</b> Mobile Panels wall bracket, type 13
<b>General information</b>		
Product type designation	Wall-mounting bracket Mobile Panel, type 10	Wall-mounting bracket
<b>Installation type/mounting</b>		
Mounting in portrait format possible	Yes	Yes
Mounting in landscape format possible	No	No
<b>Standards, approvals, certificates</b>		
CE mark	Yes	No
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	-40 °C	-40 °C
• max.	80 °C	80 °C
<b>Relative humidity</b>		
• Operation, max.	90 %	90 %
<b>Mechanics/material</b>		
Enclosure material (front)		
• Sheet steel	Yes; Powder-coated	Yes; Powder-coated
<b>Dimensions</b>		
Width	200 mm	230 mm
Height	230 mm	317 mm
Depth	25 mm; Constructive	125 mm
<b>Weights</b>		
Weight (without packaging)	550 g; Without cable holder	1.01 kg
<b>Scope of supply</b>		
Delivery quantity in pieces	1; Color: Black	1
<b>Other</b>		
Merchandise	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	Mobile Panel 170, Mobile Panel 177, Mobile Panel 277 IWLAN, Mobile Panel 277F IWLAN V1 and V2, without mounting parts	KTP400F Mobile, KTP700 Mobile, KTP700F Mobile, KTP900 Mobile, KTP900F Mobile, TP1000F without mounting parts, including cable retainer
Note:	The trickle charge is only ensured with the 6AV6671-5CE00-0AX1 charging station.	The manuals of the target devices must always be observed. Specification of the target devices may differ after product changes.

## Accessories

### Fixing elements

#### Technical specifications

Article number	<b>6AV6671-3CS00-0AX0</b> Mounting frame 8" Touch	<b>6AV6671-3CS01-0AX0</b> Mounting frame 8" Key	<b>6AV6671-8XS00-0AX0</b> Mounting frame 10" to 12" Touch devices
<b>General information</b>			
Product type designation	Mounting frame 8" touch	Mounting frame 8" key	Mounting frame 10" ... 12" touch devices
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	No; No CE marking obligation
<b>Use in hazardous areas</b>			
• ATEX Zone 2			No
• ATEX Zone 22			No
• ATEX as target device			No
• IECEx Zone 1			No
• IECEx Zone 11			No
• IECEx Zone 2			No
• IECEx Zone 22			No
• cULus Class I Zone 1			No
• cULus Class I Zone 2, Division 2			No
• cULus Class II Division 2			No
• FM Class I Division 2			No
• FM Class II Division 2			No
<b>Marine approval</b>			
• Germanischer Lloyd (GL)			No
• American Bureau of Shipping (ABS)			No
• Bureau Veritas (BV)			No
• Det Norske Veritas (DNV)			No
• Korean Register of Shipping (KRS)			No
• Lloyds Register of Shipping (LRS)			No
• Nippon Kaiji Kyokai (Class NK)			No
• Polski Rejestr Statków (PRS)			No
• Chinese Classification Society (CCS)			No
• Marine approval as target device			No
<b>Ambient conditions</b>			
Suited for indoor use			Yes
Suited for outdoor use			No
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Mechanics/material</b>			
Material			
• Sheet steel			Yes; Powder-coated
Enclosure material (front)			
• Sheet steel	Yes	Yes	Yes; Powder-coated
<b>Scope of supply</b>			
Delivery quantity in pieces	1	1	1; Adapter frame 10"
<b>Other</b>			
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For MP277 8" touch	For MP277 8" key	For KTP1000 Basic, MP277 10" touch, MP377 12" touch, Thin Client 10"

## Fixing elements

## Technical specifications

Article number	6AV6671-8XK00-0AX2	6AV6671-8XK00-0AX1	6AV6671-8XK00-0AX0	6AV6671-8XK00-0AX3	6AV6671-8XK00-0AX4
	Plastic mounting clip	Spring mounting clip	Aluminum mounting clip	Steel mounting clip	Steel mounting clamp
<b>General information</b>					
Product type designation	Mounting clip, plastic	Mounting clip, spring	Mounting clip, aluminum	Mounting clip, steel	Mounting bracket, steel
<b>Installation type/mounting</b>					
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes
<b>Degree and class of protection</b>					
IP (all-round)	none			none	none
<b>Standards, approvals, certificates</b>					
CE mark			No; No CE marking obligation		
<b>Use in hazardous areas</b>					
• ATEX Zone 2			Yes; Always comply with the operating instructions of the target device.		
• ATEX Zone 22			Yes; Always comply with the operating instructions of the target device.		
• IECEx Zone 2			Yes; Always comply with the operating instructions of the target device.		
• IECEx Zone 22			Yes; Always comply with the operating instructions of the target device.		
<b>Ambient conditions</b>					
Suited for indoor use			Yes		
Suited for outdoor use			Yes; possible under certain conditions		
<b>Ambient temperature during operation</b>					
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C
<b>Relative humidity</b>					
• Operation, max.	90 %	90 %	90 %	90 %	90 %
<b>Mechanics/material</b>					
Material			Yes		
• Sheet steel					
Enclosure material (front)					
• Plastic	Yes	Yes; For 1 ... 4 mm sheet thickness		Yes	Yes
• Sheet steel					
Screw type					
• 4.5 V	Yes; Original partially Phillips screw		Yes	Yes	Yes
<b>Torques/forces</b>					
• Tightening torque, min.	0.18 N·m; If there is not enough torque, the degree of protection on the front may not be guaranteed			0.18 N·m; If there is not enough torque, the degree of protection on the front may not be guaranteed	0.18 N·m; If there is not enough torque, the degree of protection on the front may not be guaranteed
• Tightening torque, max.	0.2 N·m			0.2 N·m	0.2 N·m
• Tightening torque, recommended	0.2 N·m; Higher torques may damage the product			0.2 N·m; Higher torques may damage the product	0.2 N·m; Higher torques may damage the product

## Accessories

### Fixing elements

#### Technical specifications

Article number	<b>6AV6671-8XK00-0AX2</b>	<b>6AV6671-8XK00-0AX1</b>	<b>6AV6671-8XK00-0AX0</b>	<b>6AV6671-8XK00-0AX3</b>	<b>6AV6671-8XK00-0AX4</b>
	Plastic mounting clip	Spring mounting clip	Aluminum mounting clip	Steel mounting clip	Steel mounting clamp
<b>Dimensions</b>					
Width	30 mm	20 mm	15 mm	20 mm	142 mm
Height	17 mm; Without screw	35 mm	21 mm; Without screw	15 mm; Without screw	18 mm; Without screw
Depth			15 mm		
Thickness	8 mm	20 mm		8 mm	8 mm
<b>Weights</b>					
Weight (without packaging)	4 g; Per unit	8 g; Per unit	5 g; Per unit	4 g; Per unit	30 g; Per unit
<b>Scope of supply</b>					
Delivery quantity in pieces	20; Units per set	20; Spring-loaded terminals	20; Units per set	20	10
<b>Other</b>					
Merchandise	No	No	No	No	No
Manufacturer name		QUERUM products UG			
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for TD17, OP7, OP17, OP73, OP77A/B, TP/OP17x except TP177 4", Push Button Panel, Key Panel, empty front design, KP300 Basic mono, Basic 2nd, KTP400 Comfort, USB hub, sheet thickness 2 ... 6 mm	TP177-4", TP/OP 277-6", MP177-6, MP277-10" T, MP277-8", MP277-8" T, MP277-10" K, MP377 12"-19", TC 10", TC 15", KTP400 Basic mono, KTP600, KTP1000, KTP1500, KP700 Comfort, TP700 Comfort, KP900 Comfort, TP900 Comfort, KP1200 Comfort, TP1200 Comfort and IPC 277D 7, 9, 12"	TP177-4", TP/OP277-6", MP177-6, MP277-10" T, MP277-8", MP277-8" T, MP277-10" K, MP377 12"-19", TC 10", TC 15", KTP400 Basic mono, KTP600 Basic, KTP1000 Basic, TP1500 Basic, KP700 Comfort, TP700 Comfort, KP900 Comfort, TP900 Comfort, KP1200 Comfort, TP1200 Comfort and IPC277D 7", 9", 12"	15", 19" and 22" widescreen - Comfort Panels, IPCs, Flat Panels and Thin Clients. Plate thick- nesses up to 6 mm	15", 19" and 22" widescreen - Comfort Panels, IPCs, Flat Panels and Thin Clients, except SCD1900 19" widescreen. Plate thicknesses up to 6 mm
Note:				Function-compatible to article number 6AV6671-8XK00-0AX4	

**Technical specifications**

Article number	<b>6AV6881-6AD10-0AA0</b> Steel mounting clip, type 2	<b>6AV2185-8MA00-0AA0</b> Aluminum diecast mounting clip	<b>6AV6671-6AP00-0AX0</b> Mounting clip Thin Client	<b>6AV6671-6AP00-0AX1</b> Spring mounting clip Thin Client
<b>General information</b>				
Product type designation	Mounting clip, steel, type 2	Mounting clip, die-cast aluminum	Mounting clip, aluminum	Mounting clip, spring
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes		Yes	Yes
Mounting in landscape format possible	Yes		Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	No; No CE marking obligation			
<b>Use in hazardous areas</b>				
• ATEX Zone 2	Yes; Always comply with the operating instructions of the target device.			
• ATEX Zone 22	Yes; Always comply with the operating instructions of the target device.			
• IECEx Zone 2	Yes; Always comply with the operating instructions of the target device.			
• IECEx Zone 22	Yes; Always comply with the operating instructions of the target device.			
<b>Ambient conditions</b>				
Suited for indoor use	Yes			
Suited for outdoor use	Yes; possible under certain conditions			
<b>Ambient temperature during operation</b>				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	90 %	90 %
<b>Mechanics/material</b>				
Material				
• Plastic	Yes; Interlock			
• Sheet steel	Yes			
Enclosure material (front)				
• Plastic				Yes; For 1 ... 4 mm sheet thickness
• Sheet steel			Yes	
• Aluminum casting				
Screw type	M4x30 round head screw			
• Cross-tip	Yes			
• 4.5 V	Yes		Yes	
• Hexagon socket		Yes		
<b>Dimensions</b>				
Width	19 mm	12 mm	15 mm	20 mm
Height	11.3 mm; Without screw	18.5 mm; Without screw	20 mm; Without screw	35 mm
Depth	15 mm			
Thickness		14 mm	15 mm	20 mm
<b>Weights</b>				
Weight (without packaging)	8 g	0.14 kg	4 g; Per unit	8 g; Per unit
<b>Scope of supply</b>				
Delivery quantity in pieces	20; Units per set	20	6; Incl. screw	6; Spring-loaded terminals
<b>Other</b>				
Merchandise	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Breslauer Strasse 5, 90766 Fürth, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	Panel and IPC from 2019	Comfort Panels INOX, ITC INOX, IFP INOX	SIMATIC Thin Client	SIMATIC Thin Client
Note:				Function-compatible to article number 6AV6671-8XK00-0AX1

## Accessories

### Fixing elements

#### Technical specifications

Article number	<b>6AV6881-0AM62-0AD0</b>	<b>6AV6881-0AM62-0AE0</b>	<b>6AV6881-0AM62-0AF0</b>	<b>6AV6881-0AM62-0AG0</b>	<b>6AV6881-0AM62-0AH0</b>	<b>6AV6881-0AM62-0AJ0</b>
	IcoTek Cable grommets, 4-5	IcoTek Cable grommets, 5-6	IcoTek Cable grommets, 6-7	IcoTek Cable grommets, 7-8	IcoTek Cable grommets, 8-9	IcoTek Cable grommets, 9-10
<b>General information</b>						
Product type designation	icotek cable grommet, 4-5	icotek cable grommet, 5-6	icotek cable grommet, 6-7	icotek cable grommet, 7-8	icotek cable grommet, 8-9	icotek cable grommet, 9-10
<b>Frame size/design</b>						
• Standard	Yes; icotek cable grommet					
<b>Degree and class of protection</b>						
IP (all-round)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)
NEMA (front)	NEMA 4x (when installed)					
NEMA (rear)	NEMA 4x (when installed)					
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	-40 °C					
• max.	140 °C					
<b>Accessories</b>						
Function description	split grommet for cables with connector					
<b>Mechanics/material</b>						
Material						
• Plastic	Yes; polyamide, halogen-free and silicone-free					
Enclosure material (front)						
• Plastic	Yes; fire class: UL94-V0, self-extinguishing					
Color	gray (similar to RAL 7035)					
<b>Dimensions</b>						
Width	21 mm					
Height	21 mm					
Depth	19 mm					
Diameter	4 mm; 4 ... 5 mm cable	5 mm; 5 ... 6 mm cable	6 mm; 6 ... 7 mm cable	7 mm; 7 ... 8 mm cable	8 mm; 8 ... 9 mm cable	9 mm; 9 ... 10 mm cable
<b>Weights</b>						
Weight, approx.	8 g; Per unit					
Weight (without packaging)	40 g					
<b>Scope of supply</b>						
Delivery quantity in pieces	5; Units per set					
<b>Other</b>						
Merchandise	Yes	Yes	Yes	Yes	Yes	Yes
Manufacturer's address	Bischof-von-Lipp-Str. 1, 73569 Eschach, Deutschland					
Target devices	icotek cable entry and cable gland					
Note:	further information is available on the manufacturer's homepage.	further information is available on the manufacturer's homepage.	further information is available on the manufacturer's homepage.	further information is available on the manufacturer's homepage.	further information is available on the manufacturer's homepage.	further information is available on the manufacturer's homepage.

## Fixing elements

## Technical specifications

Article number	<b>6AV6881-0AM62-0AQ0</b> IcoTek Cable grommets, 6+6	<b>6AV6881-0AM62-0AR0</b> IcoTek Cable grommets, 8+8	<b>6AV6881-0AM62-0AX0</b> IcoTek Cable grommets, blank
<b>General information</b>			
Product type designation	icotek cable grommet, 6+6	icotek cable grommet, 8+8	icotek cable grommet, blank
<b>Frame size/design</b>			
• Standard	Yes; icotek cable grommet	Yes; icotek cable grommet	Yes; icotek cable grommet
<b>Degree and class of protection</b>			
IP (all-round)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)	up to IP68 (acc. to DIN EN 60529:2000-09)
NEMA (front)	NEMA 4x (when installed)	NEMA 4x (when installed)	NEMA 4x (when installed)
NEMA (rear)	NEMA 4x (when installed)	NEMA 4x (when installed)	NEMA 4x (when installed)
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	140 °C	140 °C	140 °C
<b>Accessories</b>			
Function description	split grommet for cables with connector	split grommet for cables with connector	split grommet for cables with connector
<b>Mechanics/material</b>			
Material			
• Plastic	Yes; polyamide, halogen-free and silicone-free	Yes; polyamide, halogen-free and silicone-free	Yes; polyamide, halogen-free and silicone-free
Enclosure material (front)			
• Plastic	Yes; fire class: UL94-V0, self-extinguishing	Yes; fire class: UL94-V0, self-extinguishing	Yes; fire class: UL94-V0, self-extinguishing
Color	gray (similar to RAL 7035)	gray (similar to RAL 7035)	gray (similar to RAL 7035)
<b>Dimensions</b>			
Width	21 mm	21 mm	21 mm
Height	21 mm	21 mm	21 mm
Depth	19 mm	19 mm	19 mm
Diameter	6 mm; 2x 6 mm, cable in a grommet	8 mm; 2x 8 mm, cable in a grommet	0 mm; blank
<b>Weights</b>			
Weight, approx.	8 g; Per unit	8 g; Per unit	8 g; Per unit
Weight (without packaging)	40 g	40 g	40 g
<b>Scope of supply</b>			
Delivery quantity in pieces	5; Units per set	5; Units per set	5; Units per set
<b>Other</b>			
Merchandise	Yes	Yes	Yes
Manufacturer's address	Bischof-von-Lipp-Str. 1, 73569 Eschach, Deutschland	Bischof-von-Lipp-Str. 1, 73569 Eschach, Deutschland	Bischof-von-Lipp-Str. 1, 73569 Eschach, Deutschland
Target devices	icotek cable entry and cable gland	icotek cable entry and cable gland	icotek cable entry and cable gland
Note:	Further information is available on the manufacturer's homepage.	Further information is available on the manufacturer's homepage.	Further information is available on the manufacturer's homepage.

## Accessories

### Fixing elements

#### Technical specifications

Article number	<b>6AV6881-0AD56-0AA0</b>	<b>6AV6881-0AD56-2CA0</b>
	Flange mount adapter VESA 100/75	Flange mount adapter VESA 100/75 INOX
<b>General information</b>		
Product type designation	VESA 100/75 flange adapter	VESA flange mount adapter 100/75 INOX
<b>Installation type/mounting</b>		
Mounting	VESA 100 mm / 75 mm with M6 thread	VESA 100 mm / 75 mm with M6 thread
Mounting type	Support arm with VESA 100 mm or 75 mm	Support arm with VESA 100 mm or 75 mm
<b>Degree and class of protection</b>		
IP (at the front)	IP20 (depending on mounting)	IP20 (depending on mounting)
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	No	No
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	55 °C	55 °C
<b>Relative humidity</b>		
• Operation, max.	90 %	90 %
• Condensation permissible	No	No
<b>Mechanics/material</b>		
Material	steel	
• Aluminum	No; Powder-coated	
• Stainless steel		Yes; Stainless steel V2A
<b>Dimensions</b>		
Width	135 mm	135 mm
Height	120 mm	120 mm
Depth	67.5 mm	67.5 mm
<b>Scope of supply</b>		
Delivery quantity in pieces	1; VESA round tube adapter 100/75 suitable for PRO devices, max. IP20 attainable	1; VESA round tube adapter 100/75 suitable for PRO devices, max. IP20 attainable
Components included	Without additional accessories	Without additional accessories
<b>Other</b>		
Merchandise	Yes; VESA 100/75 PRO adapter	Yes; VESA 100/75 PRO INOX adapter
Manufacturer name	QUERUM products UG	QUERUM products UG
Manufacturer's address	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany
contacting the manufacturer	email: querumproducts@web.de	email: querumproducts@web.de
Target devices	Not suitable for 19" 4:3 devices	Not suitable for 19" 4:3 devices
Note:	Max. load 35 kg, for expandable support arm mounting	Max. load 35 kg, for expandable support arm mounting

**Technical specifications**

Article number	<b>6AV6881-2AM12-1AA0</b> Switch housing KP8F	<b>6AV6881-2AM12-2AA0</b> Switch housing KP8
<b>General information</b>		
Product type designation	Fixing element	Fixing element
<b>Control elements</b>		
Version of actuating element	1x emergency stop (1 NC contact / 1 NO contact)	Without, with 2x 22.5 mm blanking plugs
Operating principle of the actuating element	Latching, rotate to unlatch	
With parameterizable keys	Yes; Retrofittable with KP8F (not included in the scope of supply)	Yes; Retrofittable with KP8 or KP8F (not included in the scope of supply) optionally retrofittable with switch, pushbutton, keyswitch, etc.
Contact configuration	1 NC contact, 1 NO contact	
<b>Installation type/mounting</b>		
Mounting	For horizontal and vertical mounting	For horizontal and vertical mounting
Mounting type	Backplane mounting	Backplane mounting
Mounting in portrait format possible	Yes	Yes
Mounting in landscape format possible	Yes	Yes
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	No; possible under certain conditions	No; possible under certain conditions
<b>Ambient temperature during operation</b>		
• min.	0 °C; Operating temperature KP8F must always be maintained	0 °C; Operating temperature KP8 or KP8F must always be maintained
• max.	40 °C; Operating temperature KP8F must always be maintained	40 °C; Operating temperature KP8 or KP8F must always be maintained
<b>Relative humidity</b>		
• Operation, max.	90 %	90 %
• Condensation permissible	No; Condensation not permissible	No; Condensation not permissible
<b>Mechanics/material</b>		
Material	aluminum	aluminum
• Aluminum	Yes; Powder-coated	Yes; Powder-coated
<b>Dimensions</b>		
Width	259 mm	259 mm
Height	128 mm	128 mm
Depth	90 mm	90 mm
<b>Scope of supply</b>		
Delivery quantity in pieces	1; Bopla #115234 aluminum enclosure	1; Bopla #115234 aluminum enclosure
Components included	1x Icotek cable entry KEL-ER B4 incl. various grommets	1x Icotek cable entry KEL-ER B4 incl. various grommets
<b>Other</b>		
Merchandise	Yes	Yes
Manufacturer name	Wittwer Industrielle Elektronik	Wittwer Industrielle Elektronik
Manufacturer's address	Hembacher Straße 4, 90592 Schwarzenbruck-Lindelburg, Germany	Hembacher Straße 4, 90592 Schwarzenbruck-Lindelburg, Germany
Target devices	Suitable for the installation of KP8, KP8F, do not exceed the maximum operating temperature of the KP!	Suitable for the installation of KP8, KP8F, do not exceed the maximum operating temperature of the KP!
Note:	IP65 can only be attained if a key panel and a cable entry are properly installed.	IP65 can only be attained if a key panel and a cable entry are properly installed.

## Accessories

### Fixing elements

#### Technical specifications

Article number	<b>6AV6881-6UD42-0AA0</b> Adapter frame widescreen 19" Rack	Article number	<b>6AV6881-6UD42-0AA0</b> Adapter frame widescreen 19" Rack
<b>General information</b>		<b>Ambient conditions</b>	
Product type designation	Adapter frame 19" rack widescreen		
<b>Installation type/mounting</b>		Suited for indoor use	Yes
Mounting	Mounting on 19" standard rack	Suited for outdoor use	No; possible under certain conditions
Mounting type	Provided by customer	<b>Ambient temperature during operation</b>	
Mounting in portrait format possible	No	• min.	-40 °C
Mounting in landscape format possible	Yes	• max.	80 °C
<b>Standards, approvals, certificates</b>		<b>Relative humidity</b>	
CE mark	No; No CE marking obligation	• Operation, max.	90 %
<b>Use in hazardous areas</b>		• Condensation permissible	No; Condensation not permissible
• ATEX Zone 2	No	<b>Mechanics/material</b>	
• ATEX Zone 22	No	Material	
• ATEX as target device	No	• Stainless steel	Yes; Stainless steel V2A
• IECEx Zone 1	No	Enclosure material (front)	
• IECEx Zone 11	No	• Stainless steel	Yes; Powder-coated, RAL 9006
• IECEx Zone 2	No	<b>Dimensions</b>	
• IECEx Zone 22	No	Width	482.6 mm
• cULus Class I Zone 1	No	Height	354.75 mm
• cULus Class I Zone 2, Division 2	No	Thickness	3 mm
• cULus Class II Division 2	No	<b>Scope of supply</b>	
• FM Class I Division 2	No	Delivery quantity in pieces	1; Adapter frame 19" rack
• FM Class II Division 2	No	Components included	Without additional accessories
<b>Marine approval</b>		<b>Other</b>	
• Germanischer Lloyd (GL)	No	Merchandise	Yes; Adapter frame 19" rack widescreen
• American Bureau of Shipping (ABS)	No	Manufacturer name	QUERUM products UG
• Bureau Veritas (BV)	No	Manufacturer's address	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany
• Det Norske Veritas (DNV)	No	contacting the manufacturer	email: querumproducts@web.de
• Korean Register of Shipping (KRS)	No	Target devices	19" Unified Comfort Panel / IPC
• Lloyds Register of Shipping (LRS)	No	Note:	Observe documentation of the target device
• Nippon Kaiji Kyokai (Class NK)	No		
• Polski Rejestr Statków (PRS)	No		
• Chinese Classification Society (CCS)	No		
• Marine approval as target device	No		

**Technical specifications**

Article number	<b>6AV6881-4AW41-4AA0</b> Locking bolt PRO
<b>General information</b>	
Product type designation	PRO interlock bolts:
<b>Installation type/mounting</b>	
Mounting in portrait format possible	Yes
Mounting in landscape format possible	Yes
<b>Degree and class of protection</b>	
IP (all-round)	none
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	-40 °C
• max.	80 °C
<b>Relative humidity</b>	
• Operation, max.	90 %
<b>Mechanics/material</b>	
Interlock design	M8 screw fastening
Enclosure material (front)	
• Plastic	Yes; mushroom knob, thermoplastic, black gray
• Stainless steel	Yes; pin, hardened
<b>Torques/forces</b>	
• Tightening torque, min.	0.18 N·m; If there is not enough torque, the degree of protection on the front may not be guaranteed
• Tightening torque, max.	0.2 N·m
• Tightening torque, recommended	0.2 N·m; Higher torques may damage the product
<b>Dimensions</b>	
Length	40.5 mm; total length
Diameter	8 mm
<b>Weights</b>	
Weight (without packaging)	5 g; Per unit
<b>Scope of supply</b>	
Delivery quantity in pieces	1; Units per set
<b>Other</b>	
Merchandise	Yes
Manufacturer's address	Wörnitzstr. 117, 90449 Nuremberg, Deutschland
Target devices	for locking inclination adjustments, e.g. suitable for keyboards or shelves

**More information**Note:

3D data and technical drawings for trade goods are only available for download in the SIOS delivery release if the manufacturer has granted permission.

Integration into the Siemens 3D download area is unfortunately not possible. For this reason, it is also not possible to provide a 3D (Step) file for every accessory.

The responsibility for trade good files always lies with the manufacturer.

The manufacturer is listed at the end of the technical specifications for each product.

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Accessories

### Labeling strips

#### Overview



#### Ordering data

#### Article No.

<b>Labeling strips</b> for MP 377 Key	<b>6AV6574-1AB00-2BA0</b>
<b>Front film TD100C</b> blank	<b>6ES7272-1BF00-7AA0</b>
<b>Front film TD400C</b> blank	<b>6AV6671-0AP00-0AX0</b>
<b>Labeling set</b> for Mobile Panel 277	<b>6AV6671-5BF00-0AX0</b>
<b>Widescreen labeling set</b> • 4" widescreen for KTP400F Mobile 4" • 7" widescreen for KTP700 Mobile, KTP700F Mobile • 9" widescreen for KTP900 Mobile, KTP900F Mobile	<b>6AV2181-5DJ10-0AX0</b> <b>6AV2181-5GJ10-0AX0</b> <b>6AV2181-5JJ10-0AX0</b>
<b>Protective sleeve</b> for Mobile Panel 170/177	<b>6AV6574-1AB04-4AA0</b>

#### Labeling strips and printable films

Labeling strips enable keys and pushbuttons to be labeled. Print templates for the Panels and IPCs are available for downloading free of charge (in SIOS entry ID: 11274631).

They enable you to create transparent films on your own printer.

Perforated labeling strips are available for some classic panels. In this case, make sure that a suitable printer is used.

The thickness of the films should be between 100 and 125 µm.

- Labeling strips
- Front film
- Labeling set
- Protective sleeve

#### Note:

Protective front films which are specially designed for holding labeling strips are available for Mobile Panel 2<sup>nd</sup> Generation. The labeling strips can be printed on standard film and attached to the front with adhesive pads. The protective film is then adhered evenly over the Mobile front.

## Labeling strips

## Technical specifications

Article number	<b>6AV6574-1AB00-2BA0</b>	<b>6ES7272-1BF00-7AA0</b>	<b>6AV6671-0AP00-0AX0</b>	<b>6AV6671-5BF00-0AX0</b>	<b>6AV6574-1AB04-4AA0</b>
	Labeling strips MP 37x Key	TD100C front film, blank	TD400C front film, blank	Labeling set Mobile Panel 277	Protective pouch for labeling strips
<b>General information</b>					
Product type designation	Labeling strip MP 37x key	Front membrane TD100C, blank	Front membrane TD400C, blank	Labeling set Mobile Panel 277	Protective pouch labeling strips
<b>Installation type/mounting</b>					
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark		Yes	Yes	Yes	
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C	80 °C	80 °C
<b>Relative humidity</b>					
• Operation, max.	90 %	90 %	90 %	90 %	90 %
<b>Mechanics/material</b>					
Enclosure material (front)					
• Plastic	Yes; DIN A4 perforated sheets				
<b>Dimensions</b>					
Width	210 mm	210 mm	210 mm	210 mm	170 mm; Approximate dimension
Height	297 mm	297 mm	297 mm	297 mm	115 mm; Approximate dimension
Thickness	0.13 mm; Max. tolerance ± 0.03 mm				
Width of the housing front			163 mm		
Height of housing front			91 mm		
<b>Weights</b>					
Weight (without packaging)	45 g				
<b>Scope of supply</b>					
Delivery quantity in pieces	1; Contains two sets	10	10	2; 2 sheets with 3 labeling strips each, incl. corner seals, O-ring, replacement screw, decorative film for corner seal	5
• Number of films per sheet		6	2	6	
• Parts per unit	2; one set comprises a set of vertical and a set of horizontal labeling strips	60	20	6	1
<b>Other</b>					
printable with laser printer	Yes; Test printer suitability beforehand. No liability for printer damage	Yes	Yes	Yes	No
Merchandise	No	No	No	No	Yes
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For MP370 key, MP377 key	For TD100C	For TD400C	For Mobile Panel 277	For Mobile Panel 170, Mobile Panel 177
Note:	Transparent film, keys pre-printed in gray, LED area free				

## Accessories

### Labeling strips

#### Technical specifications

Article number	<b>6AV2181-5DJ10-0AX0</b> Labeling set 4" wide, type 13	<b>6AV2181-5GJ10-0AX0</b> Labeling set 7" wide, type 13	<b>6AV2181-5JJ10-0AX0</b> Labeling set 9" wide, type 13
<b>General information</b>			
Product type designation	Labeling set 4" widescreen	Labeling set 7" widescreen	Labeling set 9" widescreen
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Ambient conditions</b>			
Suited for indoor use	Yes; Resistant to alcohol, dilute acids, diluted alkaline solutions, hydro-carbons, household cleaning agents	Yes; Resistant to alcohol, dilute acids, diluted alkaline solutions, hydro-carbons, household cleaning agents	Yes; Resistant to alcohol, dilute acids, diluted alkaline solutions, hydro-carbons, household cleaning agents
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Mechanics/material</b>			
Material			
• Plastic	Yes; Autoflex EBA 130	Yes; Autoflex EBA 130	Yes; Autoflex EBA 130
Enclosure material (front)			
• Plastic	Yes; Film properties: Anti-glare 55 %, hardness 3H	Yes; Film properties: Anti-glare 55 %, hardness 3H	Yes; Film properties: Anti-glare 55 %, hardness 3H
<b>Dimensions</b>			
Width	168 mm	224 mm	283 mm
Height	120 mm	149 mm	178 mm
Thickness	0.125 mm	0.125 mm	0.125 mm
<b>Weights</b>			
Weight (without packaging)	60 g	80 g	100 g
<b>Scope of supply</b>			
Delivery quantity in pieces	5	5	5
Components included	including 20 double-sided adhesive dots	including 20 double-sided adhesive dots	including 20 double-sided adhesive dots
<b>Other</b>			
printable with laser printer	No	No	No
Merchandise	Yes	Yes	Yes
Manufacturer name	Kolb-Siebdruck GmbH & Co. KG	Kolb-Siebdruck GmbH & Co. KG	Kolb-Siebdruck GmbH & Co. KG
Manufacturer's address	Espenstraße 5, 95632 Wunsiedel, Germany	Espenstraße 5, 95632 Wunsiedel, Germany	Espenstraße 5, 95632 Wunsiedel, Germany
Target devices	KTP400F Mobile	KTP700 Mobile, KTP700F Mobile	KTP900 Mobile, KTP900F Mobile
Note:	Labeling strip SIOS entry No. 11274631	Labeling strip SIOS entry No. 11274631	Labeling strip SIOS entry No. 11274631

## More information

### Notice:

The labeling strips, blank films, and protective films should be printed at a printing works. Further details on printing the films can be found in the respective Technical Specifications.

Templates can be used to create labeling strips for SIMATIC HMI devices. Alternatively, a tool for the creation of labeling strips is available.

Download templates from:

<http://support.automation.siemens.com/WW/view/en/11274631>  
and

Label Creator Download from:

<http://support.automation.siemens.com/WW/view/en/61507590>

### Note:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com/>

## Accessories

### Input devices, cables

#### Overview



RFID components make it possible to log on to a suitable HMI panel or IPC using a chip card. The RFID reader is connected to the panel via USB. Installation is described in detail in the FAQs:

<https://support.industry.siemens.com/cs/ww/en/view/998081>

Suitable RFID system card types:

- ISO 15693, dimensions: 85 x 54 x 0.8 mm (L x W x H)
- ISO 15693, dimensions: 50 x 3.5 mm (D x H) disc
- MOBY E (MIFARE, ISO 14443), dimensions: 85 x 54 x 0.8 mm (L x W x H)
- MOBY E (MIFARE, ISO 14443), dimensions: 85 x 54 x 2.5 mm (L x W x H)

#### Input devices

Input devices are all those devices via which information can be supplied to a computer or panel. This enables interaction with a program.

SIMATIC HMI input devices are specially designed for operation on panels and industrial PCs in industrial environments. Trade goods, which are identified as such in the technical specifications, have been approved by the manufacturer for typical office applications. Siemens does not always carry out in-depth industrial testing on trade goods.

The following input devices are available for use with IPCs and panels:

- Desktop keyboards
- Built-in and mounted keyboards
- Removable keyboard
- USB mouse
- USB cables
- RFID components for user identification

## Input devices, cables

Ordering data	Article No.	Article No.
<b>USB keyboard TKL-105</b>	IP68 keyboard, black, with USB connection • with German layout • with international US layout	6AV6881-0AU14-0AA0 6AV6881-0AU14-1AA0
<b>USB keyboard TKV-086 IP65 stainless steel</b>	Desktop keyboard, INOX vandal-proof, also suitable for PRO system <sup>1)</sup> . Incl. 4 plastic adhesive feet <sup>2)</sup> , cable holder/ties for fixing the USB cable.  IP65 keyboard stainless steel with IP67 USB connection, incl. accessories • with German layout • with international US layout	6AV6881-0AU14-0DB0 6AV6881-0AU14-1DB0
<b>IP65 stainless steel keyboard in RAL9023 (gray)</b>	IP65 stainless steel keyboard in RAL9023 (gray) for installation on all fully-enclosed 4:3 PRO devices with suitable mechanics. With numeric keypad, layout: US, tiltable, mouse cursor control via integrated keys, and USB connection	6AV7674-0NE00-0AA0
<b>USB keyboard INT for PRO devices</b>	IP65 stainless steel keyboard in RAL9006 (silver) for installation on all fully-enclosed 16:9 PRO devices with suitable mechanics. With numeric keypad, layout: US, tiltable, mouse cursor control via integrated keys, and USB connection	6AV7674-1NE00-0AA0
<b>Tray for PRO devices</b>	For installation on all fully-enclosed IP65 PRO devices with suitable mechanics. With 2x USB connection sockets including USB cable. Unused socket can be sealed to IP65 • Tray in RAL9023 (gray) for all fully-enclosed IP65 4:3 PRO devices • Tray in RAL9006 (silver) for all fully-enclosed IP65 16:9 PRO devices	6AV7674-0NE01-0AA0 6AV7674-1NE01-0AA0
<b>Membrane keyboard IP65</b>	with touchpad, PS/2 • with German layout • with international US layout	6GF6710-2AC 6GF6710-2BC
<b>Removable keyboard</b>	19" Removable keyboard with trackball, PS/2 • with German layout • with international US layout	6GF6710-3BJ 6GF6710-3BK
<b>Built-in keyboard, touchpad</b>	19" built-in keyboard, 4U with touchpad, PS/2 • with German layout • with international US layout	6GF6710-3AE 6GF6710-3BE
<b>Built-in keyboard, trackball, international</b>	Built-in keyboard with trackball, PS/2	6GF6710-3BG
<b>USB 2.0 mouse</b>	For HMI Panels, programming devices and IPCs with corresponding interfaces. Color: Anthracite	6AV2181-8AT00-0AX0
<b>USB cables<sup>3)</sup></b>	• Type A female USB A, IP20 / male USB A, IP20, length 2.5 m • Type B with M20 screw sealing, female USB A, IP67 / male USB A, IP20, length 0.8 m • Type C with M20 screw sealing, female USB A, IP67 / male USB A, IP20, length 2.5 m • Type D female, USB A, IP67 / male USB A, IP20, length 2.5 m	6AV6881-0AF21-0LB0
<b>USB cable 0</b>	6AV6881-0AF22-0DC0	6AV6881-0AF22-0LC0
<b>SIMATIC RF1060R Access Control Reader</b>	Access control reader with USB interface; can only be used to a limited extent in outdoor environments -25 to +55 °C; incl. 1.8 m connecting cable	6GT2831-6AA50
<b>SIMATIC RF200 card holder</b>	Optional, for clipping onto the RF1060R Access Control Reader card. Can be temporarily stored on the reader.	6GT2890-0CA00
<b>RFID D400 replacement cards</b>	Transponder MDS, ISO 15693; Minimum order quantity 50 units	6GT2600-4AD00
<b>RFID E600 replacement cards</b>	MOBY E (MIFARE, ISO 14443) Minimum order quantity 50 units	6GT2300-0AA00
<p><sup>1)</sup> Further mechanical attachment parts (keyboard tray, etc.) are required for use on PRO systems. Observe the respective specifications of the target systems!</p> <p><sup>2)</sup> Plastic adhesive feet can be attached on the underside of the keyboard at the marked locations.</p> <p><sup>3)</sup> With specification IP20, the connector type specified on the cable corresponds to a standard USB connector. With specification IP67, it corresponds to a connector with IP67-protected screw connection. IP67 connectors are fitted with a cover to ensure degree of protection IP67 even when the connector is unplugged and the cover is unscrewed. In some cases a M20 screw sealing is already part of the cable. This version can be used for IP65 transitions (PRO system/control cabinet). The IP67 sockets are also suitable for standard USB connectors, however in those cases the degree of protection is reduced to IP20. Note: A maximum cable length of 3 m should not be exceeded!</p>		

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6AV6881-0AU14-0DB0</b> USB keyboard GER, KV25605, INOX	<b>6AV6881-0AU14-1DB0</b> USB keyboard INT, KV25605, INOX
<b>General information</b>		
Product type designation	USB keyboard GERMAN	USB keyboard international US
<b>Control elements</b>		
Version of actuating element	Long-stroke key with 2 mm contact travel	Long-stroke key with 2 mm contact travel
Operating principle of the actuating element	Carbon pellet on gold-plated PCB	Carbon pellet on gold-plated PCB
<b>Input device</b>		
• Scroll wheel	No; Cursor control possible, left and right mouse button	No; Cursor control possible, left and right mouse button
• Movement tracking	Capacitive touchpad	Capacitive touchpad
<b>Keyboard fonts</b>		
• Design	Keyboard with long-stroke keys	Keyboard with long-stroke keys
• Keyboard assignment	86 (Germany QWERTZ)	86 (International QWERTY, US version)
• Color of the buttons	Stainless steel	Stainless steel
• Color of the key inscription	Black, laser-inscribed	Black, laser-inscribed
• Key illumination	No	No
• Function keys	Yes	Yes
- Number of function keys	12	12
- Number of function keys with LEDs	0	0
- Programmable	No	No
• Number pad	Yes; Integrated into key layout	Yes; Integrated into key layout
• status LED displays	Yes; Num, FN, Shift, Scroll lock	Yes; Num, FN, Shift, Scroll lock
- for number pad	Yes	Yes
- for Shift keys	Yes	Yes
<b>Connection type</b>		
• USB	Yes; USB 2.0 type A	Yes; USB 2.0 type A
• PS/2	No	No
• Cable length	0 m; See cable length	0 m; See cable length
<b>Frame size/design</b>		
• Standard	Yes; For industrial applications	Yes; For industrial applications
<b>Installation type/mounting</b>		
Mounting	Desktop, PRO support arm, drawer	Desktop, PRO support arm, drawer
Mounting type	Suitable for PRO devices	Suitable for PRO devices
<b>Supply voltage</b>		
Rated value (DC)	5 V; 4.35 V to 5.25 V (USB)	5 V; 4.35 V to 5.25 V (USB)
<b>Input current</b>		
Current consumption (rated value)	55 mA; including touchpad and LED	55 mA; including touchpad and LED
<b>Battery</b>		
Battery-operated	No; maintenance-free	No; maintenance-free
<b>Interfaces</b>		
Number of USB interfaces	1; USB 2.0 (IP67 plug enclosure)	1; USB 2.0 (IP67 plug enclosure)
<b>Degree and class of protection</b>		
IP (at the front)	USB plug, meets IP67 with screws, if only inserted then without IP	USB plug, meets IP67 with screws, if only inserted then without IP
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
cULus	Yes; Available soon	Yes; Available soon
BIS	No; required for export to India	No; required for export to India

**Technical specifications**

Article number	<b>6AV6881-0AU14-0DB0</b> USB keyboard GER, KV25605, INOX	<b>6AV6881-0AU14-1DB0</b> USB keyboard INT, KV25605, INOX
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	No; > 0 °C possible under certain conditions	No; > 0 °C possible under certain conditions
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	60 °C	60 °C
<b>Relative humidity</b>		
• Operation, max.	80 %; no condensation	80 %; no condensation
• Condensation permissible	No	No
<b>Runs under operating system</b>		
• Windows CE	Yes	Yes
• Windows Vista	Yes	Yes
• Windows XP	Yes	Yes
• Windows 7	Yes	Yes
• Windows 8	Yes	Yes
• Windows 10	Yes	Yes
<b>Cables</b>		
Cable length	0.4 m; USB	0.4 m; USB
<b>Mechanics/material</b>		
Material		
• Stainless steel	Yes; Front stainless steel AISI 304	Yes; Front stainless steel AISI 304
Enclosure material (rear)	aluminum	aluminum
Material of the front ring	Generally silicone-free PORON seal	Generally silicone-free PORON seal
Enclosure color (front)	INOX AISI 304	INOX AISI 304
Enclosure color (rear)	Aluminum paint	Aluminum paint
<b>Torques/forces</b>		
• Breakdown torque	1.5 N·m; Switching force buttons 1.5 N to 1.8 N	1.5 N·m; Switching force buttons 1.5 N to 1.8 N
<b>Service life</b>		
• Number of operating cycles, keys	20 000 000; Operations (minimum)	20 000 000; Operations (minimum)
<b>Dimensions</b>		
Width	369 mm	369 mm
Height	18 mm	18 mm
Depth	130 mm; Without cable outlet (with + 3 cm)	130 mm; Without cable outlet (with + 3 cm)
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
<b>Other</b>		
printable with laser printer	No; Layout change possible, one-off costs around € 2 000	No; Layout change possible, one-off costs around € 2 000
Merchandise	Yes	Yes
Manufacturer name	GETT Gerätetechnik GmbH	GETT Gerätetechnik GmbH
Manufacturer's address	Mittlerer Ring 1, 08233 Treuen (Vogtland), Germany	Mittlerer Ring 1, 08233 Treuen (Vogtland), Germany
contacting the manufacturer	Phone +49 37468 660-0, email: info@gett.de	Phone +49 37468 660-0, email: info@gett.de
Target devices	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6AV6881-0AU14-0AA0</b>	<b>6AV6881-0AU14-1AA0</b>
	USB keyboard GER, TKL-105	USB keyboard INT, TKL-105
<b>General information</b>		
Product type designation	USB keyboard GERMAN	USB keyboard international US
<b>Control elements</b>		
Version of actuating element	Long-stroke key with 4 mm contact travel	Long-stroke key with 4 mm contact travel
Operating principle of the actuating element	Keyboard with long-stroke keys with membrane switching contacts	Keyboard with long-stroke keys with membrane switching contacts
<b>Input device</b>		
• Scroll wheel	No	No
• Movement tracking	none	none
<b>Keyboard fonts</b>		
• Design	Keyboard with long-stroke keys	Keyboard with long-stroke keys
• Keyboard assignment	105 keys, German layout	105 keys, international US layout
• Color of the buttons	Black	Black
• Color of the key inscription	White	White
• Key illumination	No	No
• Function keys	Yes	Yes
- Number of function keys	12	12
- Number of function keys with LEDs	0	0
- Programmable	No	No
• Number pad	Yes; Free-standing	Yes; Free-standing
• status LED displays	Yes; Num, Caps and Scroll	Yes; Num, Caps and Scroll
- for number pad	Yes	Yes
- for Shift keys	Yes	Yes
<b>Connection type</b>		
• USB	Yes; USB 2.0 type A	Yes; USB 2.0 type A
• PS/2	No	No
• Cable length	0 m; See cable length	0 m; See cable length
<b>Frame size/design</b>		
• Standard	Yes; For industrial applications	Yes; For industrial applications
<b>Installation type/mounting</b>		
Mounting	Desktop	Desktop
Mounting type	none	none
<b>Supply voltage</b>		
Rated value (DC)	5 V; via USB	5 V; via USB
<b>Battery</b>		
Battery-operated	No; maintenance-free	No; maintenance-free
<b>Interfaces</b>		
Number of USB interfaces	1; USB 2.0	1; USB 2.0
<b>Degree and class of protection</b>		
IP (all-round)	IP68 all-round and dishwasher safe	IP68 all-round and dishwasher safe
IP (at the front)	USB connector without degree of protection	USB connector without degree of protection
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
cULus	Yes; cUL	Yes; cUL
BIS	No; required for export to India	No; required for export to India

**Technical specifications**

Article number	<b>6AV6881-0AU14-0AA0</b> USB keyboard GER, TKL-105	<b>6AV6881-0AU14-1AA0</b> USB keyboard INT, TKL-105
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	No; possible under certain conditions	No; possible under certain conditions
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	70 °C	70 °C
<b>Relative humidity</b>		
• Operation, max.	80 %; no condensation	80 %; no condensation
• Condensation permissible	No	No
<b>Runs under operating system</b>		
• Windows CE	Yes	Yes
• Windows Vista	Yes	Yes
• Windows XP	Yes	Yes
• Windows 7	Yes	Yes
• Windows 8	Yes	Yes
• Windows 10	Yes	Yes
<b>Cables</b>		
Cable length	1.5 m; USB	1.5 m; USB
<b>Mechanics/material</b>		
Material		
• Plastic	Yes; Black	Yes; Black
Enclosure material (front)		
• Plastic	Yes; ABS with antimicrobial coating	Yes; ABS with antimicrobial coating
Enclosure color (front)	Black	Black
Enclosure color (rear)	Black	Black
<b>Torques/forces</b>		
• Breakdown torque	0.53 N·m; Switching force buttons	0.53 N·m; Switching force buttons
<b>Service life</b>		
• Number of operating cycles, keys	10 000 000; Operations (minimum)	10 000 000; Operations (minimum)
<b>Dimensions</b>		
Width	459 mm	459 mm
Height	35 mm	35 mm
Depth	174 mm	174 mm
<b>Weights</b>		
Weight (without packaging)	800 g	800 g
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
<b>Other</b>		
printable with laser printer	No; Layout change possible, one-off costs around € 2 000	No; Layout change possible, one-off costs around € 2 000
Merchandise	Yes; GETT TKL-105	Yes; GETT TKL-105
Manufacturer name	GETT Gerätetechnik GmbH	GETT Gerätetechnik GmbH
Manufacturer's address	Mittlerer Ring 1, 08233 Treuen (Vogtland), Germany	Mittlerer Ring 1, 08233 Treuen (Vogtland), Germany
contacting the manufacturer	Phone +49 37468 660-0, email: info@gett.de	Phone +49 37468 660-0, email: info@gett.de
Target devices	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot
Note:	Corresponds to KL21203	Corresponds to KL24603

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6AV7674-0NE00-0AA0</b>	<b>6AV7674-0NE01-0AA0</b>
	USB keyboard INT for 4:3 PRO devices	Shelf for 4:3 PRO devices
<b>General information</b>		
Product type designation	USB-INOX keyboard PRO, mouse keys	Tray incl. 2x USB
<b>Keyboard fonts</b>		
• Design	Keyboard with short-stroke keys	
• Keyboard assignment	English	
• Color of the buttons	Stainless steel	
• Color of the key inscription	Black	
• Key illumination	No	
• Function keys		
- Number of function keys	12	
• Number pad	Yes; Free-standing	
• status LED displays	Yes; Num, Caps and Scroll	
- for number pad	Yes	
- for Shift keys	Yes	
<b>Connection type</b>		
• USB	Yes; Type A	Yes; USB 2.0
• PS/2	No	No
• Cable length	1.5 m; Typical	500 mm; Typical
<b>Frame size/design</b>		
• Standard	Yes; For industrial applications	Yes; For industrial applications
• Ergonomic	Yes; 90° adjustable / tilttable	Yes; 90° adjustable / tilttable
<b>Ergonomics</b>		
• Trackball rest	No	No
• Adjustable height	Yes; By adjusting inclination angle 0° to 90°	Yes; By adjusting inclination angle 0° to 90°
<b>Installation type/mounting</b>		
Mounting	Max. load bearing capacity of 2 kg	Max. load bearing capacity of 2 kg
Mounting type	Suitable for PRO devices	Suitable for PRO devices
maximum permissible angle of inclination without external ventilation	90°; Between 0° and 90° in steps of 15°	90°; Between 0° and 90° in steps of 15°
<b>Supply voltage</b>		
Type of supply voltage	via USB	
<b>Input current</b>		
Current consumption (rated value)	100 mA; Typical	
<b>Interfaces</b>		
Number of USB interfaces		2; USB 2.0
<b>Degree and class of protection</b>		
IP (all-round)		IP65 fully enclosed (when protective cover is closed)
Splashproof	Yes	
<b>Standards, approvals, certificates</b>		
CE mark	Yes	
BIS	No; required for export to India	

**Technical specifications**

Article number	<b>6AV7674-0NE00-0AA0</b> USB keyboard INT for 4:3 PRO devices	<b>6AV7674-0NE01-0AA0</b> Shelf for 4:3 PRO devices
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	45 °C	45 °C
<b>Relative humidity</b>		
• Operation, max.	80 %; no condensation	80 %; no condensation
• Condensation permissible	No; Condensation not permissible	No; Condensation not permissible
<b>Runs under operating system</b>		
• Windows CE	Yes	
• Windows Vista	Yes	
• Windows XP	Yes	
• Windows 7	Yes	
• Windows 8	Yes	
• Windows 10	Yes	
<b>Mechanics/material</b>		
Material		
• Aluminum	Yes; Powder-coated, RAL 9023	Yes; Powder-coated, RAL 9023
• Stainless steel	Yes; Keyboard itself	
<b>Service life</b>		
• Number of operating cycles, keys	10 000 000; Operations (minimum)	
<b>Dimensions</b>		
Width	481 mm	500 mm
Height	20 mm	64 mm
Depth	171.6 mm	200 mm
<b>Weights</b>		
Weight (without packaging)	3 600 g	3 000 g
<b>Scope of supply</b>		
Delivery quantity in pieces	1; With support arm bracket	1; With support arm bracket, without keyboard
<b>Other</b>		
Merchandise	Yes; Sasse no. 1580.9905879	Yes; Sasse no. 1580.9906124
Manufacturer name	Sasse Elektronik GmbH	Sasse Elektronik GmbH
Manufacturer's address	Berliner Straße 12, 91126 Schwabach, Germany	Berliner Straße 12, 91126 Schwabach, Germany
contacting the manufacturer	Phone +49 9122 978-0, e-mail: info@sasse-elektronik.de	
Target devices	Merchandise suitable for 4:3 PRO devices	Merchandise suitable for 4:3 PRO devices

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6AV7674-1NE00-0AA0</b>	Article number	<b>6AV7674-1NE00-0AA0</b>
USB keyboard INT for 16:9 PRO devices			USB keyboard INT for 16:9 PRO devices
<b>General information</b>		<b>Ambient conditions</b>	
Product type designation	Stainless steel keyboard	<b>Ambient temperature during operation</b>	
<b>Keyboard fonts</b>		• min.	0 °C
• Design	Keyboard with short-stroke keys	• max.	45 °C
• Keyboard assignment	English		
• Color of the buttons	Stainless steel	<b>Relative humidity</b>	
• Color of the key inscription	Black	• Operation, max.	80 %; no condensation
• Key illumination	No	• Condensation permissible	No; Condensation not permissible
• Function keys		<b>Runs under operating system</b>	
- Number of function keys	12	• Windows CE	Yes
• Number pad	Yes; Free-standing	• Windows Vista	Yes
• status LED displays	Yes; Num, Caps and Scroll	• Windows XP	Yes
- for number pad	Yes	• Windows 7	Yes
- for Shift keys	Yes	• Windows 8	Yes
		• Windows 10	Yes
<b>Connection type</b>		<b>Mechanics/material</b>	
• USB	Yes; Type A	Material	
• PS/2	No	• Aluminum	Yes; Powder-coated, RAL 9006
• Cable length	1.5 m; Typical	• Stainless steel	Yes; Keyboard itself
<b>Frame size/design</b>		<b>Service life</b>	
• Standard	Yes; For industrial applications	• Number of operating cycles, keys	10 000 000; Operations (minimum)
• Ergonomic	Yes; 90° adjustable / tiltable	<b>Dimensions</b>	
<b>Ergonomics</b>		Width	481 mm
• Trackball rest	No	Height	20 mm
• Adjustable height	Yes; By adjusting inclination angle 0° to 90°	Depth	171.6 mm
<b>Installation type/mounting</b>		<b>Weights</b>	
Mounting	Max. load bearing capacity of 2 kg	Weight (without packaging)	3 700 g
Mounting type	Suitable for PRO devices	<b>Scope of supply</b>	
maximum permissible angle of inclination without external ventilation	90°; Between 0° and 90° in steps of 15°	Delivery quantity in pieces	1; With support arm bracket
<b>Supply voltage</b>		Components included	a basic adapter is required for mounting, this must be ordered separately
Type of supply voltage	via USB	<b>Other</b>	
<b>Input current</b>		Merchandise	Yes; Sasse no. 1580.9906433
Current consumption (rated value)	100 mA; Typical	Manufacturer name	Sasse Elektronik GmbH
<b>Degree and class of protection</b>		Manufacturer's address	Berliner Straße 12, 91126 Schwabach, Germany
Splashproof	Yes	contacting the manufacturer	Phone +49 9122 978-0, e-mail: info@sasse-elektronik.de
<b>Standards, approvals, certificates</b>		Target devices	Merchandise suitable for 16:9 PRO devices
CE mark	Yes	Note:	Successor 6AV688-10AU14-1DB0
BIS	No; required for export to India		

## Input devices, cables

## Technical specifications

Article number	<b>6AV6881-0AF21-0LB0</b> USB cable Typ A	<b>6AV6881-0AF22-0DC0</b> USB cable Typ B	<b>6AV6881-0AF22-0LC0</b> USB cable Typ C	<b>6AV6881-0AF21-0LC0</b> USB cable Typ D
<b>General information</b>				
Product type designation	Connecting cable USB	Connecting cable USB	Connecting cable USB	Connecting cable USB
<b>Connection type</b>				
• USB	Yes; USB 2.0 Typ A IP20 to Typ A IP20	Yes; USB 2.0 Typ x IP67 to Typ A IP20	Yes; USB 2.0 Typ x IP67 to Typ A IP20	Yes; USB 2.0 Typ x IP67 to Typ A IP20
<b>Degree and class of protection</b>				
IP (all-round)		On the female side up to IP65 screw connection, then IP20	On the female side up to IP65 screw connection, then IP20	On the female side up to IP65 screw connection, then IP20
<b>Standards, approvals, certificates</b>				
CE mark	No; No CE marking obligation			
<b>Ambient conditions</b>				
Suited for indoor use	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C	55 °C
<b>Relative humidity</b>				
• Operation, max.	95 %	95 %	95 %	95 %
<b>Cables</b>				
Cable length	2.5 m	2.5 m	2.5 m	0.8 m
smallest bending radius	0 mm; 10x d (cable diameter)			
Color of cable sheath	Black	Black	Black	Black
<b>Mechanics/material</b>				
Enclosure material (front)				
• Plastic	Yes; Connector enclosure	Yes; Connector enclosure	Yes; Connector enclosure	Yes; Connector enclosure
<b>Torques/forces</b>				
• Tightening torque, min.		1 N·m; Hand-tight	1 N·m; Hand-tight	1 N·m; Hand-tight
• Tightening torque, max.		1.5 N·m; Hand-tight	1.5 N·m; Hand-tight	1.5 N·m; Hand-tight
<b>Scope of supply</b>				
Delivery quantity in pieces	1; USB 2.0 cable (max. 500 mA)			
<b>Other</b>				
Merchandise	Yes	Yes	Yes	Yes
Manufacturer name	GETT Gerätetechnik GmbH	GETT Gerätetechnik GmbH	GETT Gerätetechnik GmbH	GETT Gerätetechnik GmbH
Manufacturer's address	Mittlerer Ring 1, 08233 Treuen (Vogtland), Germany			
Target devices	For Panels and PC systems with suitable interface; observe operating instructions of the target device!	For Panels and PC systems with suitable interface; observe operating instructions of the target device!	For Panels and PC systems with suitable interface; observe operating instructions of the target device!	For Panels and PC systems with suitable interface; observe operating instructions of the target device!
Note:	Request certificates and drawings from manufacturer			

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6GF6710-2AC</b>	<b>6GF6710-2BC</b>
	PS2 foil keyboard de, touchpad	PS2 foil keyboard INT, touchpad
<b>General information</b>		
Product type designation	PS/2 membrane keyboard DEU	PS/2 membrane keyboard INT
<b>Keyboard fonts</b>		
• Design	Membrane keyboard	Membrane keyboard
• Keyboard assignment	B3F, 101/102 or 104/105 OMRON	B3F, 101/102 or 104/105 OMRON
• Key illumination	No	No
• Function keys		
- Number of function keys	12	12
- Programmable	Yes	Yes
• Number pad	Yes	Yes
• status LED displays	Yes; Num, Caps and Scroll	Yes; Num, Caps and Scroll
- for number pad	Yes	Yes
- for Shift keys	Yes	Yes
<b>Connection type</b>		
• USB	Yes; With PS/2 USB adapter (not included in the scope of supply)	Yes; With PS/2 USB adapter (not included in the scope of supply)
• PS/2	Yes	Yes
• Cable length	1.75 m	1.75 m
<b>Frame size/design</b>		
• Standard	Yes; For industrial applications	Yes; For industrial applications
<b>Installation type/mounting</b>		
Rack mounting	No; Desktop housing	No; Desktop housing
<b>Input current</b>		
Current consumption (rated value)	25 mA; Typical	25 mA; Typical
<b>Battery</b>		
Battery-operated	No; maintenance-free	No; maintenance-free
<b>Degree and class of protection</b>		
Splashproof	Yes	Yes
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	40 °C	40 °C
<b>Relative humidity</b>		
• Operation, max.	90 %; no condensation	90 %; no condensation
• Condensation permissible	No	No
<b>Runs under operating system</b>		
• Windows CE	Yes	Yes
• Windows Vista	Yes	Yes
• Windows XP	Yes	Yes
• Windows 7	Yes	Yes
• Windows 10	Yes	Yes
<b>Mechanics/material</b>		
Material		
• Plastic	Yes; AUTOTEX (R) V150	Yes; AUTOTEX (R) V150
• Sheet steel	No	No
Enclosure material (front)		
• Plastic	Yes; AUTOTEX (R) V150	Yes; AUTOTEX (R) V150
<b>Service life</b>		
• Number of operating cycles, keys	1 000 000; Operations (minimum)	1 000 000; Operations (minimum)

**Technical specifications**

Article number	<b>6GF6710-2AC</b> PS2 foil keyboard de, touchpad	<b>6GF6710-2BC</b> PS2 foil keyboard INT, touchpad
<b>Dimensions</b>		
Width	478.5 mm	478.5 mm
Height	28 mm	28 mm
Depth	180 mm	180 mm
<b>Weights</b>		
Weight (without packaging)	2 260 g	2 260 g
<b>Scope of supply</b>		
Delivery quantity in pieces	1; Membrane keyboard with mouse pad	1; Membrane keyboard with mouse pad
<b>Other</b>		
Merchandise	Yes; TIPRO no. K-547	Yes; TIPRO no. K-547
Manufacturer name	TIPRO Representative Office	TIPRO Representative Office
Manufacturer's address	Vogelweg 20, 31785 Hameln, Germany	Vogelweg 20, 31785 Hameln, Germany
Target devices	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)
Note:	Suitable PS/2 USB adapter (keyboard/mouse): 1x USB 1.1, plug A on 2x PS/2 sockets, 0.20 m, black; manufacturer: Renkforce; supply by Conrad Elektronik, order no.: 1360251 - 62	Suitable PS/2 USB adapter (keyboard/mouse): 1x USB 1.1, plug A on 2x PS/2 sockets, 0.20 m, black; manufacturer: Renkforce; supply by Conrad Elektronik, order no.: 1360251 - 62

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6GF6710-3BJ</b>	<b>6GF6710-3BK</b>
	PS2 keyboard 19" de Trackb.	PS2 keyboard 19" INT Trackb.
<b>General information</b>		
Product type designation	PS/2 withdrawable keyboard DEU	PS/2 withdrawable keyboard INT
<b>Keyboard fonts</b>		
• Design	Membrane keyboard	Membrane keyboard
• Keyboard assignment	84 (Germany (QWERTZ))	84 (US version)
• Color of the buttons	light gray	light gray
• Color of the key inscription	dark gray	dark gray
• Key illumination	No	No
• Function keys		
- Number of function keys	12	12
• Number pad	Yes; Integrated into key layout	Yes; Integrated into key layout
• status LED displays	Yes; Num, Caps, Scroll and Pad	Yes; Num, Caps, Scroll and Pad
- for number pad	Yes	Yes
- for Shift keys	Yes	Yes
<b>Connection type</b>		
• Bluetooth radio standard	No	No
• USB	No	No
• PS/2	Yes	Yes
• Cable length	1.5 m	1.5 m
<b>Frame size/design</b>		
• Standard	Yes; For industrial applications	Yes; For industrial applications
<b>Installation type/mounting</b>		
Rack mounting	Yes	Yes
Front mounting	No	No
Wall mounting/direct mounting	No	No
maximum permissible angle of inclination without external ventilation	0°	0°
<b>Supply voltage</b>		
Type of supply voltage	via PS/2	via PS/2
<b>Input current</b>		
Current consumption (rated value)	10 mA; Typical	10 mA; Typical
<b>Battery</b>		
Battery-operated	No; maintenance-free	No; maintenance-free
<b>Degree and class of protection</b>		
Splashproof	No	No
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	50 °C	50 °C
<b>Relative humidity</b>		
• Operation, max.	80 %; no condensation	80 %; no condensation
• Condensation permissible	No	No
<b>Runs under operating system</b>		
• Windows CE	Yes	Yes
• Windows Vista	Yes	Yes
• Windows XP	Yes	Yes
• Windows 7	Yes	Yes
• Windows 8	Yes	Yes
• Windows 10		Yes

**Technical specifications**

Article number	<b>6GF6710-3BJ</b>	<b>6GF6710-3BK</b>
	PS2 keyboard 19" de Trackb.	PS2 keyboard 19" INT Trackb.
<b>Mechanics/material</b>		
Material		
• Plastic	Yes; Keyboard itself	Yes; Keyboard itself
• Sheet steel	Yes; Powder-coated drawer	Yes; Powder-coated drawer
<b>Service life</b>		
• Number of operating cycles, keys	20 000 000; Operations (approx.)	20 000 000; Operations (approx.)
<b>Dimensions</b>		
Width	370 mm; Keyboard	370 mm; Keyboard
Height	20 mm; Keyboard	20 mm; Keyboard
Depth	138.5 mm; Keyboard	138.5 mm; Keyboard
Width of the housing front	485 mm; Keyboard incl. drawer	485 mm; Keyboard incl. drawer
Height of housing front	45 mm; Keyboard incl. drawer	45 mm; Keyboard incl. drawer
Enclosure diameter	465 mm; Mounting depth drawer	465 mm; Mounting depth drawer
<b>Weights</b>		
Weight (without packaging)	8 000 g; Without accessories	8 000 g; Without accessories
<b>Scope of supply</b>		
Delivery quantity in pieces	1; Keyboard incl. drawer	1; Keyboard incl. drawer
<b>Other</b>		
Merchandise	Yes	Yes
Manufacturer name	ZF Friedrichshafen AG, Cherry GmbH, Electronic Systems	ZF Friedrichshafen AG, Cherry GmbH, Electronic Systems
Manufacturer's address	Cherrystr., 91275 Auerbach/OPf., Germany	Cherrystr., 91275 Auerbach/OPf., Germany
Target devices	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6GF6710-3AE</b>	<b>6GF6710-3BG</b>	<b>6GF6710-3BE</b>
	PS2 keyboard 19" de, touch pad	PS2 keyboard 19" INT, track ball	PS2 keyboard 19" INT, touch pad
<b>General information</b>			
Product type designation	PS/2 built-in keyboard DEU	PS/2 built-in keyboard INT	PS/2 built-in keyboard INT
<b>Keyboard fonts</b>			
• Design	Membrane keyboard	Membrane keyboard	Membrane keyboard
• Keyboard assignment	B3F, 101/102 or 104/105 OMRON	B3F, 101/102 or 104/105 OMRON	B3F, 101/102 or 104/105 OMRON
• Color of the buttons		light gray	
• Color of the key inscription		Black	
• Key illumination	No	No	No
• Function keys			
- Number of function keys	12	12	12
- Programmable	Yes	Yes	Yes
• Number pad	Yes	Yes; Free-standing	Yes
• status LED displays	Yes; Num, Caps and Scroll	Yes; Num, Caps and Scroll	Yes; Num, Caps and Scroll
- for number pad	Yes	Yes	Yes
- for Shift keys	Yes	Yes	Yes
<b>Connection type</b>			
• USB	Yes; With PS/2 USB adapter (not included in the scope of supply)	Yes; With PS/2 USB adapter (not included in the scope of supply)	Yes; With PS/2 USB adapter (not included in the scope of supply)
• PS/2	Yes	Yes	Yes
<b>Frame size/design</b>			
• Standard	Yes; For industrial applications	Yes; For industrial applications	Yes; For industrial applications
<b>Installation type/mounting</b>			
Rack mounting	No; Built-in keyboard, 19" rack	No	No; Built-in keyboard, 19" rack
Front mounting		Yes	
Wall mounting/direct mounting		No	
<b>Input current</b>			
Current consumption (rated value)	25 mA; Typical	35 mA; Typical	25 mA; Typical
<b>Battery</b>			
Battery-operated	No; maintenance-free	No; maintenance-free	No; maintenance-free
<b>Degree and class of protection</b>			
Splashproof	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	40 °C	40 °C	40 °C
<b>Relative humidity</b>			
• Operation, max.	90 %; no condensation	90 %; no condensation	90 %; no condensation
• Condensation permissible	No	No	No
<b>Runs under operating system</b>			
• Windows CE	Yes	Yes	Yes
• Windows Vista	Yes	Yes	Yes
• Windows XP	Yes	Yes	Yes
• Windows 7	Yes	Yes	Yes
• Windows 10	Yes	Yes	Yes

## Input devices, cables

## Technical specifications

Article number	<b>6GF6710-3AE</b>	<b>6GF6710-3BG</b>	<b>6GF6710-3BE</b>
	PS2 keyboard 19" de, touch pad	PS2 keyboard 19" INT, track ball	PS2 keyboard 19" INT, touch pad
<b>Mechanics/material</b>			
Material			
• Sheet steel	Yes	Yes	Yes
Enclosure material (front)			
• Plastic	Yes; AUTOTEX (R) V150	Yes; AUTOTEX (R) V150	Yes; AUTOTEX (R) V150
<b>Service life</b>			
• Number of operating cycles, keys	1 000 000; Operations (minimum)	1 000 000; Operations (minimum)	1 000 000; Operations (minimum)
<b>Dimensions</b>			
Width	482.6 mm	482.6 mm	482.6 mm
Height	42.5 mm	38 mm	42.5 mm
Depth	177.8 mm	177.8 mm	177.8 mm
<b>Weights</b>			
Weight (without packaging)	1 480 g	1 490 g	1 480 g
<b>Scope of supply</b>			
Delivery quantity in pieces	1; Built-in keyboard rack mounting	1; Built-in keyboard with stud bolts	1; Built-in keyboard rack mounting
<b>Other</b>			
Merchandise	Yes; TIPRO no. K-647 (K-847)	Yes; TIPRO no. K-842 (K-642)	Yes; TIPRO no. K-647 (K-847)
Manufacturer name	TIPRO Representative Office	TIPRO Representative Office	TIPRO Representative Office
Manufacturer's address	Vogelweg 20, 31785 Hameln, Germany	Vogelweg 20, 31785 Hameln, Germany	Vogelweg 20, 31785 Hameln, Germany
Target devices	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)
Note:	Suitable PS/2 USB adapter (keyboard/mouse): 1x USB 1.1, plug A on 2x PS/2 sockets, 0.20 m, black; manufacturer: Renkforce; supply by Conrad Elektronik, order no.: 1360251 - 62	Suitable PS/2 USB adapter (keyboard/mouse): 1x USB 1.1, plug A on 2x PS/2 sockets, 0.20 m, black; manufacturer: Renkforce; supply by Conrad Elektronik, order no.: 1360251 - 62	Suitable PS/2 USB adapter (keyboard/mouse): 1x USB 1.1, plug A on 2x PS/2 sockets, 0.20 m, black; manufacturer: Renkforce; supply by Conrad Elektronik, order no.: 1360251 - 62

## Accessories

### Input devices, cables

#### Technical specifications

Article number	<b>6AV2181-8AT00-0AX0</b> USB 2.0 mouse
<b>General information</b>	
Product type designation	USB mouse
<b>Control elements</b>	
With parameterizable keys	No; 5 including scroll wheel
<b>Input device</b>	
• Scroll wheel	Yes; Vertical and horizontal scrolling
• Movement tracking	Microsoft - proprietary BlueTrack™ Technology
• Movement resolution	1 000 dpi; 8 000 images/second
• Speed	1 829 mm/s; 1.829 m/s
<b>Connection type</b>	
• USB	Yes; USB 2.0 type A
<b>Frame size/design</b>	
• Standard	Yes; For industrial applications
<b>Supply voltage</b>	
Rated value (DC)	5 V; via USB
<b>Input current</b>	
Current consumption (rated value)	100 mA; USB-compatible
<b>Battery</b>	
Battery-operated	No; Without battery
<b>Interfaces</b>	
Number of USB interfaces	1
<b>Standards, approvals, certificates</b>	
CE mark	Yes; WEEE (European Union) available
cULus	Yes; ICES-003 (Canada) available
RCM (formerly C-TICK)	No; EIP / EPUP available
<b>Marine approval</b>	
• Nippon Kaiji Kyokai (Class NK)	No; Only VCCI available
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	40 °C
<b>Relative humidity</b>	
• Operation, max.	80 %; 65 % for storage
• Condensation permissible	No
<b>Runs under operating system</b>	
• Windows CE	Yes; Not all functions are available
• Windows Vista	Yes
• Windows XP	Yes; SP2 and higher
• Windows 7	Yes
• Windows 8	Yes
• Windows 10	Yes
<b>Cables</b>	
Cable length	1 930 mm
smallest bending radius	10 mm
Color of cable sheath	
• Gray	Yes

Article number	<b>6AV2181-8AT00-0AX0</b> USB 2.0 mouse
<b>Mechanics/material</b>	
Material	
• Plastic	Yes; anthracite
<b>Dimensions</b>	
Width	67.9 mm
Height	42.3 mm
Depth	116 mm
<b>Weights</b>	
Weight (without packaging)	131 g
<b>Scope of supply</b>	
Delivery quantity in pieces	1
<b>Other</b>	
Merchandise	Yes
Manufacturer name	Microsoft Deutschland GmbH
Manufacturer's address	Walter-Gropius-Straße 5, 80807 Munich, Germany
Target devices	Suitable for HMI Panels and IPCs with USB interface

#### More information

##### Certificates:

Import/export certificates are available for downloading from Industry Online Support/Product Support:

<https://support.industry.siemens.com/cs/products>

Enter the "Article No." as the search term and select "Certificate" as the Entry type.

You can always find the current certification for trade goods on the manufacturer's home page.

The manufacturer data appear at the end of the technical specifications.

##### Notes:

The degree of protection stated for input media does not apply to the USB connection pieces.

IP20 is typical for use with USB interfaces, without any particular degree of protection.

If you need to modify or supplement the products described here, we'll be pleased to provide the necessary information at: "Custom made products".

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Overview



SIMATIC HMI accessories, capacitive touch pen system

### **Input tools**

Input tools facilitate operation and input in difficult environments.

Touch pens are often extremely useful when operating touch displays, particularly if you are wearing gloves, because you can operate small buttons or input fields precisely despite the gloves.

Touch pens also protect the display from dirt and scratching during operation and when used in extreme environments.

The following input tools are available for operating the touch display:

- Touch pen
- Touch pen holder
- Spare caps for touch pens

Please be sure to note the correct touch system when ordering.

Not all touch pens are compatible with all touch types. There are touch pens available for both resistive and capacitive touch systems.

#### Note:

Continuous operation with hard touch pens on the same part of the display can significantly reduce the service life of a touch screen.

A longer service life can be achieved by using soft, wide-tip pens and variable-position input fields.

## Ordering data

## Article No.

<b>Touch pen, thin, resistive</b> For purely resistive touch screens, with retaining cord for Mobile Panel 277 10" and other resistive touch screens	<b>6AV6645-7AB14-0AS1</b>
<b>Touch pen system ELO</b> For capacitive or resistive touch screens, pen including holder for 22.5 mm, pen black anodized. Holder of black plastic, suitable for industrial use. Can be screwed into (solid or sheet metal) or glued into (e.g. glass front). Alternatives to "Touch pen system, aluminum, classic" and "Touch pen, thick, resistive"	<b>6AV6881-0AV21-0AA0</b>
<b>Touch pen system V2A, food-safe</b> For capacitive or resistive touch screens, pen including holder for 22.5 mm, pen V2A, high-gloss polished. Holder of black plastic, food-safe. Can be screwed into (solid or sheet metal) or glued into (e.g. glass front). Alternatives to Touch pen system ELO.	<b>6AV6881-0AV22-0AA0</b>
<b>Touch pen caps, classic</b> Replacement caps for touch pen systems for capacitive and resistive touch screens. Only suitable for classic touch pen system!	<b>6AV2181-8AV60-0AX0</b>
<b>Touch pen caps ELO</b> Replacement caps for touch pen systems for capacitive and resistive touch screens. Only suitable for touch pen system ELO and touch pen system V2A!	<b>6AV6881-0AV61-0AA0</b>
<b>Touch pen caps V2A</b> Replacement caps for touch pen systems for capacitive and resistive touch screens. Not suitable for classic touch pen system!	<b>6AV6881-0AV62-1AA0</b>
<b>Touch pen caps RES</b> Replacement caps for touch pen systems optimized exclusively for resistive touch screens. Only suitable for touch pen system ELO and touch pen system V2A!	<b>6AV6881-0AV63-0BA0</b>

## Accessories

### Input tools

#### Technical specifications

Article number	<b>6AV6645-7AB14-0AS1</b> Touch pen, thin, ALU resistive	<b>6AV6881-0AV21-0AA0</b> Touch pen system ELO	<b>6AV6881-0AV22-0AA0</b> Touch pen system V2A
<b>General information</b>			
Product type designation		universal touch pen system (resistive/capacitive), including support	universal touch pen system (resistive/capacitive), including support
<b>Frame size/design</b>			
• Standard	Yes; For industrial applications	Yes; For industrial applications	Yes; For industrial applications
• Exceptional		Yes; Spare caps can be stowed in the pen	Yes; Spare caps can be stowed in the pen
• Ergonomic		Yes; With holder	Yes; With holder
<b>Installation type/mounting</b>			
Mounting type		Wall-mounting bracket can be mounted with mounting disk, 2x M3 screw or adhesive pads	
Front mounting		Yes; also optimized for PRO Extension Unit 22.5 mm opening (from HS01)	
Wall mounting/direct mounting	Yes; using 40 cm retaining cord	Yes	Yes
<b>Degree and class of protection</b>			
IP (at the front)		IP65 (depending on mounting)	IP65 (depending on mounting)
<b>Standards, approvals, certificates</b>			
CE mark	No; No CE marking obligation		No; No CE marking obligation
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	Yes	Yes; only suitable under certain conditions due to different environmental conditions; replacement cycle can be increased	
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C; at temperatures below 10 °C and above 30 °C, the use of suitable gloves is recommended	
• max.	80 °C	80 °C; at temperatures below 10 °C and above 30 °C, the use of suitable gloves is recommended	
<b>Relative humidity</b>			
• Operation, max.	90 %	95 %	95 %
<b>Mechanics/material</b>			
Material			
• Plastic		Yes; Attachment cord	Yes; Attachment cord
• Aluminum		Yes; pen, anodized	
• Stainless steel			Yes; food safe, suitable for F&B
Enclosure material (front)			
• Plastic		Yes; pen holder	Yes; pen holder
Color	black, anodized	black, anodized	stainless steel, polished
Enclosure color (front)		Black	Black
<b>Dimensions</b>			
Length	125 mm	150 mm	150 mm
Diameter	8 mm	14 mm	14 mm
Enclosure diameter		37 mm; Diameter wall-mounting bracket	37 mm; Diameter wall-mounting bracket
Mounting cutout, height		39 mm; Height wall-mounting bracket	39 mm; Height wall-mounting bracket
<b>Weights</b>			
Weight (without packaging)		0.13 kg	0.13 kg
<b>Scope of supply</b>			
Delivery quantity in pieces	5; Incl. retaining cord for Mobile Panel 277 10"	1; 1x touch pen, 1x attachment cord, 1x resistive/capacitive cap, 1x resistive cap (in the touch pen), 1x complete wall bracket	1; 1x touch pen, 1x attachment cord, 1x resistive/capacitive cap, 1x resistive cap (in the touch pen), 1x complete wall bracket
<b>Other</b>			
Merchandise	Yes	Yes; ELO touch pen, small	Yes; touch pen V2A
Manufacturer name	QUERUM products UG	QUERUM products UG	QUERUM products UG
Manufacturer's address	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany
contacting the manufacturer		email: querumproducts@web.de	email: querumproducts@web.de
Target devices	for resistive touch screens	For common capacitive and resistive touch systems	For common capacitive and resistive touch systems
Note:		Length of the interconnecting lead 53 cm to 100 cm	Length of the interconnecting lead 53 cm to 100 cm

**Technical specifications**

Article number	<b>6AV2181-8AV60-0AX0</b>	<b>6AV6881-0AV61-0AA0</b>	<b>6AV6881-0AV62-1AA0</b>	<b>6AV6881-0AV63-0BA0</b>
	Touch pen caps	Touch pen caps ELO	Touch pen caps V2A	Touch pen caps RES
<b>General information</b>				
Product type designation	Touch pen caps	Touch pen caps	Touch pen caps	Touch pen caps
<b>Frame size/design</b>				
• Standard	Yes; Special cap for capacitive touch pens	Yes; threaded special cap for universal touch system	Yes; threaded special cap for universal touch system	Yes; special cap only for resistive touch systems
<b>Installation type/mounting</b>				
Wall mounting/direct mounting	Yes; Capacitive touch system	Yes; can be used for touch pen system ELO	Yes; can be used for touch pen system ELO and V2A	Yes; can be used for touch pen system ELO and V2A
<b>Standards, approvals, certificates</b>			No; No CE marking obligation	No; No CE marking obligation
CE mark				
<b>Ambient conditions</b>				
Suited for indoor use		Yes	Yes	Yes
Suited for outdoor use		Yes; only suitable under certain conditions due to different environmental conditions; replacement cycle can be increased		
<b>Ambient temperature during operation</b>				
• min.	-40 °C; at temperatures below 10 °C and above 30 °C, the use of suitable gloves is recommended			
• max.	80 °C; at temperatures below 10 °C and above 30 °C, the use of suitable gloves is recommended			
<b>Relative humidity</b>				
• Operation, max.	95 %	95 %	95 %	95 %
<b>Accessories</b>				
belongs to product		can be used for touch pen system ELO	can be used for touch pen system ELO and V2A	can be used for touch pen system ELO and V2A
<b>Mechanics/material</b>				
Material				
• Plastic	Yes	Yes; special cap only for resistive and capacitive touch systems	Yes; special cap only for resistive touch systems	
• Aluminum		Yes		
• Stainless steel			Yes; food safe, suitable for F&B	
Color		Aluminum paint	stainless steel, polished	light beige
<b>Torques/forces</b>				
• Tightening torque, max.		Hand-tight	Hand-tight	Hand-tight
<b>Dimensions</b>				
Height	8 mm	8 mm	8 mm	8 mm
Diameter	8 mm	8 mm	8 mm	8 mm
<b>Weights</b>				
Weight (without packaging)	0.8 g	0.8 g	0.8 g	0.8 g
<b>Scope of supply</b>				
Delivery quantity in pieces	10; Caps for touch pen	5; Caps for touch pen	5; Caps for touch pen	5; Caps for touch pen
<b>Other</b>				
Merchandise	Yes; Function depending on touch sensitivity, not suitable for Ceran cooktops, MP377 Daylight, possibly others	Yes; touch replacement cap ELO	Yes; touch replacement cap V2A	Yes; touch replacement cap RES
Manufacturer name	QUERUM products UG	QUERUM products UG	QUERUM products UG	QUERUM products UG
Manufacturer's address	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany	Wirtsstr. 23, 85110 Kipfenberg-Böhming, Germany
contacting the manufacturer		email: querumproducts@web.de	email: querumproducts@web.de	email: querumproducts@web.de
Target devices	For common capacitive and resistive touch systems			
Note:	only usable for touch pen 6AV2181-8AV20-0AX0	for Business	food safe, suitable for F&B	food safe, suitable for F&B

**More information**

Note:

Photos and product images may differ from the actual product. Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically.

This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>


Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Accessories

### HMI connecting components

#### Overview

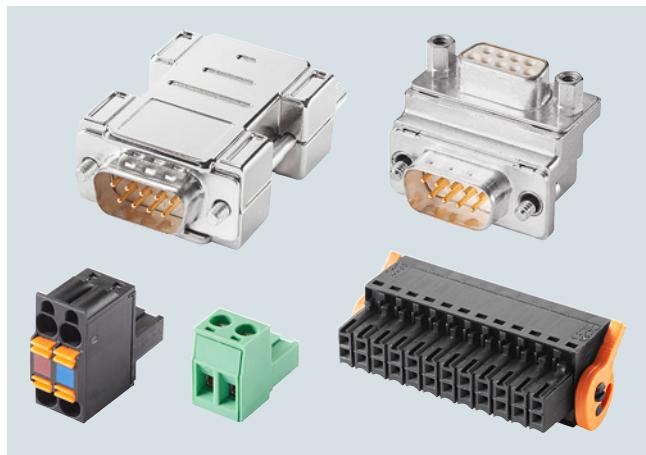

#### HMI connecting components

The following HMI connecting components are available for our operator panels and industrial PCs:

- **Converters**  
change signals from one physical system to another.  
Example: An RS 232 V.24 signal is converted to a TTY 20mA signal. The transmitted data is not affected.
- **Connectors**  
are used for connecting devices or expansion components to the power supply, data cables or I/O devices.
- **Adapters**  
can modify the pinning, as well as the output direction of a connector attached to the core product. It is also possible to implement transitions from "n"-pin" to "x"-pin.

#### Ordering data

#### Article No.

##### Converters

###### **RS422 to RS232 converter**

9-pin male contact (on HMI) to 9-pin male contact, to be screwed onto HMI RS422 interface, cable outlet 180 degrees, for connection of non-Siemens PLC

**6AV6671-8XE00-0AX0**

###### **RS422 to TTY converter**

9-pin male contact (on HMI) to 15-pin socket, to be screwed onto HMI RS422 interface, 180 degree cable outlet, for the connection to SIMATIC S5

**6AV6671-8XJ00-0AX0**

##### Plugs

###### **24 V DC plug (2-pin)**

For all SIMATIC HMI Panels, without screw fixing, loop-through not possible.  
Approved for all SIMATIC HMI Panels except Key Panels.

**6AV6671-8XA00-0AX0**

###### **24 V DC plug (2-pin) (can be looped through)**

For all SIMATIC HMI Panels, without screw fixing, loop through possible, even with unconnected plug.  
Approved for Key Panels.

**6ES7193-4JB00-0AA0**

###### **8-pin connection plug**

8-pin, 24 V DC for Extension Unit, etc.

**6AV6881-0HE20-0AA0**

###### **12-pin connection plug**

12-pin, 24 V DC for SIMATIC HMI Key Panel KP8 PN

**6AV6671-3XY38-4AX0**

###### **16-pin connection plug**

16-pin, 24 V DC for SIMATIC HMI Key Panel KP8F PN and Key Panel KP32F PN

**6AV6671-3XY48-4AX0**

###### **24-pin connection plug**

24-pin, 24 V DC for SIMATIC HMI Key Panel KP32F PN

**6AV6671-3XY58-4AX0**

##### Adapters

###### **90 degree angle adapter**

9-pin male contact (on HMI) to 9-pin socket, 1:1 connection, to be screwed onto the RS485/422/232 HMI interface, or any other suitable interface

**6AV6671-8XD00-0AX0**

##### VGA and DVI adapters

For onboard interfaces and PCI-Express graphics card NVS 295

- Display port to VGA adapter
- Display port to DVI-D adapter

**6ES7648-3AG00-0XA0**

**6ES7648-3AF00-0XA0**

**Technical specifications**

Article number	<b>6AV6671-8XE00-0AX0</b> RS422 to RS232 converter	<b>6AV6671-8XJ00-0AX0</b> RS422 to TTY converter
<b>General information</b>		
Product type designation	Converter, RS 422 to RS 232	Converter RS 422 to TTY
<b>Installation type/mounting</b>		
Wall mounting/direct mounting	Yes; Can be screwed onto the HMI	Yes; Can be screwed onto the HMI
<b>Interfaces</b>		
HMI-side interface		
• Number of pins HMI-side	9; Male (RS 422)	9; Male (RS 422)
Device-side interface		
• Number of pins device-side	9; Female (RS 232)	15; Female (TTY)
<b>Degree and class of protection</b>		
IP (all-round)	none	none
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	55 °C	55 °C
<b>Relative humidity</b>		
• Operation, max.	95 %	95 %
<b>Mechanics/material</b>		
Enclosure material (front)		
• Plastic	Yes	Yes
Screw type		
• 4.5 V	Yes; HMI page	Yes; HMI page
<b>Torques/forces</b>		
• Tightening torque, min.	0.18 N·m; Insufficient torque can lead to loosening of the screws	0.18 N·m; Insufficient torque can lead to loosening of the screws
• Tightening torque, max.	0.2 N·m	0.2 N·m
• Tightening torque, recommended	0.2 N·m; Higher torques may damage the product	0.2 N·m; Higher torques may damage the product
<b>Dimensions</b>		
Width	31 mm	42 mm
Height	50 mm	62 mm
Thickness	11 mm	11 mm
<b>Weights</b>		
Weight (without packaging)	26 g	28 g
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
<b>Other</b>		
Merchandise	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	suitable for all SIMATIC HMI RS 422 interfaces, for details refer to the operating instructions of the respective device	suitable for all SIMATIC HMI RS 422 interfaces, for details refer to the operating instructions of the respective device

## Accessories

### HMI connecting components

#### Technical specifications

Article number	<b>6AV6671-8XA00-0AX0</b>	<b>6AV6881-0HE20-0AA0</b>	<b>6AV6671-3XY38-4AX0</b>	<b>6AV6671-3XY48-4AX0</b>	<b>6AV6671-3XY58-4AX0</b>
	Connector, female, 2-pin, type 1	Connector, female, 8-pin	Connector, female, 12-pin	Connector, female, 16-pin	Connector, female, 24-pin
<b>General information</b>					
Product type designation	Connector, female, 2-pin, type 1	Connector, female, 8-pin	Connector, female, 12-pin	Connector, female, 16-pin	Connector, female, 24-pin
<b>Frame size/design</b>					
• Standard	Yes; Z shape				
<b>Installation type/mounting</b>					
Mounting type			Conductor cross-section 0.14 to 1.5 mm <sup>2</sup>	Conductor cross-section 0.14 to 1.5 mm <sup>2</sup>	
Wall mounting/direct mounting	Yes; can be plugged into SIMATIC HMI device	Yes; can be plugged into SIMATIC HMI device	Yes; can be plugged into SIMATIC HMI device	Yes; can be plugged into SIMATIC HMI device	Yes; can be plugged into SIMATIC HMI device
<b>Supply voltage</b>					
Rated value (DC)	24 V	24 V	24 V	24 V	24 V
<b>Input current</b>					
Current consumption (rated value)			9 A; Typical, maximum value	9 A; Typical, maximum value	
<b>Interfaces</b>					
HMI-side interface					
• Number of pins HMI-side	2; Male	8; Female	12; Female, spring-loaded terminals, 3.5 mm grid	16; Female, spring-loaded terminals, 3.5 mm grid	24; Female
Device-side interface					
• Number of pins device-side	2; Female, screw terminals	8; Female, spring-loaded terminals	12; Female, spring-loaded terminals	16; Female, spring-loaded terminals 0.75 mm <sup>2</sup>	24; Female, spring-loaded terminals 0.75 mm <sup>2</sup>
<b>Standards, approvals, certificates</b>					
CE mark		Yes	Yes	Yes	Yes
cULus			Yes; cURus	Yes; cURus	Yes
<b>Use in hazardous areas</b>					
• ATEX Zone 2	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	
• ATEX Zone 22	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	
• IECEx Zone 2	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	
• IECEx Zone 22	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	
• cULus Class I Zone 1	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	
• cULus Class I Zone 2, Division 2	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	
• FM Class I Division 2	Yes; Device-dependent, see operating instructions		Yes; Device-dependent, see operating instructions	Yes; Device-dependent, see operating instructions	

**Technical specifications**

Article number	<b>6AV6671-8XA00-0AX0</b>	<b>6AV6881-0HE20-0AA0</b>	<b>6AV6671-3XY38-4AX0</b>	<b>6AV6671-3XY48-4AX0</b>	<b>6AV6671-3XY58-4AX0</b>
	Connector, female, 2-pin, type 1	Connector, female, 8-pin	Connector, female, 12-pin	Connector, female, 16-pin	Connector, female, 24-pin
<b>Marine approval</b>					
• Germanischer Lloyd (GL)			Yes; Always comply with the operating instructions of the target device.		
• American Bureau of Shipping (ABS)			Yes; Always comply with the operating instructions of the target device.		
• Bureau Veritas (BV)			Yes; Always comply with the operating instructions of the target device.		
• Det Norske Veritas (DNV)			Yes; Always comply with the operating instructions of the target device.		
• Korean Register of Shipping (KRS)			Yes; Always comply with the operating instructions of the target device.		
• Lloyds Register of Shipping (LRS)			Yes; Always comply with the operating instructions of the target device.		
• Nippon Kaiji Kyokai (Class NK)			Yes; Always comply with the operating instructions of the target device.		
• Polski Rejestr Statków (PRS)			Yes; Always comply with the operating instructions of the target device.		
• Chinese Classification Society (CCS)			Yes; Always comply with the operating instructions of the target device.		
<b>Ambient conditions</b>					
Suited for indoor use			Yes; Flammability class according to UL 94-V0	Yes; Flammability class according to UL 94-V0	
Suited for outdoor use			Yes; possible under certain conditions	Yes; possible under certain conditions	
<b>Ambient temperature during operation</b>					
• min.	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C	55 °C	55 °C
<b>Relative humidity</b>					
• Operation, max.	95 %	80 %	80 %	80 %	95 %
<b>Mechanics/material</b>					
Material					
• Plastic	Yes; green	Yes; PA 66 GF 30	Yes; Insulating material PA66 GF30, actuators PA66/6	Yes; Insulating material PA66 GF30, actuators PA66/6	
Enclosure material (front)					
• Plastic	Yes; Contact spacing 5.08 mm	Yes; Spring-loaded terminals 1.5 mm <sup>2</sup>	Yes; Spring-loaded terminals 1.5 mm <sup>2</sup>	Yes; Spring-loaded terminals 1.5 mm <sup>2</sup>	Yes; Spring-loaded terminals 1.5 mm <sup>2</sup>
Enclosure color (front)		RAL 9011 (black)	Black		
Enclosure color (rear)		RAL 9011 (black)			
Screw type					
• 4.5 V	Yes; Screw terminals				
<b>Service life</b>					
• Mechanical service life (mating cycles)			25	25	

## Accessories

### HMI connecting components

#### Technical specifications

Article number	<b>6AV6671-8XA00-0AX0</b> Connector, female, 2-pin, type 1	<b>6AV6881-0HE20-0AA0</b> Connector, female, 8-pin	<b>6AV6671-3XY38-4AX0</b> Connector, female, 12-pin	<b>6AV6671-3XY48-4AX0</b> Connector, female, 16-pin	<b>6AV6671-3XY58-4AX0</b> Connector, female, 24-pin
<b>Dimensions</b>					
Width	10 mm	10.5 mm; 8-pin connector	21 mm; 12-pin connector	28 mm; 16-pin connector	16 mm
Height	15 mm	20 mm	15.2 mm	15.2 mm	54 mm
Depth			26.25 mm	26.25 mm	
Thickness	27 mm	20 mm			20 mm
<b>Weights</b>					
Weight, approx.			7.9 g	10.5 g	
Weight (without packaging)		5.3 g; Per unit			
<b>Scope of supply</b>					
Delivery quantity in pieces	10	10; Without ejector	10; Without ejector	10; Without ejector	4; with ejector
<b>Other</b>					
Merchandise	No	Yes	Yes	No	No
Manufacturer name		Weidmüller Interface GmbH & Co. KG	Weidmüller Interface GmbH & Co. KG		
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Klingenbergsstraße 16, 32758 Detmold, Germany	Klingenbergsstraße 16, 32758 Detmold, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for Comfort Panel, IPC, Flat Panel, Thin Client	suitable for all appropriate interfaces	for KP8 PN	for KP8F PN, KP32F PN	for KP32F PN

Article number	<b>6ES7193-4JB00-0AA0</b> Connector, female, 2x2-pin
<b>General information</b>	
Product type designation	Connector, female, 2x2-pin
<b>Installation type/mounting</b>	
Wall mounting/direct mounting	Yes; can be plugged into SIMATIC HMI device
<b>Supply voltage</b>	
Rated value (DC)	24 V
<b>Interfaces</b>	
HMI-side interface	
• Number of pins HMI-side	2; Outgoing side jumpered internally, color-coded
Device-side interface	
• Number of pins device-side	4; Female, spring-loaded terminals 0.75 mm <sup>2</sup>
<b>Standards, approvals, certificates</b>	
CE mark	Yes
RoHS conformity	Yes
China RoHS compliance	Yes
<b>Ambient temperature during storage/transportation</b>	
• min.	-20 °C
• max.	70 °C

Article number	<b>6ES7193-4JB00-0AA0</b> Connector, female, 2x2-pin
<b>Mechanics/material</b>	
Design of housing	plastic
<b>Dimensions</b>	
Width	10 mm
Height	22 mm
Thickness	25 mm
<b>Scope of supply</b>	
Delivery quantity in pieces	10
<b>Other</b>	
Merchandise	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Note:	For ET 200S, interface module, KP32F, PN/PN coupler

## HMI connecting components

## Technical specifications

Article number	<b>6AV6671-8XD00-0AX0</b> 90 degree bracket adapter, 1:1	<b>6ES7648-3AG00-0XA0</b> Displayport to VGA adapter	<b>6ES7648-3AF00-0XA0</b> Displayport to DVI-D Adapter
<b>General information</b>			
Product type designation	90 degree angle adapter, 1:1	PCI to VGA adapter	PCI to DVI-D adapter
<b>Installation type/mounting</b>			
Wall mounting/direct mounting	Yes; Can be screwed onto the HMI		
<b>Interfaces</b>			
Interfaces/bus type		DisplayPort to VGA adapter	DisplayPort to DVI-D adapter
HMI-side interface			
• Number of pins HMI-side	9; Male		
Device-side interface		For onboard interfaces and PCI graphics card NVS 295	For onboard interfaces and PCI Express graphics card NVS 295
• Number of pins device-side	9; Female		
<b>Degree and class of protection</b>			
IP (all-round)	none		
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	55 °C	50 °C	50 °C
<b>Relative humidity</b>			
• Operation, max.	95 %		
• Condensation permissible		No	No
<b>Cables</b>			
Cable length		178 mm; incl. connector	203 mm; incl. connector
<b>Mechanics/material</b>			
Material			
• Plastic		Yes; PVC	Yes; PVC
Enclosure material (front)			
• Aluminum casting	Yes		
Screw type			
• 4.5 V	Yes; HMI page		
<b>Torques/forces</b>			
• Tightening torque, min.	0.18 N·m; Insufficient torque can lead to loosening of the screws		
• Tightening torque, max.	0.2 N·m		
• Tightening torque, recommended	0.2 N·m; Higher torques may damage the product		
<b>Dimensions</b>			
Width	31 mm	36 mm; widest point	44 mm; widest point
Height	25 mm	11.9 mm; Highest point	20 mm; Highest point
Thickness	25 mm		
Length		178 mm; total length	203 mm; total length
Width of the housing front		36 mm	
Height of housing front		19 mm	
<b>Weights</b>			
Weight (without packaging)	34 g		
<b>Scope of supply</b>			
Delivery quantity in pieces	1	1; Quantity	1; Quantity
<b>Other</b>			
Merchandise	No	Yes	Yes
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	47211 Bayside Parkway, Fremont, CA 94538, USA	47211 Bayside Parkway, Fremont, CA 94538, USA
contacting the manufacturer		Phone +1 510 252 0786, email: sales@bizlinktech.com	Phone +1 510 252 0786, email: sales@bizlinktech.com
Target devices	suitable for all appropriate interfaces	SIMATIC Rack IPC427D, IPC477D, IPC547D, IPC547E, IPC627D, IPC647C, IPC647D, IPC677D, IPC827D, IPC847C, IPC847D	SIMATIC Rack IPC227E, IPC277E, IPC427D, IPC477D, IPC547D, IPC547E, IPC627D, IPC647C, IPC647D, IPC677D, IPC827D, IPC847C, IPC847D

## Accessories

### HMI connecting components

#### More information

Note:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.


<http://support.automation.siemens.com>

**Accessories**

## Industrial Wireless LAN, Access Control with RFID

**Access Points IEEE 802.11n****Overview**

IWLAN Access point

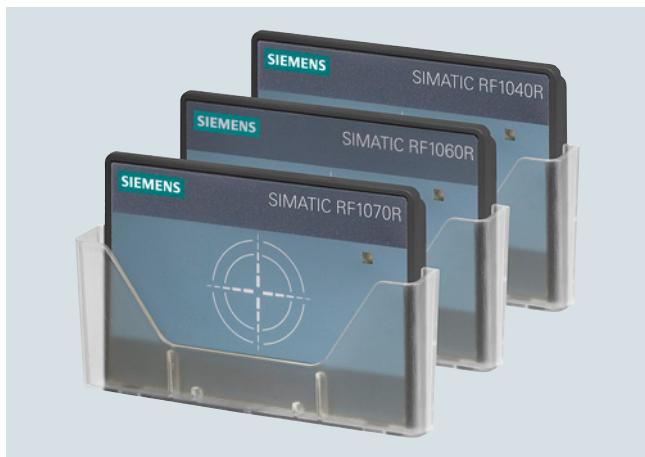

SIMATIC RF1000

**Ordering data****Article No.***Access Points IEEE 802.11n***SCALANCE W788 RJ45**

IWLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP30 degree of protection (-20 °C to +60 °C)

Scope of supply: Mounting hardware, 4-pin screw terminal for 24 V DC; 4-pin screw terminal for digital input and output; manual on CD-ROM; German/English

**SCALANCE W788-1 RJ45**

IWLAN access point with one integrated wireless interface

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>

6GK5788-1FC00-0AA0

6GK5788-1FC00-0AB0

**SCALANCE W788-2 RJ45**

IWLAN dual access point with two integrated wireless interfaces

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>
- Country approvals for operation in Israel<sup>(2)</sup>

6GK5788-2FC00-0AA0

6GK5788-2FC00-0AB0

6GK5788-2FC00-0AC0

**SCALANCE W788 M12**

IWLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection (-20 °C to +60 °C)

Scope of supply: Mounting hardware; manual on CD-ROM, English/German

**SCALANCE W788-1 M12**

IWLAN access point with one integrated wireless interface

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>

6GK5788-1GD00-0AA0

6GK5788-1GD00-0AB0

**SCALANCE W788-2 M12**

IWLAN dual access point with two integrated wireless interfaces

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>

6GK5788-2GD00-0AA0

6GK5788-2GD00-0AB0

**SCALANCE W788 M12 EEC**

IWLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; railway approval in accordance with EN 50155 / NEMA TS2; conformal coating; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection

Scope of supply: Mounting hardware; manual on CD-ROM, English/German

**SCALANCE W788-2 M12 EEC**

IWLAN dual access point with two integrated wireless interfaces

- Country approvals for operation outside the USA
- Country approvals for operation within the USA<sup>1)</sup>

6GK5788-2GD00-0TA0

6GK5788-2GD00-0TB0

Please note country approvals under:  
<http://www.siemens.com/wireless-approvals>

## Accessories

### Industrial Wireless LAN, Access Control with RFID

#### Access Points IEEE 802.11n

Ordering data	Article No.	Article No.
<b>SCALANCE W786</b>  SI WLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection (-40°C to +60 °C) Scope of supply: Mounting hardware, 2-pin screw terminal for 24 V DC; manual on CD-ROM; German/English		<b>SCALANCE W774 RJ45</b>  IW WLAN access points with built-in wireless interface for establishing wireless connections with iFeatures; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; WPA2/AES; integrated 2-port switch; Power over Ethernet (PoE), IP30 degree of protection (-20 °C to +60 °C); scope of supply: Mounting hardware; 4-pin screw terminal for 24 V DC; manual on CD-ROM; English/German
<b>SCALANCE W786-1 RJ45</b>  IW WLAN access points with one integrated wireless interface and RJ45 connector <ul style="list-style-type: none"><li>• Connections for three external antennas<ul style="list-style-type: none"><li>- Country approvals for operation outside the USA</li><li>- Country approvals for operation within the USA<sup>1)</sup></li></ul></li></ul>	<b>6GK5786-1FC00-0AA0</b>  <b>6GK5786-1FC00-0AB0</b>	<b>SCALANCE W774-1 RJ45</b>  IW WLAN Access Point with one built-in wireless interface <ul style="list-style-type: none"><li>• Country approvals for operation outside the USA</li><li>• Country approvals for operation within the USA<sup>1)</sup></li><li>• Country approvals for operation in Israel<sup>1)</sup></li></ul>
<b>SCALANCE W786-2 RJ45</b>  IW WLAN access points with two integrated wireless interfaces and RJ45 connection <ul style="list-style-type: none"><li>• Six connections for external antennas<ul style="list-style-type: none"><li>- Country approvals for operation outside the USA</li><li>- Country approvals for operation within the USA<sup>1)</sup></li><li>- Country approvals for operation in Israel<sup>1)</sup></li></ul></li></ul>	<b>6GK5786-2FC00-0AA0</b>  <b>6GK5786-2FC00-0AB0</b>  <b>6GK5786-2FC00-0AC0</b>	<b>SCALANCE W774 M12 EEC</b>  IW WLAN Access Points with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 300 Mbps; railway approval in accordance with EN 50155; conformal coating; WPA2/AES; Power over Ethernet (PoE), IP20 degree of protection Scope of supply: Mounting hardware; manual on CD-ROM, English/German
<b>SCALANCE W786-2IA RJ45</b>  IW WLAN access points with two integrated wireless interfaces and RJ45 connection <ul style="list-style-type: none"><li>• Six internal antennas<ul style="list-style-type: none"><li>- Country approvals for operation outside the USA</li><li>- Country approvals for operation within the USA<sup>1)</sup></li></ul></li></ul>	<b>6GK5786-2HC00-0AA0</b>  <b>6GK5786-2HC00-0AB0</b>	<b>SCALANCE W774-1 M12 EEC</b>  IW WLAN access point with one integrated wireless interface <ul style="list-style-type: none"><li>• Country approvals for operation outside the USA</li><li>• Country approvals for operation within the USA<sup>1)</sup></li></ul>
<b>SCALANCE W786 SFP</b>  SI WLAN access points with built-in wireless interfaces; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 450 Mbps; WPA2/AES; Power over Ethernet (PoE), IP65 degree of protection (-40°C to +60 °C) Scope of supply: Mounting hardware, 2-pin screw terminal for 24 V DC; manual on CD-ROM; German/English		<b>SCALANCE W761</b>  IW WLAN Access Point with built-in wireless interface; wireless networks IEEE 802.11a/b/g/h/n at 2.4/5 GHz up to 150 Mbps; WPA2/AES; IP20 degree of protection (0 °C to +55 °C); scope of delivery: Mounting hardware, 3-pin screw terminal for 24 V DC; manual on CD-ROM; German/English
<b>SCALANCE W786-2 SFP</b>  IW WLAN access points with two integrated wireless interfaces and RJ45 connection <ul style="list-style-type: none"><li>• Six external antennas<ul style="list-style-type: none"><li>- Country approvals for operation outside the USA</li><li>- Country approvals for operation within the USA<sup>1)</sup></li></ul></li></ul>	<b>6GK5786-2FE00-0AA0</b>  <b>6GK5786-2FE00-0AB0</b>	<b>SCALANCE W761-1 RJ45</b>  IW WLAN Access Point with one built-in wireless interface <ul style="list-style-type: none"><li>• National approvals for operation outside the USA</li><li>• National approvals for operation within the USA<sup>1)</sup></li></ul>

<sup>1)</sup> Please note country approvals under:  
<http://www.siemens.com/wireless-approvals>

**Accessories**

## Industrial Wireless LAN, Access Control with RFID

**Transponder, SIMATIC RF1000**

<b>Ordering data</b>	<b>Article No.</b>	<b>Article No.</b>
<b>Accessories</b>		
<b>KEY-PLUG W780 iFeatures</b>  Removable data storage medium for enabling additional iFeatures, for simple device replacement if a fault occurs and for storage of configuration data; can be used in SCALANCE W access points with PLUG compartment	<b>6GK5907-8PA00</b>	<b>Transponder</b>
<b>KEY-PLUG W740 iFeatures</b>  Removable data storage medium for enabling additional iFeatures, for simple device replacement in the event of a fault, and for storing configuration data. Can be used in SCALANCE W client modules with a PLUG slot	<b>6GK5907-4PA00</b>	<b>Transponder MDS D100</b> 112 bytes EEPROM Ordering quantity 50 units or a multiple thereof.
<b>KEY-PLUG W700 Security</b>  Removable data storage medium for enabling security features for SCALANCE W700, for simple device replacement in the event of a fault, and for storing configuration data.	<b>6GK5907-0PA00</b>	<b>Transponder MDS E600</b> MOBY E Mobile data storage unit MDS E600 ISO card, 752 byte EEPROM, IP68, -25 ... +60 °C, 85x54x0.8 mm • For RF300, MOBY E • Minimum order quantity: 50 units
<b>Power supply PS791-2DC</b>  24 V DC power supply for installation in SCALANCE W786 products; operating instructions in German/English	<b>6GK5791-2DC00-0AA0</b>	<b>SIMATIC RF1000<sup>1)</sup></b> <b>SIMATIC RF1040R Reader</b> Access control reader (LF 125 kHz) for HITAG 1/2/S, EM41xx, and (HF 13.56 MHz) for ISO14443 A/B, ISO15693, with USB connection (incl. 1.8 m connecting cable)
<b>Power supply PS791-2AC</b>  110 V AC to 230 V AC power supply for installation in the SCALANCE W786 products; operating instructions in German/English	<b>6GK5791-2AC00-0AA0</b>	<b>SIMATIC RF1060R Reader</b> Access control reader (13.56 MHz) for ISO 14443 A/B and ISO 15693, with USB connection (incl. 1.8 m connecting cable)
		<b>SIMATIC RF1070R Reader</b> Access control reader (13.56 MHz) for ISO 14443 A/B, ISO 15693, LEGIC Prime, LEGIC Advant, with USB connection (incl. 1.8 m connecting cable)
		<b>SIMATIC RF1070R OEM Reader</b> Access control reader (13.56 MHz) for ISO 14443 A/B, ISO 15693, LEGIC Prime, LEGIC Advant, with USB connection (incl. 1.8 m connecting cable), with supplied neutral front film

<sup>1)</sup> Further accessories for Access Control SIMATIC RF1000 under:  
<https://mall.industry.siemens.com/mall/en/en/Catalog/Products/10344657?tree=CatalogTree>:

## Accessories

### Power supply units, power supply cords

#### Overview



#### Power supply unit and connecting cables

The external power supply unit is intended for laboratory and office operation only.

The following power supply units and non-heating apparatus cables are available:

- Mobile Panel IWLAN power supply unit without non-heating apparatus cable
- Mobile Panel IWLAN power supply unit with non-heating apparatus cable
- Non-heating apparatus cable for Box and Panel PCs

#### Ordering data

#### Article No.

##### *Power supply units*

##### **Power supply unit, external, Mobile Panel IWLAN without non-heating apparatus cable**

Suitable only for operation under laboratory/office conditions.

##### **Power supply unit, external, Mobile Panel IWLAN with 90° non-heating apparatus cable**

Suitable only for operation under laboratory/office conditions.

- Power supply unit with non-heating apparatus cable for Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria, Finland

- Power supply unit with non-heating apparatus cable for the United Kingdom

- Power supply unit with non-heating apparatus cable for Switzerland

- Power supply unit with non-heating apparatus cable for USA

- Power supply unit with non-heating apparatus cable for Italy

- Power supply unit with non-heating apparatus cable for China

**6AV6671-5CN00-0AX3**

**6AV2181-5AL10-0AX0**

**6AV2181-5AL20-0AX0**

**6AV2181-5AL30-0AX0**

**6AV2181-5AL40-0AX0**

**6AV2181-5AL50-0AX0**

**6AV2181-5AL60-0AX0**

##### *Power supply cable*

##### **Power supply cable 230 V AC, angled 90°**

For Box PCs and Panel PCs

- For Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria, Finland

- For the United Kingdom

- For Switzerland

- For the USA

- For Italy

- For China

**6ES7900-1AA00-0XA0**

**6ES7900-1BA00-0XA0**

**6ES7900-1CA00-0XA0**

**6ES7900-1DA00-0XA0**

**6ES7900-1EA00-0XA0**

**6ES7900-1FA00-0XA0**

##### **Power supply cable 230 V AC, straight 180°**

For Box PCs and Panel PCs

- For Germany, France, Spain, the Netherlands, Belgium, Sweden, Austria, Finland

- For the United Kingdom

- For Switzerland

- For the USA

- For Italy

- For China

**6ES7900-0AA00-0XA0**

**6ES7900-0BA00-0XA0**

**6ES7900-0CA00-0XA0**

**6ES7900-0DA00-0XA0**

**6ES7900-0EA00-0XA0**

**6ES7900-0FA00-0XA0**

## Power supply units, power supply cords

## Technical specifications

Article number	<b>6AV6671-5CN00-0AX3</b>
	Power supply AC/DC, external
<b>General information</b>	
Product type designation	Power supply, connecting cable
<b>Control elements</b>	
Functional lighting	Yes; LED indicator for power on
<b>Frame size/design</b>	
• Standard	Yes; For industrial applications
<b>Supply voltage</b>	
Type of supply voltage	100 - 240 V AC
<b>Input current</b>	
Current consumption (rated value)	1.4 A
<b>Output voltage</b>	
Rated value (DC)	12 V
<b>Output current</b>	
Current output (rated value)	5 A
<b>Standards, approvals, certificates</b>	
CE mark	Yes; TÜV EN 60950-1, BSMI CNS14336
cULus	Yes
<b>Ambient conditions</b>	
Suited for indoor use	Yes
Suited for outdoor use	No
<b>Ambient temperature during operation</b>	
• min.	-30 °C
• max.	50 °C; Up to 70 °C, see manufacturer's data sheet
<b>Relative humidity</b>	
• Operation, max.	90 %; Non-condensing (max. 95% humidity for storage)
<b>Cables</b>	
Cable length	
• Input side	0 m; 3-pole AC inlet IEC320-C14, Class power unit
• Output side	1 m; With ferrite core
Color of cable sheath	Black

Article number	<b>6AV6671-5CN00-0AX3</b>
	Power supply AC/DC, external
<b>Connection method</b>	
Connector type	Connector 5.5 mm jack ( - ) / 2.1 mm pin ( + ) 12 V DC
<b>Mechanics/material</b>	
Material	
• Plastic	Yes
Color	Black
<b>Service life</b>	
• Mechanical service life (mating cycles)	1; See manufacturer's data sheet
<b>Dimensions</b>	
Width	125 mm
Height	50 mm
Thickness	31.5 mm
<b>Weights</b>	
Weight (without packaging)	305 g
<b>Scope of supply</b>	
Delivery quantity in pieces	1; Incl. DC cable with P1J jack connector, excl. 3-pin AC connecting cable IEC320-C14
<b>Other</b>	
Merchandise	Yes
Manufacturer's address	Marzahner Straße 34, 13053 Berlin, Germany
Target devices	Standard power supply, e.g. suitable for Mobile Panel WLAN (always see the Operating Instructions for the target device)
Note:	Manufacturer's address = importer's address (for manufacturer, see commercial goods information text)

## Accessories

### Power supply units, power supply cords

#### Technical specifications

Article number	<b>6AV2181-5AL10-0AX0</b>	<b>6AV2181-5AL20-0AX0</b>	<b>6AV2181-5AL30-0AX0</b>	<b>6AV2181-5AL40-0AX0</b>	<b>6AV2181-5AL50-0AX0</b>	<b>6AV2181-5AL60-0AX0</b>
	Power supply, ext., Mobile P. IWLAN DE	Power supply, ext., Mobile P. IWLAN UK	Power supply, ext., Mobile P. IWLAN SW	Power supply, ext., Mobile P. IWLAN US	Power supply, ext., Mobile P. IWLAN IT	Power supply, ext., Mobile P. IWLAN CN
<b>General information</b>						
Product type designation	External power supply unit					
<b>Supply voltage</b>						
Type of supply voltage	100 - 240 V AC					
<b>Input current</b>						
Current consumption (rated value)	1.4 A					
<b>Output voltage</b>						
Rated value (DC)	12 V					
<b>Output current</b>						
Current output (rated value)	5 A	5 A	5 A	5 A	5 A	5 A
<b>Standards, approvals, certificates</b>						
CE mark	Yes; UL 69950, TÜV EN 600950-1, BSMI CNS14336, CCC GB4942 approved	Yes; UL 69950, TÜV EN 600950-1, BSMI CNS14336, CCC GB4942 approved	Yes; UL 69950, TÜV EN 600950-1, BSMI CNS14336, CCC GB4942 approved	Yes; UL 69950, TÜV EN 600950-1, BSMI CNS14336, CCC GB4942 approved	Yes; UL 69950, TÜV EN 600950-1, BSMI CNS14336, CCC GB4942 approved	Yes; UL 69950, TÜV EN 600950-1, BSMI CNS14336, CCC GB4942 approved
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	-10 °C					
• max.	50 °C					
<b>Relative humidity</b>						
• Operation, max.	90 %	90 %	90 %	90 %	90 %	90 %
<b>Cables</b>						
Cable length						
• Input side	3 m	3 m	3 m	3 m	3 m	3 m
• Output side	0.9 m					
Color of cable sheath	Black	Black	Black	Black	Black	Black
<b>Connection method</b>						
Connector type	Connector 5.5 mm jack (-) / 2.1 mm pin (+) 12 V DC	Connector 5.5 mm jack (-) / 2.1 mm pin (+) 12 V DC	Connector 5.5 mm jack (-) / 2.1 mm pin (+) 12 V DC	Connector 5.5 mm jack (-) / 2.1 mm pin (+) 12 V DC	Connector 5.5 mm jack (-) / 2.1 mm pin (+) 12 V DC	Connector 5.5 mm jack (-) / 2.1 mm pin (+) 12 V DC
<b>Mechanics/material</b>						
Material						
• Plastic	Yes	Yes	Yes	Yes	Yes	Yes
Color	Black	Black	Black	Black	Black	Black
<b>Dimensions</b>						
Width	125 mm					
Height	50 mm					
Thickness	31.5 mm					
<b>Weights</b>						
Weight (without packaging)	540 g	560 g	525 g	540 g	520 g	540 g
<b>Scope of supply</b>						
Delivery quantity in pieces	1; Incl. AC and DC connecting cable					
• Parts per unit	1; AC cable for DE, FR, ES, NL, BE, SE, AT, FI	1; AC cable for GB	1; AC cable for CH	1; AC cable for US	1; AC cable for IT	1; AC cable for CN
<b>Other</b>						
Merchandise	Yes	Yes	Yes	Yes	Yes	Yes
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany					
Target devices	for Mobile Panel IWLAN					

## Power supply units, power supply cords

## Technical specifications

Article number	<b>6ES7900-0AA00-0XA0</b>	<b>6ES7900-0BA00-0XA0</b>	<b>6ES7900-0CA00-0XA0</b>	<b>6ES7900-0DA00-0XA0</b>	<b>6ES7900-0EA00-0XA0</b>	<b>6ES7900-0FA00-0XA0</b>
	Power cord, Germany and others	Power cord, United Kingdom,	Power cord, Switzerland	Power cord, USA, Canada	Power cord, Italy type L	Power cord, China GB 1002 and others
<b>General information</b>						
Product type designation	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus
<b>Interfaces</b>						
Interfaces/bus type	Line-side, country-specific connector: Type CEE 7/7 Schuko	Line-side, country-specific connector: Type BS 1363 (Commonwealth connector)	Line-side, country-specific connector: Type J (SEV 1011)	Line-side, country-specific connector: Type B (NEMA 5-15)	Line-side, country-specific connector: Type L (CEI 23-50)	Line-side, country-specific connector: Type I: GB 1002 (China), AS 3112 (Australia), IRAM 2073 (Argentina)
Device-side interface						
• Number of pins device-side	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>						
Suited for indoor use	Yes; Max. 10 A	Yes; Equipped with internal 13 A melting fuse	Yes; Max. 10 A			
<b>Ambient temperature during operation</b>						
• min.	-10 °C	-10 °C	-10 °C	-10 °C	-10 °C	-10 °C
• max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Relative humidity</b>						
• Operation, max.	90 %	90 %	90 %	90 %	90 %	90 %
<b>Cables</b>						
Cable length	3 m	3 m	3 m	3 m	3 m	3 m
Color of cable sheath	Black	Black	Black	Black	Black	Black
<b>Weights</b>						
Weight, approx.	290 g	300 g	260 g	230 g	255 g	280 g
<b>Scope of supply</b>						
Delivery quantity in pieces	1; AC cable for DE, FR, ES, NL, BE, SE, AT, FI	1; AC cable for GB	1; AC cable for CH	1; AC cable for US	1; AC cable for IT	1; AC cable for CN
<b>Other</b>						
Merchandise	Yes	Yes	Yes	Yes	Yes	Yes
Manufacturer name	FELLER GmbH	FELLER GmbH	FELLER GmbH	FELLER GmbH	FELLER GmbH	FELLER GmbH
Manufacturer's address	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com
Target devices	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces

## Accessories

### Power supply units, power supply cords

#### Technical specifications

Article number	<b>6ES7900-1AA00-0XA0</b>	<b>6ES7900-1BA00-0XA0</b>	<b>6ES7900-1CA00-0XA0</b>	<b>6ES7900-1DA00-0XA0</b>	<b>6ES7900-1EA00-0XA0</b>	<b>6ES7900-1FA00-0XA0</b>
	Power cord, Germany	Power cord, United Kingdom,	Power cord, Switzerland	Power cord, USA	Power cord, Italy	Power cord, China
<b>General information</b>						
Product type designation	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus	Cable for non-heating apparatus
<b>Interfaces</b>						
Interfaces/bus type	Line-side, country-specific connector: Type CEE 7/7 Schuko	Line-side, country-specific connector: Type BS 1363 (Commonwealth connector)	Line-side, country-specific connector: Type J (SEV 1011)	Line-side, country-specific connector: Type B (NEMA 5-15)	Line-side, country-specific connector: Type L (CEI 23-50)	Line-side, country-specific connector: Type I: GB 1002 (China), AS 3112 (Australia), IRAM 2073 (Argentina)
Device-side interface • Number of pins device-side	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type	3; Female, C13 connector type
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>						
Suited for indoor use	Yes; Max. 10 A	Yes; Equipped with internal 13 A melting fuse	Yes; Max. 10 A			
<b>Ambient temperature during operation</b>						
• min.	-10 °C	-10 °C	-10 °C	-10 °C	-10 °C	-10 °C
• max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C
<b>Relative humidity</b>						
• Operation, max.	90 %	90 %	90 %	90 %	90 %	90 %
<b>Cables</b>						
Cable length	3 m	3 m	3 m	3 m	3 m	3 m
Color of cable sheath	Black	Black	Black	Black	Black	Black
<b>Weights</b>						
Weight, approx.	290 g	300 g	260 g	230 g	255 g	280 g
<b>Scope of supply</b>						
Delivery quantity in pieces	1; AC cable for DE, FR, ES, NL, BE, SE, AT, FI	1; AC cable for GB	1; AC cable for CH	1; AC cable for US	1; AC cable for IT	1; AC cable for CN
<b>Other</b>						
Merchandise	Yes	Yes	Yes	Yes	Yes	Yes
Manufacturer name	FELLER GmbH	FELLER GmbH	FELLER GmbH	FELLER GmbH	FELLER GmbH	FELLER GmbH
Manufacturer's address	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com	Wärndorferstraße 3, 2525 Günselsdorf, Austria; email: sales@feller-at.com
Target devices	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces	Suitable for all appropriate DC interfaces

#### More information

##### Notice:

The technical specifications remain unchanged; however, the power supply cable now has to be ordered separately.

Suitable SITOP power supplies are available for use with machinery and plants.

Network cables for the connection of IPC systems for various countries are also available.

The replacement type has the article number:  
**6AV6671-5CN00-0AX3**

##### Note:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical

specifications of the respective accessory.  
Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Back covers

## Overview



The back covers in IP20 design are ideal for simple mounting of Panels, Panel PCs, Flat Panels and industrial Thin Clients on VESA 100 brackets.

They are screwed onto the device and implement low-cost wall-mounting or connection to a supporting arm system.

Back covers are available for display size 15", 19" and 22" for the following SIMATIC HMI devices:

- Touch Panels
- Panel PC IPC477D<sup>1)</sup> and IPC277D
- Flat Panels
- Thin Clients

<sup>1)</sup> IPC477D 15" is only available as a single touch version.

## Ordering data

## Article No.

## Back covers IP20

15" devices

- IPC277D 15"
- IPC477D 15"<sup>1)</sup>
- IPC477D 15" MT<sup>1)</sup>
- IFP1500
- IFP1500 MT
- TP1500 / ITC1500

**6AV7675-1RB00-0AA0**  
**6AV7675-2RB00-0AA0**  
**6AV7675-2RH00-0AA0**  
**6AV7675-4RB00-0AA0**  
**6AV7675-4RH00-0AA0**  
**6AV7675-8RB00-0AA0**

19" devices

- IPC277D 19"
- IPC477D 19"<sup>1)</sup>
- IFP1900, black
- IFP1900, gray
- TP1900 / ITC1900

**6AV7675-1RD00-0AA0**  
**6AV7675-2RD00-0AA0**  
**6AV7675-4RD00-0AA0**  
**6AV7675-4RD00-0AA1**  
**6AV7675-8RD00-0AA0**

22" devices

- IPC477D 22"<sup>1)</sup>
- IFP2200
- TP2200 / ITC2200

**6AV7675-2RE00-0AA0**  
**6AV7675-4RE00-0AA0**  
**6AV7675-8RE00-0AA0**

<sup>1)</sup> Without DVD/PCIe expansion

## Accessories

### Back covers

#### Technical specifications

Article number	6AV7675-1RB00-0AA0	6AV7675-2RB00-0AA0	6AV7675-2RH00-0AA0	6AV7675-4RB00-0AA0	6AV7675-4RH00-0AA0	6AV7675-8RB00-0AA0
	BACK COVER IP20 15" (IPC277D/E)	BACK COVER IP20 15" (IPC477D)	BACK COVER IP20 15" (IPC477D MT)	BACK COVER IP20 15" (IFP1500)	BACK COVER IP20 15" (IFP1500 MT)	Backplane cover IP20 15" (TP/ITC1500)
<b>General information</b>						
Product type designation	Backplane cover					
<b>Installation type/mounting</b>						
Mounting type	VESA	VESA	VESA	VESA	VESA	VESA
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>						
CE mark	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity
cULus	Yes; UL 60950-1, file number E115352					
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.					0 °C	0 °C
• max.	40 °C					
<b>Relative humidity</b>						
• Operation, max.	95 %	95 %	95 %	95 %	95 %	95 %
• Condensation permissible	No	No	No	No	No	No
<b>Mechanics/material</b>						
Material	Yes	Yes	Yes	Yes	Yes	Yes
• Aluminum						
Screw type	Yes; T10					
• Torx						
<b>Dimensions</b>						
Width	415 mm	415 mm	416.5 mm	415 mm	416.5 mm	415 mm
Height	310 mm	310 mm	298 mm	310 mm	298 mm	310 mm
Depth	90 mm	90 mm	89 mm	89 mm	89 mm	90 mm
<b>Weights</b>						
Weight (without packaging)	1.6 kg					

**Technical specifications**

Article number	<b>6AV7675-1RD00-0AA0</b> BACK COVER IP20 19" (IPC277D/E)	<b>6AV7675-2RD00-0AA0</b> back cover IP20 19" (IPC477x)	<b>6AV7675-4RD00-0AA0</b> BACK COVER IP20 19" (IFP1900)	<b>6AV7675-4RD00-0AA1</b> Back plane cover IP20 19" (IFP1900)	<b>6AV7675-8RD00-0AA0</b> Backplane cover IP20 19" (TP/ITC1900)
<b>General information</b>					
Product type designation	Backplane cover	Backplane cover	Backplane cover	Backplane cover	Backplane cover
<b>Installation type/mounting</b>					
Mounting type	VESA	VESA	VESA	VESA	VESA
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity
cULus	Yes; UL 60950-1, file number E115352	Yes; UL 60950-1, file number E115352	Yes; UL 60950-1, file number E115352	Yes; UL 60950-1, file number E115352	Yes; UL 60950-1, file number E115352
<b>Ambient conditions</b>					
<b>Ambient temperature during operation</b>					
• min.					0 °C
• max.	40 °C	40 °C	40 °C	40 °C	40 °C
<b>Relative humidity</b>					
• Operation, max.	95 %	95 %	95 %	95 %	95 %
• Condensation permissible	No	No	No	No	No
<b>Mechanics/material</b>					
Material					
• Aluminum	Yes	Yes	Yes	Yes	Yes
Screw type					
• Torx	Yes; T10	Yes; T10	Yes; T10	Yes; T10	Yes; T10
<b>Dimensions</b>					
Width	483 mm	483 mm	483 mm	483 mm	483 mm
Height	337 mm	337 mm	337 mm	337 mm	337 mm
Depth	89 mm	89 mm	89 mm	89 mm	89 mm
<b>Weights</b>					
Weight (without packaging)	1.9 kg	1.9 kg	1.9 kg	1.9 kg	1.9 kg

## Accessories

### Back covers

#### Technical specifications

Article number	<b>6AV7675-2RE00-0AA0</b> back cover IP20 22" (IPC477x)	<b>6AV7675-4RE00-0AA0</b> Backplane cover IP20 22" (IFP2200)	<b>6AV7675-8RE00-0AA0</b> Backplane cover IP20 22" (TP/ITC2200)
<b>General information</b>			
Product type designation	Backplane cover	Backplane cover	Backplane cover
<b>Installation type/mounting</b>			
Mounting type	VESA	VESA	VESA
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity	Yes; CE marking / EC Declaration of Conformity
cULus	Yes; UL 60950-1, file number E115352	Yes; UL 60950-1, file number E115352	Yes; UL 60950-1, file number E115352
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.		0 °C	0 °C
• max.	40 °C	40 °C	40 °C
<b>Relative humidity</b>			
• Operation, max.	95 %	95 %	95 %
• Condensation permissible	No	No	No
<b>Mechanics/material</b>			
Material			
• Aluminum	Yes	Yes	Yes
Screw type			
• Torx	Yes; T10	Yes; T10	Yes; T10
<b>Dimensions</b>			
Width	560 mm	560 mm	560 mm
Height	380 mm	380 mm	380 mm
Depth	89 mm	89 mm	89 mm
<b>Weights</b>			
Weight (without packaging)	2.2 kg	2.2 kg	2.2 kg

#### More information

Note:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

**Overview****Protective films**

Protective films are available for almost all SIMATIC HMI devices. They protect the display from dirt and scratching during operation and in harsh environments. The SIMATIC protective films are non-reflective. This ensures that the display is always easy to read, even when using protective films. The protective film can be removed without leaving any adhesive residue on the front. Adhesive-edged protective films are now available for resistive touch systems (membrane touch). For multi-touch systems (typically with glass fronts) full-width adhesive protective films are available. Full-width adhesive films should not be used on single-touch systems, as the touch system could be damaged when removing the film. All full-width adhesive films can be trimmed to any size, this does not affect the quality of the film. Adhesive-edged films should not be trimmed, as this would lead to the loss of the adhesive edge.

For complete protection of the front side in harsh environments, protective covers are also available for some devices.

Benefits of protective films/protective covers:

- Reduced reflections
- Lightweight, thin and frameless design
- Simple and fast to attach
- Residue-free removal
- Dust-resistant
- Antibacterial coating on request (for the medical sector or F&B)

The protective film does not always need to cover the whole front. For compatibility reasons, not all protective films extend as far as the edge of the enclosure. This does not in any way impair the function of protecting the display.

**Ordering data****Article No.****Protective films 4"**

- Touch devices
- Widescreen
- Widescreen, Type 13

**6AV6671-2EC00-0AX0  
6AV2124-6DJ00-0AX0  
6AV2181-5DJ00-0AX0**

**Protective films 6"**

- Touch devices, Type 1
- Touch devices, Type 2
- Touch devices, Type 4
- Touch devices, Type 10

**6AV6574-1AD00-4AX0  
6AV6574-1AD00-4DX0  
6AV6671-2XC00-0AX0  
6AV6574-1AD04-4AA0**

**Protective films 7"**

- Widescreen
- Widescreen, Type 5 Unified / IPC
- Widescreen, Type 5 BAC Unified / IPC
- Widescreen, Type 13

**6AV2124-6GJ00-0AX0  
6AV6881-0GJ22-0AA0  
6AV6881-0GJ22-1AA0  
6AV2181-5GJ00-0AX0**

**Protective films 8"**

- Touch devices, Type 1
- Touch devices, Type 2
- Touch devices, Type 10

**6AV6671-3CC00-0AX0  
6AV6671-3CC00-0AX5  
6AV6671-5BC00-0AX0**

**Protective films 9"**

- Widescreen, Type 1
- Widescreen, Type 2
- Widescreen, Type 13

**6AV2124-6JJ00-0AX0  
6AV2181-3JJ20-0AX0  
6AV2181-5JJ00-0AX0**

**Protective films 10"**

- Touch devices, Type 1
- Touch devices, Type 2
- Widescreen "full-surface bonding", Type 4
- Widescreen, Type 5 Unified / IPC
- Widescreen, Type 5 BAC Unified / IPC
- Touch devices, Type 10

**6AV6671-3DC00-0AX0  
6AV6671-3DC00-0AX5  
6AV6881-0AJ21-0AA0  
6AV6881-0KJ22-0AA0  
6AV6881-0KJ22-1AA0  
6AV6645-7AB15-0AS0**

**Protective films for 10" to 12" touch devices**

- Widescreen, Type 1
- Widescreen, Type 2
- Widescreen, Type 5 Unified / IPC
- Widescreen, Type 5 BAC Unified / IPC
- Protective film, Type 6 IFF

**6AV6574-1AD00-4CX0  
6AV2124-6MJ00-0AX0  
6AV2181-3MJ20-0AX0  
6AV6881-0MJ22-0AA0  
6AV6881-0MJ22-1AA0  
6AV6881-7MJ13-2AA0**

**Protective films 15"**

- Touch devices
- Widescreen
- Widescreen, Type 5 Unified / IPC
- Widescreen, Type 5 BAC Unified / IPC
- Protective film, Type 6 IFF

**6AV6574-1AD00-4EX0  
6AV2124-6QJ00-0AX1  
6AV6881-0QJ22-0AA0  
6AV6881-0QJ22-1AA0  
6AV6881-7QJ13-2AA0**

**Protective films 19"**

- Touch devices
- Widescreen
- Widescreen "full-surface bonding"
- Widescreen, Type 5 Unified / IPC
- Widescreen, Type 5 BAC Unified / IPC
- Protective film, Type 6 IFF

**6AV7672-1CE00-0AA0  
6AV2124-6UJ00-0AX1  
6AV6881-0UJ20-0AA0  
6AV6881-0UJ22-0AA0  
6AV6881-0UJ22-1AA0  
6AV6881-7UJ13-2AA0**

**Protective films 22"**

- Widescreen
- Widescreen, Type 5 Unified / IPC
- Widescreen, Type 5 BAC<sup>1)</sup> Unified / IPC
- Protective film, Type 6 IFF

**6AV2124-6XJ00-0AX1  
6AV6881-0VJ22-0AA0  
6AV6881-0VJ22-1AA0  
6AV6881-7VJ13-2AA0**

**Protective films 24"**

- Widescreen, Type 5 Unified / IPC

**6AV6881-0WJ22-0AA0**

<sup>1)</sup> BAC stands for antibacterial coating. These films are suitable in particular for the F&B and pharmaceuticals industries, or wherever hygiene is a priority.

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV6671-2EC00-0AX0</b> Protect. Film 4" Touch Device	<b>6AV2124-6DJ00-0AX0</b> Protect. Film 4" Widescreen	<b>6AV2181-5DJ00-0AX0</b> Protect. film 4" widescreen, type 13
<b>General information</b>			
Product type designation	Protective film 4"	Protective film 4" widescreen	Protective film 4" widescreen
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
• Condensation permissible		No	No
<b>Mechanics/material</b>			
Material			
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting
<b>Dimensions</b>			
Width	120 mm	131.4 mm	110.1 mm
Height	105 mm	107.4 mm	68.9 mm
Thickness	0.125 mm	0.125 mm	0.125 mm
<b>Scope of supply</b>			
Delivery quantity in pieces	10	10	10
<b>Other</b>			
printable with laser printer	Yes	Yes	No
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for TP 177B 4", KTP 400 Basic	For KTP400 Basic, KTP400 Basic 2nd, KTP400 Comfort, KTP400F Mobile	KTP400F Mobile 4"

**Technical specifications**

Article number	<b>6AV6574-1AD00-4AX0</b> Protect. Film 6" Touch Device, Type 1	<b>6AV6574-1AD00-4DX0</b> Protect. Film 6" Touch Device, Type 2	<b>6AV6671-2XC00-0AX0</b> Protect. Film 6" Touch Device, Type 3	<b>6AV6574-1AD04-4AA0</b> Protect. Film 6" Touch Device, Type 10
<b>General information</b>				
Product type designation	Protective film 6"	Protective film 6"	Protective film 6"	Protective film 6"
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	-40 °C	-40 °C	-40 °C	-40 °C
• max.	50 °C	50 °C	80 °C	80 °C
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	90 %	90 %
<b>Mechanics/material</b>				
Material				
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting
<b>Dimensions</b>				
Width	118.4 mm	178.4 mm	179.4 mm	120.5 mm
Height	89 mm	135.4 mm	141.4 mm	91 mm
Thickness	0.125 mm	0.125 mm	0.125 mm	0.125 mm
<b>Scope of supply</b>				
Delivery quantity in pieces	10	10	10	10
<b>Other</b>				
printable with laser printer	Yes	Yes	Yes	Yes
Merchandise	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany			
Target devices	For TP070, TP170micro, TP170A/B, C7-635 touch	For TP270 6", TP277 6", MP177 6" touch, MP270B 6" touch	for TP 177micro, TP 177A, TP 177B, OP 177B, KTP 600 Basic	For Mobile Panel 170, Mobile Panel 177

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV2181-5GJ00-0AX0</b>	<b>6AV2124-6GJ00-0AX0</b>	<b>6AV6881-0GJ22-0AA0</b>	<b>6AV6881-0GJ22-1AA0</b>
	Protect. film 7" widescreen, type 13	Protect. film 7" widescreen	Protect. film 7" front, type 5	Protect. film 7 BAC front, type 5
<b>General information</b>				
Product type designation	Protective film 7" widescreen	Protective film 7" widescreen	Protective film 7" front, surface, type 5	Protective film 7" front, surface, type 5
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	No; No CE marking obligation	
<b>Ambient conditions</b>				
Suited for indoor use			Yes; Processing temperature 5 °C to 32 °C, empirical value	
Suited for outdoor use			No; possible under certain conditions	
<b>Ambient temperature during operation</b>				
• min.	-40 °C	-40 °C	-20 °C	-20 °C
• max.	80 °C	80 °C	80 °C	80 °C
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	50 %	50 %
• Condensation permissible	No	No		
<b>Accessories</b>				
Function description				antibacterial
<b>Mechanics/material</b>				
Material			Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	
• PET			Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue	
Enclosure material (front)			Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)	
• Plastic			Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1	
• PET			Yes; Basic foil, storage life > 1 year	
<b>Dimensions</b>				
Width	169.5 mm	205.4 mm	206 mm	206 mm
Height	108.5 mm	149.4 mm	150 mm	150 mm
Thickness	0.125 mm	0.125 mm	0.225 mm	0.225 mm
<b>Weights</b>				
Weight (without packaging)			8 g; Per unit	8 g; Per unit
<b>Scope of supply</b>				
Delivery quantity in pieces	10; Units per set	10	5; Units per set	5; Units per set
Components included			5x removers, 5x cleaning cloths, 1x spatula for applying	5x removers, 5x cleaning cloths, 1x spatula for applying
<b>Other</b>				
printable with laser printer	No	No; digital UV printing	No	No
Merchandise	No	No	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de
contacting the manufacturer				
Target devices	KTP700 Mobile, KTP700F Mobile	for KTP700 Basic 2nd, TP700 Comfort, IPC277D	Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)
Note:		Edge-adhesive film, can be trimmed to a limited extent, printable, observe target device manual before attaching, high suitability for resistive touch systems, limited suitability for glass fronts	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems

**Technical specifications**

Article number	<b>6AV6671-3CC00-0AX0</b> Protect. Film 8" Touch Device, Type 1	<b>6AV6671-3CC00-0AX5</b> Protect. Film 8" Touch Device, Type 2	<b>6AV6671-5BC00-0AX0</b> Protect. film 8" Touch device, type 10
<b>General information</b>			
Product type designation	Protective film 8"	Protective film 8"	Protective film 8"
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Mechanics/material</b>			
Material			
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting
<b>Dimensions</b>			
Width	207 mm	217 mm	155.5 mm
Height	165 mm	217 mm	117.7 mm
Thickness	0.125 mm	0.125 mm	0.3 mm
<b>Scope of supply</b>			
Delivery quantity in pieces	10	10	2
<b>Other</b>			
printable with laser printer	Yes	Yes	Yes
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For MP277 8" touch up to product version "ES 14"	For MP277 8" touch in product version "ES 15" and later	for Mobile Panel 277 8"

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV2124-6JJ00-0AX0</b> Protect. Film 9" Widescreen	<b>6AV2181-3JJ20-0AX0</b> Protect. Film 9" Widescreen, Type 2	<b>6AV2181-5JJ00-0AX0</b> Protect. film 9" widescreen, type 13
<b>General information</b>			
Product type designation	Protective film 9" widescreen	Protective film 9" widescreen	Protective film 9" widescreen
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
• Condensation permissible	No	No	No
<b>Mechanics/material</b>			
Material			
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting
<b>Dimensions</b>			
Width	265.4 mm	258.4 mm	214.6 mm
Height	181.4 mm	173.4 mm	134.6 mm
Thickness	0.125 mm	0.125 mm	0.125 mm
<b>Scope of supply</b>			
Delivery quantity in pieces	10	10	10
<b>Other</b>			
printable with laser printer	Yes	Yes	No
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for TP900 Comfort, IPC277D	for KTP900 Basic	KTP900 Mobile, KTP900F Mobile

**Technical specifications**

Article number	<b>6AV6671-3DC00-0AX0</b>	<b>6AV6671-3DC00-0AX5</b>	<b>6AV6881-0AJ21-0AA0</b>	<b>6AV6881-0KJ22-0AA0</b>	<b>6AV6881-0KJ22-1AA0</b>	<b>6AV6645-7AB15-0AS0</b>	<b>6AV6574-1AD00-4CX0</b>
Protect. Film 10" Touch Device, Type 1	Protect. Film 10" Touch Device, Type 2	Protect. film 10" widescreen, type 4	Protect. film 10" front, type 5	Protect. film 10" BAC front, type 5	Protect. film 10" front, type 5	Protect. film 10" Touch device, type10	Protect. Film 10" to 12" Touch Device
<b>General information</b>							
Product type designation	Protective film 10"	Protective film 10"	Protective film 10" widescreen, type 4	Protective film 10" front, surface, type 5	Protective film 10" front, surface, type 5	Protective film 10"	Protective film 10" ... 12"
<b>Installation type/mounting</b>							
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>							
CE mark	Yes	Yes	No; No CE marking obligation	No; No CE marking obligation	No; No CE marking obligation	Yes	Yes
<b>Ambient conditions</b>							
Suited for indoor use			Yes	Yes; Processing temperature 5 °C to 32 °C, empirical value	Yes; Processing temperature 5 °C to 32 °C, empirical value		
Suited for outdoor use			No; possible under certain conditions	No; possible under certain conditions	No; possible under certain conditions		
<b>Ambient temperature during operation</b>							
• min.	-40 °C	-40 °C	0 °C	-20 °C	-20 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	55 °C	80 °C	80 °C	80 °C	50 °C
<b>Relative humidity</b>							
• Operation, max.	90 %	90 %	50 %	50 %	50 %	90 %	90 %
<b>Accessories</b>							
Function description					antibacterial		
<b>Mechanics/material</b>							
Material			Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer			
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Polyester; non-reflecting
• PET			Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue		Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue		
Enclosure material (front)			Scratching hardness 2H, adhesive force 0.011 N/25 mm	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)	Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1	Yes; Basic foil, storage life > 1 year	Yes; Basic foil, storage life > 1 year
• Plastic							
• PET							

## Accessories

### Protective films

#### Technical specifications

Article number	6AV6671-3DC00-0AX0	6AV6671-3DC00-0AX5	6AV6881-0AJ21-0AA0	6AV6881-0KJ22-0AA0	6AV6881-0KJ22-1AA0	6AV6645-7AB15-0AS0	6AV6574-1AD00-4CX0
	Protect. Film 10" Touch Device, Type 1	Protect. Film 10" Touch Device, Type 2	Protect. film 10" widescreen, type 4	Protect. film 10" front, type 5	Protect. film 10" BAC front, type 5	Protect. film 10" Touch device, type10	Protect. Film 10" to 12" Touch Device
<b>Dimensions</b>							
Width	292 mm	299.8 mm	216.96 mm	277 mm	277 mm	223.17 mm	297.4 mm
Height	248 mm	259.9 mm	135.6 mm	198 mm	198 mm	170.37 mm	254.4 mm
Thickness	0.125 mm	0.125 mm	0.225 mm	0.225 mm	0.225 mm	0.3 mm	0.125 mm
<b>Weights</b>							
Weight (without packaging)			30 g; Per unit	16 g; Per unit	16 g; Per unit		
<b>Scope of supply</b>							
Delivery quantity in pieces	10	10	5; Units per set 5x removers, 5x cleaning cloths, 5x spatulas for applying	5; Units per set 5x removers, 5x cleaning cloths, 1x spatula for applying	5; Units per set 5x removers, 5x cleaning cloths, 1x spatula for applying	10	10
Components included							
<b>Other</b>							
printable with laser printer	Yes	Yes; Test printer suitability beforehand. No liability for printer damage	No	No	No	Yes	Yes
Merchandise	No	No	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte		No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany		Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany			Gleiwitzerstraße 555, 90475 Nuremberg, Germany	
contacting the manufacturer					phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de		
Target devices		SIMATIC ITP1000	Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)	for Mobile Panel 277 10"	
Note:		Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems		

**Technical specifications**

Article number	<b>6AV6881-0MJ22-1AA0</b> Protect. film 12" BAC front, type 5	<b>6AV2124-6MJ00-0AX0</b> Protect. Film 12" Widescreen	<b>6AV2181-3MJ20-0AX0</b> Protect. Film 12" Widescreen, Type 2	<b>6AV6881-0MJ22-0AA0</b> Protect. film 12" front, type 5
<b>General information</b>				
Product type designation	Protective film 12" front, surface, type 5	Protective film 12" wide-screen	Protective film 12" wide-screen	Protective film 12" front, surface, type 5
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark	No; No CE marking obligation	Yes	Yes	No; No CE marking obligation
<b>Ambient conditions</b>				
Suited for indoor use	Yes; Processing temperature 5 °C to 32 °C, empirical value			Yes; Processing temperature 5 °C to 32 °C, empirical value
Suited for outdoor use	No; possible under certain conditions			No; possible under certain conditions
<b>Ambient temperature during operation</b>				
• min.	-20 °C	-40 °C	-40 °C	-20 °C
• max.	80 °C	80 °C	80 °C	80 °C
<b>Relative humidity</b>				
• Operation, max.	50 %	90 %	90 %	50 %
• Condensation permissible		No	No	
<b>Accessories</b>				
Function description	antibacterial			
<b>Mechanics/material</b>				
Material	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer			Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer
• Plastic	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant
• PET	Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue			Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue
Enclosure material (front)	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)			Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)
• Plastic	Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1			Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1
• PET	Yes; Basic foil, storage life > 1 year			Yes; Basic foil, storage life > 1 year
<b>Dimensions</b>				
Width	318 mm	321.4 mm	321.4 mm	318 mm
Height	229 mm	232.4 mm	236.8 mm	229 mm
Thickness	0.225 mm	0.125 mm	0.125 mm	0.225 mm
<b>Weights</b>				
Weight (without packaging)	22 g; Per unit			22 g; Per unit

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV6881-0MJ22-1AA0</b> Protect. film 12" BAC front, type 5	<b>6AV2124-6MJ00-0AX0</b> Protect. Film 12" Widescreen	<b>6AV2181-3MJ20-0AX0</b> Protect. Film 12" Widescreen, Type 2	<b>6AV6881-0MJ22-0AA0</b> Protect. film 12" front, type 5
<b>Scope of supply</b>				
Delivery quantity in pieces	5; films per package	10	10	5; films per package
Components included	5x removers, 5x cleaning cloths, 1x spatula for applying			5x removers, 5x cleaning cloths, 1x spatula for applying
<b>Other</b>				
printable with laser printer	No	Yes	Yes	No
Merchandise	Yes; URM55 reflection shield, matte	No	No	Yes; URM55 reflection shield, matte
Manufacturer's address	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany
contacting the manufacturer	phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de			phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de
Target devices	Panels and IPC with start of delivery from 2020 (WFP2.3)	for TP1200 Comfort, IPC277D	for KTP1200 Basic	Panels and IPC with start of delivery from 2020 (WFP2.3)
Note:	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems			Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems

**Technical specifications**

Article number	<b>6AV2124-6QJ00-0AX1</b> Protect. Film 15" Widescreen	<b>6AV6574-1AD00-4EX0</b> Protect. Film 15" Touch Device	<b>6AV6881-0QJ22-0AA0</b> Protect. film 15" front, type 5	<b>6AV6881-0QJ22-1AA0</b> Protect. film 15" BAC front, type 5
<b>General information</b>				
Product type designation	Protective film 15" widescreen	Protective film 15", 4:3	Protective film 15" front, surface, type 5	Protective film 15" front, surface, type 5
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark		Yes	No; No CE marking obligation	No; No CE marking obligation
<b>Ambient conditions</b>				
Suited for indoor use	Yes		Yes; Processing temperature 5 °C to 32 °C, empirical value	Yes; Processing temperature 5 °C to 32 °C, empirical value
Suited for outdoor use	No		No; possible under certain conditions	No; possible under certain conditions
<b>Ambient temperature during operation</b>				
• min.	-40 °C	-40 °C	-20 °C	-20 °C
• max.	80 °C	50 °C	80 °C	80 °C
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	50 %	50 %
<b>Accessories</b>				
Function description				antibacterial
<b>Mechanics/material</b>				
Material			Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant
• PET			Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue	Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue
Enclosure material (front)			Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)
• Plastic			Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1	Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1
• PET			Yes; Basic foil, storage life > 1 year	Yes; Basic foil, storage life > 1 year
<b>Dimensions</b>				
Width	368 mm	362 mm	390 mm	390 mm
Height	259 mm	289 mm	249 mm	249 mm
Thickness	0.125 mm	0.125 mm	0.225 mm	0.225 mm
<b>Weights</b>				
Weight (without packaging)	26 g; Per unit		150 g; Per unit	150 g; Per unit

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV2124-6QJ00-0AX1</b> Protect. Film 15" Widescreen	<b>6AV6574-1AD00-4EX0</b> Protect. Film 15" Touch Device	<b>6AV6881-0QJ22-0AA0</b> Protect. film 15" front, type 5	<b>6AV6881-0QJ22-1AA0</b> Protect. film 15" BAC front, type 5
<b>Scope of supply</b>				
Delivery quantity in pieces	10; Units per set	10	5; films per package	5; films per package
Components included				
<b>Other</b>				
printable with laser printer	Yes	Yes	No; Suitable for screen printing	No; Suitable for screen printing
Merchandise	No	No	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany Phone +49 (7531) 12738 10, email: info@bedifol.com	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de
contacting the manufacturer				
Target devices	for Comfort Panel, IPC, Flat Panel, Thin Client		Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)
Note:	not suitable for multi-touch (glass front)	Not suitable for widescreen	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems

## Technical specifications

Article number	6AV7672-1CE00-0AA0	6AV2124-6UJ00-0AX1	6AV6881-0UJ20-0AA0	6AV6881-0UJ22-0AA0	6AV6881-0UJ22-1AA0
	Protect. Film 19" Touch Device	Protect. Film 19" Widescreen	Protect. film 19" glass front, type 1	Protect. film 19" front, type 5	Protect. film 19" BAC front, type 5
<b>General information</b>					
Product type designation	Protective film 19", 4:3	Protective film 19" widescreen	Protective film, 19" glass front	Protective film 19" front, surface, type 5	Protective film 19" front, surface, type 5
<b>Installation type/mounting</b>					
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>					
CE mark	Yes		No; No CE marking obligation	No; No CE marking obligation	No; No CE marking obligation
<b>Ambient conditions</b>					
Suited for indoor use		Yes	Yes	Yes; Processing temperature 5 °C to 32 °C, empirical value	Yes; Processing temperature 5 °C to 32 °C, empirical value
Suited for outdoor use		No	No; possible under certain conditions	No; possible under certain conditions	No; possible under certain conditions
<b>Ambient temperature during operation</b>					
• min.	-40 °C	-40 °C	0 °C	-20 °C	-20 °C
• max.	80 °C	80 °C	55 °C	80 °C	80 °C
<b>Relative humidity</b>					
• Operation, max.	90 %	90 %	50 %	50 %	50 %
<b>Accessories</b>					
Function description					antibacterial
<b>Mechanics/material</b>					
Material			Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant
• PET			Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue	Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue	Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue
Enclosure material (front)			Scratching hardness 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)
• Plastic				Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1	Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1
• PET				Yes; Basic foil, storage life > 1 year	Yes; Basic foil, storage life > 1 year
<b>Dimensions</b>					
Width	378 mm	451 mm	409 mm	456 mm	456 mm
Height	302.5 mm	285 mm	231 mm	286 mm	286 mm
Thickness	0.2 mm	0.125 mm	0.225 mm	0.225 mm	0.225 mm
<b>Weights</b>					
Weight (without packaging)		34 g; Per unit	34 g; Per unit	190 g; Per unit	190 g; Per unit

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV7672-1CE00-0AA0</b>	<b>6AV2124-6UJ00-0AX1</b>	<b>6AV6881-0UJ20-0AA0</b>	<b>6AV6881-0UJ22-0AA0</b>	<b>6AV6881-0UJ22-1AA0</b>
	Protect. Film 19" Touch Device	Protect. Film 19" Widescreen	Protect. film 19" glass front, type 1	Protect. film 19" front, type 5	Protect. film 19" BAC front, type 5
<b>Scope of supply</b>					
Delivery quantity in pieces	10	10; Units per set	5; Units per set 5x removers, 5x cleaning cloths, 5x spatulas for applying	5; films per package 5x removers, 5x cleaning cloths, 1x spatula for applying	5; films per package 5x removers, 5x cleaning cloths, 1x spatula for applying
<b>Other</b>					
printable with laser printer	Yes	Yes	No	No; Suitable for screen printing	No; Suitable for screen printing
Merchandise	No	No	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany  Phone +49 (7531) 12738 10, email: info@bedifol.com	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany  Phone +49 (7531) 12738 10, email: info@bedifol.com	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany  phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de
contacting the manufacturer					
Target devices		for Comfort Panel, IPC, Flat Panel, Thin Client	For 19" widescreen flat panels, can also be cut to size for smaller, glass front displays, not suitable for membrane fronts	Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)
Note:	Not suitable for wide-screen	not suitable for multi-touch (glass front)	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems

**Technical specifications**

Article number	<b>6AV2124-6XJ00-0AX1</b> Protect. Film 22" Widescreen	<b>6AV6881-0VJ22-0AA0</b> Protect. film 22" front, type 5	<b>6AV6881-0VJ22-1AA0</b> Protect. film 22 BAC front, type 5	<b>6AV6881-0WJ22-0AA0</b> Protect. film 24" front, type 5
<b>General information</b>				
Product type designation	Protective film 22" wide-screen	Protective film 22" front, surface, type 5	Protective film 22" front, surface, type 5	Protective film 24" front, surface, type 5
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes
<b>Standards, approvals, certificates</b>				
CE mark		No; No CE marking obligation	No; No CE marking obligation	No; No CE marking obligation
<b>Ambient conditions</b>				
Suited for indoor use	Yes	Yes; Processing temperature 5 °C to 32 °C, empirical value	Yes; Processing temperature 5 °C to 32 °C, empirical value	Yes; Processing temperature 5 °C to 32 °C, empirical value
Suited for outdoor use	No	No; possible under certain conditions	No; possible under certain conditions	No; possible under certain conditions
<b>Ambient temperature during operation</b>				
• min.	-40 °C	-20 °C	-20 °C	-20 °C
• max.	80 °C	80 °C	80 °C	80 °C
<b>Relative humidity</b>				
• Operation, max.	90 %	50 %	50 %	50 %
<b>Accessories</b>				
Function description			antibacterial	
<b>Mechanics/material</b>				
Material		Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer	Polyester with functional hard layer, dirt-repellant, URM55, silicone adhesive layer
• Plastic	Yes; Non-reflecting	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant	Yes; Non-reflecting, matte, can be removed without residue, hard-coated, dirt-repellant
• PET		Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue	Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue	Yes; Non-antistatic, non-reflecting, scratch-resistant, can be removed without residue
Enclosure material (front)		Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)	Scratch resistance 2H (acc. to JIS K 5600), adhesive force 0.011 N/25 mm (acc. to JIS Z 0237)
• Plastic		Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1	Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1	Yes; Haze 11.9% acc. to JIS K 7136 and transmission 90.5% acc. to JIS K 7361-1
• PET		Yes; Basic foil, storage life > 1 year	Yes; Basic foil, storage life > 1 year	Yes; Basic foil, storage life > 1 year
<b>Dimensions</b>				
Width	518 mm	521 mm	521 mm	577 mm
Height	334 mm	323 mm	323 mm	355 mm
Thickness	0.125 mm	0.225 mm	0.225 mm	0.225 mm
<b>Weights</b>				
Weight (without packaging)	44 g; Per unit	220 g; Per unit	220 g; Per unit	240 g; Per unit

## Accessories

### Protective films

#### Technical specifications

Article number	<b>6AV2124-6XJ00-0AX1</b>	<b>6AV6881-0VJ22-0AA0</b>	<b>6AV6881-0VJ22-1AA0</b>	<b>6AV6881-0WJ22-0AA0</b>
	Protect. Film 22" Widescreen	Protect. film 22" front, type 5	Protect. film 22 BAC front, type 5	Protect. film 24" front, type 5
<b>Scope of supply</b>				
Delivery quantity in pieces	10; Units per set	5; films per package	5; films per package	5; films per package
Components included		5x removers, 5x cleaning cloths, 1x spatula for applying	5x removers, 5x cleaning cloths, 1x spatula for applying	5x removers, 5x cleaning cloths, 1x spatula for applying
<b>Other</b>				
printable with laser printer	Yes	No; Suitable for screen printing	No; Suitable for screen printing	No; Suitable for screen printing
Merchandise	No	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte	Yes; URM55 reflection shield, matte
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany	Byk-Gulden-Straße 2 // F22, 78467 Constance, Germany
contacting the manufacturer		Phone +49 (7531) 12738 10, email: info@bedifol.com	Phone: +49 (7531) 12738-60, email: shop@schutzfolien24.de	Phone +49 (7531) 12738 10, email: info@bedifol.com
Target devices	for Comfort Panel, IPC, Flat Panel, Thin Client	Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)	Panels and IPC with start of delivery from 2020 (WFP2.3)
Note:	not suitable for multi-touch (glass front)	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems	Surface-adhesive film, can be trimmed, printable, observe target device manual before attaching, limited suitability for resistive touch systems

#### More information

Note:

Suitable target devices and contents can be found at the end of the technical specifications of each protective film.

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Protective covers, dust caps

## Overview

**Protective covers and dust caps**Protective covers

With a protective cover the complete panel front can be additionally protected. This gives IP65 degree of protection to the complete panel front.

Protective covers with IP65 degree of protection provide complete frontal protection of the panel and IPC against dirt and scratches.

If the protective cover is now attacked by corrosive substances, the actual front of the device remains unaffected. If it is damaged, the protective cover can easily be replaced at any time.

Self-adhesive protective films are available for simple display protection.

The protective covers can be kept clean using high-pressure cleaning equipment.

Ready-made templates can be downloaded to help you create and print out your own low-cost frame designs between panel and protective cover.

Unfortunately, no protective covers are available for the Basic and Comfort Panels, or the IPCs.

Dust caps

It is also possible to dustproof unused or rarely used interfaces on the back or underside of the device.

For this purpose we offer dust caps.

**Ordering data****Article No.*****INOX frame***

Can be used for Unified Panels, for example.  
Increases the degree of protection to IP69 and makes the front FDA-compliant together with the "antibacterial protective film". The Panel front is completely covered and protected.  
Not approved for hazardous and marine environments!  
The front film set must be ordered separately.  
Without required mounting frame!

**INOX frame:**

- 7" Type 1, Unified; without required mounting frame
- 10" Type 1, Unified; without required mounting frame
- 12" Type 1, Unified; without required mounting frame
- 15" Type 1, Unified; without required mounting frame
- 19" Type 1, Unified; without required mounting frame
- 22" Type 1, Unified; without required mounting frame

**6AV6881-0GH21-2AA0****6AV6881-0KH21-2AA0****6AV6881-0MH21-2AA0****6AV6881-0QH21-2AA0****6AV6881-0UH21-2AA0****6AV6881-0VH21-2AA0****INOX frame sets**

INOX frame and required mounting frame in set.  
Only one protective film set (antibacterial or standard) needs to be ordered separately here.

- 7" Type 1, Unified; with mounting frame
- 10" Type 1, Unified; with mounting frame
- 12" Type 1, Unified; with mounting frame
- 15" Type 1, Unified; with mounting frame
- 19" Type 1, Unified; with mounting frame
- 22" Type 1, Unified; with mounting frame

**6AV6881-0GH21-2BA0****6AV6881-0KH21-2BA0****6AV6881-0MH21-2BA0****6AV6881-0QH21-2BA0****6AV6881-0UH21-2BA0****6AV6881-0VH21-2BA0**

## Accessories

### Protective covers, dust caps

Ordering data	Article No.	Article No.
<b>Full front protection for Unified Panels in stainless steel V2A</b>	6AV6881-6UD41-1AA0	6AV6671-3CK01-0AX0
<p>The complete front of a Unified Panel can be enclosed by this stainless steel frame. First, a protective film (to be purchased separately) must be applied to the front. The front is then IP69- and FDA-compliant and the Panel can be used in corresponding areas. The front film is printable and can be replaced at any time (Panel must be removed for this purpose).</p>		
<b>Protective covers for 6" touch devices</b> for TP 070, TP 170micro, TP 177micro, TP 170A/B, TP 177A/B, TP 270 6", TP 277 6" MP 177 6" touch, MP 270 6" touch	6AV6574-1AE00-4AX0	
<b>Protective covers for OP 77</b> for OP77 and OP77B	6AV6671-1AJ00-0AX0	
<b>Protective covers for OP 177</b> for OP177B	6AV6671-2DJ00-0AX0	6ES7648-1AA50-0XG0

<sup>1)</sup> E14 = Product version 14

<sup>2)</sup> E03 = Product version 03

## Protective covers, dust caps

## Technical specifications

Article number	6AV6574-1AE00-4AX0	6AV6671-1AJ00-0AX0	6AV6671-2DJ00-0AX0	6AV6671-3CK01-0AX0	6AV6671-3CK00-0AX0	6ES7648-1AA50-0XG0
	Protective Cover 6" Touch Devices	Protective Cover OP 77	Protective Cover OP 177	Protective Cover MP 277-8" Touch	Protective Cover MP 277 10" Touch	Dust protection set interfaces
<b>General information</b>						
Product type designation	Protective cover 6" touch devices	Protective cover	Protective cover	Protective cover MP277 8" touch	Protective cover MP277 10" touch	Dust protection set interfaces
<b>Installation type/mounting</b>						
Mounting in portrait format possible	Yes	Yes	Yes	Yes	Yes	
Mounting in landscape format possible	Yes	Yes	Yes	Yes	Yes	
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	-40 °C	-40 °C	-40 °C	-40 °C	-40 °C	
• max.	80 °C	80 °C	80 °C	80 °C	80 °C	
<b>Relative humidity</b>						
• Operation, max.	95 %	95 %	95 %	95 %	95 %	
<b>Mechanics/material</b>						
Material						
• Plastic	Yes	Yes	Yes	Yes	Yes	
<b>Dimensions</b>						
Width	242.3 mm	178.6 mm	274.3 mm	270.8 mm	355.8 mm	
Height	186.3 mm	214.6 mm	243.26 mm	211 mm	294 mm	
Thickness	10 mm	7.8 mm	7.8 mm	7.8 mm	7.8 mm	
Mounting cutout, width	198 mm	135 mm	229 mm	226 mm	310 mm	
Mounting cutout, height	142 mm	171 mm	196 mm	166 mm	248 mm	
<b>Weights</b>						
Weight (without packaging)	750 g	750 g	750 g	750 g	750 g	
<b>Scope of supply</b>						
Delivery quantity in pieces						
• Parts per unit	2; 2 cover frames, 2 base frames, 2 protective covers, molded (for TP070, TP170micro, TP170A/B), 2 protective covers, smooth (for TP177micro, TP177A/B, TP270 6", MP177 6" touch, MP270 6" touch)	2; 2 cover frames, 2 base frames, 2 protective covers	2; 2 cover frames, 2 base frames, 2 protective covers	2; 2 cover frames, 2 base frames, 2 protective covers	2; 2 cover frames, 2 base frames, 2 protective covers	
<b>Other</b>						
Merchandise	No	No	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For TP070, TP170A, TP170B, TP170micro, TP177micro, TP177A, TP177B, TP270 6", TP277 6", MP270 6" touch	for OP 77A, OP 77B	For OP177B	For MP277 8" touch as far as product version "ES 14" with narrow frame	For MP277 10" touch up to product version "ES 14", Thin Client 10" up to "ES 03" (6AV6646-0AA21-2AX0) with narrow frame	

## Accessories

### Service sets

#### Overview



#### Service sets

A service set contains all the typical parts that are required for a core product.

If several identical parts are required, e.g. mounting clips, it makes more sense to order these separately.

Detailed information and quantities can be obtained from the relevant technical specifications. The number and contents are optimized in terms of functionality and cost. For this reason, accessories can only be obtained in the specified pack sizes.

Ordering data	Article No.
<b>Service sets</b> <b>For contents and matching devices, see technical specifications in the Mall</b>	
<b>For 4" and 6" devices</b> Service set for KTP400 Basic, KTP600 Basic, TP 177B 4"	6AV6671-2EA00-0AX0
<b>For 6" devices, type 1</b> Service set for TP 070, TP 170A/B, OP 170B, TP 170micro, OP 270, TP 270B, MP 270B touch	6AV6574-1AA00-4AX0
<b>For 6" devices, type 2</b> Service set for TP 070, TP 170A/B, OP 170B, TP 170micro, TP/OP 270 6", MP 270B 6" touch	6AV2181-8XA80-0AX0
<b>For 6" devices, type 3</b> Service set for TP 177micro, TP 177A/B, OP 177B	6AV6671-2XA00-0AX0
<b>For 6" to 10" devices</b> Service set for TP/OP 277 6", MP 277 8" touch, MP 277 8" key, MP 277 10" key and MP 277 10" touch devices up to product version "ES 14"	6AV6671-3XA01-0AX0
<b>For 8" to 10" devices</b> Service set for MP 277 8" touch and key devices from product version "ES 15", MP 277 10" touch devices from product version "ES 15"	6AV6671-3XA01-0AX1
<b>For 10", type 1</b> Service set for OP 270 10", MP 270B key devices	6AV6574-1AA00-2DX0
<b>For 10" devices, type 2</b> Service set for MP 277 10" touch devices with stainless steel front	6AV6675-3AA00-0AX0
<b>For 10" to 15" devices</b> Service set for C7-636 touch, TP 270 10", MP 270B 10" touch, MP 370 12"/15" touch devices	6AV6574-1AA00-2CX0

Ordering data	Article No.	Article No.
<b>For 12" devices</b> Service set suitable for MP 370 12"/15" touch/key devices and TP37	<b>6AV6574-1AA00-2BX0</b>	<b>For TD17, OP7/17</b> Service set for OP7/OP17 and TD17; TD17 mounting gasket, OP7 mounting gasket, OP17 mounting gasket 5x mounting clamps
<b>For 12" to 19" devices</b> Service set for MP 377 12" touch and key devices, MP 377 15" touch, MP 377 19" touch devices	<b>6AV6671-4XA00-0AX0</b>	<b>For OP73 micro, OP73, OP77</b> Service set for OP73micro, OP 73, OP 77A, OP 77B
<b>For 15" devices</b> Service set for MP 377 15" touch devices with stainless steel front	<b>6AV6671-4CA00-0AX0</b>	<b>KTP Mobile covers complete set</b> Cable clamp, USB cover incl. M3x10 screws.
<b>For Mobile Panel 177/277</b>	<b>6AV6574-1AA04-4AA0</b>	<b>KTP Mobile covers</b> Cable clamp, USB cover
<b>For Mobile Panel 277(F) WLAN V1</b>	<b>6AV6671-5CA00-0AX1</b>	<b>KTP Mobile screw set M3x10</b> M3x10 screws
<b>For Mobile Panel 277(F) WLAN V2</b>	<b>6AV6671-5CA00-0AX2</b>	
<b>For Industrial USB Hub 4</b>	<b>6AV6671-3EA01-0AX0</b>	
<b>For Pushbutton Panels</b>	<b>6AV3678-3XC30</b>	

## Technical specifications

Article number	6AV6671-2EA00-0AX0	6AV6574-1AA00-4AX0	6AV2181-8XA80-0AX0	6AV6671-2XA00-0AX0	6AV6671-3XA01-0AX0	6AV6671-3XA01-0AX1
	Service set for 4" and 6" devices	Service set for 6" devices, type 1	Service set for 6" devices, type 2	Service set for 6" devices, type 3	Service set for 6" to 10" devices	Service set for 8" to 10" devices
<b>General information</b>						
Product type designation	Service set			Service set	Service set 6" ... 10"	Service set 8" ... 10"
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>						
<b>Ambient temperature during operation</b>						
• min.	0 °C	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C	55 °C	55 °C	55 °C
<b>Relative humidity</b>						
• Operation, max.	95 %	95 %	95 %	95 %	95 %	95 %
<b>Scope of supply</b>						
Delivery quantity in pieces						
• Parts per unit	1; Content: 2x seal KTP 400-TP 177B 4", 2x seal for KTP 600, 7x aluminum mounting clip, 1x 2-pin female connector	1; Content: 3x mounting seal, 2x labeling strip, 7x plastic mounting clip, 1x 2-pin female connector	1; Content: 3x mounting seal, 2x labeling strip, 7x plastic mounting clip, 20x aluminum mounting clip, 1x 2-pin female connector	1; Content: 1x mounting seal TP 177, 1x mounting seal OP 177, 7x plastic mounting clip, 1x 2-pin female connector	1; Content: 6x device-specific seals, 15x aluminum mounting clips, 1x 2-pin female connector, 1x product informa- tion clamp	1; Content: 14x spring mounting clip, 1x 2-pin female connector
<b>Other</b>						
Merchandise	No	No	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for KTP 400 Basic, KTP 600 Basic, TP 177B 4"	For TP070, TP170A/B, OP170B, TP170micro, OP270 6", TP270 6", MP270B 6" touch	For TP070, TP170A/B, OP170B, TP170micro, OP/TP270 6", MP177 6", MP270B 6" touch	for TP 177micro, TP 177A, TP 177B, OP 177B	For TP/OP277 6", MP277 8" touch, MP277 8" key, MP277 10" key product version "ES 14" and later, MP277 10" touch product version "ES 14" and later	For MP277 8" touch, MP277 8" key product version "ES 15" and later, MP277 10" touch product version "ES 15" and later

## Accessories

### Service sets

#### Technical specifications

Article number	<b>6AV6574-1AA00-2DX0</b>	<b>6AV6675-3AA00-0AX0</b>	<b>6AV6574-1AA00-2CX0</b>	<b>6AV6574-1AA00-2BX0</b>
	Service set for 10" devices, type 1	Service set for 10" devices, type 2	Service set for 10" to 15" devices	Service set for 12" devices
<b>General information</b>				
Product type designation		Service set 10"		Service set, 12" ... 15"
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.		0 °C		0 °C
• max.		55 °C		55 °C
<b>Relative humidity</b>				
• Operation, max.	95 %	95 %	95 %	95 %
<b>Mechanics/material</b>				
Screw type				
• Hexagon socket				Yes; 2.5 mm
<b>Scope of supply</b>				
Delivery quantity in pieces				
• Parts per unit	1; Content: 1x slide-in label strip for OP270 10" and MP270 10" key, 1x installation seal for OP270 10" and MP270 10" key, 10x cast aluminum mounting clips, 1x 2-pin female connector, 1x Allen key	1; Content: 1x installation seal, 10x cast aluminum mounting clips, 1x 2-pin female connector, 1x Allen key	1; Content: 10x aluminum mounting clips, 1x 2-pin female connector, 1x CF card interlock, 1x PC card interlock, 1x installation seal, C7-636, TP/MP270(B), MP370-12" T, 1x installation seal for MP370-15" T, all other panels have a non-replaceable foam seal	1; Content: 1x mounting gasket sold by the meter, 2x memory card lock wide, 2x memory card lock narrow, 10x mounting clip cast aluminum, 6x mounting bracket, 1x female connector 2-pole 90 degrees, 1x female connector 2-pole 180 degrees, 2x Allen key and labeling strips for Key Panel
<b>Other</b>				
Merchandise	No		No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany		Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for OP270 10", MP270B key	For MP277 10" touch with stainless steel front	For C7-636 touch, TP270 10", MP270B 10" touch, MP370 12" touch, MP370 15" touch	For MP370 12" ... 15" Touch/ Key and TP37

**Technical specifications**

Article number	<b>6AV6671-4XA00-0AX0</b>	<b>6AV6671-4CA00-0AX0</b>
	Service set for 12" to 19" devices	Service set for 15" devices
<b>General information</b>		
Product type designation	Service set 12" ... 19"	Service set 15"
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
<b>Ambient conditions</b>		
<b>Ambient temperature during operation</b>		
• min.	0 °C	0 °C
• max.	55 °C	55 °C
<b>Relative humidity</b>		
• Operation, max.	95 %	95 %
<b>Mechanics/material</b>		
Screw type		
• 4.5 V	Yes	
<b>Scope of supply</b>		
Delivery quantity in pieces		
• Parts per unit	1; Content: 1x mounting seal MP377 12" key, 1x mounting seal MP377 12" touch, 1x mounting seal MP377 15" touch, 1x mounting seal MP377 19" touch, 18x aluminum mounting clip, 1x 2-pin female connector	1; Content: 1x mounting seal, 1x memory card lock, 12x cast aluminum mounting clip, 1x 2-pin female connector, 1x Allen key
<b>Other</b>		
Merchandise	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For MP377 12" key, MP377 12" touch, MP377 15" touch, MP377 19" touch	For MP377 15" touch with stainless steel front

## Accessories

### Service sets

#### Technical specifications

Article number	<b>6AV6574-1AA04-4AA0</b>	<b>6AV6671-5CA00-0AX1</b>	<b>6AV6671-5CA00-0AX2</b>
	Service set Mobile Panel	Service set Mobile Panel Wireless V1	Service set Mobile Panel Wireless V2
<b>General information</b>			
Product type designation		Service set Mobile Panel 277 (F) IWLAN V1	Service set Mobile Panel 277 (F) IWLAN V2
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.		0 °C	0 °C
• max.		55 °C	55 °C
<b>Relative humidity</b>			
• Operation, max.	95 %	95 %	95 %
<b>Scope of supply</b>			
Delivery quantity in pieces			
• Parts per unit	1; Content: 1x blanking plug, 2x PG cable gland A-box, 1x screw set cover A-box, 2x 12-pin terminal box, 1x 3-pin terminal box, 1x dummy cap A-box, 2x corner seal l/r and O-ring, 4x decorative film corner seal l/r	1; Content: 2x covers for charging station l/r, 1x connector for charging station, 2x corner seals l/r, 2x gasket corner seals, 4x decorative film corner seals l/r, 1x backup battery 3.6 V / 1.5 Ah including cover, 1x spare key for charging cradle	1; Content: 1x battery slot cover device with seal, 2x cover charging station l/r, 1x circular connector charging station, 2x corner seal l/r, 2x O-ring seal, 4x decorative foil, 1x charging tray spare key incl. lock and lock holder, screws
<b>Other</b>			
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For Mobile Panel 170, Mobile Panel 177	for Mobile Panel 277 IWLAN V1, Mobile Panel 277F IWLAN V1	for Mobile Panel 277 IWLAN V2, Mobile Panel 277F IWLAN V2

**Technical specifications**

Article number	<b>6AV6671-3EA01-0AX0</b> Service set Industrial USB Hub 4	<b>6AV3678-3XC30</b> Service Package F: PP7, PP17 I, PP17 II	<b>6AV3678-1CC10</b> Service Package f.OP7/17 and TD17	<b>6AV6671-1XA00-0AX0</b> OP73Micro, OP73, OP77 Service Set
<b>General information</b>				
Product type designation	Service set	Service pack	Service pack	Service set
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C	55 °C
<b>Relative humidity</b>				
• Operation, max.	95 %	95 %	95 %	95 %
<b>Scope of supply</b>				
Delivery quantity in pieces				
• Parts per unit	1; Content: 1x mounting seal, 1x mounting frame, 5x plastic mounting clip, 1x 2-pin female connector	1; Content: 1x mounting seal PP7, 1x mounting seal PP17, 5x plastic mounting clip, 1x 2-pin female connector, 1x 3-pin female connector, 1x 4-pin female connector, 2x 16-pin female connector	1; Content: 1x mounting seal TD17, 1x mounting seal OP7, 1x mounting seal TD/OP17, 5x plastic mounting clip	1; Content: 1x mounting seal OP73, 1x mounting seal OP77, 4x plastic mounting clip, 1x 2-pin female connector
<b>Other</b>				
Merchandise	Yes			
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany			
Target devices	For the Industrial USB Hub 4			
Note:		for PP7, PP17-I, PP17-II	for TD17, OP7, OP17	for OP73micro, OP73, OP77A, OP77B

## Accessories

### Service sets

#### Technical specifications

Article number	<b>6AV6881-5AA00-0AA1</b>	<b>6AV6881-5AA00-0AA2</b>	<b>6AV6881-0AG11-0AA0</b>
	Service set KTP Mobile covers	Service set KTP Mobile covers	Service set KTP Mobile screws M3
<b>General information</b>			
Product type designation	Mobile Panel Cover Set without M3	Mobile Panel Cover Set incl. M3	Mobile Panel M3 screw
<b>Standards, approvals, certificates</b>			
CE mark	No; No CE marking obligation	No; No CE marking obligation	No; No CE marking obligation
<b>Ambient conditions</b>			
Suited for indoor use	Yes	Yes	Yes
Suited for outdoor use	No; possible under certain conditions	No; possible under certain conditions	No; possible under certain conditions
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C
<b>Relative humidity</b>			
• Operation, max.	95 %	95 %	95 %
<b>Mechanics/material</b>			
Material			general requirement according to DIN ISO 8992
• Plastic	Yes; Misc. parts	Yes; Misc. parts	
• Sheet steel	Yes; Miscellaneous screws	Yes; Miscellaneous screws	
Screw type			
• Cross-tip	Yes; Cross-tip including slot	Yes; Cross-tip including slot	Yes; Cross-tip including slot
<b>Dimensions</b>			
Height			12 mm; Overall
Depth			10 mm; Up to underside of screw head
Thickness			11 mm; Screw head
<b>Weights</b>			
Weight (without packaging)	40 g	45 g	2.2 g
<b>Scope of supply</b>			
Delivery quantity in pieces	1; 5x plastic cable clamps, 5x USB covers	1; 5x plastic cable clamps, 5x USB covers, and 5x (M3x10) screws	5; Combination cross-tip collar screw (M3x10)
Components included	5x plastic cable clamps, 5x USB covers	5x plastic cable clamps, 5x USB covers, and 5x (M3x10) screws	Screws for attachment
<b>Other</b>			
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	Wired Mobile Panel (PROFIBUS and PROFINET)	Wired Mobile Panel (PROFIBUS and PROFINET)	Wired Mobile Panel (PROFIBUS and PROFINET)
Note:	Observe documentation of the target device	Observe documentation of the target device	Observe documentation of the target device

#### More information

##### Note:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Overview



### Note:

SIMATIC S7 memory cards from S7 controllers **may not** be used in HMI devices or PC systems.

If used in this way, the memory cards lose their functionality and can then no longer be used with S7 controllers.

SIMATIC HMI system cards **must not be formatted** because this irrevocably deletes system files, and **they can then no longer be used for their usual functions**, or may even become totally worthless.

Cyclic archiving may place very high stress on the memory and could lead to failure. In this case, it is necessary to calculate the write cycles in respect of the frequency and size of the data volume in advance. Network drives are more suitable for archiving larger data volumes at short to very short intervals.

In cases of doubt, please clarify with your Siemens contact person. Failure to comply rules out any repair or replacement.

## Storage media

Storage media which has been tested and approved by Siemens ensure the best possible functionality and compatibility.

SIMATIC HMI storage media are suitable for industry and optimized for the requirements in industrial environments. Special formatting and write algorithms ensure fast read/write cycles and a long service life of the memory cells.

MultiMediaCards can also be used in operator panels with SD slots. Detailed information on usability can be found in the storage media and panels technical specifications.

The actual memory capacity of the memory cards or USB flash drives may change depending on production factors. This means that the specified memory capacity may not always be 100% available to the user. When selecting or searching for core products using the SIMATIC selection guide, accessories appropriate to the core product are always automatically displayed or offered.

Due to the nature of the technology used, the reading/writing speed can diminish over time. This is always dependent on the environment, the size of the files saved, the extent to which the card is filled and a number of additional factors. SIMATIC memory cards, however, are always designed so that typically all of the data is reliably written to a card even when the device is being switched off.

More information can be taken from the operating instructions of the respective devices.

The following storage media are available:

- Multi Media Card
- Secure Digital Memory Card
- SD memory card Outdoor
- PC memory card (PC Card)
- PC memory card adapter (PC Card Adapter)
- CompactFlash Card
- CFast memory card
- SIMATIC HMI USB memory stick
- SIMATIC HMI USB FlashDrive
- Pushbutton Panel memory module
- IPC memory expansions

## Accessories

### Storage media

Ordering data	Article No.	Article No.
<i>Memory cards<sup>1)</sup> Indoor use only</i>		
SIMATIC MM memory card 128 MB	6AV6671-1CB00-0AX2	SIMATIC SD memory card, outdoor 2 GB 6AV6881-0AQ10-0AA0
SIMATIC SD memory card 512 MB	6AV6671-8XB10-0AX1	SIMATIC SD memory card, outdoor 32 GB 6AV6881-0AQ40-0AA0
SIMATIC SD memory card 2 GB	6AV2181-8XP00-0AX0	USB flash drive <sup>3)</sup> 32 GB, USB 3.0, metal enclosure, boot capability, without software, for current and new SIMATIC HMI Panels and IPCs. 6AV6881-0AS42-0AA1
SIMATIC SD memory card 32 GB <sup>2)</sup>	6AV6881-0AP40-0AA0	
SIMATIC CF memory card 512 MB	6AV6574-2AC00-2AA1	
PC memory card, 512 MB (PCMCIA)	6AV6574-2AC00-2AF1	
PC card adapter for CF memory card	6AV6574-2AF00-8AX0	SIMATIC HMI USB FlashDrive EX1 <ul style="list-style-type: none"> <li>• 32 GB, explosion protection, for HMI devices and IPCs with the corresponding slot. 6AV7675-0FX00-0AA0</li> <li>• 32 GB, explosion protection, for HMI devices and IPCs with the corresponding slot, with recovery function 6AV7675-0FX10-0AA0</li> </ul>
		SIMATIC IPC CompactFlash <ul style="list-style-type: none"> <li>• 2 GB 6ES7648-2BF02-0XF0</li> <li>• 4 GB 6ES7648-2BF02-0XG0</li> <li>• 8 GB 6ES7648-2BF02-0XH0</li> <li>• 16 GB 6ES7648-2BF02-0XJ0</li> </ul>
		SIMATIC IPC CFast <ul style="list-style-type: none"> <li>• 2 GB 6ES7648-2BF10-0XF0</li> <li>• 4 GB 6ES7648-2BF10-0XG0</li> <li>• 8 GB 6ES7648-2BF10-0XH0</li> <li>• 16 GB 6ES7648-2BF10-0XJ0</li> <li>• 30 GB 6ES7648-2BF10-0KK1</li> <li>• 128 GB 6ES7648-2BF10-0XM1</li> </ul>
		SIMATIC PP memory module 6ED1056-1BA00-0AA0

<sup>1)</sup> Not all memory is compatible with every target device. Please observe the current technical specifications of the memory. For compatibility and innovations, see SIMATIC Support pages, search term "Status Accessories" or entry "40466415"

<sup>2)</sup> For compatibility and innovations, see SIMATIC Support pages, entry 109759104

<sup>3)</sup> Note: This memory stick does not support Classic Panels such as TPs, OPs, and Multi Panels.  
The following software in SIOS is available for download for IPC systems. SIMATIC IPC Image & Partition Creator V3.3.2 and SIMATIC IPC BIOS-Manager V3.3 (Win PE) pre-installed, incl. CD.

**Technical specifications**

Article number	<b>6AV6671-1CB00-0AX2</b> SIMATIC MM memory card 128 MB	<b>6AV6671-8XB10-0AX1</b> SIMATIC SD memory card 512 MB	<b>6AV2181-8XP00-0AX0</b> SIMATIC SD memory card 2 GB	<b>6AV6881-0AP40-0AA0</b> SIMATIC SD indoor card 32 GB
<b>General information</b>				
Product type designation	MM memory card	SD memory card	SD memory card	SD memory card
<b>Frame size/design</b>				
• Standard	Yes; Typically 10 000 insertion cycles			
• Flat	Yes	Yes	Yes	Yes
<b>Installation type/mounting</b>				
Mounting in portrait format possible	Yes	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes	Yes
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	3.3 V; Max 3.6 V			
<b>Input current</b>				
Current consumption (rated value)	80 mA; Typical, maximum value	100 mA; Typical, maximum value	100 mA; Typical, maximum value	100 mA; Typical, maximum value
<b>Memory</b>				
Type of memory	MultiMediaCard	Secure Digital memory card	Secure Digital memory card	Secure Digital memory card
Memory size	128 Mbyte	512 Mbyte	2 048 Mbyte; Larger internal memory	2 048 Mbyte; Larger internal memory
Transmission rate for reading, max.	0 kbit/s; No value available	1.6 Mbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory
Transmission rate for writing, max.	300 kbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory
Wear leveling (distributed writing)	Yes; > 100 000 write/read cycles per cell and > 3 000 000 write/read cycles per card	Yes; > 100 000 write/read cycles per cell and > 3 000 000 write/read cycles per card	Yes; > 100 000 write/read cycles per cell and > 3 000 000 write/read cycles per card	Yes; > 100 000 write/read cycles per cell and > 3 000 000 write/read cycles per card
Write protection switch	No	Yes; Effectiveness depends on the device	Yes; Effectiveness depends on the device	Yes; Effectiveness depends on the device
<b>Interfaces</b>				
Device-side interface				
• Number of pins device-side	7	9	9	9
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
cULus		Yes	Yes	Yes
Marine approval	Yes; Passive component, therefore dependent on target device	Yes; Passive component, therefore dependent on target device	Yes; Passive component, therefore dependent on target device	Yes; Passive component, therefore dependent on target device
<b>Use in hazardous areas</b>				
• ATEX Zone 2	Yes; Always comply with the operating instructions of the target device.			
• ATEX Zone 22	Yes; Always comply with the operating instructions of the target device.			
• IECEx Zone 2	Yes; Always comply with the operating instructions of the target device.			
• IECEx Zone 22	Yes; Always comply with the operating instructions of the target device.			
• cULus Class I Zone 2, Division 2	Yes; Always comply with the operating instructions of the target device.			
• FM Class I Division 2	Yes; Always comply with the operating instructions of the target device.			
<b>Marine approval</b>				
• Germanischer Lloyd (GL)	Yes; Always comply with the operating instructions of the target device.			
• American Bureau of Shipping (ABS)	Yes; Always comply with the operating instructions of the target device.			
• Bureau Veritas (BV)	Yes; Always comply with the operating instructions of the target device.			
• Det Norske Veritas (DNV)	Yes; Always comply with the operating instructions of the target device.			
• Lloyds Register of Shipping (LRS)	Yes; Always comply with the operating instructions of the target device.			
• Nippon Kaiji Kyokai (Class NK)	Yes; Always comply with the operating instructions of the target device.			
• Polski Rejestr Statków (PRS)	Yes; Always comply with the operating instructions of the target device.			
• Chinese Classification Society (CCS)	Yes; Always comply with the operating instructions of the target device.			
• Compass working clearance	5 m	5 m	5 m	

## Accessories

### Storage media

#### Technical specifications

Article number	<b>6AV6671-1CB00-0AX2</b> SIMATIC MM memory card 128 MB	<b>6AV6671-8XB10-0AX1</b> SIMATIC SD memory card 512 MB	<b>6AV2181-8XP00-0AX0</b> SIMATIC SD memory card 2 GB	<b>6AV6881-0AP40-0AA0</b> SIMATIC SD indoor card 32 GB
<b>Ambient conditions</b>				
Suited for indoor use	Yes	Yes	Yes	Yes
Suited for outdoor use		No	Yes; possible under certain conditions	No
<b>Ambient temperature during operation</b>				
• min.	0 °C; Indoor	0 °C; Indoor	-30 °C	0 °C; Indoor
• max.	50 °C; Indoor	50 °C; Indoor	60 °C	55 °C; Indoor
<b>Relative humidity</b>				
• Operation, max.	90 %	90 %	95 %	95 %; no condensation
• Condensation permissible	No; Condensation not permissible	No; Condensation not permissible	No; Condensation not permissible	No; Condensation not permissible
<b>Operating systems</b>				
<b>pre-installed operating system</b>				
• Windows CE			No; Preinstalled system files	No; Preinstalled system files
<b>Runs under operating system</b>				
• Windows CE	Yes	Yes	Yes	Yes
• Windows Vista	Yes	Yes	Yes	Yes
• Windows XP	Yes	Yes	Yes	Yes
• Windows 7	Yes	Yes	Yes	Yes
• Windows 8	Yes	Yes	Yes	Yes
• Windows 10	Yes	Yes	Yes	Yes
• Linux	No	No	No	No
• other	Yes; Card must not be formatted!	Yes; Card must not be formatted!	Yes; Card must not be formatted!	Yes; Card must not be formatted!
<b>Mechanics/material</b>				
Enclosure material (front)				
• Plastic	Yes; Gold contacts	Yes; Gold contacts	Yes; Gold contacts	Yes; Gold contacts
Enclosure color (front)	RAL 6034 (color deviation possible)	RAL 6034 (color deviation possible)	RAL 6034 (color deviation possible)	RAL 6034 (color deviation possible)
<b>Service life</b>				
• Number of operating cycles, keys	10; Min. data storage without loss (in years)	10; Min. data storage without loss (in years)	10; Min. data storage without loss (in years)	10; Min. data storage without loss (in years)
<b>Dimensions</b>				
Width	24 mm	24 mm	24 mm	24 mm
Height	32 mm	32 mm	32 mm	32 mm
Thickness	2.1 mm	2.1 mm	2.1 mm	2.1 mm
<b>Weights</b>				
Weight (without packaging)	3 g	3 g	3 g	3 g
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1; can also be used in Outdoor Panels however the limited temperature range must be observed and complied with.
<b>Other</b>				
Merchandise	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for OP77B, TP177B, OP177B, TP277, OP277, C7-635, MP177, MP277, MP377, Mobile Panel 177, Mobile Panel 277, Comfort Panel	for MP177, MP277, MP377 and Mobile Panel 277, WinCC flexible 2008 SP1 and higher for OP77, TP/OP177, TP/OP277, Mobile Panel 177, with SD/MMC slot	Especially for KTP Mobile Panels 2nd Generation, MP377 and Comfort Panels, but also for all other panels (other than Classic Panels) and PCs with suitable slot	Storage medium especially for indoor areas, suitable for Panels as of TIA V16 (observe manual for target panel) but also for PCs with a suitable slot. Formatting destroys the system properties of the card
Note:		MP377 only up to and including FS:04 or ES:04 - Alternatively 2 GB SD card	Not suitable for MP177, MP277, Mobile Panel 277, OP77, TP/OP177, TP/OP277 and Mobile Panel 177	can only be used with WinCC V16 or later, panel firmware must be upgraded if necessary (cannot be used in Classic Panels)

**Technical specifications**

Article number	<b>6AV6574-2AC00-2AA1</b> SIMATIC HMI CF memory card, 512 MB	<b>6AV6574-2AC00-2AF1</b> PC memory card 512 MB	<b>6AV6574-2AF00-8AX0</b> PC card adapter for CF memory card
<b>General information</b>			
Product type designation	CompactFlash card	PC memory card	PC card adapter for CF memory card
<b>Connection type</b>			
• USB		No	
<b>Frame size/design</b>			
• Standard	Yes	Yes	Yes
• Flat	Yes	Yes	Yes
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	Yes	Yes
Mounting in landscape format possible	Yes	Yes	Yes
<b>Supply voltage</b>			
Type of supply voltage	DC	DC	none
Rated value (DC)	3.3 V; Selectable power supply: 3.3 V ±10% or 5.0 V ±10%	3.3 V	
<b>Input current</b>			
Current consumption (rated value)	75 mA; Typical, maximum value	75 mA	0 mA; No additional power consumption
<b>Memory</b>			
Type of memory	CompactFlash memory CF type I	Personal computer memory card type II	Personal computer memory card type II
Design	CompactFlash		
Memory size	512 Mbyte	512 Mbyte	0 byte; Only adapter
SLC flash write cycles	2; Millions, consumer quality		
Write protection switch	No	No	No
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
cULus	No		No
Marine approval	Yes; Passive component, therefore dependent on target device		Yes; Passive component, therefore dependent on target device
<b>Use in hazardous areas</b>			
• ATEX Zone 2	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• ATEX Zone 22	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• IECEx Zone 2	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• IECEx Zone 22	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• cULus Class I Zone 2, Division 2	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• FM Class I Division 2	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.

## Accessories

### Storage media

#### Technical specifications

Article number	<b>6AV6574-2AC00-2AA1</b> SIMATIC HMI CF memory card, 512 MB	<b>6AV6574-2AC00-2AF1</b> PC memory card 512 MB	<b>6AV6574-2AF00-8AX0</b> PC card adapter for CF memory card
<b>Marine approval</b>			
• Germanischer Lloyd (GL)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• American Bureau of Shipping (ABS)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Bureau Veritas (BV)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Det Norske Veritas (DNV)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Lloyds Register of Shipping (LRS)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Nippon Kaiji Kyokai (Class NK)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Polski Rejestr Statków (PRS)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Chinese Classification Society (CCS)	Yes; Always comply with the operating instructions of the target device.		Yes; Always comply with the operating instructions of the target device.
• Compass working clearance	5 m		5 m
<b>Ambient conditions</b>			
Suited for indoor use	Yes		Yes
<b>Ambient temperature during operation</b>			
• min.	0 °C; Any mounting angle	0 °C	0 °C; Indoor
• max.	50 °C; Any mounting angle	50 °C	50 °C; Indoor
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
• Condensation permissible	No; Condensation not permissible	No	No; Condensation not permissible
<b>Runs under operating system</b>			
• Windows CE	Yes	Yes	Yes
• Windows Vista	Yes	Yes	Yes
• Windows XP	Yes	Yes	Yes
• Windows 7	Yes	Yes	Yes
• Windows 8	Yes	Yes	Yes
• Linux	No	No	No
• other	Yes; Card must not be formatted!		No
<b>Mechanics/material</b>			
Enclosure material (front)			
• Plastic	Yes	Yes	
• Sheet steel			Yes
<b>Service life</b>			
• Number of operating cycles, keys	10; Min. data storage without loss (in years)		
<b>Dimensions</b>			
Width	42.8 mm	54 mm	54 mm
Height	36.4 mm	85.6 mm	85.6 mm
Thickness	3.3 mm	5 mm	5 mm
<b>Weights</b>			
Weight (without packaging)	10 g	34 g	24 g
<b>Scope of supply</b>			
Delivery quantity in pieces	1	1; Content: CF memory card, 512 MB, and PC card adapter	1
<b>Other</b>			
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	for SIMATIC HMI devices with CF slot	for SIMATIC HMI devices with PC card slot	for SIMATIC HMI devices with PC card slot

**Technical specifications**

Article number	<b>6ES7648-2BF02-0XF0</b> SIMATIC CF memory card, 2 GB	<b>6ES7648-2BF02-0XG0</b> SIMATIC CF memory card, 4 GB	<b>6ES7648-2BF02-0XH0</b> SIMATIC CF memory card, 8 GB	<b>6ES7648-2BF02-0XJ0</b> SIMATIC CF memory card, 16 GB
<b>General information</b>				
Product type designation	CompactFlash card	CompactFlash card	CompactFlash card	CompactFlash card
<b>Supply voltage</b>				
Type of supply voltage	DC	DC	DC	DC
Rated value (DC)	3.3 V; Selectable power supply: 3.3 V ±10% or 5.0 V ±10%	3.3 V; Selectable power supply: 3.3 V ±10% or 5.0 V ±10%	3.3 V; Selectable power supply: 3.3 V ±10% or 5.0 V ±10%	3.3 V; Selectable power supply: 3.3 V ±10% or 5.0 V ±10%
<b>Memory</b>				
Type of memory	CompactFlash memory CF type I			
Design	SLC flash	SLC flash	SLC flash	SLC flash
Memory size	2 Gbyte; 1 year (data retention)	4 Gbyte; 1 year (data retention)	8 Gbyte; 1 year (data retention)	16 Gbyte; 1 year (data retention)
Speed class	Write speed: up to 16 MB/s (UDMA4), read speed: up to 36 MB/s (UDMA4)	Write speed: up to 16 MB/s (UDMA4), read speed: up to 36 MB/s (UDMA4)	Write speed: up to 16 MB/s (UDMA4), read speed: up to 36 MB/s (UDMA4)	Write speed: up to 16 MB/s (UDMA4), read speed: up to 36 MB/s (UDMA4)
SLC flash write cycles	2; Millions, industrial quality			
Write protection switch	No	No	No	No
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	-40 °C; Any mounting angle			
• max.	85 °C; Any mounting angle			
<b>Relative humidity</b>				
• Operation, max.	85 %	85 %	85 %	85 %
• Condensation permissible	No	No	No	No
<b>Accessories</b>				
belongs to product	fixed mode, multiple partitions possible			
<b>Mechanics/material</b>				
Enclosure material (front)				
• Plastic	Yes	Yes	Yes	Yes
<b>Dimensions</b>				
Width	42.8 mm	42.8 mm	42.8 mm	42.8 mm
Height	36.4 mm	36.4 mm	36.4 mm	36.4 mm
Thickness	3.3 mm	3.3 mm	3.3 mm	3.3 mm
<b>Weights</b>				
Weight, approx.	10 g	10 g	10 g	10 g
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
<b>Other</b>				
Merchandise	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany			
Target devices	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot

## Accessories

### Storage media

#### Technical specifications

Article number	6ES7648-2BF10-0XF0	6ES7648-2BF10-0XG0	6ES7648-2BF10-0XH0	6ES7648-2BF10-0XJ0	6ES7648-2BF10-0XK1	6ES7648-2BF10-0XM1
	SIMATIC CFAST memory card, 2 GB	SIMATIC CFAST memory card, 4 GB	SIMATIC CFAST memory card, 8 GB	SIMATIC CFAST memory card, 16 GB	SIMATIC CFAST memory card, 30 GB	SIMATIC CFAST memory card, 128 GB
<b>General information</b>						
Product type designation	CFast memory card	CFast memory card	CFast memory card	CFast memory card	CFast memory card	CFast memory card
<b>Frame size/design</b>						
• Standard	Yes; Serial ATA	Yes; Serial ATA	Yes; Serial ATA	Yes; Serial ATA	Yes; Serial ATA	Yes
• Flat					Yes	Yes
<b>Installation type/mounting</b>						
Mounting in portrait format possible					Yes	Yes
Mounting in landscape format possible					Yes	Yes
<b>Supply voltage</b>						
Type of supply voltage	DC	DC	DC	DC	DC	DC
Rated value (DC)	3.3 V	3.3 V	3.3 V	3.3 V	3.3 V	3.3 V
<b>Input current</b>						
Current consumption (rated value)						100 mA; Typical
<b>Memory</b>						
Type of memory	CFast Type I	CFast Type I	CFast Type I	CFast Type I	CFast Type I	CFast Type I
Design	SLC NAND flash	SLC NAND flash	SLC NAND flash	SLC NAND flash	Multi-level cell (MLC)	
Memory size	2 Gbyte; 1 year (data retention)	4 Gbyte; 1 year (data retention)	8 Gbyte; 1 year (data retention)	16 Gbyte; 1 year (data retention)	30 Gbyte; 1 year (data retention)	128 Gbyte; 1 year (data retention)
Speed class	Write speed: up to 60 MB/s (UDMA6), read speed: up to 100 MB/s (UDMA6)	Write speed: up to 60 MB/s (UDMA6), read speed: up to 100 MB/s (UDMA6)	Write speed: up to 60 MB/s (UDMA6), read speed: up to 100 MB/s (UDMA6)	Write speed: up to 60 MB/s (UDMA6), read speed: up to 100 MB/s (UDMA6)	Write speed: up to 45 MBps (UDMA6), read speed: up to 200 MBps (UDMA6)	Write speed: up to 200 MB/s (UDMA6), read speed: up to 100 MB/s (UDMA6)
SLC flash write cycles	4; TB; number of write cycles determines the lifetime - with flash mass storage devices, the maximum number of possible write cycles is limited due to the physical properties of the flash cells. The intelligent data management of the flash controller ensures that the write cycle count of the mass storage device far surpasses the write cycles of a single flash memory cell. To ensure overall performance, it is recommended not use the memory area completely.	4.5; TB; number of write cycles determines the lifetime - with flash mass storage devices, the maximum number of possible write cycles is limited due to the physical properties of the flash cells. The intelligent data management of the flash controller ensures that the write cycle count of the mass storage device far surpasses the write cycles of a single flash memory cell. To ensure overall performance, it is recommended not use the memory area completely.	4; TB; number of write cycles determines the lifetime - with flash mass storage devices, the maximum number of possible write cycles is limited due to the physical properties of the flash cells. The intelligent data management of the flash controller ensures that the write cycle count of the mass storage device far surpasses the write cycles of a single flash memory cell. To ensure overall performance, it is recommended not use the memory area completely.	4; TB; number of write cycles determines the lifetime - with flash mass storage devices, the maximum number of possible write cycles is limited due to the physical properties of the flash cells. The intelligent data management of the flash controller ensures that the write cycle count of the mass storage device far surpasses the write cycles of a single flash memory cell. To ensure overall performance, it is recommended not use the memory area completely.	17; TB; number of write cycles determines the lifetime - with flash mass storage devices, the maximum number of possible write cycles is limited due to the physical properties of the flash cells. The intelligent data management of the flash controller ensures that the write cycle count of the mass storage device far surpasses the write cycles of a single flash memory cell. To ensure overall performance, it is recommended not use the memory area completely.	
Write cycles MLC flash						8.8; Terabytes, industrial quality
Wear leveling (distributed writing)						8.8; Terabytes, industrial quality
Write protection switch						Yes No

**Technical specifications**

Article number	<b>6ES7648-2BF10-0XF0</b>	<b>6ES7648-2BF10-0XG0</b>	<b>6ES7648-2BF10-0XH0</b>	<b>6ES7648-2BF10-0XJ0</b>	<b>6ES7648-2BF10-0XK1</b>	<b>6ES7648-2BF10-0XM1</b>
	SIMATIC CFAST memory card, 2 GB	SIMATIC CFAST memory card, 4 GB	SIMATIC CFAST memory card, 8 GB	SIMATIC CFAST memory card, 16 GB	SIMATIC CFAST memory card, 30 GB	SIMATIC CFAST memory card, 128 GB
<b>Interfaces</b>						
Interfaces/bus type						Serial ATA
<b>Standards, approvals, certificates</b>						
CE mark	Yes	Yes	Yes	Yes	Yes	Yes; Certificates, Declaration of Conformity can be downloaded from SIOS, for commodities directly from the manufacturer
<b>Ambient temperature during operation</b>						
• min.	-40 °C; Any mounting angle	-40 °C; Any mounting angle	-40 °C; Any mounting angle	-40 °C; Any mounting angle	-40 °C; Any mounting angle	0 °C; Any mounting angle
• max.	85 °C; Any mounting angle	85 °C; Any mounting angle	85 °C; Any mounting angle	85 °C; Any mounting angle	85 °C; Any mounting angle	55 °C; Any mounting angle
<b>Relative humidity</b>						
• Operation, max.	85 %	85 %	85 %	85 %	85 %	85 %
• Condensation permissible	No	No	No	No	No	No
<b>Operating systems</b>						
<b>pre-installed operating system</b>						Yes
• Windows CE						
<b>Runs under operating system</b>						
• Windows CE	No	No	No	No	No	No
• Windows Vista	Yes	Yes	Yes	Yes	Yes	No
• Windows XP	No	No	No	No	No	No
• Windows 7	Yes	Yes	Yes	Yes	Yes	Yes
• Windows 8	Yes	Yes	Yes	Yes	Yes	Yes
• Windows 10	Yes	Yes	Yes	Yes	Yes	Yes
• Linux	Yes	Yes	Yes	Yes	Yes	Yes
<b>Accessories</b>						
Function description	fixed mode, multiple partitions possible	fixed mode, multiple partitions possible	fixed mode, multiple partitions possible	fixed mode, multiple partitions possible	fixed mode, multiple partitions possible	fixed mode, multiple partitions possible
<b>Mechanics/material</b>						
Enclosure material (front)						
• Plastic	Yes	Yes	Yes	Yes	Yes	Yes
<b>Dimensions</b>						
Width	42.8 mm	42.8 mm	42.8 mm	42.8 mm	42.8 mm	42.8 mm
Height	36.4 mm	36.4 mm	36.4 mm	36.4 mm	36.4 mm	36.4 mm
Thickness	3.6 mm	3.6 mm	3.6 mm	3.6 mm	3.6 mm	3.6 mm
<b>Weights</b>						
Weight, approx.	10 g	10 g	10 g	10 g		
Weight (without packaging)	10 g	10 g	10 g	10 g	10 g	10 g
<b>Scope of supply</b>						
Delivery quantity in pieces	1	1	1	1	1	1
<b>Other</b>						
Merchandise	No	No	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany					
Target devices	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot	For SIMATIC HMI devices and IPCs with the appropriate slot	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)
Note:	bootable, real-time capable, error correction, wear leveling, power loss protection and diagnostics-capable					

## Accessories

### Storage media

#### Technical specifications

Article number	<b>6AV6881-0AQ10-0AA0</b> SIMATIC SD outdoor card 2 GB	<b>6AV6881-0AQ40-0AA0</b> SIMATIC SD-Outdoorkarte 32 GB
<b>General information</b>		
Product type designation	SD memory card	SD memory card
<b>Frame size/design</b>		
• Standard	Yes; Typically 10 000 insertion cycles	Yes; Typically 10 000 insertion cycles
• Flat	Yes	Yes
<b>Installation type/mounting</b>		
Mounting in portrait format possible	Yes	Yes
Mounting in landscape format possible	Yes	Yes
<b>Supply voltage</b>		
Type of supply voltage	DC	DC
Rated value (DC)	3.3 V; Max 3.6 V	3.3 V; Max 3.6 V
<b>Input current</b>		
Current consumption (rated value)	100 mA; Typical, maximum value	100 mA; Typical, maximum value
<b>Memory</b>		
Type of memory	Secure Digital memory card	Secure Digital memory card
Memory size	2 048 Mbyte; Larger internal memory	2 048 Mbyte; Larger internal memory
Transmission rate for reading, max.	1.6 Mbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory
Transmission rate for writing, max.	1.6 Mbit/s; Minimum, typical for newly formatted memory	1.6 Mbit/s; Minimum, typical for newly formatted memory
Wear leveling (distributed writing)	Yes; > 100 000 write/read cycles per cell and > 3 000 000 write/read cycles per card	Yes; > 100 000 write/read cycles per cell and > 3 000 000 write/read cycles per card
Write protection switch	Yes; Effectiveness depends on the device	Yes; Effectiveness depends on the device
<b>Interfaces</b>		
Device-side interface		
• Number of pins device-side	9	9
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
cULus	Yes	Yes
Marine approval	Yes; Passive component; therefore dependent on target device	Yes; Passive component, therefore dependent on target device
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• ATEX Zone 22	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• IECEx Zone 2	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• IECEx Zone 22	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• cULus Class I Zone 2, Division 2	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• FM Class I Division 2	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
<b>Marine approval</b>		
• Germanischer Lloyd (GL)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• American Bureau of Shipping (ABS)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Bureau Veritas (BV)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Det Norske Veritas (DNV)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Lloyds Register of Shipping (LRS)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Nippon Kaiji Kyokai (Class NK)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Polski Rejestr Statków (PRS)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Chinese Classification Society (CCS)	Yes; Always comply with the operating instructions of the target device.	Yes; Always comply with the operating instructions of the target device.
• Compass working clearance	5 m	5 m

**Technical specifications**

Article number	<b>6AV6881-0AQ10-0AA0</b> SIMATIC SD outdoor card 2 GB	<b>6AV6881-0AQ40-0AA0</b> SIMATIC SD-Outdoorkarte 32 GB
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	Yes	Yes
<b>Ambient temperature during operation</b>		
• min.	-30 °C; Indoor/outdoor	-30 °C; Indoor/outdoor
• max.	60 °C; Indoor/outdoor	60 °C; Indoor/outdoor
<b>Relative humidity</b>		
• Operation, max.	95 %; no condensation	95 %; no condensation
• Condensation permissible	No; Condensation not permissible	No; Condensation not permissible
<b>Operating systems</b>		
<b>pre-installed operating system</b>		
• Windows CE	No; Preinstalled system files	No; Preinstalled system files
<b>Runs under operating system</b>		
• Windows CE	Yes	Yes
• Windows Vista	Yes	Yes
• Windows XP	Yes	Yes
• Windows 7	Yes	Yes
• Windows 8	Yes	Yes
• Windows 10	Yes	Yes
• Linux	No	No
• other	Yes; Card must not be formatted!	Yes; Card must not be formatted!
<b>Mechanics/material</b>		
Enclosure material (front)		
• Plastic	Yes; Gold contacts	Yes; Gold contacts
Enclosure color (front)	RAL 6034 (color deviation possible)	RAL 6034 (color deviation possible)
<b>Service life</b>		
• Number of operating cycles, keys	10; Min. data storage without loss (in years)	10; Min. data storage without loss (in years)
<b>Dimensions</b>		
Width	24 mm	24 mm
Height	32 mm	32 mm
Thickness	2.1 mm	2.1 mm
<b>Weights</b>		
Weight (without packaging)	3 g	3 g
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1; 100% Indoor compatible
<b>Other</b>		
Merchandise	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	Storage medium especially for outdoor or indoor areas, suitable for Panels as of TIA V16 (observe manual for target panel) but also for PCs with a suitable slot. Formatting destroys the system properties of the card	Storage medium especially for outdoor or indoor areas, suitable for Panels as of TIA V16 (observe manual for target panel) but also for PCs with a suitable slot. Formatting destroys the system properties of the card
Note:	TIA Portal V16 or higher; image required on target hardware	can only be used with WinCC V16 or later, panel firmware must be upgraded if necessary (cannot be used in Classic Panels)

## Accessories

### Storage media

#### Technical specifications

Article number	<b>6AV6881-0AS42-0AA1</b>	Article number	<b>6AV6881-0AS42-0AA1</b>
USB flash drive, 32 GB			USB flash drive, 32 GB
<b>General information</b>			
Product type designation	USB flash drive (without software)		
<b>Connection type</b>			
• USB	Yes; USB 3.0 type A	• Windows CE	Yes
<b>Frame size/design</b>			
• Standard	Yes	• Windows Vista	No
• Flat	Yes	• Windows XP	Yes
<b>Installation type/mounting</b>			
Mounting in portrait format possible	Yes	• Windows 7	Yes
Mounting in landscape format possible	Yes	• Windows 8	Yes
<b>Supply voltage</b>			
Type of supply voltage	DC	• Windows 10	Yes
Rated value (DC)	5 V	• Linux	Yes
<b>Input current</b>			
Current consumption (rated value)	100 mA; Typical	<b>Mechanics/material</b>	
<b>Memory</b>			
Type of memory	Multi-level cell (MLC)	Enclosure material (front)	
Memory size	32 Gbyte	• Aluminum	Yes
Speed class	Up to: read: 75 MB/s, write: 21 MB/s	<b>Dimensions</b>	
File format	FAT32	Width	16.7 mm
Write cycles MLC flash	3 000; Program/Erase cycle	Height	59.1 mm
Write protection switch	No	Thickness	7 mm
<b>Interfaces</b>			
Number of USB interfaces	1; USB 3.0 type A	<b>Weights</b>	
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Weight (without packaging)	12 g
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	Delivery quantity in pieces	1; Without content
• max.	50 °C	<b>Other</b>	
<b>Relative humidity</b>			
• Operation, max.	85 %	Merchandise	No
• Condensation permissible	No	Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
		Target devices	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)
		Note:	TP1500 Comfort Outdoor, TP700 Comfort Outdoor: Observe the temperature range

**Technical specifications**

Article number	<b>6AV7675-0FX00-0AA0</b> SIMATIC USB flash drive 32 GB, Ex	<b>6AV7675-0FX10-0AA0</b> SIMATIC USB flash drive 32 GB, Ex
<b>General information</b>		
Product type designation	USB flash drive	USB flash drive
<b>Connection type</b>		
• USB	Yes	Yes
<b>Frame size/design</b>		
• Standard	No; Special enclosure for screw mounting	No; Special enclosure for screw mounting
• Flat	No	No
• Space-saving	Yes; Suitable for hazardous zones with locking screw	Yes; Suitable for hazardous zones with locking screw
<b>Installation type/mounting</b>		
Mounting in portrait format possible	Yes	Yes
Mounting in landscape format possible	Yes	Yes
<b>Supply voltage</b>		
Type of supply voltage	DC	DC
Rated value (DC)	5.9 V	5.9 V
<b>Input current</b>		
Current consumption (rated value)	3 A	3 A
<b>Memory</b>		
Type of memory	USB drive	USB drive
Memory size	32 Gbyte	32 Gbyte
Write protection switch	No	No
<b>Standards, approvals, certificates</b>		
CE mark	Yes	Yes
<b>Use in hazardous areas</b>		
• ATEX Zone 2	Yes	Yes
• ATEX Zone 22	Yes	Yes
• IECEx Zone 1	Yes; Up to Zone 1, TÜV (German Technical Inspectorate) 06 ATEX 7342, IECEx TUR 13.0005	Yes; Up to Zone 1, TÜV (German Technical Inspectorate) 06 ATEX 7342, IECEx TUR 13.0005
• IECEx Zone 11	Yes; Up to Zone 1, TÜV (German Technical Inspectorate) 06 ATEX 7342, IECEx TUR 13.0005	Yes; Up to Zone 1, TÜV (German Technical Inspectorate) 06 ATEX 7342, IECEx TUR 13.0005
• IECEx Zone 2	Yes	Yes
• IECEx Zone 22	Yes	Yes
• cULus Class I Zone 1	Yes; CSA Class II No. 2649448	Yes; CSA Class II No. 2649448
• cULus Class I Zone 2, Division 2	Yes; CSA Class II No. 2649448	Yes; CSA Class II No. 2649448
• FM Class I Division 2	Yes; CSA Class II No. 2649448	Yes; CSA Class II No. 2649448
• FM Class II Division 2	Yes; CSA, Group F and G; T 130 °C	Yes; CSA, Group F and G; T 130 °C
<b>Ambient conditions</b>		
Suited for indoor use	Yes	Yes
Suited for outdoor use	No	No
<b>Ambient temperature during operation</b>		
• min.	-20 °C	-20 °C
• max.	70 °C	70 °C
<b>Relative humidity</b>		
• Condensation permissible	No	No
<b>Runs under operating system</b>		
• Windows CE	No	No
• Windows Vista	Yes	Yes
• Windows XP	Yes	Yes
• Windows 7	Yes	Yes
• Windows 8	Yes	Yes
• Linux	No	No

## Accessories

### Storage media

#### Technical specifications

Article number	<b>6AV7675-0FX00-0AA0</b>	<b>6AV7675-0FX10-0AA0</b>
	SIMATIC USB flash drive 32 GB, Ex	SIMATIC USB flash drive 32 GB, Ex
<b>Mechanics/material</b>		
Material		
• Aluminum	Yes	Yes
<b>Dimensions</b>		
Width	25 mm	25 mm
Height	110 mm	110 mm
Thickness	15 mm	15 mm
<b>Weights</b>		
Weight (without packaging)	70 g	70 g
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
Components included	USB flash drive (encapsulated) screw fastening and leather casing	USB flash drive (encapsulated) screw fastening and leather casing
<b>Other</b>		
Merchandise	Yes; USBi drive, 16 GB	Yes; USBi drive, 16 GB recovery
Manufacturer name	R. Stahl HMI Systems GmbH	R. Stahl HMI Systems GmbH
Manufacturer's address	Adolf-Grimme-Allee 8, 50829 Cologne, Germany	Adolf-Grimme-Allee 8, 50829 Cologne, Germany
Target devices	ATEX certified for operating on xx6 USB Ex-i and non-Ex interfaces, Zones 1, 2, 21<>&<>22 Gas Zones: II 2 G Ex is IIC T4 Dust Zones: II 2 D Ex ibD 21 T110 degrees C	ATEX certified for operating on xx6 USB Ex-i and non-Ex interfaces, Zones 1, 2, 21<>&<>22 Gas Zones: II 2 G Ex is IIC T4 Dust Zones: II 2 D Ex ibD 21 T110 degrees C
Note:	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)	Suitable for IPC and HMI devices with the corresponding interfaces (see manual)

#### More information

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Transport and storage

## Overview

**Transport and storage cases**

Transport and storage cases are perfectly suited for tablet PCs and industrial tablet PCs such as the ITP100.

The basic transport case was created especially for mobile operation of a tablet PC with all of the required accessories, such as a power supply unit, mouse, keyboard, etc. It can be modularly expanded. Various expansion pockets are available for this purpose.

Additional expansion pockets can easily be connected to the basic case. Covered holes allow the tablet to be connected to the power supply unit even during transport without the cable visibly hanging out of the case. This ensures particularly fast access times when used. The basic case features a hook-and-loop strip and a wrist rest for using an optional Bluetooth keyboard. The rear part of the transport case can be opened to allow the tablet PC to be optimally set up in the case as well. The outer fabric straps can be used for securing anything from tools to writing materials, meaning that everything is at your fingertips during a service call.

Optimal ventilation during operation is also provided for. Thick, elastic material ribs not only protect against small impacts, but also against over-heating. A rugged shoulder strap, a double carrying handle, and side reflective strips round off the well thought out transport case.

A case with all-round protection meant purely for storage purposes is also available for tablet PCs.

**Note:**

The expansion module pockets must be ordered separately. 1 to 3 small expansion pockets or 1 small and 1 medium expansion pocket can be attached to one basic case at the same time.

## Ordering data

## Article No.

<b>Basic transport bag for tablet PC:</b>	<b>6AV6881-0AW11-3AA0</b>
---	---------------------------

Multifunctional transport bag, suitable, for example, for the tablet PC ITP1000 or other tablet PCs, laptops. Can be expanded. Can be used as stand, with carrying strap. Quantity and content: See technical specifications.

<b>Small expansion pocket for tablet PC</b>	<b>6AV6881-0AW12-3AA0</b>
---	---------------------------

Expansion pocket, small, suitable for transport bag ITP1000. Quantity and content: See technical specifications.

<b>Medium expansion pocket for tablet PC</b>	<b>6AV6881-0AW13-3AA0</b>
--	---------------------------

Expansion pocket, medium-size, suitable for transport bag ITP1000. Can be used instead of 2 small ones. Quantity and content: See technical specifications.

<b>Storage bag for tablet PC</b>	<b>6AV6881-0AW11-2AA0</b>
----------------------------------	---------------------------

Universal storage bag, suitable for all tablet PCs. Quantity and content: See technical specifications.

<b>Tablet PC support with handle for ITP1000</b>	<b>6AV6881-0AW21-3AA0</b>
--	---------------------------

<b>Tablet PC carrying strap for ITP1000</b>	<b>6AV6881-0AW31-3AA0</b>
---	---------------------------

## Accessories

### Transport and storage

#### Technical specifications

Article number	6AV6881-0AW11-3AA0	6AV6881-0AW12-3AA0	6AV6881-0AW13-3AA0	6AV6881-0AW11-2AA0	6AV6881-0AW21-3AA0	6AV6881-0AW31-3AA0
	Transport bag Basic Tablet	Additional pocket small Tablet	Additional pocket medium Tablet	Storage bag Tablet	Tablet PC support with handle	Tablet PC carrying strap
<b>General information</b>						
Product type designation	Transport pouch basic	Transport pouch small	Transport pouch medium	Transport pouch storage	Tablet PC holder with handle	Tablet PC carrying strap
<b>Frame size/design</b>						
• Exceptional	Yes; Integrated ventilation, laying of cables possible	No	Yes; With integrated cable opening	No	Yes; Optimized for tablet PC, ITP1000	Yes; Optimized for tablet PC, ITP1000
<b>Ergonomics</b>						
• Trackball rest	Yes	No	No	No	No; Adjustable handle with hook-and-loop connection, any useful angle can be set	No; Carrying strap with adjustable shoulder pad
• Adjustable height	No; Case with stand function	No	No	No	No	No; Strap can be adjusted for length
<b>Installation type/mounting</b>						
Mounting type					Real assembly with provided screws	Rear lug mounting, also suitable as a belt strap
<b>Degree and class of protection</b>						
IP (all-round)					none	none
<b>Standards, approvals, certificates</b>						
CE mark					No; No CE marking obligation	No; No CE marking obligation
<b>Ambient conditions</b>						
Suited for indoor use	Yes; Washable	Yes; Washable	Yes; Washable	Yes; Washable	Yes	Yes
Suited for outdoor use	Yes; Washable	Yes; Washable	Yes; Washable	Yes; Washable	Yes	Yes
<b>Ambient temperature during operation</b>						
• min.	-30 °C; Indoor/outdoor	-30 °C; Indoor/outdoor	-30 °C; Indoor/outdoor	-30 °C; Indoor/outdoor	0 °C	0 °C
• max.	60 °C; Indoor/outdoor	60 °C; Indoor/outdoor	60 °C; Indoor/outdoor	60 °C; Indoor/outdoor	50 °C	50 °C
<b>Relative humidity</b>						
• Operation, max.	95 %	95 %	95 %	95 %	90 %	90 %
• Condensation permissible	Yes; Applies only for case, not for contents	Yes; Applies only for case, not for contents	Yes; Applies only for case, not for contents	Yes; Applies only for case, not for contents		
<b>Mechanics/material</b>						
Material						
• Plastic	Yes; 420 HD nylon	Yes; 420 HD nylon	Yes; 420 HD nylon	Yes; 420 HD nylon		
<b>Torques/forces</b>						
• Tightening torque, min.					1 N·m; Insufficient torque can lead to loosening of the screws	1 N·m; Insufficient torque can lead to loosening of the screws
• Tightening torque, max.					1.5 N·m	1.5 N·m

## Transport and storage

## Technical specifications

Article number	6AV6881-0AW11-3AA0	6AV6881-0AW12-3AA0	6AV6881-0AW13-3AA0	6AV6881-0AW11-2AA0	6AV6881-0AW21-3AA0	6AV6881-0AW31-3AA0
	Transport bag Basic Tablet	Additional pocket small Tablet	Additional pocket medium Tablet	Storage bag Tablet	Tablet PC support with handle	Tablet PC carrying strap
<b>Dimensions</b>						
Width	40 cm; Approximate dimension	18 cm; Approximate dimension	25 cm; Approximate dimension	35 cm; Approximate dimension		
Height	30 cm; Approximate dimension	12 cm; Approximate dimension	18 cm; Approximate dimension	24 cm; Approximate dimension		
Depth	10 cm; Approximate dimension	5 cm; Approximate dimension	5 cm; Approximate dimension	5 cm; Approximate dimension		
Mounting cutout, width	33 cm; Max. device width	10 cm; Max. device width	20 cm; Max. device width	33 cm; Max. device width		
Mounting cutout, height	23 cm; Max. device height	14 cm; Max. device height	14 cm; Max. device height	23 cm; Max. device height		
Overall depth	3 cm; Max. device depth	3 cm; Max. device depth	3 cm; Max. device depth	3 cm; Max. device depth		
<b>Weights</b>						
Weight (without packaging)	280 g	35 g	50 g	50 g	0.4 kg	0.25 kg
<b>Scope of supply</b>						
Delivery quantity in pieces	1	1	1	1	1; 1x mounting plate with 4 lugs, 1x handle with hook-and-loop pad, 4x M4 screws, 4x washers	1; 1x carrying strap, adjustable length with snap hooks, 2 lugs, 2x M4 screws, 2x washers
<b>Other</b>						
Merchandise	Yes; Tatonka 6540.040	Yes; Tatonka 6541.040	Yes; Tatonka 6542.040	Yes; Tatonka 6539.040	Yes	Yes
Manufacturer name	TATONKA GmbH	TATONKA GmbH	TATONKA GmbH	TATONKA GmbH	ADVITEX GmbH	ADVITEX GmbH
Manufacturer's address	Robert-Bosch-Straße 3, 86451 Dasing, Germany	Eisenbahnstraße 40, 75228 Ispringen, Germany	Eisenbahnstraße 40, 75228 Ispringen, Germany			
Target devices	Suitable laptops and tablets, or similar	suitable for all appropriate interfaces	suitable for all appropriate interfaces			
Note:	Integrated cable inlets for power supply unit, hard disks etc. - simply flip open to get started	Integrated cable inlets for power supply unit, hard disks etc. - simply flip open to get started	Integrated cable inlets for power supply unit, hard disks etc. - simply flip open to get started	Integrated cable inlets for power supply unit, hard disks etc. - simply flip open to get started	Commodity, can be used for ITP1000	Commodity, can be used for ITP1000

**More information**Note:

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Accessories

### Distribution boards

#### Overview

##### **Distribution boards**

Industrial distribution boards are used for extending and/or multiplying interfaces. The distribution boards offered here are optimized for SIMATIC devices and intended for industrial use.

This also includes the interface extensions. A USB device interface with IP65<sup>1)</sup> degree of protection is provided on the front of the control cabinet or console.

1) The stated degree of protection always refers to the closed interface. The stated degree of protection can differ significantly from the stated value when using the USB interfaces.

#### USB extension

Installation of an external USB interface is practical if external input devices or mass storage devices are frequently connected to a SIMATIC HMI PRO device. The USB interface can optionally be mounted at the top or bottom of the device. Use of the USB interface increases the availability of the system to be operated. It is also no longer necessary to open the backplane of the SIMATIC HMI PRO device to connect I/O.

Further benefits:

- Accessible to any operator without the need for tools
- Also suitable for retrofitting in enclosure
- Mountable on the front
- Increased degree of protection at front if protective cover is closed

#### Technical specifications

Article number	<b>6AV7674-0LX00-0AA0</b>	<b>6AV7674-0LX01-0AA0</b>
	1 port USB interface set RAL9023	2 port USB interface set RAL9023
<b>General information</b>		
Product type designation	USB port	USB port
<b>Standards, approvals, certificates</b>		
CE mark	No; No CE marking obligation	No; No CE marking obligation
<b>Scope of supply</b>		
Delivery quantity in pieces	1	1
<b>Other</b>		
Merchandise	Yes; 1-port USB interface	Yes; 2-port USB interface
Manufacturer name	RITTAL GmbH & Co. KG	RITTAL GmbH & Co. KG
Manufacturer's address	Auf dem Stützelberg, 35745 Herborn, Germany	Auf dem Stützelberg, 35745 Herborn, Germany
Note:	for general use or for PRO devices with a suitable USB interface	for general use or for PRO devices with a suitable USB interface

#### More information

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.de/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Additional accessories

## Overview



SIMATIC small components are also perfected for the industrial environment and optimally matched to the SIMATIC HMI devices.

In order to achieve attractive prices, it is only possible in some cases to order packages containing larger quantities.

Note:

Keys for KTP Mobile come with a preset breaking point. This ensures that a key can still always be removed from a KTP Mobile lock even if it breaks off.

## Ordering data

## Article No.

<b>Spare key for Mobile Panel, Type 10</b>	<b>6AV6574-1AG04-4AA0</b>
For key-operated switch of the Mobile Panel.	
<b>Spare key for Mobile Panel, Type 13</b>	<b>6AV2181-5AR80-0AX0</b>
For key-operated switch of the Mobile Panel 2 <sup>nd</sup> Generation.	
<b>Spare key PRO, Type 14</b>	<b>6AV6881-4AR23-0AA0</b>
For Extension Unit	
<b>Spare key PRO, Safety, Type 14</b>	<b>6AV6881-4AR23-1AA0</b>
For Extension Unit	
<b>Battery compartment lid for all WLAN Mobile Panels with Article No. 6AV6645-0...</b>	<b>6AV6881-5AM52-0AA0</b>

## Accessories

### Additional accessories

#### Technical specifications

Article number	<b>6AV6574-1AG04-4AA0</b> Spare key Mobile Panel, type 10	<b>6AV2181-5AR80-0AX0</b> Spare key Mobile Panel, type 13	<b>6AV6881-5AM52-0AA0</b> Battery cover IWLAN Mobile Panel
<b>General information</b>			
Product type designation	Spare key Mobile Panel 1st Generation	Spare key	Battery compartment cover
<b>Standards, approvals, certificates</b>			
CE mark	Yes	No; No CE marking obligation	No; No CE marking obligation
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	-40 °C	-40 °C	-40 °C
• max.	80 °C	80 °C	80 °C
<b>Relative humidity</b>			
• Operation, max.	90 %	90 %	90 %
<b>Mechanics/material</b>			
Material			
• Plastic			Yes; Incl. seal
• Sheet steel	Yes; Handle made of plastic	Yes; Handle made of plastic	
<b>Dimensions</b>			
Width	35 mm	15 mm	8 mm; Approximate dimension
Height	18 mm	35 mm	10 mm; Approximate dimension
Depth			5 mm; Approximate dimension
Thickness	4 mm	4 mm	
<b>Weights</b>			
Weight (without packaging)	30 g	5 g	22 g
<b>Scope of supply</b>			
Delivery quantity in pieces	10; Coupled with key ring	5	1
<b>Other</b>			
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany
Target devices	For Mobile Panel 1st Generation	For Mobile Panel 2nd Generation	For Mobile Panel 2nd Generation
Note:			Only required for IWLAN

#### More information

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

**Overview**

Connecting cables

**Key**

P = PROCESS COUPLING

K = Optional process coupling (option required)

D = DOWNLOAD (update operating system, project, ...)

U = Booting (factory setting in the case of a missing or damaged operating system)

MBP = Mobile Panel

**Overview of SIMATIC HMI connection options**

	RS 232 external (15/9-pin)	TD-PPI (incl. voltage)	RS 232 Null modem	RS 232/PPI multi-master cable	USB/PPI multi-master cable	MPI (PG-S7) up to 187.5 kbaud
	6XV1440-2Kxxx	6ES7901-3EB10-0XA0	6ES7901-1BF00-0XA0	6ES7901-3CB30-0XA0	6ES7901-3DB30-0XA0	6ES7901-0BF00-0AA0
Key Panel KP8/KP8F, KP32F	-	-	-	-	-	-
PP7, PP17-I, PP17-II	-	-	-	-	-	-
KTP400 Basic mono PN	-	-	-	-	-	-
KTP600 Basic mono PN	-	-	-	-	-	-
KTP600 Basic color DP	-	-	-	D/U	D/U	P/D
KTP600 Basic color PN	-	-	-	-	-	-
KTP1000 Basic color DP	-	-	-	D/U	D/U	P/D
KTP1000 Basic color PN	-	-	-	-	-	-
KTP1500 Basic color PN	-	-	-	-	-	-
K(T)P400 Comfort	-	-	-	-	-	P/D
K(T)P700 - KP1500 Comfort	-	-	-	-	-	P/D
TP700 -TP2200 Comfort	-	-	-	-	-	P/D
MBP 177	-	-	-	D/U	-	-
MBP 277	-	-	-	D/U	-	-
TD200	-	P	-	D/U	-	P
TD400C	-	P	-	D/U	-	P
OP73micro	-	P	-	D/U	D/U	P
TP177micro	-	-	-	D/U	D/U	-
OP73	-	P	-	D/U	D/U	P/D
OP77A	-	-	-	D/U	D/U	P/D
OP77B	P	-	D/U	-	-	P/D
TP177A	-	-	-	D/U	D/U	P/D
TP177B	P <sup>1)</sup>	-	-	D/U	-	P/D
TP177B 4"	P <sup>1)</sup>	-	D	D	-	P/D
OP177B	P <sup>1)</sup>	-	-	D/U	-	P/D
TP277-6	P <sup>1)</sup>	-	-	D/U	-	P/D
OP277-6	P <sup>1)</sup>	-	-	D/U	-	P/D
MP177-6 T	P <sup>1)</sup>	-	-	D/U	-	P/D
MP277-8 T	P <sup>1)</sup>	-	-	D/U	-	P/D
MP277-10 T	P <sup>1)</sup>	-	-	D/U	-	P/D
MP377-12 T	P <sup>1)</sup>	-	-	D	-	P/D
MP377-15 T	P <sup>1)</sup>	-	-	D	-	P/D
MP377-19 T	P <sup>1)</sup>	-	-	D	-	P/D

<sup>1)</sup> Only in conjunction with the RS 422/232 converter

## Accessories

### Process coupling

#### Connecting cables

##### Overview

	DP PtP	DP Standard	DP (Mobile Panel)	PN (cross cable) <sup>1)</sup> PtP	PN (standard cable) <sup>1)</sup>	PN (Mobile Panel)	RS 422 to RS 232 converter	RS 232 to TTY converter (20 mA)	90° angular (9-pin 1:1)
	6XV1830-0Axxx	Standard PROFIBUS (2-pin)	6XV1440-4Axxx	6XV1870-3RH20	Standard Ethernet CAT5	6XV1440-4Bxxx	6AV6671-8XE00-0AX0	6ES5734-1BD20	6AV6671-8XD00-0AX0
Key Panel KP8/KP8F, KP32F	-	-	-	P/D	P/D	-	-	-	-
PP7, PP17-I, PP17-II	P	P	-	-	-	-	-	-	-
KTP400 Basic mono PN	-	-	-	P/D/U	P/D/U	-	-	-	-
KTP600 Basic mono PN	-	-	-	P/D/U	P/D/U	-	-	-	-
KTP600 Basic color DP	P/D	P/D	-	-	-	-	-	-	P/D/U
KTP600 Basic color PN	-	-	-	P/D/U	P/D/U	-	-	-	-
KTP1000 Basic color DP	P/D	P/D	-	-	-	-	-	-	P/D/U
KTP1000 Basic color PN	-	-	-	P/D/U	P/D/U	-	-	-	-
KTP1500 Basic color PN	-	-	-	P/D/U	P/D/U	-	-	-	-
K(T)P400 Comfort	P/D	P/D	-	P/D/U	P/D/U	-	-	-	P/D/U
K(T)P700 - TP1500 Comfort	P/D	P/D	-	P/D/U	P/D/U	-	-	-	P/D/U
TP700 -TP2200 Comfort	P/D	P/D	-	P/D/U	P/D/U	-	-	-	P/D/U
MBP 177 DP	P/D	P/D	P/D	-	-	-	-	-	-
MBP 177 PN	-	-	-	-	P/D	-	-	-	-
MBP 277	P/D	P/D	P/D	-	-	P/D	-	-	-
TD200	-	-	-	-	-	-	-	-	-
TD400C	-	-	-	-	-	-	-	-	-
OP73micro	P	-	-	-	-	-	-	-	-
TP177micro	P	P	-	-	-	-	-	-	P/D/U
OP73	P	P	-	-	-	-	-	-	-
OP77A	P	P	-	-	-	-	-	-	P/D/U
OP77B	P/D	P/D	-	-	-	-	-	P	P/D/U
TP177A	P	P	-	-	-	-	-	-	P/D/U
TP177B DP	P/D	P/D	-	-	-	-	P	P <sup>2)</sup>	P/D/U
TP177B PN/DP	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
TP177B 4"	P/D	P/D	-	P/D/U	P/D/U	-	P	P <sup>2)</sup>	P/D/U
OP177B DP	P/D	P/D	-	-	-	-	P	P <sup>2)</sup>	P/D/U
OP177B PN/DP	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
TP277-6	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
OP277-6	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
MP177-6 T	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
MP277-8 T	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
MP277-8 K	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
MP277-10 T	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
MP277-10 K	P/D	P/D	-	P/D	P/D	-	P	P <sup>2)</sup>	P/D/U
MP377-12 T	P/D	P/D	-	P/D/U	P/D/U	-	P	P <sup>2)</sup>	P/D
MP377-12 K	P/D	P/D	-	P/D/U	P/D/U	-	P	P <sup>2)</sup>	P/D
MP377-15 T	P/D	P/D	-	P/D/U	P/D/U	-	P	P <sup>2)</sup>	P/D
MP377-19 T	P/D	P/D	-	P/D/U	P/D/U	-	P	P <sup>2)</sup>	P/D

Note:

This table is for basic orientation only. Technical characteristics are described in the communication manual or the respective user manual.

<sup>1)</sup> PROFINET IRT (isochronous runtime); isochronous mode only possible with IRT-enabled switch

<sup>2)</sup> WinCC flexible 2008 SP2 and higher

Ordering data	Article No.	Article No.
<i>Connecting cables</i> <b>SIMATIC S7 connecting cables</b>		
<b>MPI cable</b> between SIMATIC S7 and programming device via MPI max. 187.5 kBaud, standard length 5.0 m	6ES7901-0BF00-0AA0	<b>Connecting cable for KTP Mobile Panels</b> • 2 m • 5 m • 8 m • 10 m • 15 m • 20 m • 25 m
<b>Connecting cable</b> between HMI adapter and PC/TS Adapter (RS 232 cable/null-modem cable) for OP 77B, TP 177A/B, OP 177B, standard length 5.0 m	6ES7901-1BF00-0XA0	<b>USB connecting cable</b> Optional 0.5 m USB cable (type A connector) female to male, can be used as extension for USB cable with type "A" connector
<b>PROFIBUS connecting cable 830-1T</b> For connection of data terminals, pre-assembled with two sub-D connectors, 9-pin terminated at both ends for PP, OP 73micro, OP 73, TP 177micro, OP 77A/B, TP 177A, TP/OP 177B • 1.5 m • 3.0 m	6XV1830-1CH15 6XV1830-1CH30	6AV2181-5AF02-0AX0 6AV2181-5AF05-0AX0 6AV2181-5AF08-0AX0 6AV2181-5AF10-0AX0 6AV2181-5AF15-0AX0 6AV2181-5AF20-0AX0 6AV2181-5AF25-0AX0
<b>PROFIBUS FC Standard Cable GP</b> 2-core bus cable, shielded, special design for fast mounting, delivery unit:, max. 1000 m, minimum ordering quantity 20 m	6XV1830-0EH10	6GT2891-0UE50
<b>Industrial Ethernet TP XP Cord RJ45/RJ45</b> Crossed TP cable 4 x 2, pre-assembled with 2 x RJ45 connectors • 1.0 m • 6.0 m • 10.0 m	6XV1870-3RH10 6XV1870-3RH60 6XV1870-3RN10	1) Instead of using longer cables, we recommend that you use additional connection boxes. 2) See length code.
<b>DP connecting cable (MPI/PROFIBUS)</b> For wired Mobile Panels 177, Mobile Panels 277, standard lengths • 2 m • 5 m • 8 m • 10 m • 15 m • 20 m • 25 m <sup>1)</sup>	6XV1440-4AH20 6XV1440-4AH50 6XV1440-4AH80 6XV1440-4AN10 6XV1440-4AN15 6XV1440-4AN20 6XV1440-4AN25	<b>Length key for connecting cables</b> With connecting cables whose length is freely selectable according to the following lists, the blanks (...) in the Article No. must be completed in accordance with the length codes given. The different length keys must be taken into account here! Other lengths on request.
<b>PN connecting cable (PROFINET)</b> For wired Mobile Panels 177, Mobile Panels 277, standard lengths • 2 m • 5 m • 8 m • 10 m • 15 m • 20 m • 25 m <sup>1)</sup>	6XV1440-4BH20 6XV1440-4BH50 6XV1440-4BH80 6XV1440-4BN10 6XV1440-4BN15 6XV1440-4BN20 6XV1440-4BN25	<b>Length key for 6XV connecting cables</b> <b>6XV... connecting cables</b> <b>Length of the connecting cable = Multiplier x length key</b> Article No. supplement of the connecting cable 6XV.....  <b>Multiplier</b> • 0.01 m • 0.1 m • 1.0 m • 10.0 m • 100.0 m <b>Length digit</b> • 10 • 12 • 15 • 16 • 20 • 25 • 32 • 40 • 50 • 60 • 63 • 80  <b>Ordering example:</b> The 6XV1404-0A... connecting cable must be 16 m long. Multiplier 1.0 m (N) x length digit 16 (16) gives a length of 16 m. The Article No. supplement is N16. Enter this in the blank spaces of the Article No. The complete Article No. for the 16-m-long connecting cable is then: <b>6XV1404-0AN16</b>

## Accessories

### Process coupling

#### Connecting cables

##### Technical specifications

Article number	<b>6ES7901-0BF00-0AA0</b> S7 MPI Cable, 5m			<b>6ES7901-1BF00-0XA0</b> RS232 / zero Modem Cable, 6 M						
<b>General information</b>										
Product type designation	MPI cable				RS 232/null modem cable					
<b>Cables</b>										
Cable length	5 m			6 m						
<b>Weights</b>	Weight, approx.			293 g						
272 g										
Article number	<b>6XV1440-4AH20</b> Connecting cable MOBILE PANELS, 2M	<b>6XV1440-4AH50</b> Connecting cable MOBILE PANELS, 5M	<b>6XV1440-4AH80</b> Connecting cable MOBILE PANELS, 8M	<b>6XV1440-4AN10</b> Connecting cable MOBILE PANELS, 10M	<b>6XV1440-4AN15</b> Connecting cable MOBILE PANELS, 15M	<b>6XV1440-4AN20</b> Connecting cable MOBILE PANELS, 20M	<b>6XV1440-4AN25</b> Connecting cable MOBILE PANELS, 25M			
<b>General information</b>										
Product type designation	MPI/DP connecting cable	MPI/DP connecting cable	MPI/DP connecting cable	MPI/DP connecting cable	MPI/DP connecting cable	MPI/DP connecting cable	MPI/DP connecting cable			
<b>Supply voltage</b>										
Rated value (DC)	24 V; DC	24 V; DC	24 V; DC		24 V; DC	24 V; DC	24 V; DC			
<b>Standards, approvals, certificates</b>										
CE mark	Yes	Yes	Yes		Yes	Yes	Yes			
<b>Ambient conditions</b>										
<b>Ambient temperature during operation</b>										
• min.	0 °C	0 °C	0 °C		0 °C	0 °C	0 °C			
• max.	55 °C	55 °C	55 °C		55 °C	55 °C	55 °C			
<b>Relative humidity</b>										
• Operation, max.	85 %	85 %	85 %		85 %	85 %	85 %			
<b>Cables</b>										
Cable length	2 m	5 m	8 m	10 m	15 m	20 m	25 m			
smallest bending radius	45 mm	45 mm	45 mm		45 mm	45 mm	45 mm			
Color of cable sheath	red	red	red		red	red	red			
Oil resistance of outer sheath	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/ B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/ B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/ B, also resistant to commercially available lubricants and hydraulic oils		Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/ B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/ B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/ B, also resistant to commercially available lubricants and hydraulic oils			
Resistance to MEK, xylene, toluene, isopropanol	Yes	Yes	Yes		Yes	Yes	Yes			
<b>Mechanics/material</b>										
Material of cable sheath	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963		Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963			
<b>Dimensions</b>										
Thickness	9 mm	9 mm	9 mm		9 mm	9 mm	9 mm			
<b>Scope of supply</b>										
Delivery quantity in pieces	1	1	1		1	1	1			
<b>Other</b>										
Merchandise	No	No	No	No	No	No	No			
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany			

**Technical specifications**

Article number	<b>6XV1440-4BH20</b> Conn. cable PN for MOBILE PANELS, 2M	<b>6XV1440-4BH50</b> Conn. cable PN for MOBILE PANELS, 5M	<b>6XV1440-4BH80</b> Conn. cable PN for MOBILE PANELS, 8M
<b>General information</b>			
Product type designation	PN connecting cable	PN connecting cable	PN connecting cable
<b>Supply voltage</b>			
Rated value (DC)	24 V	24 V	24 V
<b>Standards, approvals, certificates</b>			
CE mark	Yes	Yes	Yes
<b>Ambient conditions</b>			
<b>Ambient temperature during operation</b>			
• min.	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C
<b>Relative humidity</b>			
• Operation, max.	85 %	85 %	85 %
<b>Cables</b>			
Cable length	2 m	5 m	8 m
smallest bending radius	45 mm	45 mm	45 mm
Color of cable sheath	green	green	green
Oil resistance of outer sheath	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils
Resistance to MEK, xylene, toluene, isopropanol	Yes	Yes	Yes
<b>Mechanics/material</b>			
Material of cable sheath	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963
<b>Dimensions</b>			
Thickness	9 mm	9 mm	9 mm
<b>Scope of supply</b>			
Delivery quantity in pieces	1	1	1
<b>Other</b>			
Merchandise	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany	Gleiwitzerstraße 555, 90475 Nuremberg, Germany

## Accessories

### Process coupling

#### Connecting cables

##### Technical specifications

Article number	<b>6XV1440-4BN10</b> Conn. cable PN for MOBILE PANELS,10M	<b>6XV1440-4BN15</b> Conn. cable PN for MOBILE PANELS,15M	<b>6XV1440-4BN20</b> Conn. cable PN for MOBILE PANELS,20M	<b>6XV1440-4BN25</b> Conn. cable PN for MOBILE PANELS,25M
<b>General information</b>				
Product type designation	PN connecting cable	PN connecting cable	PN connecting cable	PN connecting cable
<b>Supply voltage</b>				
Rated value (DC)	24 V	24 V	24 V	24 V
<b>Standards, approvals, certificates</b>				
CE mark	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>				
<b>Ambient temperature during operation</b>				
• min.	0 °C	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C	55 °C
<b>Relative humidity</b>				
• Operation, max.	85 %	85 %	85 %	85 %
<b>Cables</b>				
Cable length	10 m	15 m	20 m	25 m
smallest bending radius	45 mm	45 mm	45 mm	45 mm
Color of cable sheath	green	green	green	green
Oil resistance of outer sheath	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils	Yes; Hydrolysis-resistant and oil-resistant acc. to VDE 0472 Part 803/B, also resistant to commercially available lubricants and hydraulic oils
Resistance to MEK, xylene, toluene, isopropanol	Yes	Yes	Yes	Yes
<b>Mechanics/material</b>				
Material of cable sheath	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963	Special PUR, flame-resistant acc. to VDE 0472 Part 804 Test Type B, Shore A 88 Flame-Retardant UR Style 20963
<b>Dimensions</b>				
Thickness	9 mm	9 mm	9 mm	9 mm
<b>Scope of supply</b>				
Delivery quantity in pieces	1	1	1	1
<b>Other</b>				
Merchandise	No	No	No	No
Manufacturer's address	Gleiwitzerstraße 555, 90475 Nuremberg, Germany			

**Technical specifications**

Article number	6AV2181-5AF02-0AX0	6AV2181-5AF05-0AX0	6AV2181-5AF08-0AX0	6AV2181-5AF10-0AX0	6AV2181-5AF15-0AX0	6AV2181-5AF20-0AX0	6AV2181-5AF25-0AX0
	Connecting Cable 2 M KTP Mobile	Connecting Cable 5 M KTP Mobile	Connecting Cable 8 M KTP Mobile	Connecting Cable 10 M KTP Mobile	Connecting Cable 15 M KTP Mobile	Connecting Cable 20 M KTP Mobile	Connecting Cable 25 M KTP Mobile
<b>General information</b>							
Product type designation	Connecting cable	Connecting cable	Connecting cable	Connecting cable	Connecting cable	Connecting cable	Connecting cable
<b>Standards, approvals, certificates</b>							
CE mark	Yes	Yes	Yes	Yes	Yes	Yes	Yes
cULus	Yes	Yes	Yes	Yes	Yes	Yes	Yes
RCM (formerly C-TICK)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Ambient conditions</b>							
<b>Ambient temperature during operation</b>							
• min.	0 °C	0 °C	0 °C	0 °C	0 °C	0 °C	0 °C
• max.	55 °C	55 °C	55 °C	55 °C	55 °C	55 °C	55 °C
<b>Cables</b>							
Cable length	2 m	5 m	8 m	10 m	15 m	20 m	25 m
Maximum tensile load	300 N	300 N	300 N	300 N	300 N	300 N	300 N
Color of cable sheath							
• green	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Scope of supply</b>							
Delivery quantity in pieces	1	1	1	1	1	1	1
<b>Other</b>							
Merchandise	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Manufacturer name	On request	On request	On request	On request	On request	On request	On request

**More information**Note:

Cable pin assignments can be found on the Internet in the Online Help of WinCC flexible and under FAQs.

<http://support.automation.siemens.com>

Photos and product images may differ from the actual product.

Detailed technical specifications, content information, quantities and compatible core products are listed online in the technical specifications of the respective accessory.

Industry Mall:

<https://mall.industry.siemens.com>

If you use the TIA Selection Tool (selection guide) to find your core product, the appropriate accessories are also displayed automatically. This facilitates selection of suitable accessories.

<http://www.siemens.com/tia-selection-tool>

Data sheets and manufacturer declarations are available for downloading in the Online Support area.

<http://support.automation.siemens.com>

## Accessories

### Process coupling

#### Connecting cable 830-1T

##### Overview



##### Ordering data

##### Article No.

**830-1T PROFIBUS connecting cable**

for terminal connection,  
preassembled, with two Sub-D  
plugs, 9-pin terminated at both  
ends

- 1.5 m long
- 3 m long

**6XV1830-1CH15**  
**6XV1830-1CH30**

- Prefabricated cable for fast and cost-effective connection of PROFIBUS nodes to OLM and OBT
- Flexible PROFIBUS connecting cable

**Overview**

- Patch cable, available fully assembled
- with 2 x 2 cores for 10/100 Mbps and 4 x 2 cores for 10/100/1 000 Mbps Ethernet
- Small cable diameter
- Category Cat5e (2 x 2) and Cat6<sub>A</sub> (4 x 2) of the ISO/IEC 11801 and EN 50173 international cabling standards

**Ordering data****Article No.****IE TP Cord RJ45/RJ45**

TP cable 4 x 2 with 2 RJ45 plugs

- 0.3 m
- 0.5 m
- 1 m
- 2 m
- 3 m
- 4 m
- 6 m
- 10 m
- 15 m
- 20 m
- 25 m
- 30 m
- 35 m
- 40 m
- 45 m
- 50 m

- Article No.**
- 6XV1870-3QE30
  - 6XV1870-3QE50
  - 6XV1870-3QH10
  - 6XV1870-3QH20
  - 6XV1870-3QH30
  - 6XV1870-3QH40
  - 6XV1870-3QH60
  - 6XV1870-3QN10
  - 6XV1870-3QN15
  - 6XV1870-3QN20
  - 6XV1870-3QN25
  - 6XV1870-3QN30
  - 6XV1870-3QN35
  - 6XV1870-3QN40
  - 6XV1870-3QN45
  - 6XV1870-3QN50

**IE TP XP Cord RJ45/RJ45**

Twisted TP cable 4 x 2 with 2 RJ45 plugs

- 0.5 m
- 1 m
- 2 m
- 6 m
- 10 m

- Article No.**
- 6XV1870-3RE50
  - 6XV1870-3RH10
  - 6XV1870-3RH20
  - 6XV1870-3RH60
  - 6XV1870-3RN10

**IE TP Cord 9/RJ45**

TP cable 2 x 2 with one 9-pole sub D connector and one RJ45 connector

- 0.5 m
- 1 m
- 2 m
- 6 m
- 10 m

- Article No.**
- 6XV1850-2JE50
  - 6XV1850-2JH10
  - 6XV1850-2JH20
  - 6XV1850-2JH60
  - 6XV1850-2JN10

## Accessories

### Process coupling

#### IE TP Cord

Ordering data	Article No.	Article No.	
<b>IE TP XP Cord 9/RJ45</b> Twisted TP cable 2 x 2 with one 9-pole sub D connector and one RJ45 connector • 2 m • 6 m • 10 m	<b>6XV1850-2MH20</b> <b>6XV1850-2MH60</b> <b>6XV1850-2MN10</b>	<b>IE TP Cord RJ45/15</b> TP cable 2 x 2 with one 15-pole Sub D connector and one RJ45 connector • 0.5 m • 1 m • 2 m • 6 m • 10 m	<b>6XV1850-2LE50</b> <b>6XV1850-2LH10</b> <b>6XV1850-2LH20</b> <b>6XV1850-2LH60</b> <b>6XV1850-2LN10</b>
<b>IE TP Cord 9-45/RJ45</b> TP cable 2 x 2 with one RJ45 connector and one Sub D connector with 45° cable outlet (not for OSM/ESM) • 1 m	<b>6XV1850-2NH10</b>	<b>IE TP Converter Cord 15/RJ45</b> TP connecting cable 2 x 2 for connecting data terminals with RJ45 interfaces to the ITP cabling system; with a 15-pole Sub D socket with slide locking and an RJ45 connector. • 0.5 m • 2 m	<b>6XV1850-2EE50</b> <b>6XV1850-2EH20</b>
<b>IE TP XP Cord 9/9</b> Twisted TP cable 2 x 2 for direct connection of two Industrial Ethernet components with an ITP interface with two 9-pole Sub D connectors • 1 m	<b>6XV1850-2RH10</b>		

#### More information

You can order supplementary components for the SIMATIC NET cabling range from your local contact.

Technical advice on this subject is available from:

J. Hertlein  
DI PA CI PRM 4  
Tel.: +49 (172) 3172810  
Email: [juergen.hertlein@siemens.com](mailto:juergen.hertlein@siemens.com)

#### Selection Tool:

The TIA Selection Tool is available to assist you in selecting cabling systems for SIMATIC NET at:

<http://www.siemens.com/tst>

#### Ordering overview:

You can find more information on the FastConnect range in the <https://support.industry.siemens.com/cs/document/109766358/ordering-overview-cabling-technology-for-communication-networks-in-industry?dti=0&lc=en-DE>

**Overview**

- Used for connecting PROFIBUS nodes to the PROFIBUS bus cable
- Easy installation
- FastConnect plugs ensure extremely short assembly times due to their insulation-displacement technology
- Integrated terminating resistors (not in the case of 6ES7972-0BA30-0XA0)
- Connectors with D-sub sockets permit PG connection without the additional installation of network nodes


Ordering data	Article No.	Article No.
<b>RS 485 bus connector with axial cable outlet (180°)</b>  For industrial PC, SIMATIC HMI OP, OLM; max. transmission rate 12 Mbps	<b>6GK1500-0EA02</b>	<b>6ES7972-0BA30-0XA0</b>
<b>PROFIBUS FC RS 485 plug 180, PROFIBUS connector with FastConnect connection plug and axial cable outlet</b>  With insulation displacement terminals, with 180° cable outlet, for industrial PC, SIMATIC HMI OP, OLM; max. transmission rate 12 Mbps	<b>6GK1500-0FC10</b>	<b>PROFIBUS RS 485 bus connector with FastConnect technology</b>
<b>SIPLUS DP PB RS 485 connector with axial cable outlet (180°)</b>  For exposure to media; Based-on 6GK1 500-0EA02	<b>6AG1500-0EA02-2AA0</b>	<b>PROFIBUS FastConnect RS 485 bus connector with 90° cable outlet</b>  With insulation displacement, max. transmission rate 12 Mbps
<b>RS 485 bus connector with cable outlet (90°)</b>  With screw-terminals, max. transmission rate 12 Mbps • Without PG interface • With PG interface	<b>6ES7972-0BA12-0XA0</b> <b>6ES7972-0BB12-0XA0</b>	Without PG interface • 1 unit • 100 units  With PG interface • 1 unit • 100 units  Without PG interface, grounding via control cabinet cover • 1 unit  With PG interface, grounding via control cabinet cover • 1 unit
<b>SIPLUS DP PB RS 485 connector with 90° cable outlet</b>  For extended temperature range -25 ... +60 °C • Without PG interface Based on 6ES7 972-0BA12-0XA0 • With PG interface Based on 6ES7 972-0BB12-0XA0	<b>6AG1972-0BA12-2XA0</b> <b>6AG1972-0BB12-2XA0</b>	<b>PROFIBUS FastConnect RS 485 bus connector with angled cable outlet (35°)</b>  With insulation displacement, max. transmission rate 12 Mbps • Without PG interface • With PG interface
<b>RS 485 bus connector with angled cable outlet (35°)</b>  With screw-terminals, max. transmission rate 12 Mbps • Without PG interface • With PG interface	<b>6ES7972-0BA42-0XA0</b> <b>6ES7972-0BB42-0XA0</b>	<b>6ES7972-0BA61-0XA0</b> <b>6ES7972-0BB61-0XA0</b>
<b>SIPLUS DP PB RS 485 connector with angled cable outlet (35°)</b>  For extended temperature range -25 ... +60 °C • Without PG interface Based on 6ES7 942-0BA42-0XA0 • With PG interface Based on 6ES7 942-0BB42-0XA0	<b>6AG1972-0BA42-7XA0</b> <b>6AG1972-0BB42-7XA0</b>	

## Accessories

### Process coupling

#### IE FC RJ45 plug 2 x 2, Cat5e

##### Overview

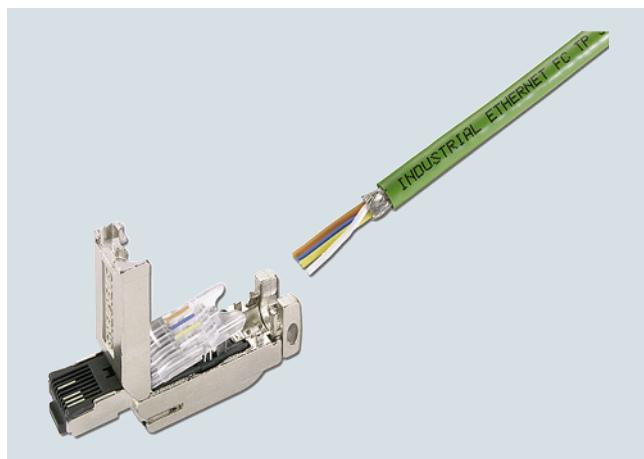

- Implementation of direct device connections of up to 100 m with Industrial Ethernet FC installation cable 2 x 2 without using patch technology
- Easy connection (insulation displacement contacts) for 4-wire Twisted Pair installation cables (100 Mbps) without the need for special tools
- Error-minimizing connection technique thanks to visible connection area as well as colored insulation displacement termination
- Industrial design (rugged metal enclosure, no easily lost small parts)
- Excellent EMI shielding and deflection (metal enclosure)
- Integrated strain-relief for installation cables
- Compatible with the EN 50173 (RJ45)/ISO IEC 11801 standard
- Additional strain and bending relief of plug-in connection possible through latching of plug on device enclosure, e.g. with SCALANCE X, SCALANCE S, SCALANCE M, SIMATIC CPs, SIMATIC S7-1500.

##### Ordering data

##### Article No.

###### **IE FC RJ45 plugs**

RJ45 plug connector for Industrial Ethernet with a rugged metal housing and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables

###### **IE FC RJ45 Plug 180**

180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**6GK1901-1BB10-2AA0  
6GK1901-1BB10-2AB0  
6GK1901-1BB10-2AE0**

###### **IE FC RJ45 Plug 90**

90° cable outlet; e.g. for ET 200S

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**6GK1901-1BB20-2AA0  
6GK1901-1BB20-2AB0  
6GK1901-1BB20-2AE0**

###### **IE FC RJ45 Plug 145**

145° cable outlet; e.g. for SIMOTION and SINAMICS

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**6GK1901-1BB30-0AA0  
6GK1901-1BB30-0AB0  
6GK1901-1BB30-0AE0**

##### More information

You can order supplementary components for the SIMATIC NET cabling range from your local contact. Technical advice on this subject is available from:

J. Hertlein  
DI PA DCP IWA  
Tel.: +49 (172) 3172810  
Email: [juergen.hertlein@siemens.com](mailto:juergen.hertlein@siemens.com)

##### Selection Tool:

The TIA Selection Tool is available to assist you in selecting cabling systems for SIMATIC NET at:

<http://www.siemens.com/tst>

##### Ordering overview:

You can find more information on the FastConnect range in the <https://support.industry.siemens.com/cs/document/109766358/ordering-overview-cabling-technology-for-communication-networks-in-industry?dti=0&lc=en-DE>

**Overview**

- Implementation of direct device connections of up to 100 m using IE FC RJ45 plug 4x2 with Industrial Ethernet FC installation cable 4 x 2 without patch technology
- Connection of rack switches (e.g. SCALANCE XR-500) in a 19" cabinet by means of FC installation cables 4x2 and patch cable via IE FC Keystone RJ45 4x2 in 19" racks
- Easy connection (insulation displacement contacts) for 8-core twisted pair installation cables (10/100/1 000/10 000 Mbps) without the need for special tools
- Error-minimizing connection technique thanks to visible connection area as well as color-coded insulation displacement contacts
- Industry-compatible design (rugged metal housing, no easily lost small parts)
- Excellent EMI shielding and deflection (metal enclosure)
- Integrated strain-relief for installation cables
- Compatible with the EN 50173 (RJ45) / ISO IEC 11801 standard
- Additional strain and bending relief of the plug-in connector possible by latching of the IE FC RJ45 plug 4x2 onto the device housing, e.g. with SCALANCE X, SCALANCE S, SCALANCE W.

**Ordering data****IE FC RJ45 plug 4 x 2**

RJ45 plug connector for Industrial Ethernet (10/100/1 000/10 000 Mbps, Cat6A) with a rugged metal housing and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for network components and CPs/CPUs with Industrial Ethernet interface

- 1 pack = 1 unit
- 1 pack = 10 units
- 1 pack = 50 units

**Article No.**

**6GK1901-1BB12-2AA0  
6GK1901-1BB12-2AB0  
6GK1901-1BB12-2AE0**

**IE FC Keystone RJ45 4x2**

RJ45 socket for Industrial Ethernet (10/100/1 000/10 000 Mbps, Cat 6A) with a rugged metal housing and integrated insulation displacement contacts for connecting Industrial Ethernet FC installation cables; 180° cable outlet; for mounting on DIN rails and 19" racks

- 1 pack = 1 unit

**6GK1901-0BE10-0AA0**

**More information**

You can order supplementary components for the SIMATIC NET cabling range from your local contact. Technical advice on this subject is available from:

J. Hertlein  
DI PA CI PRM 4  
Tel.: +49 (172) 3172810  
Email: [juergen.hertlein@siemens.com](mailto:juergen.hertlein@siemens.com)

**Selection Tool:**

The TIA Selection Tool is available to assist you in selecting cabling systems for SIMATIC NET at:

<http://www.siemens.com/tst>

**Ordering overview:**


You can find more information on the FastConnect range in the <https://support.industry.siemens.com/cs/document/109766358/ordering-overview-cabling-technology-for-communication-networks-in-industry?dti=0&lc=en-DE>

## Accessories

### Process coupling

#### IE FC TP cable 2 x 2

##### Overview

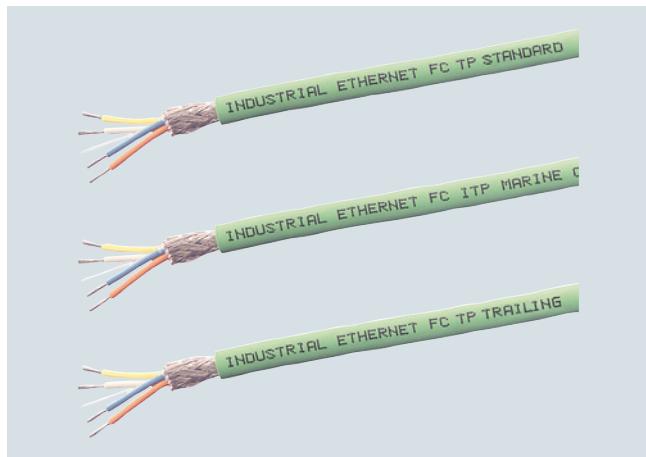

- 4-core FastConnect installation cables for structured Fast Ethernet cabling with special design for fast installation
- Easy stripping with the FastConnect Stripping Tool; the outer sheath and the braided shield are stripped accurately in one step
- Connection to FastConnect products using insulation displacement
- Exceeds Category 5 (Cat5e) of the international cabling standards ISO/IEC 11801 and EN 50173
- PROFINET-compatible
- UL approval
- Different versions for different fields of application (e.g. trailing, food, marine, railways)
- High interference immunity thanks to double shielding
- Easy length measurement thanks to printed meter markings

##### Ordering data

##### Article No.

###### **IE FC TP Standard Cable GP 2 x 2 (Type A)**

4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/ IE FC RJ45/IE FC M12 plug PRO; PROFINET-compatible; with UL approval

Sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m

###### Preferred length

- 20 m
- 50 m
- 100 m
- 200 m
- 500 m
- 1 000 m

**6XV1840-2AH10**

###### **IE FC TP Robust Cable GP 2 x 2 (Type A)**

4-core, shielded TP installation cable with TPE protective jacket for connection to IE FC Outlet RJ45/ IE FC RJ45/IE FC M12 plug PRO; PROFINET-compatible; with UL approval

Sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m

**6XV1841-2A**

###### **IE FC TP Flexible Cable GP 2 x 2 (Type B)**

4-core, shielded TP installation cable for connection to IE FC Outlet RJ45/ IE FC RJ45/IE FC M12 plug PRO for occasional movement; PROFINET-compatible; with UL approval

Sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m

**6XV1870-2B**

###### Preferred length

- 1 000 m

**6XV1870-2BU10**

Ordering data	Article No.	Article No.		
<b>IE FC TP Robust Flexible Cable GP 2 x 2 (Type B)</b>	4-core, shielded TP installation cable with TPE protective jacket for connection to IE FC Outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for occasional movement; PROFINET-compatible; with UL approval  Sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1841-2B	<b>IE FC TP Food Cable GP 2 x 2 (Type C)</b>  4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for the food and beverages industry; PROFINET-compatible; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1871-2L
<b>IE FC TP FRNC Cable GP 2 x 2 (Type B)</b>	4-core, shielded, halogen-free TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for occasional movement; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1871-2F	<b>IE FC TP Robust Food Cable GP 2 x 2 (Type B)</b>  4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for the food and beverages industry (IP69); PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1881-2A
<b>IE FC TP Trailing Cable GP 2 x 2 (Type C)</b>	4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for use as trailing cable; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1870-2D	<b>IE FC TP Marine Cable 2 x 2 (Type B)</b>  4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for marine applications; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1840-4AH10
<b>IE FC TP Trailing Cable 2 x 2 (Type C)</b>	4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for use as trailing cable; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1840-3AH10	<b>IE TP Ground Cable 2 x 2 (Type C)</b>  4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO (additional protective jacket must be removed) for laying in soil; sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1871-2G
<b>IE FC TP Festoon Cable GP 2 x 2 (Type B)</b>	4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for use in festoon applications; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1871-2S	<b>IE TP Robust Ground Cable</b>  4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO (additional outer sheath must be removed) for laying in soil, with metallic rodent protection; sold by the meter, max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1871-2N
<b>IE TP torsion cable 2 x 2 (Type C)</b>	4-core, shielded TP installation cable for connection to IE FC outlet RJ45/IE FC RJ45/IE FC M12 plug PRO for use with robots; PROFINET-compatible; with UL approval; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1870-2F	<b>IE TP Train Cable 2 x 2 (Type C)</b>  4-core, shielded TP installation cable for connection to IE FC RJ45 plug and IE FC M12 plug PRO; sold by the meter; max. delivery unit 1 000 m, minimum order quantity 20 m	6XV1871-2T
<u>Preferred length</u>	• 1 000 m	6XV1878-2FU10	<b>IE Hybrid Cable 2x2 + 4x0.34</b>  Flexible cable, 4 x Cu Cat5, shielded (0.75 mm) and 4 x Cu (0.34 mm <sup>2</sup> ) with IE FC modular outlet and power insert and IP67 hybrid plug connector; sold by the meter; max. delivery unit 1 000 m; minimum order quantity 20 m	6XV1870-2J

## Accessories

Process coupling

### IE FC TP cable 2 x 2

#### More information

You can order supplementary components for the SIMATIC NET cabling range from your local contact. Technical advice on this subject is available from:

J. Hertlein  
DI PA CI PRM 4  
Tel.: +49 (172) 3172810  
Email: [juergen.hertlein@siemens.com](mailto:juergen.hertlein@siemens.com)

#### Selection Tool:

The TIA Selection Tool is available to support the selection of cabling systems for SIMATIC NET at:

<http://www.siemens.com/tst>

#### Ordering overview:

You can find more information on the FastConnect range in the [ordering overview](https://support.industry.siemens.com/cs/document/109766358/ordering-overview-cabling-technology-for-communication-networks-in-industry?dti=0&lc=en-DE)

**Overview**

- 8-core FastConnect installation cables for cabling system with Gigabit capability (AWG22 and AWG24 versions)
- Easy stripping with the FastConnect Stripping Tool; the outer sheath and the braided shield are stripped accurately in one step
- Connection to IE FC RJ45 modular outlet (AWG22), IE FC RJ45 plug 4 x 2 (AWG24) or IE FC M12 plug PRO 4x2 (X-coded) using insulation displacement method
- Satisfies Category 6 (Cat6A) of the international cabling standards ISO/IEC 11801 and EN 50173
- UL approval
- Easy length measurement thanks to printed meter markings

**Ordering data****Article No.****IE FC TP Standard Cable GP 4 x 2**

8-core, shielded TP installation cable for universal applications; with UL approval;  
sold by the meter;  
max. delivery unit 1 000 m,  
minimum order quantity 20 m  
• AWG24,  
for connection to  
IE FC RJ45 plug 4 x 2,  
IE FC M12 plug PRO 4 x 2  
• Preferred length  
1 000 m

**6XV1878-2A****IE FC TP Flexible Cable GP 4 x 2**

8-core, shielded TP installation cable for occasional movement;  
with UL approval;  
sold by the meter;  
max. delivery unit 1 000 m,  
minimum order quantity 20 m  
• AWG24,  
for connection to  
IE FC RJ45 plug 4 x 2,  
IE FC M12 plug PRO 4 x 2

**6XV1878-2AU10****IE FC TP Trailing Cable GP 4 x 2**

8-core, shielded TP trailing cable;  
with UL approval;  
sold by the meter;  
max. delivery unit 1 000 m,  
minimum order quantity 20 m  
• AWG24,  
for connection to  
IE FC RJ45 plug 4 x 2,  
IE FC M12 plug PRO 4 x 2

**6XV1878-2B****IE TP Ground Cable 4 x 2**

8-core, shielded TP installation cable for occasional movement;  
with UL approval;  
sold by the meter;  
max. delivery unit 1 000 m,  
minimum order quantity 20 m  
• AWG24,  
for connecting to  
IE FC RJ45 plug 4 x 2,  
IE FC M12 plug PRO 4 x 2  
(after removing the additional PE  
outer sheath)

**6XV1878-2C****IE TP Train Cable GP 4 x 2**

8-core, shielded TP installation cable for use in trains;  
sold by the meter;  
max. delivery unit 1 000 m,  
minimum order quantity 20 m  
• AWG24,  
for connection to  
IE M12 RJ45 plug PRO 4 x 2

**6XV1878-2G****6XV1878-2T**

## Accessories

Process coupling

### IE FC TP cable 4 x 2

#### More information

You can order supplementary components for the SIMATIC NET cabling range from your local contact. Technical advice on this subject is available from:

J. Hertlein  
DI PA CI PRM 4  
Tel.: +49 (172) 3172810  
Email: [juergen.hertlein@siemens.com](mailto:juergen.hertlein@siemens.com)

#### Selection Tool:

The TIA Selection Tool is available to support the selection of cabling systems for SIMATIC NET at:

<http://www.siemens.com/tst>

#### Ordering overview:

You can find more information on the FastConnect range in the  
<https://support.industry.siemens.com/cs/document/109766358/ordering-overview-cabling-technology-for-communication-networks-in-industry?dti=0&lc=en-DE>


## Appendix



<b>7/2</b>	<b>SITRAIN – Digital Industry Academy</b>
7/3	SIMATIC HMI course overview
<b>7/4</b>	<b>Standards and approvals</b>
<b>7/5</b>	<b>WinCC Competence Center</b>
<b>7/6</b>	<b>Siemens Automation Cooperates with Education</b>
<b>7/9</b>	<b>Partners</b>
7/9	Siemens Partner Program
7/11	Partners at Siemens
<b>7/12</b>	<b>Siemens Service Option for SIMATIC IPC</b>
<b>7/13</b>	<b>Expertise and services relating to all aspects of PC-based Automation</b>
<b>7/14</b>	<b>Industry Services</b>
7/15	Portfolio overview
7/16	Online Support
<b>7/17</b>	<b>Software licenses</b>
<b>7/19</b>	<b>Conditions of sale and delivery</b>


## Appendix

SITRAIN – Digital Industry Academy

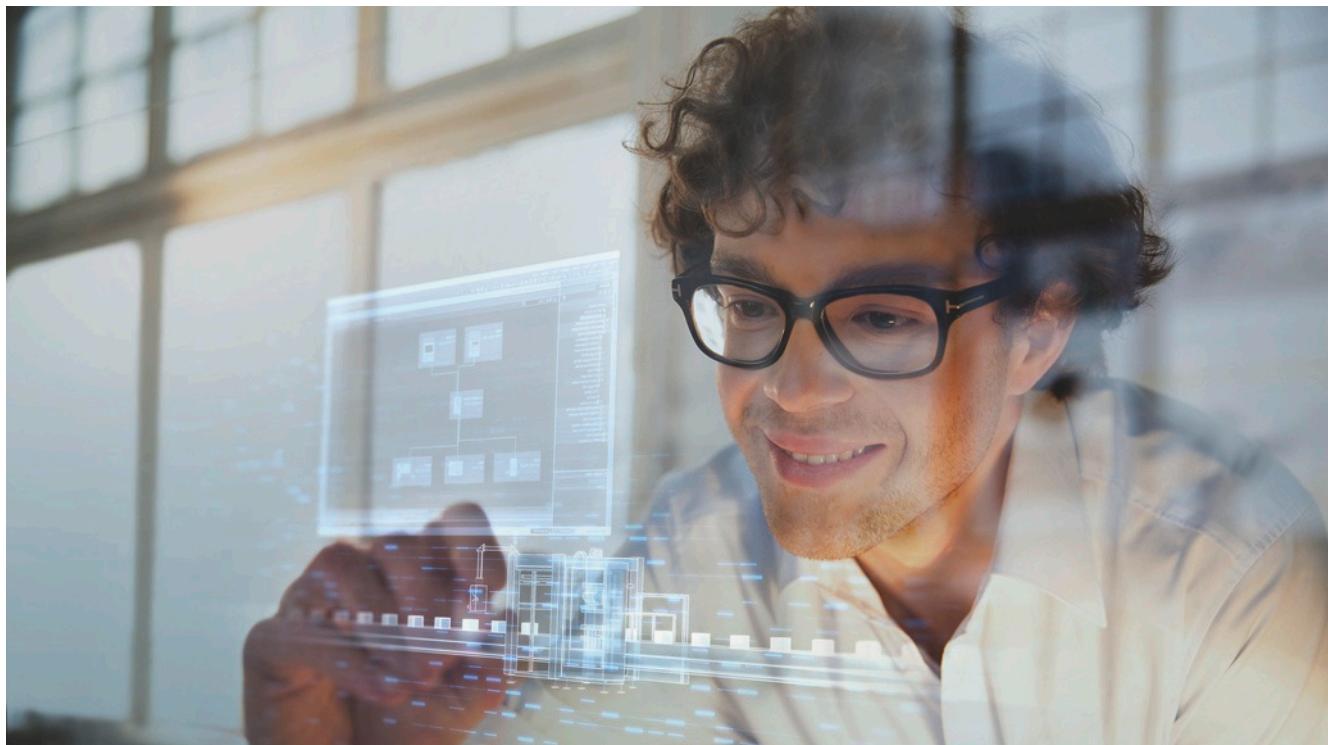


### **Time for learning**

Today's demands on our knowledge are every bit as diverse and dynamic as our profession itself. We keep learning more and longer – for our work, for our career and for ourselves. Advancing digitalization entails new topics and is also changing the way we absorb and process knowledge. SITRAIN – Digital Industry Academy offers the right source of knowledge here, which we can use anytime in just the way we need it. The time for learning is now.

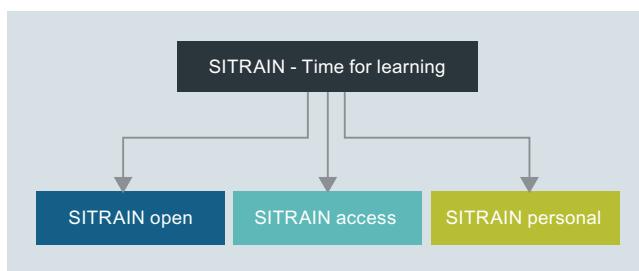

### **Knowledge for every need**

With its three areas – SITRAIN open, SITRAIN access and SITRAIN personal – SITRAIN offers you an all-encompassing range of options for an ongoing expansion of your knowledge and skills, suited for every type of learner. And SITRAIN uses advancing digitalization to continuously expand content and offer new training methods.



**SITRAIN – Digital Industry Academy**  
**Customer Support Germany**

Tel.: +49 911 895-7575

Email: [sitrain.digital.industry.academy.de@siemens.com](mailto:sitrain.digital.industry.academy.de@siemens.com)

### Knowledge you can always find

SITRAIN open bundles useful information, worthwhile data and up-to-date expert knowledge about Siemens products for industry. Search it anytime, find anything – and always the right stuff.

### Knowledge that gets you ahead

SITRAIN access is learning in the digital age. It offers you individualized ways to build your knowledge and access to exclusive digital training courses. Take advantage of sustainable learning success with a wide range of learning methods. Improve your skills – whether working in groups with others, or by yourself. Whenever, wherever and however you need to.

### Knowledge you can experience

We all want to learn from the best. And SITRAIN personal's training courses let you benefit from our well-practiced trainers' expert knowledge, along with direct access to our training equipment. That's the best way to convey knowledge – whether at your company or in our training classrooms.

### **SITRAIN – Digital Industry Academy**

[www.siemens.com/sitrain](http://www.siemens.com/sitrain)

- SITRAIN open: [www.siemens.com/sitrain-open](http://www.siemens.com/sitrain-open)
- SITRAIN access: [www.siemens.com/sitrain-access](http://www.siemens.com/sitrain-access)
- SITRAIN personal: [www.siemens.com/sitrain-personal](http://www.siemens.com/sitrain-personal)

## Training for SIMATIC HMI

This page contains an overview of the SITRAIN training offer for SIMATIC HMI operator control and monitoring systems.

Depending on your demands we'll make you fit for specific applications or teach you important background knowledge about products and systems.

All courses contain the largest possible share of practical exercises (also in online training), so that training can be carried out very intensively in small groups and directly on the systems.

Further information regarding course contents, dates and prices can be found in the Internet at:

[www.siemens.com/sitrain-simatic-hmi](http://www.siemens.com/sitrain-simatic-hmi)

Title	Course suitable for			Medium/Duration	Order code
	Implementation	Operation			
<b>SIMATIC WinCC Unified in the TIA Portal</b>					
SIMATIC WinCC Unified & Unified Comfort Panels System Course	TIA	✓	✓	On-site training / 3 days	TIA-UWCCM
SIMATIC WinCC Unified & Unified Comfort Panels System Course	TIA	✓	✓	Online training / 3 days	TIA-UWCCM
SIMATIC WinCC Unified for PC-Systems Advanced Course	TIA	✓	✓	On-site training / 2 days	TIA-UWCCPC
SIMATIC WinCC Unified for PC-Systems Advanced Course	TIA	✓	✓	Online-Training / 2 days	TIA-UWCCPC
SIMATIC WinCC Unified Scripting (JavaScript)	TIA	✓		Self-study	SITRAIN access
<b>SIMATIC WinCC in the TIA Portal</b>					
SIMATIC WinCC on the machine level in the TIA Portal, System Course	TIA	✓	✓	On-site training / 3 days	TIA-WCCM
SIMATIC WinCC on the machine level in the TIA Portal, System Course	TIA	✓	✓	Online training / 3 days	TIA-WCCM
SIMATIC WinCC on the machine level in the TIA Portal, Advanced Course	TIA	✓	✓	On-site training / 2 days	TIA-WCCM2
SIMATIC WinCC on the machine level in the TIA Portal, Advanced Course	TIA	✓	✓	Online training / 2 days	TIA-WCCM2
SIMATIC WinCC SCADA in the TIA Portal	TIA	✓	✓	On-site training / 5 days	TIA-WCCS
SiVARC – Options of Automatic Visualization Generation	TIA	✓		On-site training / 1 day	TIA-SIVARC
<b>SIMATIC WinCC V7.x</b>					
SIMATIC WinCC, System Course		✓	✓	On-site training / 5 days	ST-BWINCCS
SIMATIC WinCC, System Course		✓	✓	Online training / 5 days	ST-BWINCCS
SIMATIC WinCC, Advanced Course		✓	✓	On-site training / 5 days	ST-BWINOND
ANSI-C in the SIMATIC World, Introduction		✓		On-site training / 5 days	ST-SIMACE
Visual Basic Script in the SIMATIC World		✓		On-site training / 3 days	ST-VBSCR

**TIA** These courses are based on the TIA Portal.

## Appendix

### Standards and approvals

#### Operating system licenses for SIMATIC PC/PG

The accompanying operating system license is only valid for installation on the supplied SIMATIC PC/PG.

Installation can only be performed on these SIMATIC systems in accordance with Microsoft OEM licensing regulations.

#### Standards UL (U) and CSA (C)

All HMI products comply with the standards UL (U) and CSA (C), or the approval procedure has been applied for.

Products which have no approval are specially marked (see ordering data of the products).

#### CE marking

The electronic products described in this catalog comply with the requirements and protection objectives of the following EC-directives insofar as they relate to the product concerned. They also comply with the corresponding harmonized European standards (EN) published for these products in the Official Journals of the European Community.

- Directive 2004/108/EC of the European Parliament and Council on the approximation of the laws of the Member States relating to electromagnetic compatibility (EMC Directive)
- Directive 2006/95/EC of the European Parliament and of the Council on the harmonization of the laws of the Member States relating to electrical equipment designed for use within certain voltage limits (Low Voltage Directive)
- Directive 94/9/EC of the European Parliament and the Council on approximation of the laws of the Member States concerning equipment and protective systems intended for use in potentially explosive atmospheres (ATEX Directive)
- Directive 1999/5/EC of the European Parliament and of the Council on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (RTTE Directive)

The originals of the declarations of conformity are kept available for the responsible supervisory authorities at:

##### SIMATIC PLC / HMI:

Siemens Aktiengesellschaft  
DF FA MF QM  
Postfach 4848  
90327 Nürnberg  
Germany

##### SIMATIC IPC:

Siemens Aktiengesellschaft  
DF FA AS DH KHE  
Oestliche Rheinbrueckenstr. 50  
76187 Karlsruhe  
Germany

##### SIMATIC NET:

Siemens Aktiengesellschaft  
Industry Sector  
PD PA CI  
Postfach 4848  
90327 Nürnberg  
Germany

##### **Note on the Directives:**

The installation instructions in the manuals must be adhered to when installing and operating the products described in this catalog. These contain, for example, important information on installation in cabinets and on the use of shielded cables.

**WinCC Competence Center****Overview**

The WinCC Competence Centers are Siemens-internal partners. They offer a wide range of products and services designed to make optimal economic and system-oriented use of the openness and integration capability of WinCC.

In addition to the development of standard solutions/add-on products, they are authorized to implement customized/industry-specific solutions in the areas of application development and system integration on the basis of WinCC.

The portfolio is rounded off with consulting services, project-related training, and workshops for decision-makers and users.

Sector competence in addition to automation expertise and WinCC system know-how ensure professional and efficient solutions. The software is, of course, developed in compliance with recognized standards on the basis of certified quality management in accordance with ISO 9001.

More information is available on the internet at:  
[www.siemens.com/process-management](http://www.siemens.com/process-management)

## Appendix

Siemens Automation Cooperates with Education (SCE)

### Teaching made easy - Comprehensive support on the way to Industry 4.0

#### Knowledge & technology – the keystones to success in digitalization



#### **Digitalization is quickly and radically changing our world. What does this mean for education?**

In the world of Industry 4.0, companies can expect a host of new opportunities and challenges. New systems are verified on the spot through simulations. Automated mass production processes can make every product on the conveyor belt a unique product.

New products are now market-ready much faster. Siemens is shaping this transformation as a technology leader in the field of automation and process lifecycle management (PLM).


These new digitalization processes are changing the know-how requirements for employees. Many educational institutions are facing the challenge of conveying Industry 4.0 know-how as part of their teaching and training. The Siemens Automation Cooperates with Education (SCE) program is supporting educators on the way to Industry 4.0.

#### The SCE digitalization concept for educators

**The SCE digitalization concept presented here shows how digitalization can be implemented in educational institutions – from vocational schools to universities.**

Digitalization (or Industry 4.0) know-how is now introduced through CAx and cloud technologies. It is founded on the basics of automation, such as digital technologies, PLC and information technologies, and on advanced automation and industrial communication technologies.

The level of digitalization knowledge can be weighted, depending on the vocational field or branch of study – e.g. mechanical engineering, automation engineering or computer science.

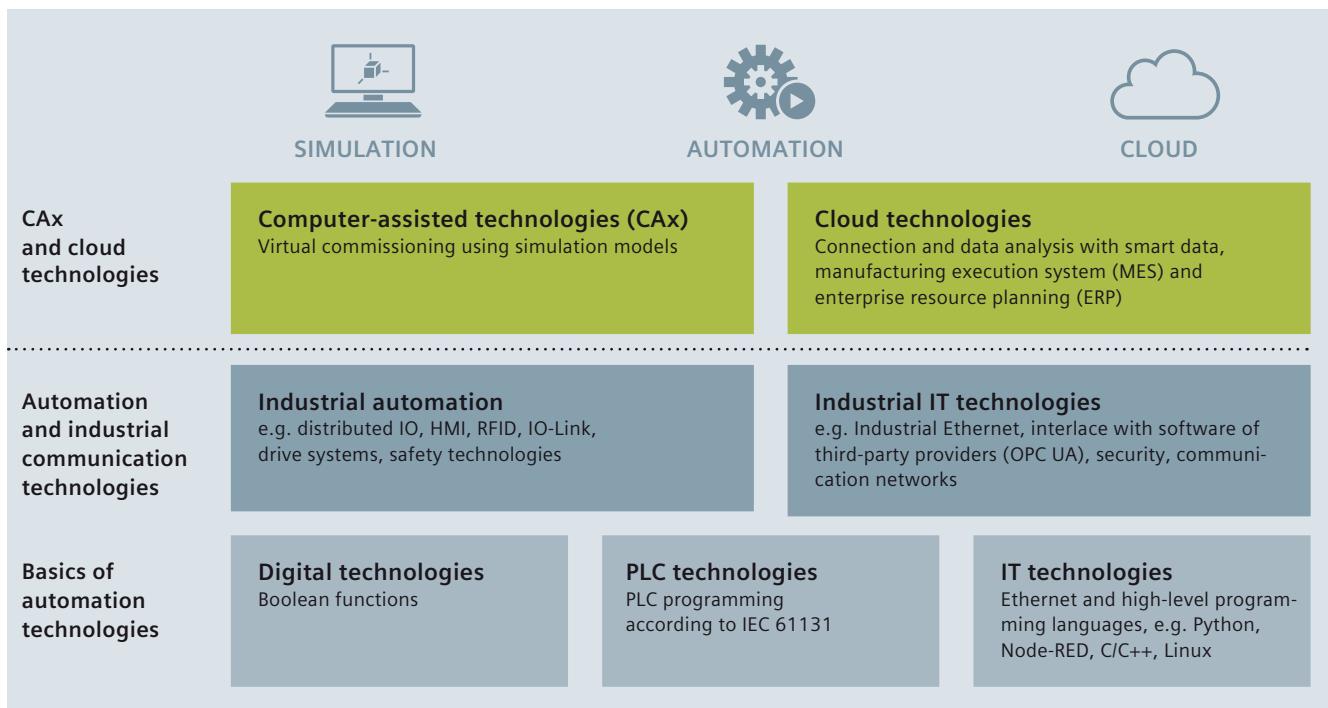

**The SCE digitalization concept for educators (continued)**

As part of their project work, students at Vocational School 2 in Wolfsburg, Germany, have implemented the three levels of the SCE Industry 4.0 concept. A virtual twin created with the Siemens NX Mechatronics Designer (MCD) CAD software was used for the design and virtual commissioning. This enables fast and efficient assembly of the real automation system, e.g. with SIMATIC S7-1500/ET 200SP/RFID, for use in classes. Production data, such as the number of bottles filled, production date and system parameters, are uploaded to a cloud using SIMATIC IOT2000.

[siemens.com/sce/iot2000](http://siemens.com/sce/iot2000)

[siemens.com/nx](http://siemens.com/nx)

**The SCE offers****Learning and training documents**

More than 100 didactically prepared learning and training documents are available through SCE and incorporate the digitalization concept. They are designed for use in classes, but can also be customized or used for individual study. These documents are available for free download, most of them in 7 languages.

[siemens.com/sce/documents](http://siemens.com/sce/documents)

**Educator courses**

Excellent teaching content is needed to introduce students to digitalization. For this purpose, SCE holds educator courses in certain regions. Based on our learning and training documents and through practical exercises, educators acquire the latest Industry 4.0 know-how.

[siemens.com/sce/courses](http://siemens.com/sce/courses)

**Trainer packages**

The 90 SCE trainer packages help educators teaching and implementing the SCE digitalization concept. Trainer packages comprise specially compiled, genuine Siemens hardware and software products. The trainer packages are based on the learning and training documents and are offered to schools, colleges and universities at special terms.

[siemens.com/sce/tp](http://siemens.com/sce/tp)

**Support for your projects / textbooks**

We support you on selected projects with advice and assistance from SCE contact partners.

As a special service, we support textbook authors. We maintain a list of textbooks on the SCE website.

[siemens.com/sce/contact](http://siemens.com/sce/contact)

[siemens.com/sce/books](http://siemens.com/sce/books)

## Appendix

### Siemens Automation Cooperates with Education (SCE)

#### Teaching made easy - Comprehensive support on the way to Industry 4.0

##### Partnerships for proliferation of Industry 4.0 in education



##### **Partnership with WorldSkills**

As a technology powerhouse, we support vocational training of students around the world. Since 2010, we have partnered with WorldSkills as a Global Industry Partner in order to amplify this cause.

WorldSkills is an international organization whose mission is to raise the profile and recognition of skilled people, and show how important vocational skills are in achieving economic growth and personal success. Every two years, WorldSkills hosts the world championships of skills.

Siemens provides the competitors with automation products, such as SIMATIC S7-1500 and LOGO!, for the disciplines: industrial control, electrical installations, Polymechanics/Automation and manufacturing technology.

Additionally, we support selected continental and regional competitions.

[siemens.com/worldskills](http://siemens.com/worldskills)

##### **Partnerships with educators**

We provide support to educators and educational organizations in the form of one-on-one advice through SCE contact partners and Siemens experts as well as long-term cooperation.

[siemens.com/sce/contact](http://siemens.com/sce/contact)

##### **Partnerships with producers of learning systems**

For practical training in classrooms and labs, numerous producers of learning systems offer a wide range of complete didactic solutions based on SCE trainer packages.

[siemens.com/sce/learningsystems](http://siemens.com/sce/learningsystems)

##### Information portal



To facilitate your teaching assignment and/or for selfstudy, we offer educators and students a comprehensive SCE information portal. At this portal you have quick access to all SCE offers, e.g. learning and training documents including projects, Getting Started information, videos, manuals, trial software and newsletters.

[siemens.com/sce](http://siemens.com/sce)

**Global  
Industry  
Partner**



**Overview****Siemens Solution and Approved Partner –  
Partners for your success**Highest competence in automation and drive technology

Siemens works closely together with selected partner companies around the world in order to ensure that customer requirements for all aspects of automation and drives are fulfilled as best as possible – wherever you are, and whatever the time.

We place great value on our customers acting in accordance with the same ideals which characterize Siemens as a whole: Competence, professionalism and quality. That is why continuous development through qualification and certification measures in line with global standards is a central aspect of our Partner Program. This means that with our partners, you benefit from the same high quality standards all over the world. The partner emblem is the symbol for tried and tested quality.

The partner network for industry

The Siemens Partner Program offers you expertise and experience close at hand.

Within our global network, we distinguish between Solution Partners and Approved Partners. We currently work with more than 1,500 Solution Partners around the world. Our network of over 150 Approved Partners continues to grow. In more than 80 countries worldwide

Siemens Solution Partner – Automation Drives

At present we are working with more than 1,500 [Solution Partners](#) worldwide. They are characterized by extensive application, system and sector knowledge, as well as proven project experience, and are able to implement future-proof tailored solutions of the highest quality, based on our product and system portfolio.

Siemens Approved Partner – Value Added Reseller

With their detailed technical knowledge, [Siemens Approved Partners – Value Added Resellers](#) offer a combination of products and services that range from specialist technologies and customized modifications to the provision of high-quality system and product packages. They also provide qualified technical support and assistance.

## Appendix

### Partners

#### Siemens Partner Program

##### Overview

###### Siemens Approved Partner – Industry Services



Siemens Approved Partner – Industry Services put their unique expertise entirely at the service of enhancing your productivity and can be instrumental in ensuring the availability of your plants.

##### Partner Finder

The ideal partner for your task is just a mouse click away!

The screenshot displays the Siemens Partner Finder interface. At the top, there's a banner with a person pointing at a globe. Below it, a search bar has 'Company search' selected. Underneath the search bar are two radio buttons: 'Show regional offices' (unchecked) and 'Location search' (checked). To the right of these are dropdown menus for 'Country' and 'Distance'. Below the search bar are three filter options: 'All partners' (selected), 'Solution Partner', 'Approved Partner', and 'References Solution Partner'. A large map of the world is on the right side of the page, with numerous green dots representing partner locations. On the left, there are two sections: 'Approved Partner – Value Added Reseller' and 'Solution Partner – Automation Drives'. Both sections contain small images and brief descriptions. At the bottom of the page, there's a copyright notice: '© Siemens AG 1999-2010 | Corporate Information | Privacy Policy | Terms of Use | Digital ID | Version: 2.0.0.39'.

In the Siemens global Solution Partner program, customers are certain to find the optimum partner for their specific requirements – with no great effort. The Partner Finder is basically a comprehensive database that showcases the profiles of all our partners.

Easy selection:

Set filters in the search screen form according to the criteria that are relevant to you. You can also directly enter the name of an existing partner.

Skills at a glance:

Gain a quick insight into the specific competencies of any particular partner with the reference reports.

Direct contact option:

Use our electronic query form:

[www.siemens.com/partnerfinder](http://www.siemens.com/partnerfinder)

Additional information of the Siemens Partners for industry is available online at:

[www.siemens.com/partnerprogram](http://www.siemens.com/partnerprogram)

## Partners at Siemens

The screenshot shows a search interface for Siemens partners. At the top, there's a search bar with 'Search...' and 'Location search' fields, both containing 'Germany'. Below the search bar are dropdown menus for 'Competence' (set to 'Industrial automation') and 'City/Region' (set to 'Germany'). A map of Europe is displayed, with red markers indicating partner locations across Germany, France, and parts of neighboring countries. On the left side of the map, several partner entries are listed, each with a name, competence level (E or F), a small profile picture, and three buttons: 'Download', 'Plan route', and 'Bookmark'. The partner names include Siemens AG Digital Factory and Process Industries and Drives branches in Berlin, Chemnitz, Düsseldorf, Frankfurt, and Mannheim.

At your service locally, around the globe for consulting, sales, training, service, support, spare parts on the entire portfolio of Digital Industries.

Your partner can be found in our Personal Contacts Database at:  
[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

You start by selecting

- the required competence,
- products and branches,
- a country and a city

or by a

- location search or free text search.

## Appendix

### Siemens Service Option for SIMATIC IPC

#### Siemens Service Option for SIMATIC IPC

##### **The expanded hardware service for SIMATIC IPC products**

Purchasing and registering this additional agreement for a SIMATIC IPC extends the time period for free repairs of this device to 36 or 48 months after delivery.

Scope of services of the service option within the period of service (36/48 months):

- Free<sup>1)</sup> repair during the period of service at one of our authorized repair centers near you  
The addresses of our worldwide partners can be found on the Internet at [www.siemens.com/asis](http://www.siemens.com/asis)
- Within the agreed contractual period, Siemens will bear the costs that are incurred in the repair center (labor and materials/replacement parts), which are needed to restore the functions<sup>2)</sup> of the hardware
- Siemens will also assume the return shipping costs of the repaired device from the repair center to the customer

<sup>1)</sup> Wear and tear as well as problems that arise due to improper handling of the devices are not included.

<sup>2)</sup> For hard disk defects that require the system to be restored, the repair service will only cover restoring the installation to its original condition exworks. The uploading of additional application software, drivers and setting up the operating software are not covered by the free repair service.

Product family	Article No. Service Option	Article designation
<b>SIMATIC Rack PC</b>	<b>6ES7648-4AB36-0AA0</b> <b>6ES7648-4AB48-0AA0</b>	<b>36 or</b> <b>48 months</b> service option for SIMATIC Rack PCs and Box PCs
<b>SIMATIC Box PC</b>	• SIMATIC IPC227 • SIMATIC IPC327 • SIMATIC IPC427 • SIMATIC IPC627 • SIMATIC IPC827	
<b>SIMATIC Panel PC</b>	<b>6ES7648-4AP36-0AA0</b> <b>6ES7648-4AP48-0AA0</b>	<b>36 or</b> <b>48 months</b> service option for SIMATIC Panel PC

##### **Ordering and registering the additional agreement:**

- Select the appropriate article number for the optional package based on the product family and place your order
- Scope of supply:  
Description of services in 4 languages + service device label with a license number for identifying the additional agreement on the device
- Activation of the service license number for a SIMATIC PC/SIMATIC PG via the Internet (<https://id.login.siemens.com/about/faq?&lang=en>):  
The registration must be completed within the first 90 days after initial delivery of the device!

## Expertise and services relating to all aspects of PC-based Automation

### Overview




#### *Expertise and services relating to all aspects of PC-based Automation*

Do you require support with the dimensioning and options of a PC-based Automation project, or even engineering support?

Specifically for this purpose, Siemens has established a team of specialists in Cologne and Milan who work closely with Development and Product Marketing and can thus provide our sales departments worldwide with competent support in PC-based Automation.

### Our core competencies

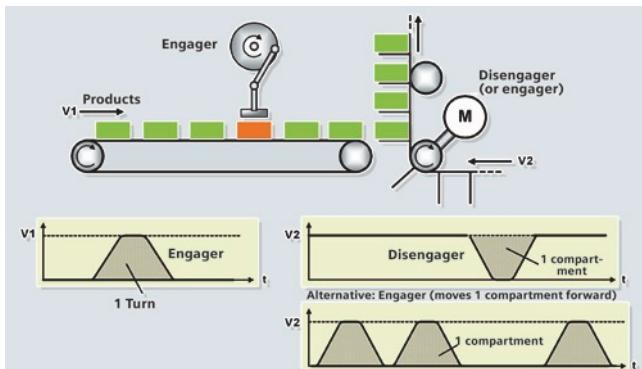

- Design of PC-based Automation systems from Siemens
- Integrated, customer-specific technology (add-ons) using high-level languages (C++) in Windows or real-time environments
- Knowledge transfer/workshops for the integration of third-party components, as well as for applications using the Open Development Kit (ODK)
- Technology and application know-how
- Development of add-ons for WinAC and WinCC flexible

### Reference applications



- Fast recording of measured values
- Software blocks for drives library
- Customer-specific communications via Ethernet (OPC/ActiveX, TCP socket)
- Synchronous operation, flying shear, table interpolation for electric and hydraulic axes
- Integration of PCI cards into PC-based Automation applications (e.g. WinAC and ASi-Bus)
- Customer-specific development and integration of C++ programs
- Database connections
- Integration of complex control algorithms

### Contacts

Activation of the Competence Centers for your application via your regional contact.

If you do not yet have a contact person in your region, just go to:  
<http://www.siemens.com/automation/partner>


The latest information about the workshops offered can be found on the Internet:

<http://www.siemens.com/pc-based>

## Appendix

### Industry Services

#### Overview

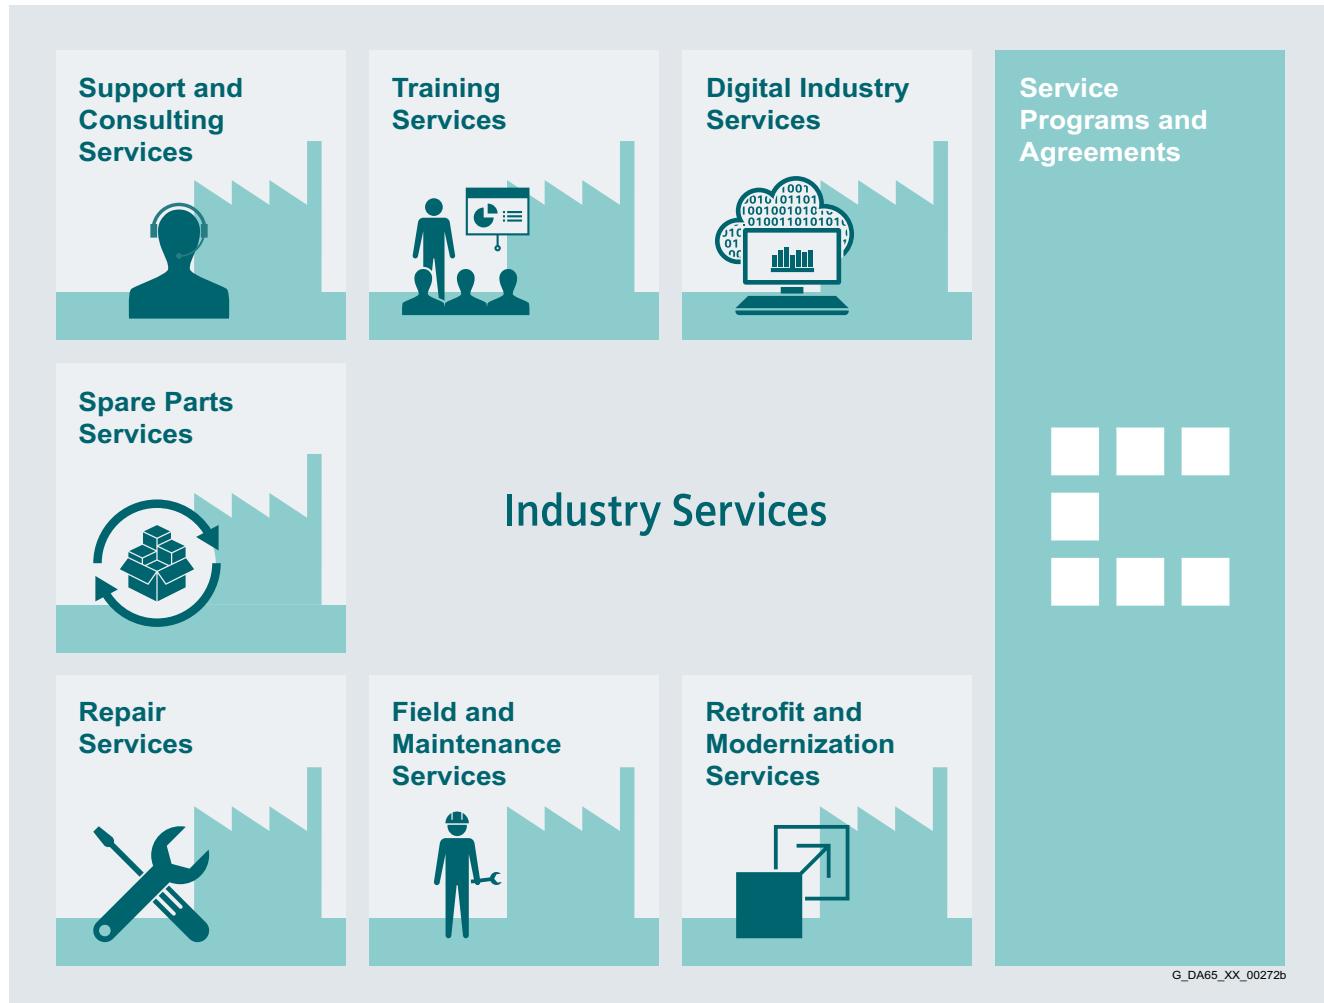

G\_DA65\_XX\_00272b

#### **Keep your business running and shaping your digital future – with Industry Services**

Optimizing the productivity of your equipment and operations can be a challenge, especially with constantly changing market conditions. Working with our service experts makes it easier. We understand your industry's unique processes and provide the services needed so that you can better achieve your business goals.

You can count on us to maximize your uptime and minimize your downtime, increasing your operations' productivity and reliability. When your operations have to be changed quickly to meet a new demand or business opportunity, our services give you the flexibility to adapt. Of course, we take care that your production is protected against cyber threats. We assist in keeping your operations as energy and resource efficient as possible and reducing your total cost of ownership. As a trendsetter, we ensure that you can capitalize on the opportunities of digitalization and by applying data analytics to enhance decision making: You can be sure that your plant reaches its full potential and retains this over the longer lifespan.

You can rely on our highly dedicated team of engineers, technicians and specialists to deliver the services you need – safely, professionally and in compliance with all regulations. We are there for you, where you need us, when you need us.

[www.siemens.com/industryservices](http://www.siemens.com/industryservices)

**Industry Services – Portfolio overview**
**Overview**

**Digital Industry Services**

Digital Industry Services make your industrial processes transparent to gain improvements in productivity, asset availability, and energy efficiency.

Production data is generated, filtered and translated with intelligent analytics to enhance decision-making.

This is done whilst taking data security into consideration and with continuous protection against cyber-attack threats.

[www.siemens.com/global/en/products/services/industry/digital-industry-services.html](http://www.siemens.com/global/en/products/services/industry/digital-industry-services.html)


**Training Services**

From the basics and advanced to specialist skills, SITRAIN courses provide expertise right from the manufacturer – and encompass the entire spectrum of Siemens products and systems for the industry.

Worldwide, SITRAIN courses are available wherever you need a training course in more than 170 locations in over 60 countries.

<https://support.industry.siemens.com/cs/ww/en/sc/2226>


**Support and Consulting Services**

**Industry Online Support** site for comprehensive information, application examples, FAQs and support requests.

**Technical and Engineering Support** for advice and answers for all inquiries about functionality, handling, and fault clearance. The Service Card as prepaid support for value added services such as Priority Call Back or Extended Support offers the clear advantage of quick and easy purchasing.

**Information & Consulting Services**, e.g. SIMATIC System Audit; clarity about the state and service capability of your automation system or Lifecycle Information Services; transparency on the lifecycle of the products in your plants.

<https://support.industry.siemens.com/cs/ww/en/sc/2235>


**Spare Parts**

Spare Parts Services are available worldwide for smooth and fast supply of spare parts – and thus optimal plant availability. Genuine spare parts are available for up to ten years. Logistic experts take care of procurement, transport, custom clearance, storage and order management. Reliable logistics processes ensure that components reach their destination as needed.

Since not all spare parts can be kept in stock at all times, Siemens offers a preventive measure for spare parts provisioning on the customer's premises with optimized **Spare Parts Packages** for individual products, custom-assembled drive components and entire integrated drive trains – including risk consulting.

**Asset Optimization Services** help you design a strategy for parts supply where your investment and carrying costs are reduced and the risk of obsolescence is avoided.

<https://support.industry.siemens.com/cs/ww/en/sc/2110>


**Repair Services**

Repair Services are offered on-site and in regional repair centers for fast restoration of faulty devices' functionality.

Also available are extended repair services, which include additional diagnostic and repair measures, as well as emergency services.

<https://support.industry.siemens.com/cs/ww/en/sc/2154>


**Field and Maintenance Services**

Siemens specialists are available globally to provide expert field and maintenance services, including commissioning, functional testing, preventive maintenance and fault clearance.

All services can be included in customized service agreements with defined reaction times or fixed maintenance intervals.

<https://support.industry.siemens.com/cs/ww/en/sc/2265>


**Retrofit and Modernization Services**

Provide a cost-effective solution for the expansion of entire plants, optimization of systems or upgrading existing products to the latest technology and software, e.g. migration services for automation systems.

Service experts support projects from planning through commissioning and, if desired over the entire extended lifespan, e.g. Retrofit for Integrated Drive Systems for an extended lifetime of your machines and plants.

<https://support.industry.siemens.com/cs/ww/en/sc/2286>


**Service Programs and Agreements**

A technical Service Program or Agreement enables you to easily bundle a wide range of services into a single annual or multi-year agreement.

You pick the services you need to match your unique requirements or fill gaps in your organization's maintenance capabilities.

Programs and agreements can be customized as KPI-based and/or performance-based contracts.

<https://support.industry.siemens.com/cs/ww/en/sc/2275>

## Appendix

### Industry Services

#### Online Support

##### Overview

Online Support – fast, intuitive, whenever you want, wherever you need

**Web**  
[www.siemens.com/online-support](http://www.siemens.com/online-support)

**App**

Scan the QR code for information on our Online Support app.

**FAQ / Application examples**  
Information about industrial products, programming and configuration as well as application examples

**Technical information**  
Videos, documentation, manuals, updates, product notes, compatibility tool, certificates, planning data such as dimensional drawings, product data, 3D models

**Forum**  
Exchange information and experience with other users and experts

## Online Support for Siemens Industry Products

Siemens Industry and Online Support with some 1.7 million visitors per month is one of the most popular web services provided by Siemens. It is the central access point for comprehensive technical know-how about products, systems and services for automation and drives applications as well as for process industries.

In connection with the challenges and opportunities related to digitalization you can look forward to continued support with innovative offerings.

## Overview

### Software types

Software requiring a license is categorized into types. The following software types have been defined:

- Engineering software
- Runtime software

### Engineering software

This includes all software products for creating (engineering) user software, e.g. for configuring, programming, parameterizing, testing, commissioning or servicing.

Data generated with engineering software and executable programs can be duplicated for your own use or for use by third-parties free-of-charge.

### Runtime software

This includes all software products required for plant/machine operation, e.g. operating system, basic system, system expansions, drivers, etc.

The duplication of the runtime software and executable programs created with the runtime software for your own use or for use by third-parties is subject to a charge.

You can find information about license fees according to use in the ordering data (e.g. in the catalog). Examples of categories of use include per CPU, per installation, per channel, per instance, per axis, per control loop, per variable, etc.

Information about extended rights of use for parameterization/configuration tools supplied as integral components of the scope of supply can be found in the readme file supplied with the relevant product(s).

### License types

Siemens Industry Automation & Drive Technologies offers various types of software license:

- Floating license
- Single license
- Rental license
- Rental floating license
- Trial license
- Demo license
- Demo floating license

### Floating license

The software may be installed for internal use on any number of devices by the licensee. Only the concurrent user is licensed. The concurrent user is the person using the program. Use begins when the software is started.

A license is required for each concurrent user.

### Single license

Unlike the floating license, a single license permits only one installation of the software per license.

The type of use licensed is specified in the ordering data and in the Certificate of License (CoL). Types of use include for example per instance, per axis, per channel, etc.

One single license is required for each type of use defined.

### Rental license

A rental license supports the "sporadic use" of engineering software. Once the license key has been installed, the software can be used for a specific period of time (the operating hours do not have to be consecutive).

One license is required for each installation of the software.

### Rental floating license

The rental floating license corresponds to the rental license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

### Trial license

A trial license supports "short-term use" of the software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license.

### Demo license

The demo license support the "sporadic use" of engineering software in a non-productive context, for example, use for testing and evaluation purposes. It can be transferred to another license. After the installation of the license key, the software can be operated for a specific period of time, whereby usage can be interrupted as often as required.

One license is required per installation of the software.

### Demo floating license

The demo floating license corresponds to the demo license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

### Certificate of License (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL is required for every type of use and must be kept in a safe place.

### Downgrading

The licensee is permitted to use the software or an earlier version/release of the software, provided that the licensee owns such a version/release and its use is technically feasible.

### Delivery versions

Software is constantly being updated.

The following delivery versions

- PowerPack
- Upgrade

can be used to access updates.

Existing bug fixes are supplied with the ServicePack version.

### PowerPack

PowerPacks can be used to upgrade to more powerful software. The licensee receives a new license agreement and CoL (Certificate of License) with the PowerPack. This CoL, together with the CoL for the original product, proves that the new software is licensed.

A separate PowerPack must be purchased for each original license of the software to be replaced.

### Upgrade

An upgrade permits the use of a new version of the software on the condition that a license for a previous version of the product is already held.

The licensee receives a new license agreement and CoL with the upgrade. This CoL, together with the CoL for the previous product, proves that the new version is licensed.

A separate upgrade must be purchased for each original license of the software to be upgraded.

## Appendix

### Software licenses

#### Overview

##### **ServicePack**

ServicePacks are used to debug existing products. ServicePacks may be duplicated for use as prescribed according to the number of existing original licenses.

##### **License key**

Siemens Industry Automation & Drive Technologies supplies software products with and without license keys.

The license key serves as an electronic license stamp and is also the "switch" for activating the software (floating license, rental license, etc.).

The complete installation of software products requiring license keys includes the program to be licensed (the software) and the license key (which represents the license).

##### **Software Update Service (SUS)**

As part of the SUS contract, all software updates for the respective product are made available to you free of charge for a period of one year from the invoice date. The contract will automatically be extended for one year if it is not canceled three months before it expires.

The possession of the current version of the respective software is a basic condition for entering into an SUS contract.

You can download explanations concerning license conditions from [https://mall.industry.siemens.com/legal/ww/en/terms\\_of\\_trade\\_en.pdf](https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf)

## General provisions, prices, terms and conditions

**1. General Provisions**

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

**1.1 For customers with a seat or registered office in European Union**

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for stand-alone software products and software products forming a part of a product or project, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany"<sup>1)</sup> and/or
- for consulting services the "Allgemeine Geschäftsbedingungen für Beratungsleistungen der Division DF – Deutschland" (available only in German) and/or
- for other services, the „Supplementary Terms and Conditions for Services ("BL")<sup>1)</sup> and/or
- for other supplies the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>.

In case such supplies should contain Open Source Software, the conditions of which shall prevail over the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"<sup>1)</sup>, a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

**1.2 For customers with a seat or registered office outside European Union**

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the "Standard Terms and Conditions for Consulting Services of the Division DF for Customers with a Seat or Registered Office Outside of Germany"<sup>1)</sup> and/or
- for other services the "International Terms & Conditions for Services"<sup>1)</sup> supplemented by "Software Licensing Conditions"<sup>1)</sup> and/or
- for other supplies of hard- and software the "International Terms & Conditions for Products"<sup>1)</sup> supplemented by "Software Licensing Conditions"<sup>1)</sup>

**1.3 For customers with master or framework agreement**

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

**2. Prices**

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation.

An exact explanation of the metal factor can be downloaded at: [https://mall.industry.siemens.com/legal/ww/en/terms\\_of\\_trade\\_en.pdf](https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf)

To calculate the surcharge (except in the cases of dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

**3. Additional Terms and Conditions**

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

<sup>1)</sup> The text of the Terms and Conditions of Siemens AG can be downloaded at [https://mall.industry.siemens.com/legal/ww/en/terms\\_of\\_trade\\_en.pdf](https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf)

## Appendix

### Conditions of sale and delivery

#### Export regulations

##### 4. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with "ECCN" unequal "N") and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations. Products labeled with "AL" unequal "N" are subject to European / national export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels "AL" and "ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Products without label, with label "AL:N" / "ECCN:N", or label "AL:9X9999" / "ECCN: 9X9999" may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you shall comply with all applicable national and international (re-)export control regulations. In any event of such transfer of goods, works and services you shall comply with the (re-) export control regulations of the Federal Republic of Germany, of the European Union and of the United States of America.

Prior to any transfer of goods, works and services provided by us to a third party you shall in particular check and guarantee by appropriate measures that

- there will be no infringement of an embargo imposed by the European Union, by the United States of America and/ or by the United Nations by such transfer, by brokering of contracts concerning those goods, works and services or by provision of other economic resources in connection with those goods, works and services, also considering the limitations of domestic business and prohibitions of by-passing those embargos;
- such goods, works and services are not intended for use in connection with armaments, nuclear technology or weapons, if and to the extent such use is subject to prohibition or authorization, unless required authorization is provided;
- the regulations of all applicable Sanctioned Party Lists of the European Union and the United States of America concerning the trading with entities, persons and organizations listed therein are considered.

If required to enable authorities or us to conduct export control checks, you, upon request by us, shall promptly provide us with all information pertaining to the particular end customer, the particular destination and the particular intended use of goods, works and services provided by us, as well as any export control restrictions existing.

You acknowledge that under the EU embargo regulations against Iran, Syria and Russia respectively the sale of certain listed goods and related services is subject to authorization by the competent export control authorities of the European Union. If (i) the goods or services ordered by you are destined for Iran, Syria or Russia, and (ii) the contract for our supplies and/or services is subject to prior authorization of the competent export control authorities of the European Union, the contract between you and us shall come into force in this respect only upon granting of such authorization.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

## Selection and ordering at Siemens Industry Mall, downloading and ordering catalogs

### **Easy product selection and ordering: Industry Mall**

The screenshot shows the Siemens Industry Mall homepage. At the top, there's a navigation bar with links for Home, Language, Contact, Help, Site Explorer, Product Search, and Catalog. Below the navigation is a search bar. The main content area features a "Country overview" section with a grid of flags representing various countries, each with a link to the respective page.

### **Downloading catalogs**

The screenshot shows the Siemens Industry Online Support catalog download interface. It includes a search bar, filter criteria for products (e.g., All Products, My Products, Product tree), and a search results table. The table lists 670 entries, including details like catalog titles, dates, and download links. A "mySupport Cockpit" sidebar on the right provides links to Favorites, My requests, CAE downloads, and other support resources.

### **Ordering printed catalogs**



### Industry Mall

The Industry Mall is a Siemens AG Internet ordering platform. It provides you with online access to a comprehensive product spectrum that is presented in an informative, well-organized way.

Powerful search functions help you select the required products, while configurators enable you to configure complex product and system components quickly and easily. CAx data are also available for you to use.

Data transfer allows the entire procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, individual customer discounting, and quotation preparation are also possible.

[www.siemens.com/industrymall](http://www.siemens.com/industrymall)

### Siemens Industry Online Support

You can download catalogs and brochures in PDF format from Siemens Industry Online Support without having to register.

The filter box makes it possible to perform targeted searches.

[www.siemens.com/industry-catalogs](http://www.siemens.com/industry-catalogs)

Please contact your local Siemens branch if you are interested in ordering printed catalogs.  
Addresses can be found at  
[www.siemens.com/automation-contact](http://www.siemens.com/automation-contact)

Published by:  
Siemens AG

Digital Industries  
Factory Automation  
Postfach 48 48  
90026 Nürnberg  
Germany  
  
PDF (E86060-K4680-A101-C9-7600)  
KG 0821 PDF 740 En  
Produced in Germany

© Siemens 2021

Subject to change without prior notice.

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products.

An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

## Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit

<http://www.siemens.com/industrialsecurity>.

Siemens' products and solutions undergo continuous development to make them more secure.

Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under

<http://www.siemens.com/industrialsecurity>.