

Cable Assembly Coaxial MCX to MCX  
RG-316 12.00" (304.80mm)

RoHS  
Compliant

Stock No.: 9202558R0783

FEATURES

- 50Ω impedance
- MCX Plug to MCX Plug
- RG-316




Product Description

Terminated with MCX male straight connector to MCX male straight connector for a durable, impedance match coaxial cable assembly. Gold plated contacts are utilized to minimize insertion loss.

General Specifications

Attribute	Value
Terminated/Unterminated	Terminated
Coaxial Type	RG-316
Connector 1	MCX Plug
Connector 2	MCX Plug
Connector 1 Gender	Male
Connector 2 Gender	Male
Characteristic Impedance	50 Ω
Length	12.00" (304.80mm)
Voltage Rating	750 V

## Product Drawing

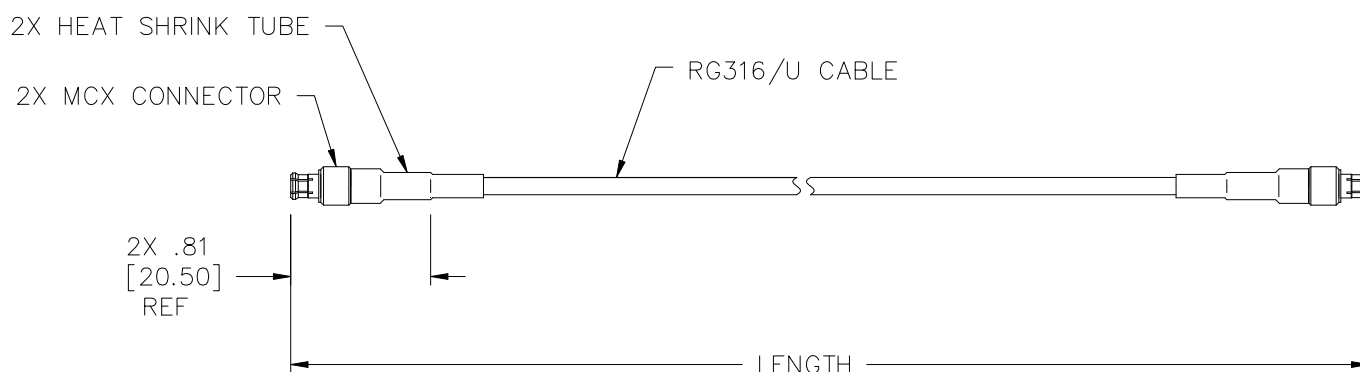

### Features:

- DC - 3GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

### Materials

#### MCX Male Connectors:

Center Contact: Phosphor Bronze, Gold Plated  
Connector Body: Brass, Gold Plated  
Crimp Ferrule: Copper, Nickel Plated  
Insulators: PTFE

### Specifications

<b>Cable Type</b>	RG316/U
<b>Impedance</b>	50Ω
<b>Frequency Range</b>	DC - 3GHz
<b>Insulation Resistance</b>	≥ 1000 MΩ
<b>Insulator Withstand</b>	750V
<b>Temperature Range</b>	-55° C to +155°C (-67°F to +311°F)
<b>Jacket</b>	FEP
<b>Cable O.D.</b>	0.098" (2.5mm)
<b>Center Conductor (mm)</b>	7 x .18 silver coated copper covered steel

Dimensions: Millimeters (Inches)

### Part Number Table

Part Number	Description
9202558R0783	Cable Assembly Coaxial MCX to MCX RG-316 12.00" (304.80mm)

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.