


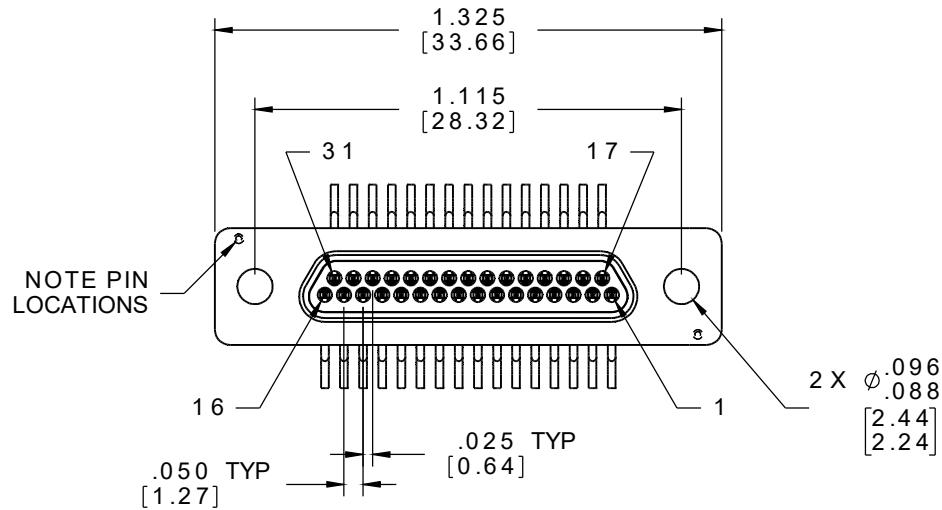


PART NO.	A98002-031	REV	ECO	DATE	APP
		A	101818	08-11-15	TLM

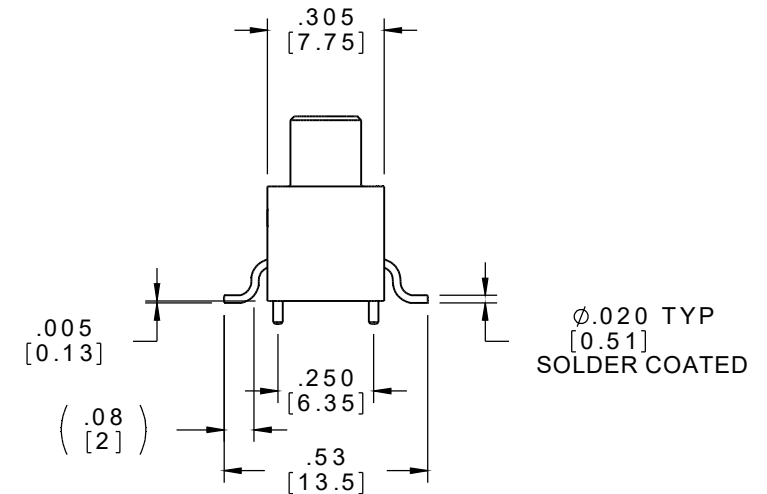

ACTUAL SIZE

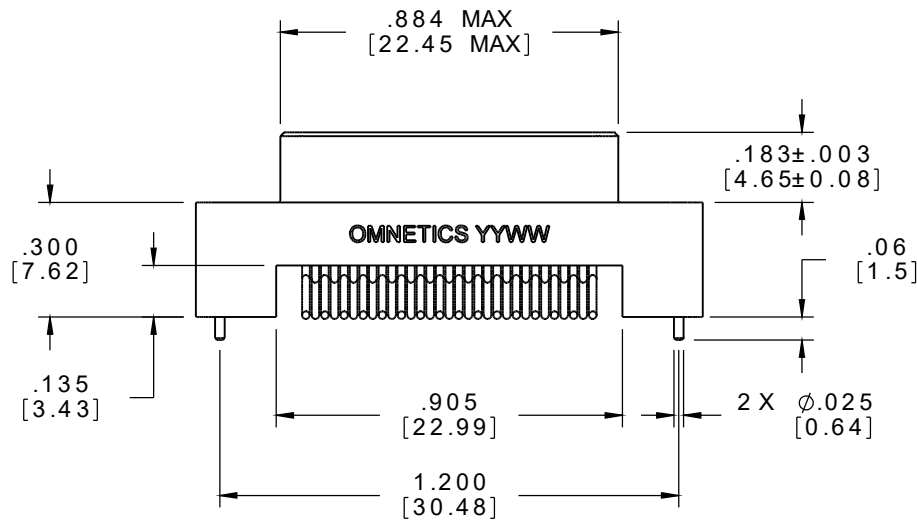

NOTE:

DIMENSIONS IN [] ARE IN MILLIMETERS UNLESS OTHERWISE NOTED AND ARE FOR REFERENCE ONLY

MMDP SLDW	THIRD ANGLE
	-TOLERANCES-
	UNLESS OTHERWISE NOTED
	DIMENSIONS IN INCHES
	2 PL DEC $\pm$.01
	3 PL DEC $\pm$.005
	4 PL DEC $\pm$.0005
	ANGLES $\pm$ 1°

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.

DFTM. TLM	DATE 07-27-15
CHK'D.	DATE
APP'D.	DATE

TITLE:
(31) PIN MALE
VERTICAL SURFACE
MOUNT MICRO-D



OMNETICS
CONNECTOR CORPORATION
7260 COMMERCE CIRCLE EAST
MINNEAPOLIS, MN 55432
WWW.OMNETICS.COM

CAGE CODE 61873	DWG NO. A98002-031
SHEET 1 OF 2	REV A
SCALE: 2:1	

PART NO.	A98002-031	REV	ECO	DATE	APP
		A	101818	08-11-15	TLM

MATERIALS

- HOUSING:
- ALUMINUM 6061-T6, NICKEL
PLATE PER SAE-AMS-2404
- INSULATOR:
- LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138
- CONTACT:
- BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C, CLASS 1.27
- TERMINATION:
- SOLDER COATED WITH SN63A
PER J-STD-006 OR AMS-P-
81728

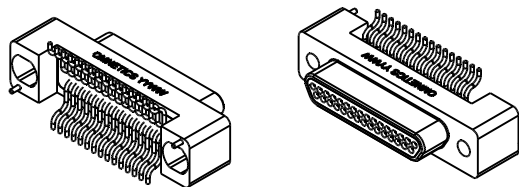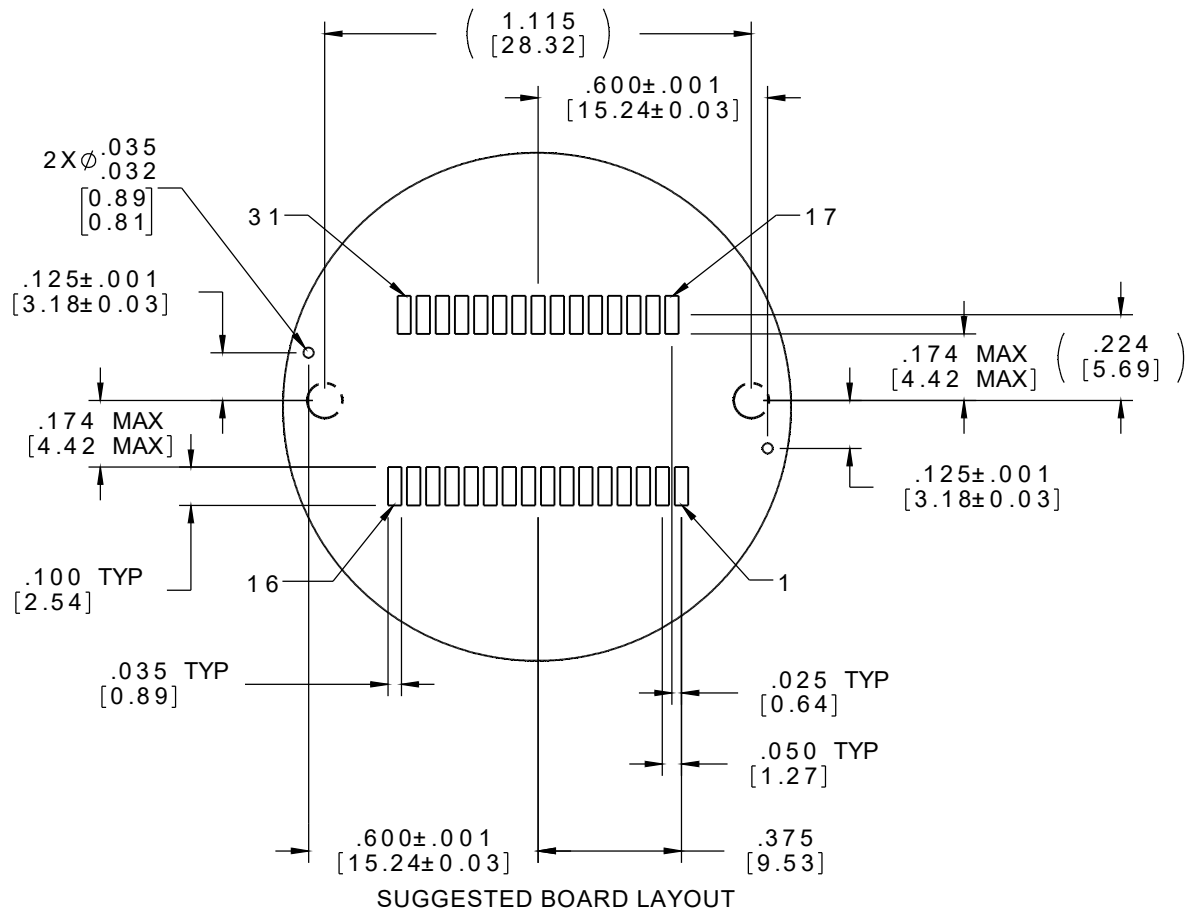

ACTUAL SIZE

NOTE:

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MMDP SLDW	THIRD ANGLE		THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.			OMNETICS CONNECTOR CORPORATION 7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNETICS.COM	CAGE CODE 61873	
	-TOLERANCES-						DWG NO.	
	UNLESS OTHERWISE NOTED						A98002-031	
	DIMENSIONS IN INCHES						SHEET 2 OF 2	
							REV	
	2 PL DEC ± .01	DFTM. TLM	DATE	07-27-15	TITLE:			
	3 PL DEC ± .005	CHK'D.	DATE		(31) PIN MALE			
	4 PL DEC ± .0005				VERTICAL SURFACE			
	ANGLES ± 1°	APP'D.	DATE		MOUNT MICRO-D			
							SCALE: 2:1	A