


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

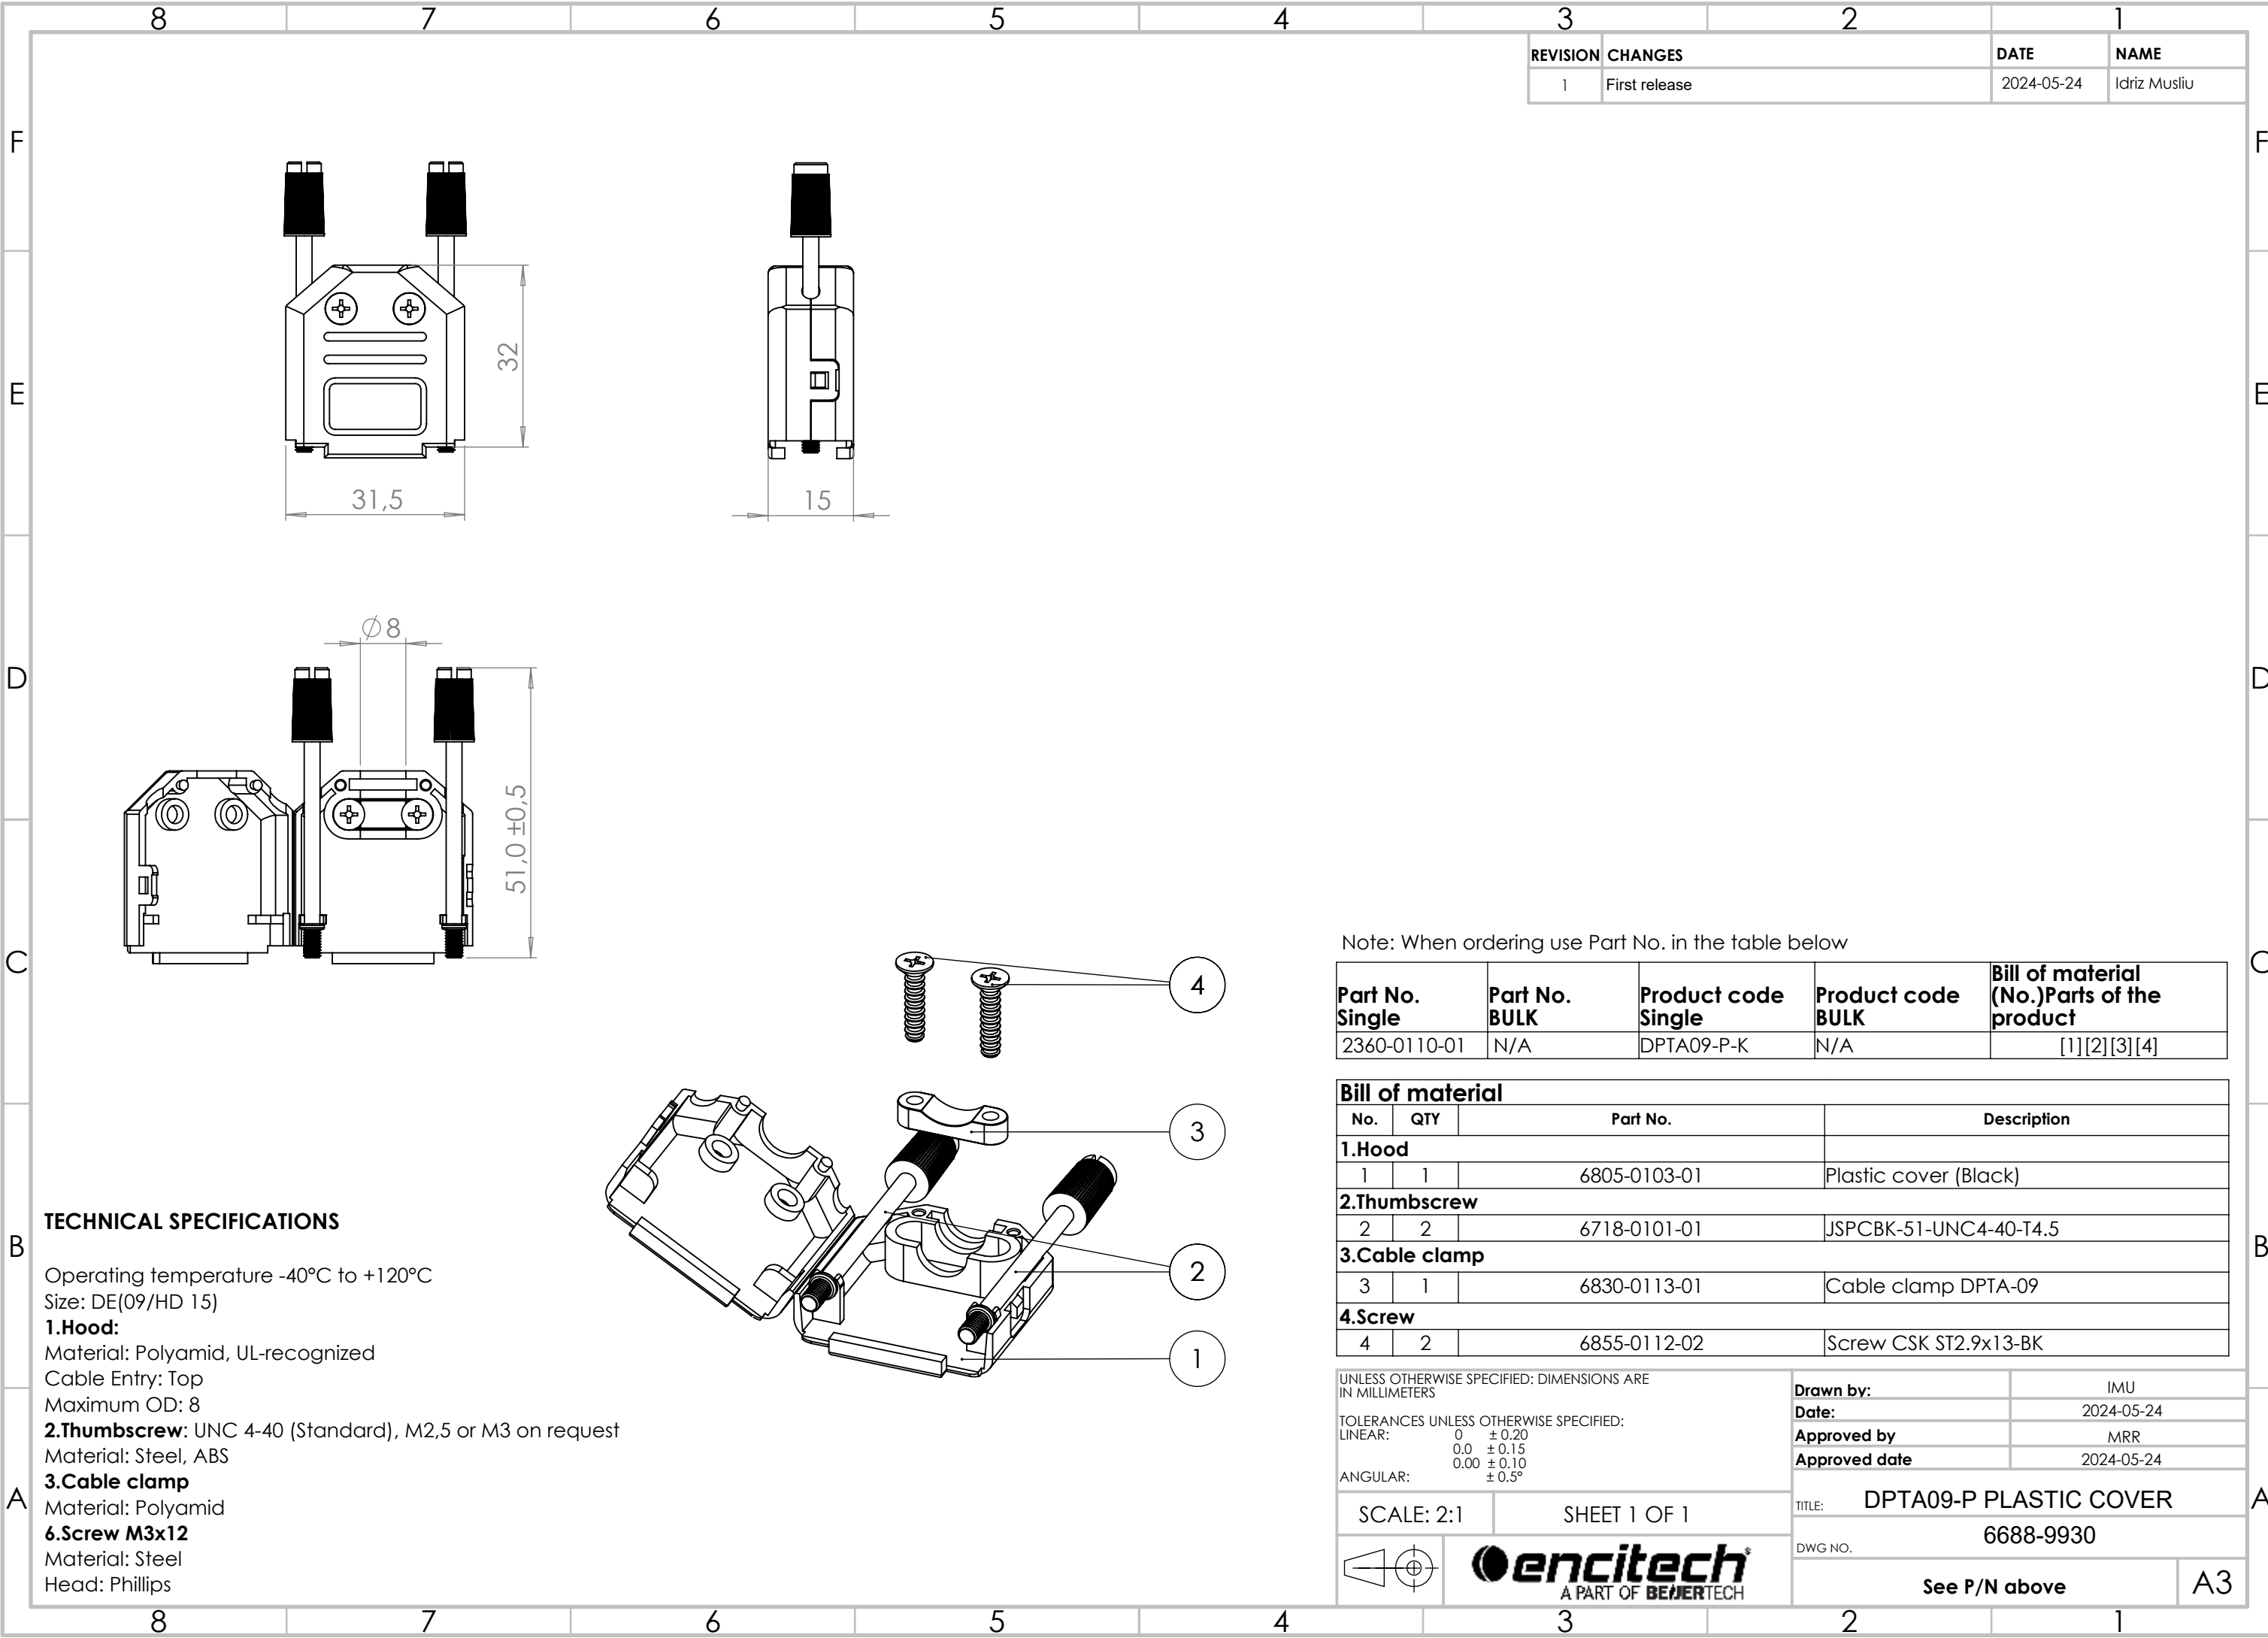

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DE(09/HD 15)
1.Hood:
Material: Polyamid, UL-recognized
Cable Entry: Top
Maximum OD: 8
2.Thumbscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel, ABS
3.Cable clamp
Material: Polyamid
6.Screw M3x12
Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
2360-0110-01	N/A	DPTA09-P-K	N/A	[1][2][3][4]

Bill of material				
No.	QTY	Part No.	Description	
1.Hood				
1	1	6805-0103-01	Plastic cover (Black)	
2.Thumbscrew				
2	2	6718-0101-01	JSPCBK-51-UNC4-40-T4.5	
3.Cable clamp				
3	1	6830-0113-01	Cable clamp DPTA-09	
4.Screw				
4	2	6855-0112-02	Screw CSK ST2.9x13-BK	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED: LINEAR: 0 ± 0.20 0.0 ± 0.15 0.00 ± 0.10 ANGULAR: ± 0.5°		Drawn by:	IMU
		Date:	2024-05-24
		Approved by	MRR
		Approved date	2024-05-24
SCALE: 2:1		SHEET 1 OF 1	
		TITLE: DPTA09-P PLASTIC COVER	
		DWG NO. 6688-9930	
		See P/N above	A3