
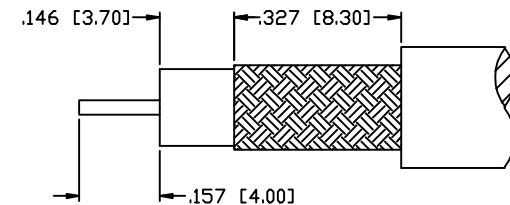
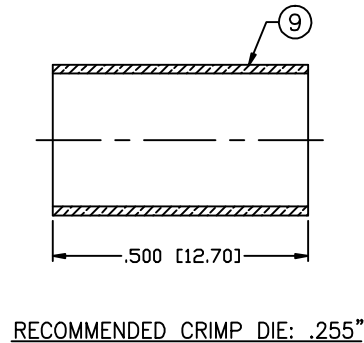
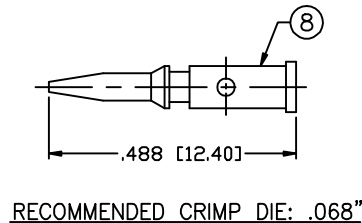


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

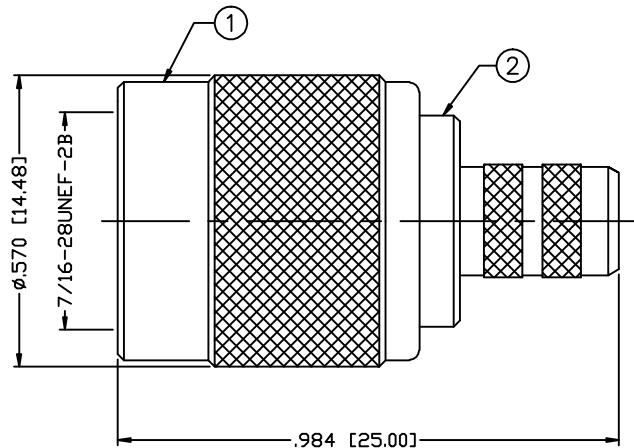

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 75 Ohms
FREQUENCY RANGE: 0-2 GHz
WORKING VOLTAGE: 500 V rms @ sea level
INSULATION RESISTANCE: 5k M ohms min.
TEMPERATURE RANGE: -65°C TO +85°C
FOR RG-59, 59A, 59B, 62, 62A, 62C/U; ALPHA 9059, 9062,
9830, 9840, 9845; BELDEN 8221, 8241, 9169, 9204,
9228; CANARE LV-61S; CommScope 5555, 5560, 5563

1	SHELL	1	BRASS	NICKEL, 100 μ "	008974	DRAWN C. ZUNIGA 11/11/04 CHECKED ORJ DRAWN C. ZUNIGA 7/27/92
2	BODY	1	BRASS	NICKEL, 100 μ "		
3	INSULATOR	1	DELTRIN	---		
4	GASKET	1	RUBBER	---		
5	RETAINING RING	1	BRASS	NICKEL, 100 μ "		
6	RING	1	DELTRIN	---		
7	WASHER	1	BRASS	NICKEL, 100 μ "		
8	PIN	1	BRASS	GOLD, 3 μ "		
9	FERRULE	1	BRASS	NICKEL, 100 μ "		
10						
11						
12						
13						
14						
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]
UNLESS OTHERWISE NOTED
TOLERANCES ARE:

DECIMALS

DIAMETER

PART NO.

RFT-1803-D3

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CJ	7/27/92	J. BENZ
B	CHANGE PART NUMBER [WAS RFT-1203-1]	KMM	12/12/94	R. RICE
C	CHG PIN, FERRULE & FERRULE STUD ID / CHG STRIPING INST	CZS	11/4/97	R. RICE
D	REMOVE P/N FROM CONNECTOR / UPDATE DWG.	CZS	11/11/04	JDMc

RFconnectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

TNC PLUG, CRIMP

SIZE A	CABLE GROUP D3	DWG NO. RFT-1803-D3	REV —
SCALE: NTS	CAD FILE	OUTLINE	SHEET 1 OF 1